APPLE1 / WOODEN ENCLOSURE

Corrected side profile / keyboard slope ends at the flat shelf

FRONT IS LEFT; REAR IS RIGHT

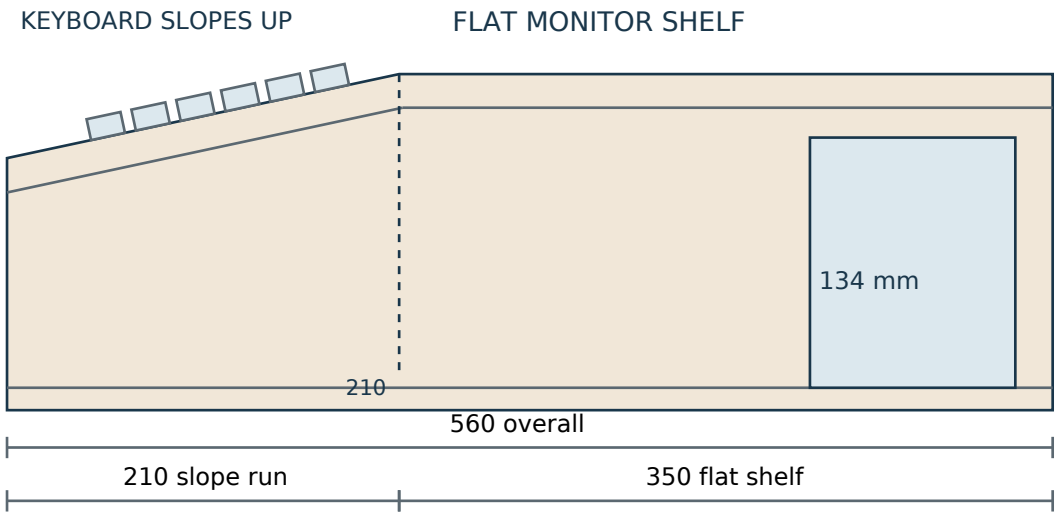

Front 135 mm / shelf 180 mm. Slope ends at depth 210 mm, level with the shelf.

Card fits beneath the flat shelf

Keep the entire upright CFFA1 + CF envelope under the shelf. The marked depth 430-540 mm zone has 150 mm interior height; the conservative 134 mm allocation leaves 16 mm. Clearance is uniform beneath the shelf.

Horizontal motherboard

Keep Replica 1 Plus horizontal on mounts with a total 10 mm rise. Orient/place it so the slot and complete card envelope occupy the marked zone. The zone is a placement constraint; motherboard outline and mounting holes still need fitting.

Width allocation

424 mm inside width: 230 mm motherboard/card zone, 20 mm gap, 160 mm NEURAL1 zone and 14 mm spare. These planning zones require assembly fitting.

Keyboard and deck fittings

Transfer the actual keyboard aperture, brackets and keycap clearance. Support it parallel to the slope. Optional side trim rises 8 mm above the deck. Keep rails out of the CFFA zone.

REFERENCE / RELEASE STATUS

R04 replaces R03: the keyboard deck rises to a level rear shelf. Its end height equals the shelf height. The transition changes angle only; it has no vertical step.

Sanyo footprint allowance remains 230 W x 285 D mm. Place it within depth 235-520 mm. Leave the manufacturer ventilation clearance behind the monitor cabinet, plus room for its connector and cable bend; the case rear edge alone is not that clearance.

Keyboard reference is Schlaepfer's 298.45 x 139.7 mm PCB. Exact purchased variant remains unidentified in recovered records. Fit the physical assembly already held by the woodworker.

NEURAL1 160 x 125 mm tray / 35 mm flange is an earlier proposal. Rev A was withdrawn; corrected tray geometry and installed assembly size remain unresolved.

This is a corrected enclosure proposal, not a complete fabrication release. Remaining fitting items: keyboard aperture/brackets, mainboard placement and holes, revised NEURAL1 tray, vent openings and monitor support strength.

APPLE1 / WOODEN ENCLOSURE

Corrected form: keyboard deck rises, then meets a flat monitor shelf at equal height

PLAN VIEW

Dimensions in millimetres. Do not scale the drawing.

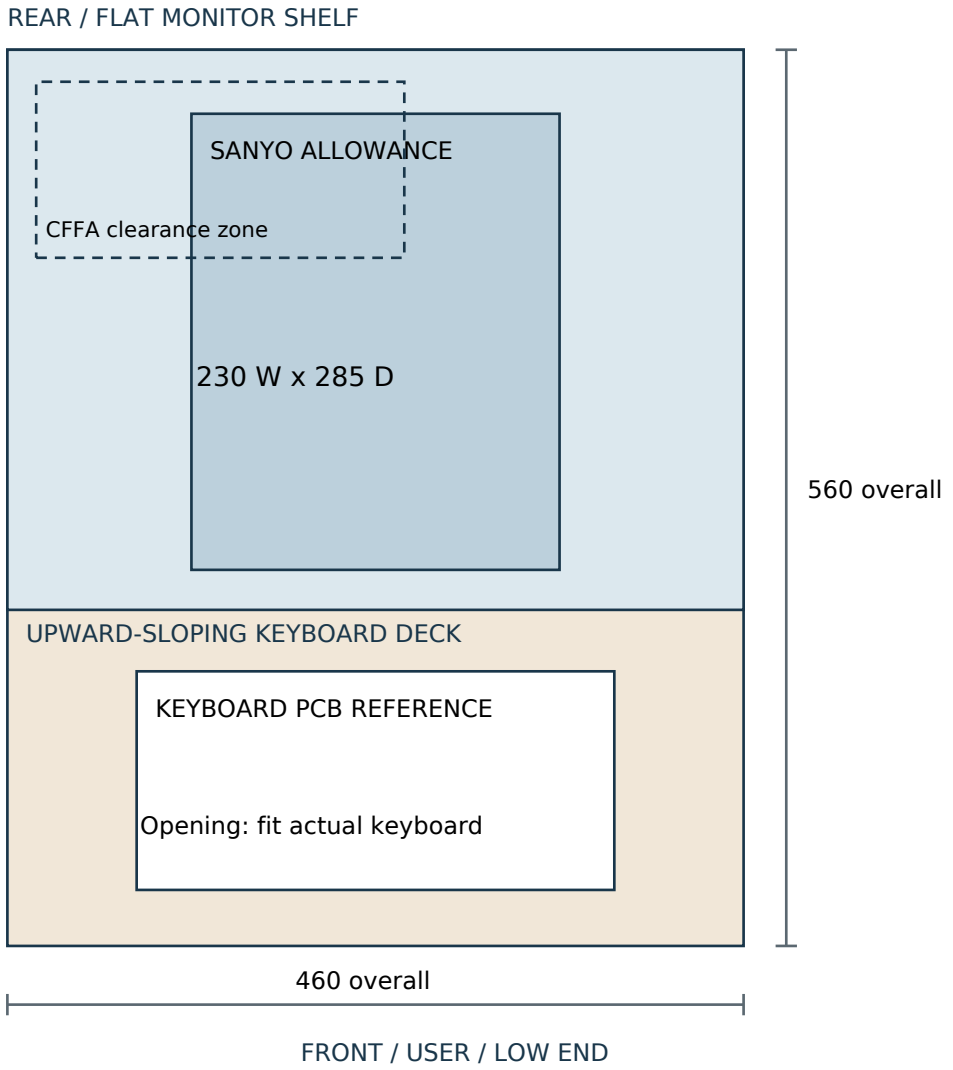

Slope, then flat shelf

460 W x 560 D mm footprint. Front deck rises from 135 mm to 180 mm over 210 mm horizontal depth (12.09 degrees). It meets a flat 350 mm-deep rear shelf at 180 mm. Heights exclude feet and raised side trim.

Flush transition

Mount the keyboard parallel to the rising front deck. At depth 210 mm the deck ends at the shelf surface height. The top changes from inclined to horizontal there, with a flush joint and no vertical riser.

Monitor support

Sanyo rests directly on the flat rear shelf. Use its normal feet and preserve ventilation clearance. No leveling cradle is required. Keep the monitor footprint within depth 235-520 mm.

Construction and access

18 mm side walls and flat monitor shelf; 18 mm sloping keyboard deck measured normal to its surface; 12 mm removable bottom. Use screws and threaded inserts for removable shelf access to the CF card.

Original appearance / adapted dimensions

The user correction establishes the required rising keyboard deck followed by a flat shelf. These proposed dimensions accommodate the hardware; they are not recovered dimensions of the photographed case.

RESULT: 150 mm interior height minus 134 mm allocation leaves 16 mm

Applies to the conservative Rev D reconstruction and the specified mounting/placement limits.

10 mm	Motherboard mounts	Limit: inside floor to PCB underside, including any baseplate
2 mm	Motherboard PCB	Design allowance; not a recovered measurement
20 mm	Slot connector	Conservative allowance; EDAC 305/355 housing is 11.94 mm
65 mm	Entire CFFA1 PCB	Photo estimate about 53-55 mm; enlarged to 65 mm
37 mm	Entire CF-card length	36.40 +/- 0.15 mm specification, rounded up; counted above PCB
134 mm	Total allocated stack	10 + 2 + 20 + 65 + 37
150 mm	Interior beneath shelf	180 mm shelf surface - 18 mm shelf - 12 mm bottom
16 mm	Remaining gap	150 - 134; keep rails, screws and wiring outside this zone

The upright card sits under the flat shelf

The card envelope is positioned entirely beneath the horizontal rear shelf, so the keyboard slope does not reduce its headroom. Keep it clear of the transition joint, shelf supports and fasteners. Any baseplate or mounting rise above the allocated 10 mm reduces the 16 mm gap millimetre for millimetre.

The entire adapter is counted above the entire connector, and the entire CF card above the entire adapter, although both overlap when installed. This deliberately generous stack is an engineering allowance. It does not establish manufacturer-certified dimensions for the actual unit. Closed-lid clearance is separate from withdrawal access.