
1 · WHERE


inside (front) face of the ear, scale 1 : 1.8

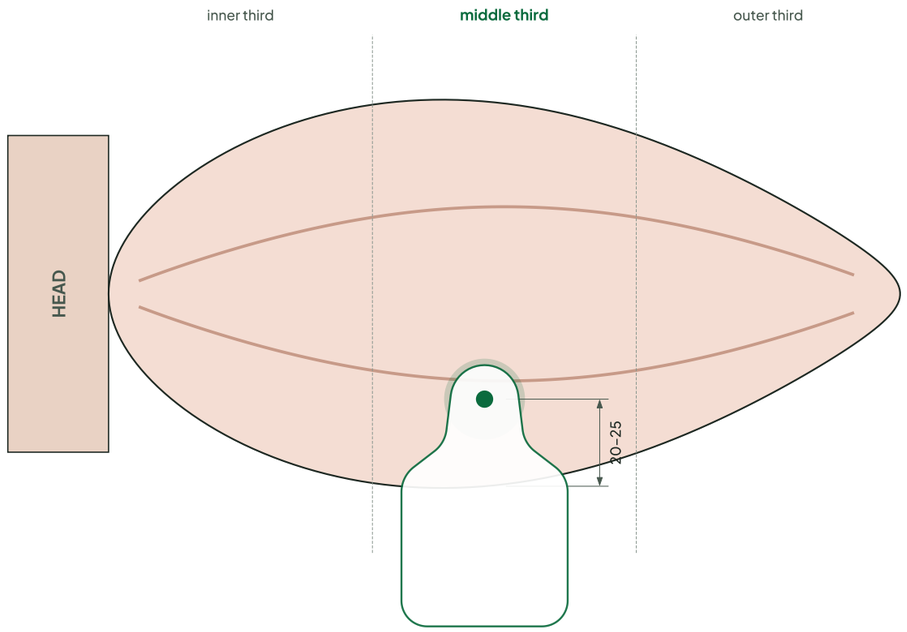

Pin in the middle third, below the lower cartilage rib, 20–25 mm above the lower ear margin: the yoke rests on the ear, the solar half hangs free below it.

2 · HOW IT HOLDS

side section through the pin, scale 2 : 1

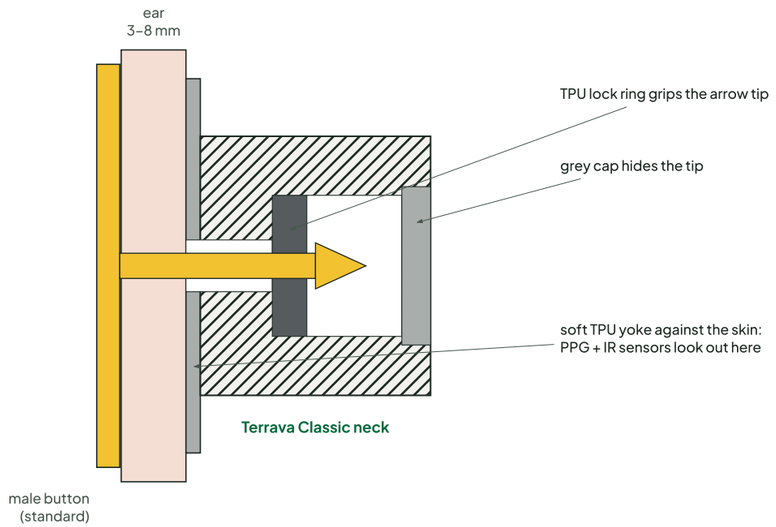

3 · PLUG & USE IN SIX STEPS

1 Charge
USB-C on the bottom edge; full in ~1.5 h (250 mAh).

2 Seal
Press the TPU plug into the port until flush; check the gasket seam.

3 Register
Terrava dashboard → Devices → add DevEUI, pair with the animal.

4 Load
Cap off. Neck on the applicator's female spike, male button on the pin.

5 Apply
Logo out, yoke to the ear, 20–25 mm above the lower margin; one stroke.

6 Cap & go
Snap the grey cap in. Reports within 5 min; the sun tops it up.

Terrava
SMART EAR TAG · TV-ET0 CLASSIC

Placement & installation

Use with standard two-piece male buttons (pin ≈ 19 mm) · Re-tagging: cut the pin, replace the lock ring

UNITS	SCALE	TOLERANCE	REV	DATE	SHEET
mm	as noted	±0.2 unless noted	A	2026-10-21	3 / 3