
1 · WHERE


inside (front) face of the ear, scale 1 : 1.8

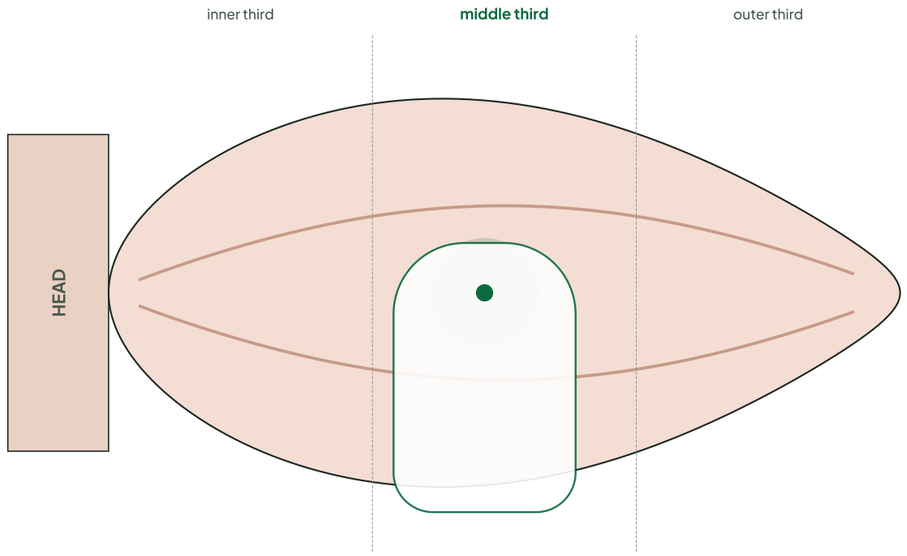

Pin between the two cartilage ribs, in the middle third of the ear.
Avoid the large veins (hold the ear to the light) and the ear edge.

2 · HOW IT HOLDS

side section through the pin, scale 2 : 1

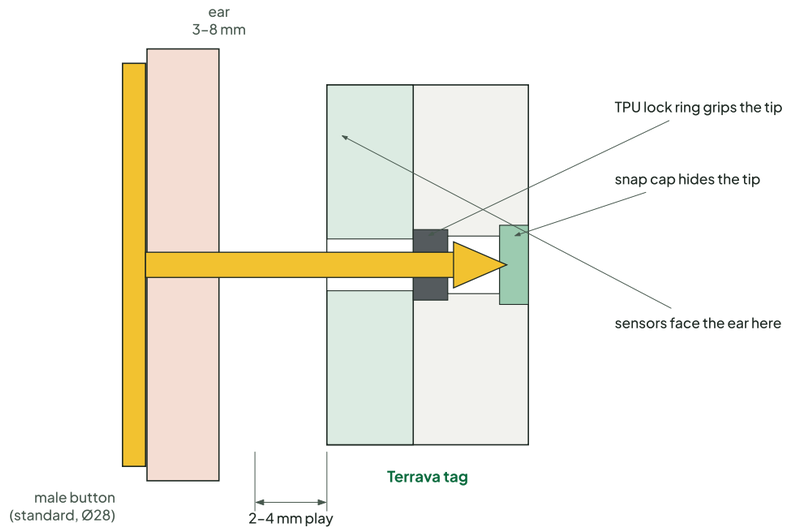

3 · PLUG & USE IN SIX STEPS

1 Charge
Plug USB-C, the status light glows through the shell. Full in ~2 h.

2 Seal
Press the TPU plug into the port until flush; check the gasket seam.

3 Register
Terrava dashboard → Devices → add DevEUI, pair with the animal.

4 Load
Cap off. Tag on the applicator's female jaw, male button on the pin.

5 Apply
Disinfect, squeeze in one firm stroke at the marked zone.

6 Cap & go
Snap the cap in. The tag joins LoRaWAN and reports within 5 min.

Terrava
SMART EAR TAG · TV-ET1

Placement & installation

Use with standard two-piece male buttons (pin ≈ 19 mm) · Re-tagging: cut the pin, replace the lock ring

UNITS	SCALE	TOLERANCE	REV	DATE	SHEET
mm	as noted	±0.2 unless noted	A	2026-10-21	3 / 3