Servo motor

https://wokwi.com/projects/404286279378625537

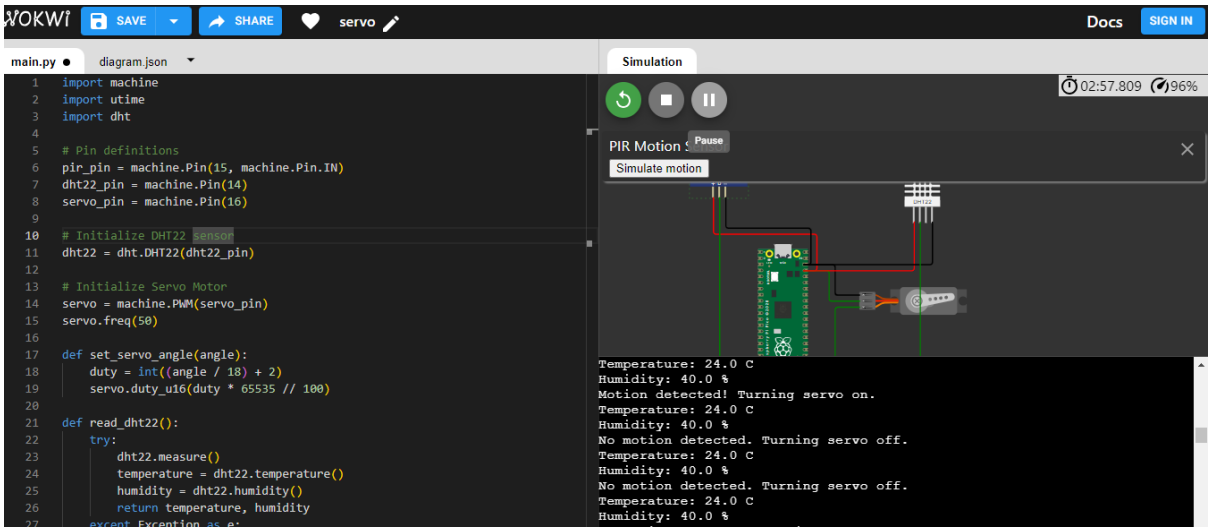

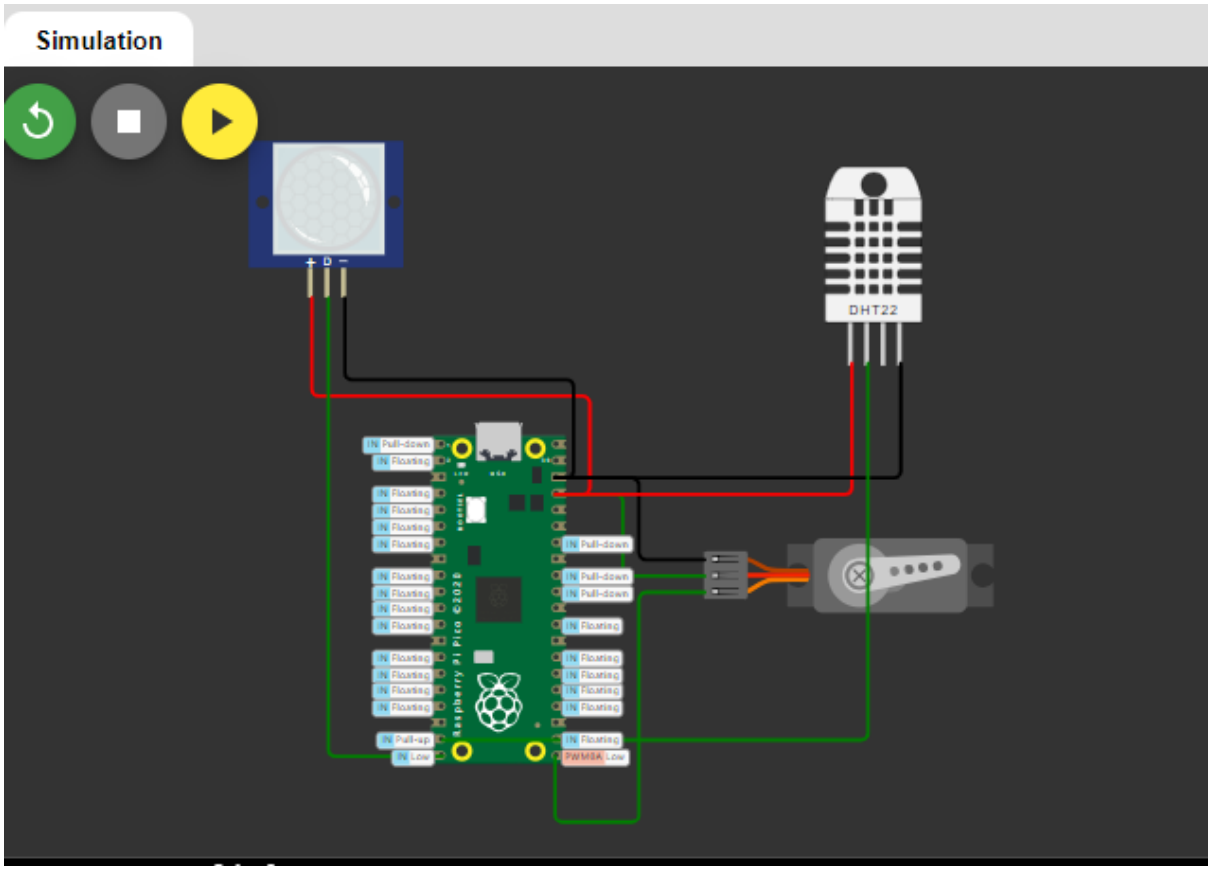

Code for motion detected servo motor should on otherwise off

```
import machine
import utime
import dht

# Pin definitions
pir_pin = machine.Pin(15, machine.Pin.IN)
dht22_pin = machine.Pin(14)
servo_pin = machine.Pin(16)

# Initialize DHT22 sensor
dht22 = dht.DHT22(dht22_pin)

# Initialize Servo Motor
servo = machine.PWM(servo_pin)
servo.freq(50)

def set_servo_angle(angle):
    duty = int((angle / 18) + 2)
    servo.duty_u16(duty * 65535 // 100)

def read_dht22():
    try:
        dht22.measure()
        temperature = dht22.temperature()
        humidity = dht22.humidity()
        return temperature, humidity
    except Exception as e:
        print('Failed to read DHT22 sensor:', e)
        return None, None

def main():
    while True:
        if pir_pin.value():
            print("Motion detected! Turning servo on.")
            set_servo_angle(90)  # Move servo to 90 degrees
        else:
            print("No motion detected. Turning servo off.")
            set_servo_angle(0)   # Move servo to 0 degrees

        temperature, humidity = read_dht22()
        if temperature is not None and humidity is not None:
            print("Temperature:", temperature, "C")
            print("Humidity:", humidity, "%")

        utime.sleep(1)
```

```python
if __name__ == '__main__':
    main()
```