


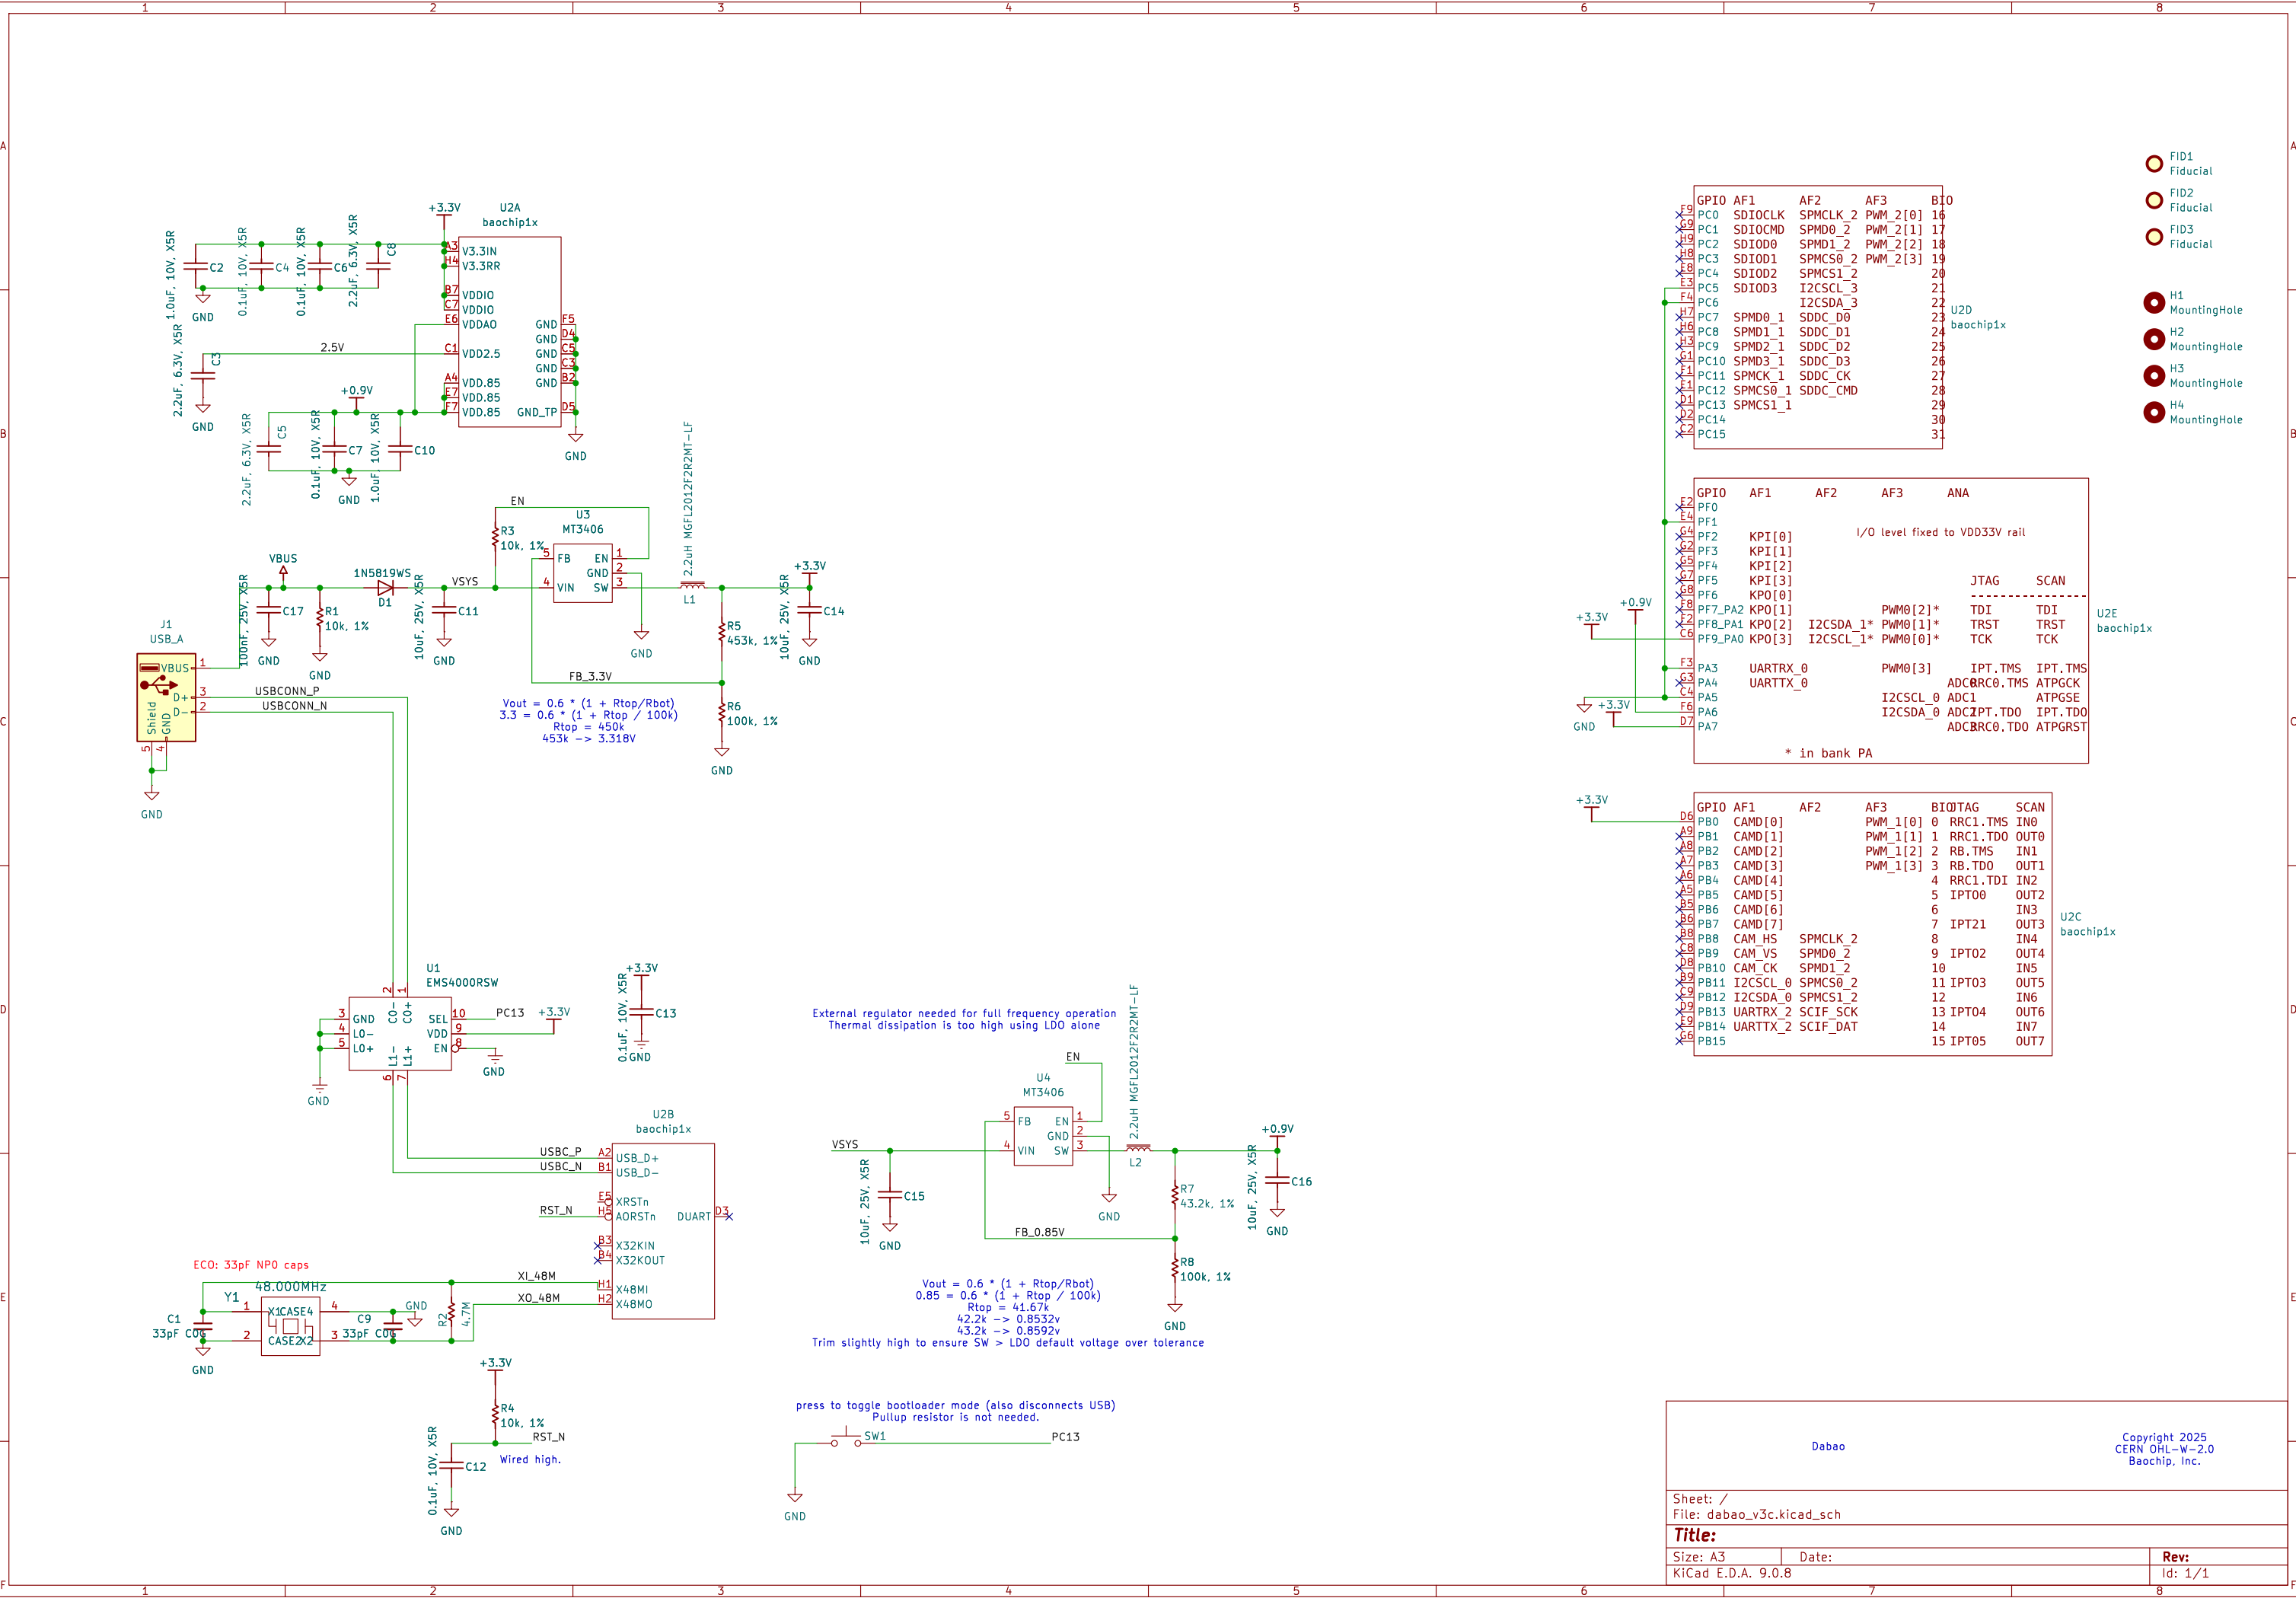

GPIO	AF1	AF2	AF3	BI0
PC0	SDIOCLK	SPMCLK_2	PWM_2[0]	16
PC1	SDIOCMD	SPMD0_2	PWM_2[1]	17
PC2	SDIOD0	SPMD1_2	PWM_2[2]	18
PC3	SDIOD1	SPMCS0_2	PWM_2[3]	19
PC4	SDIOD2	SPMCS1_2		20
PC5	SDIOD3	I2CSCL_3		21
PC6		I2CSDA_3		22
PC7	SPMD0_1	SDDC_D0		23
PC8	SPMD1_1	SDDC_D1		24
PC9	SPMD2_1	SDDC_D2		25
PC10	SPMD3_1	SDDC_D3		26
PC11	SPMCK_1	SDDC_CK		27
PC12	SPMCS0_1	SDDC_CMD		28
PC13	SPMCS1_1			29
PC14				30
PC15				31

GPIO	AF1	AF2	AF3	ANA
PF0				
PF1				
PF2	KPI[0]			I/O level fixed to VDD33V rail
PF3	KPI[1]			
PF4	KPI[2]			
PF5	KPI[3]			
PF6	KP0[0]			
PF7_PA2	KP0[1]			
PF8_PA1	KP0[2]			
PF9_PA0	KP0[3]			
PA3	UARTRX_0			
PA4	UARTTX_0			
PA5				
PA6				
PA7				

GPIO	AF1	AF2	AF3	BI0	JTAG	SCAN
PB0	CAMD[0]					
PB1	CAMD[1]					
PB2	CAMD[2]					
PB3	CAMD[3]					
PB4	CAMD[4]					
PB5	CAMD[5]					
PB6	CAMD[6]					
PB7	CAMD[7]					
PB8	CAM_HS	SPMCLK_2				
PB9	CAM_VS	SPMD0_2				
PB10	CAM_CK	SPMD1_2				
PB11	I2CSCL_0	SPMCS0_2				
PB12	I2CSDA_0	SPMCS1_2				
PB13	UARTRX_2	SCIF_SCK				
PB14	UARTTX_2	SCIF_DAT				
PB15						