



Left View

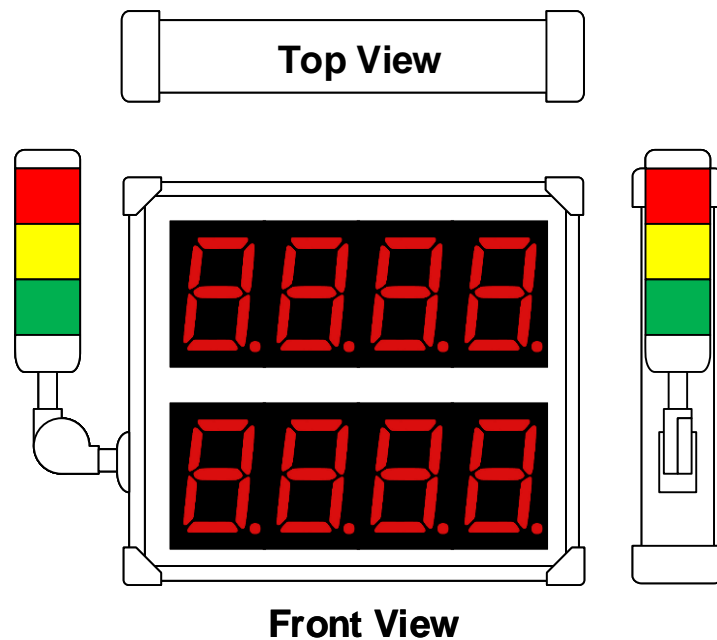

Front View

Rear View

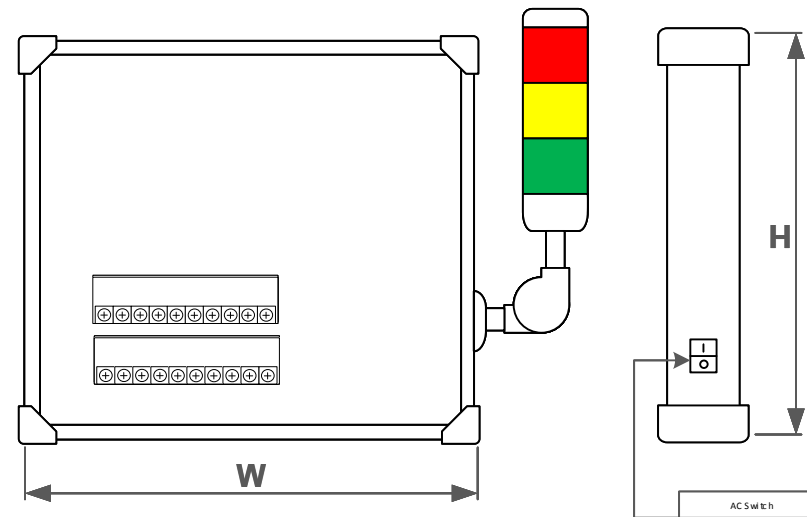

Right View

- Detail :**
- Display : 7 Segment 4"
 - Input : 4 – 20 mA 2 Channel
 - Output : Transfer 4 – 20 mA 2 Channel
 - Alarm Relay 3 Channel
 - Ch 1,2 อยู่ ใน Scale ปกติ Alarm 1 ON หรือ สีเขียวติด
 - Ch 1,2 มากกว่า Limit High1 หรือน้อยกว่า Limit Low1 >> Alarm 2 ON หรือ สีเหลืองติด
 - Ch 1,2 มากกว่า Limit High2 หรือน้อยกว่า Limit Low2 >> Alarm 3 ON หรือ สีแดงติด
 - ให้จอแสดงการกระพริบช่องที่เกิด Alarm เพื่อให้สังเกตเห็นได้ว่าช่องใดเกินค่า Limit

Transfer : ใช้งาน Transfer จาก Transmitter ที่ติดตั้งอยู่ภายใน 2 ชุด
Tower Light: RYG 3 สี มี Terminal สำหรับต่อใช้งาน ที่ User สามารถเลือกใช้ได้ว่าต้องการให้ กระพริบ หรือติดค้าง จากช่องต่อ Common บน Terminal

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment
Input	4-20 mA 2 Channel
Output	3 Alarm , 2 Transfer
Memory	EEPROM with Battery
Setting	Remote
Communication	-

REMARK	
Frame	Aluminum
Color	Black
Protect	IP30
Model	TGM-62011
APPEND	
Dimension	1.2" -
	2.3" -
	4" 450W x 350H x 100D mm.
Character	Arial (Font), White PVC Sticker

PRIMUS CO., LTD.	
Draft by	Suphot
Date	23.01.2019
Revision	0
Customer	
Approve	

ราคาตั้ง

7 Segment Big Display + TL + Transfer

TGM-62011 : 31,400 บาท