


คู่มือการใช้งานป้ายแสดงผล Target Counter

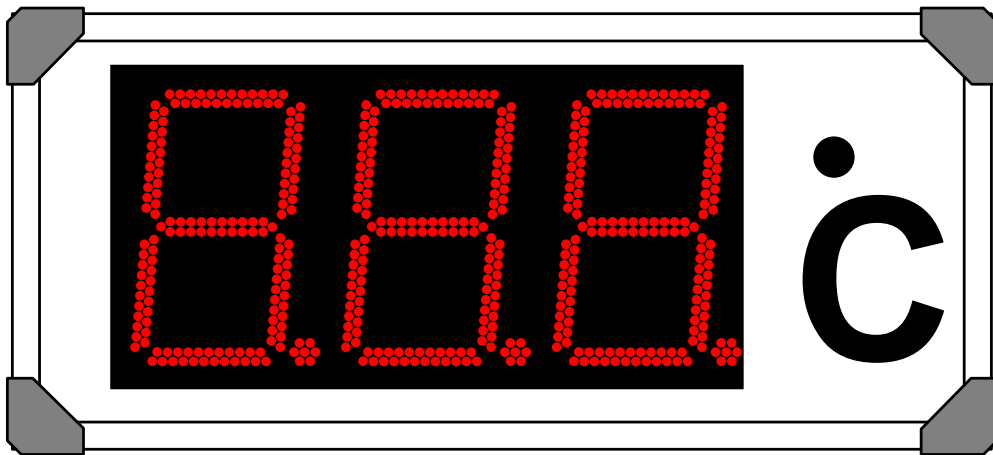

CODE : C414

- แสดงผลด้วยตัวเลข 7 SEGMENT สีแดง ขนาด 8 นิ้ว
- รับอินพุต TC Type K (IM-A)

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment Size 8"
Input	TC type K
Output	-
Memory	EEPROM with Battery
Setting	Remote IF.
Communication	-


สารบัญ

เรื่อง	หน้า
การตั้งค่า ค่าชดเชย.....	3
ตั้งค่า Decimal Point.....	3
ข้อต่อด้านหลังและการต่อใช้งาน (Contact Panel)	4
Technical Specification.....	4

การตั้งค่าใช้งาน (รีโมท)

- การตั้งค่า ชดเชย
 - กดปุ่ม F4
 - แสดง PUS กระพริบ กด Enter เพื่อแก้ไข PUS
 - กด 0-9 เปลี่ยนค่า (-199...999)
 - กด -/- เพื่อป้อนค่าติดลบ (-)
 - หากต้องการบันทึกการตั้งค่า กด ENTER
 - ต้องการยกเลิก กด CANCEL
- การตั้งค่า Decimal Point
 - กดปุ่ม DP
 - ตำแหน่งทศนิยมจะเลื่อนแสดงบนหน้าจอ
 - สามารถแสดงได้ 1 ตำแหน่ง เป็น [X.X] และ [X]
- กด ปุ่ม POWER เพื่อ เปิด/ปิด หน้าจอ

ข้อต่อด้านหลังและการต่อใช้งาน (Contact Panel)

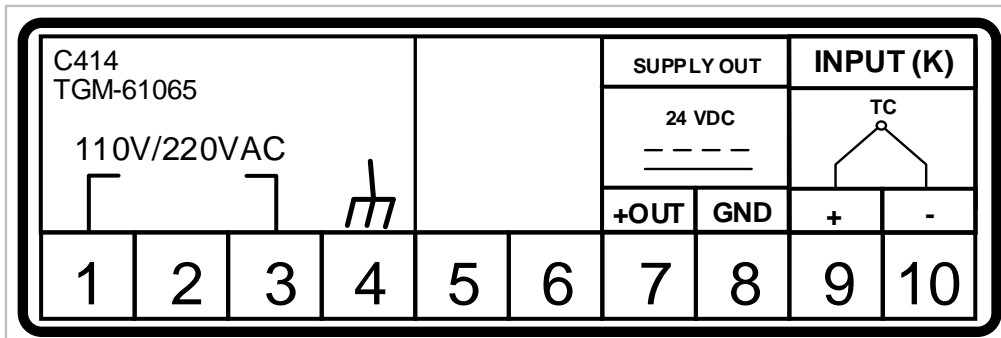

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment Size 8"
Input	TC type K
Output	-
Memory	EEPROM with Battery
Setting	Remote IF.
Communication	-

REMARK	
Frame	Aluminum
Color	Black
Model	TGM-61065

APPEND	
Dimension : 650W x 300H x 100D mm.	
Character	Arial (Font), White PVC Sticker

PRIMUS COMPANY LIMITED.

PRIMUS COMPANY LIMITED. : 119 Soi Srimuang-Anusorn Sutthisarnvinijchai Rd., Dindaeng Bangkok 10400
Tel. 0-2693-7005 (Auto 40 Lines) Fax. 0-2277-3565 www.primusthai.com