

PUREZZA™
PREMIUM WATER

Frizzante Mini

The compact solution for modern hospitality environments, designed for spaces where every centimetre counts.

With its functional design, the Frizzante Mini delivers premium water options to smaller spaces: it can dispense chilled, ambient and sparkling water and chilled, ambient, sparkling and hot water. Thanks to its stylish professional design, the Frizzante Mini enhances any hospitality setting.




KEY TECHNOLOGY




Performance filtration

When attached to our recommended, high capacity professional grade filters, the dispenser addresses colour, taste, odour, for great tasting, crystal-clear water.



Ice Bath cooling technology

The Ice Bath water cooling system delivers ice cold water in challenging environments.




Nanotechnological surface treatment

This treatment inhibits the growth of biofilms and bacteria colonies for better hygiene.



R290 gas

Eco-sustainable refrigeration using R290 gas, for low environmental impact.



Inline UVC Purification System (optional)

Inline UVC Purification System offers one of the highest level of microbiological protection in the industry, eliminating up to 99.9999% of waterborne bacteria and viruses.



Features

- ▶ A modern, clean design with external surfaces in stainless steel to facilitate easy cleaning
- ▶ Dispensing point for bottles of up to 305 mm




- ▶ The cooling system allows for a smaller machine footprint
- ▶ Available in countertop and freestanding versions (with optional base cabinet)



- ▶ Up-to four water dispensing options: chilled, ambient sparkling and also available as chilled, ambient, sparkling and hot
- ▶ CAS version is available with portion control
- ▶ Thanks to its Ice Bath technology, the Mini can dispense up to 30 litres per hour



TECHNICAL SPECIFICATIONS

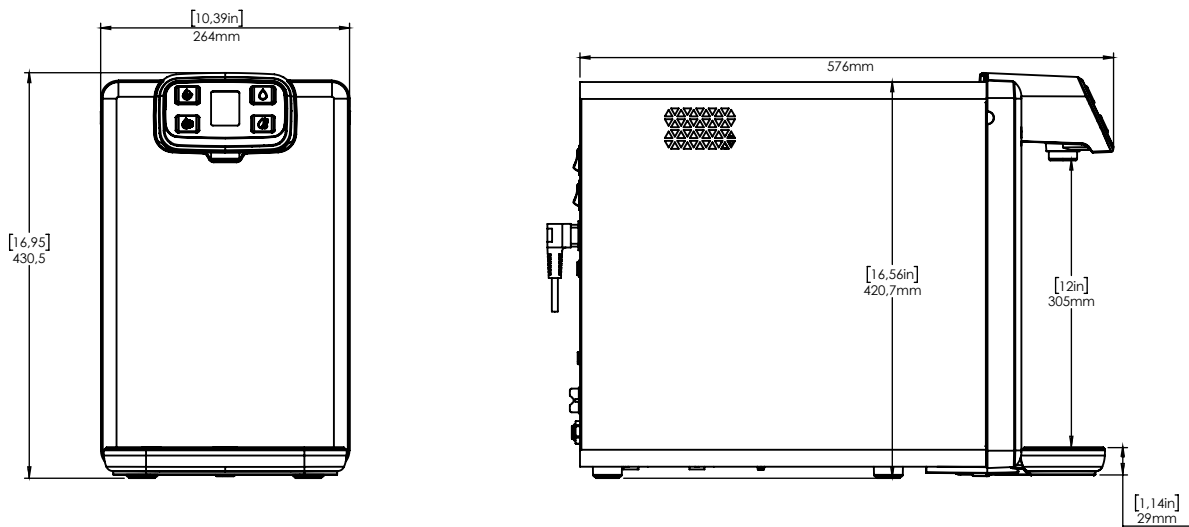

Types available	Countertop and freestanding (with optional base cabinet)
Dimensions	Countertop: 264 mm (W) x 430.5 mm (H) x 576 mm (D) Base Cabinet: 350 mm (W) x 925 (H) x 600 (D)
Dispense area height	305 mm
Weight	Countertop: chilled/sparkling/ambient: Net 23.3 kg Countertop: chilled/sparkling/ambient/hot: Net 24.8 kg Base Cabinet: Net 18 kg
Storage capacity	Sparkling tank: 1 litre
Dispensing capacity	Up to 30 l/h
Flow rate	2.5-3.5 litre/min
Compressor	(R290): 230V/50Hz
Water temperature output	Cold: 5° - 12°C Hot: 87°C, 92°C, 96°C (default), 98°C +/- 2%
Cooling system	Ice Bath - Single Coil
Tested and certified	CE

Water options

	chilled	sparkling	ambient	hot
1				
2				

For more information
www.purezzawater.com
global@purezzawater.com

Purezza Premium Water is a trading brand marketed by Blupura Srl

Blupura Srl reserves the right, in order to reflect continuous research and development, to amend or change specifications without prior notice. Purezza Pemium Water and the Pureza Premium Water logo, Firewall and the Firewall logo are trademarks in countries where the Group and Trading operate. Blupura Srl licensed to use BioCote, and BioCote logo which are registered trademarks of BioCote Ltd.

PUREZZATM
PREMIUM WATER