National University of Computer & Emerging Sciences

CS 3001 – COMPUTER NETWORKS

Lecture 03

Chapter 1

28th January, 2025

Nauman Moazzam Hayat

nauman.moazzam@lhr.nu.edu.pk

Office Hours: 11:30 am till 01:00 pm (Every Tuesday & Thursday)

Packet-switching: store-and-forward

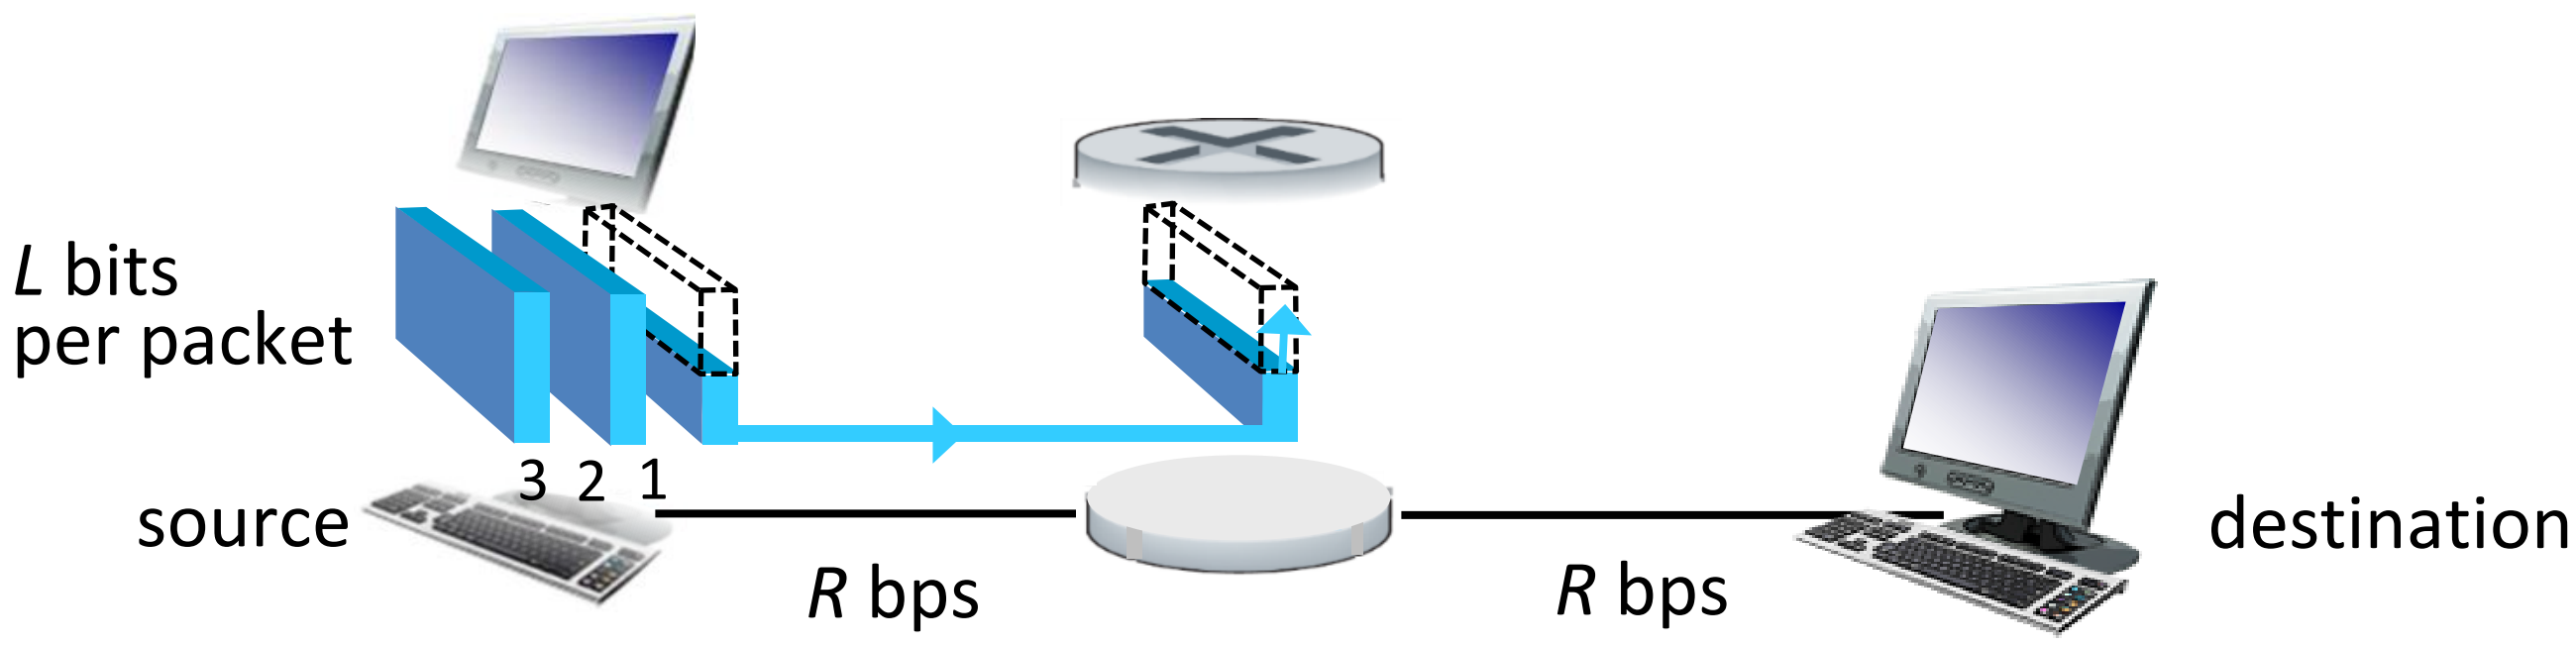

- packet transmission delay: takes *L*/*R* seconds to transmit (push out) *L*-bit packet into link at *R* bps
- *store and forward: entire* packet must arrive at router before it can be transmitted on next link

One-hop numerical example:
- *L* = 10 Kbits
- *R* = 100 Mbps
- one-hop transmission delay = 0.1 msec

Packet-switching: queueing

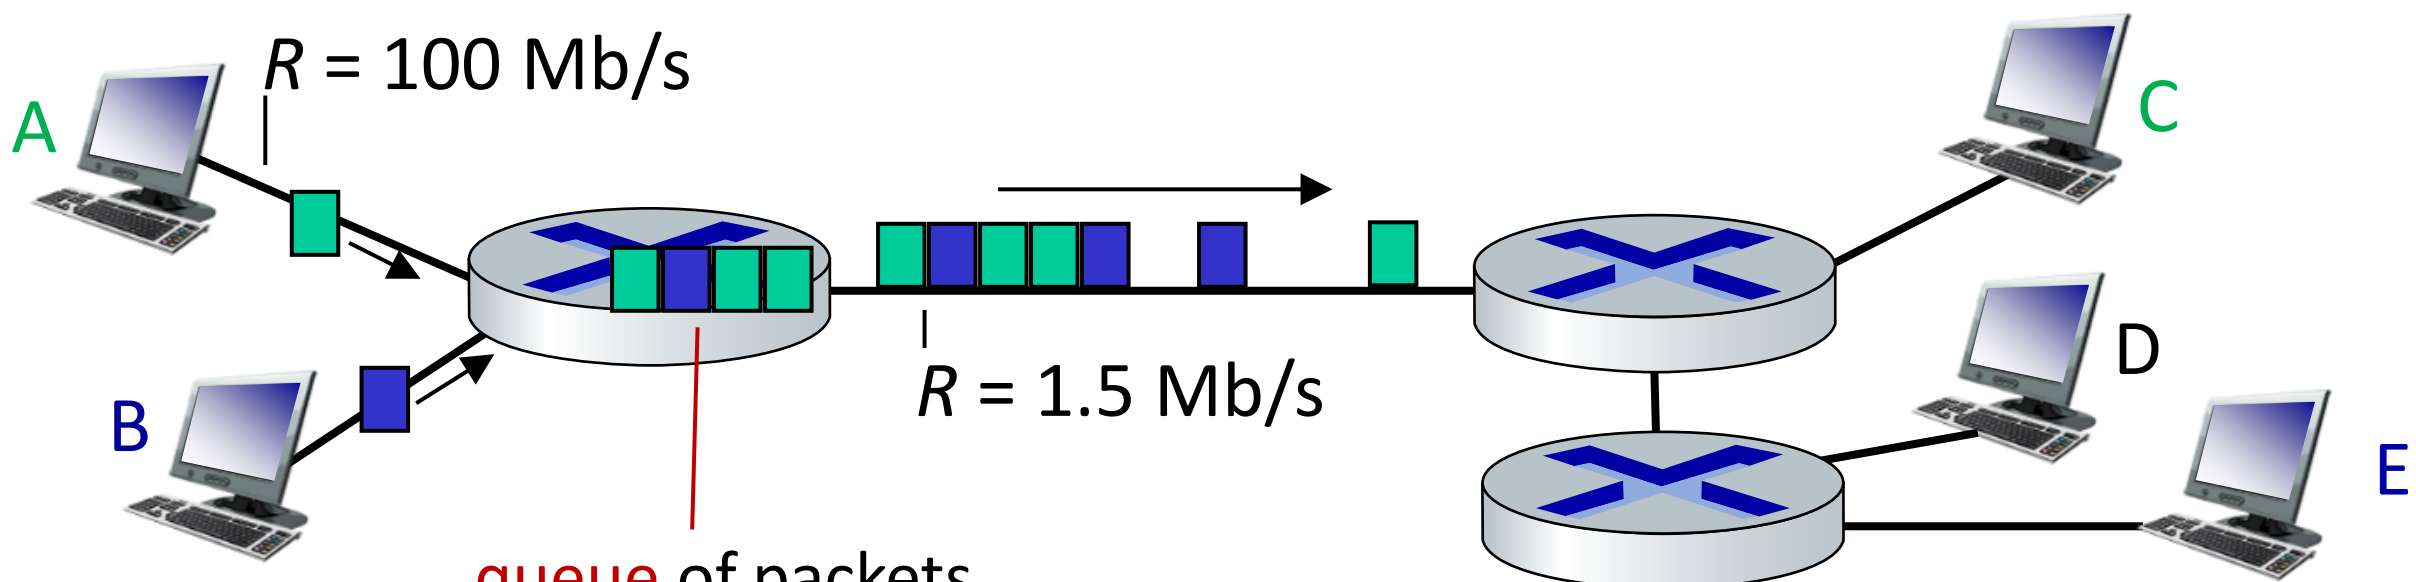

Queueing occurs when work arrives faster than it can be serviced:

Packet-switching: queueing

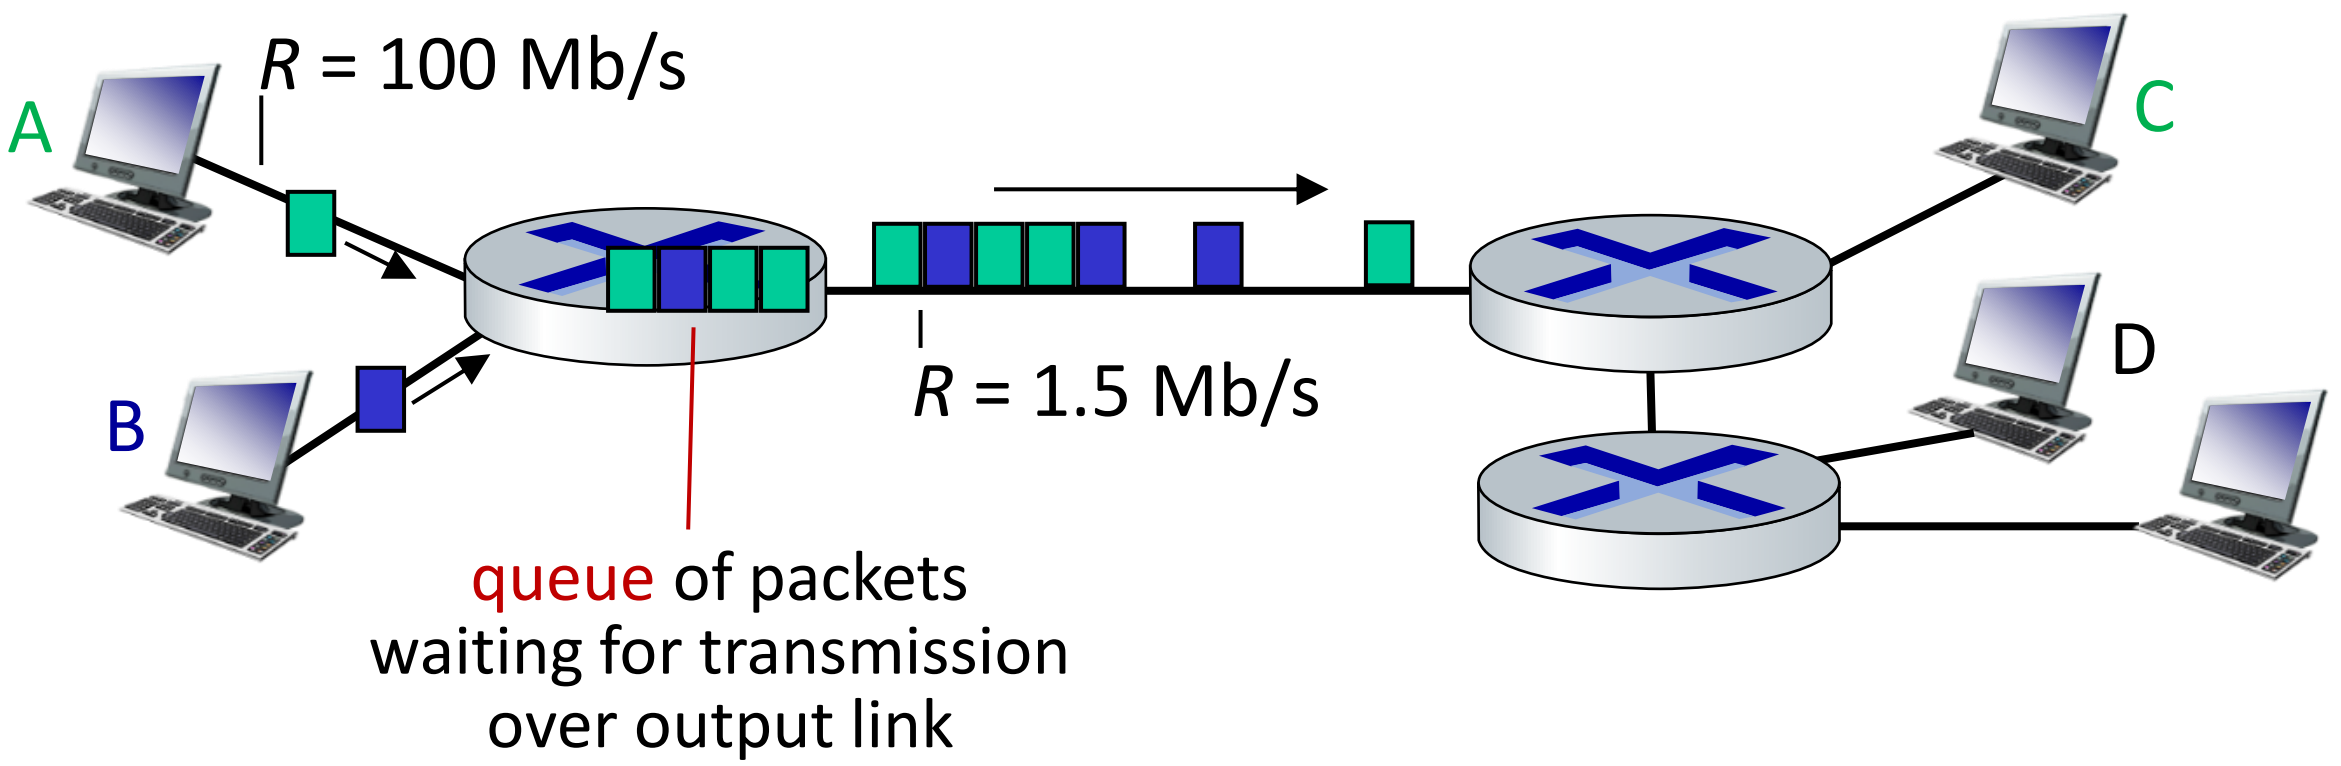

Packet queuing and loss: if arrival rate (in bps) to link exceeds transmission rate (bps) of link for some period of time:

- packets will queue, waiting to be transmitted on output link
- packets can be dropped (lost) if memory (buffer) in router fills up

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

Alternative to packet switching: circuit switching

end-end resources allocated to, reserved for "call" between source and destination

- in diagram, each link has four circuits.
  - call gets 2nd circuit in top link and 1st circuit in right link.
- dedicated resources: no sharing
  - circuit-like (guaranteed) performance
- circuit segment idle if not used by call (no sharing)
- commonly used in traditional telephone networks

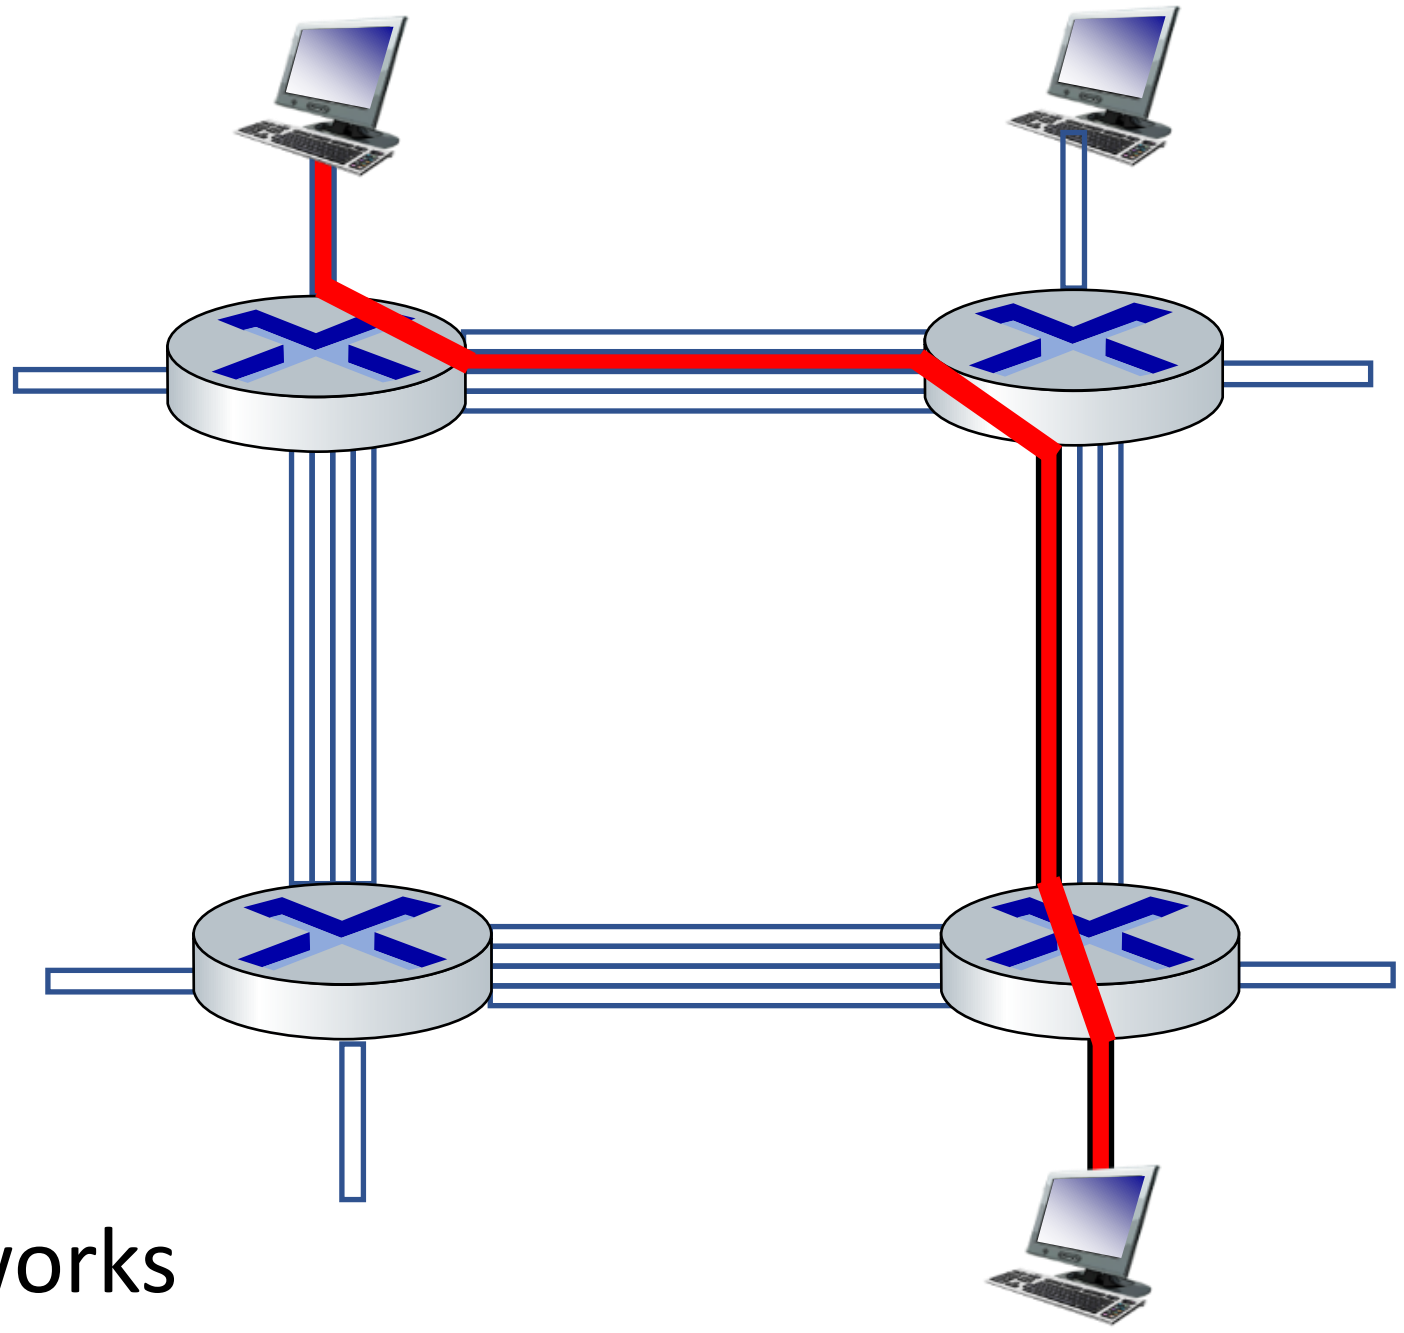

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive

Circuit switching: FDM and TDM

Frequency Division Multiplexing (FDM)

- optical, electromagnetic frequencies divided into (narrow) frequency bands
- each call allocated its own band, can transmit at max rate of that narrow band

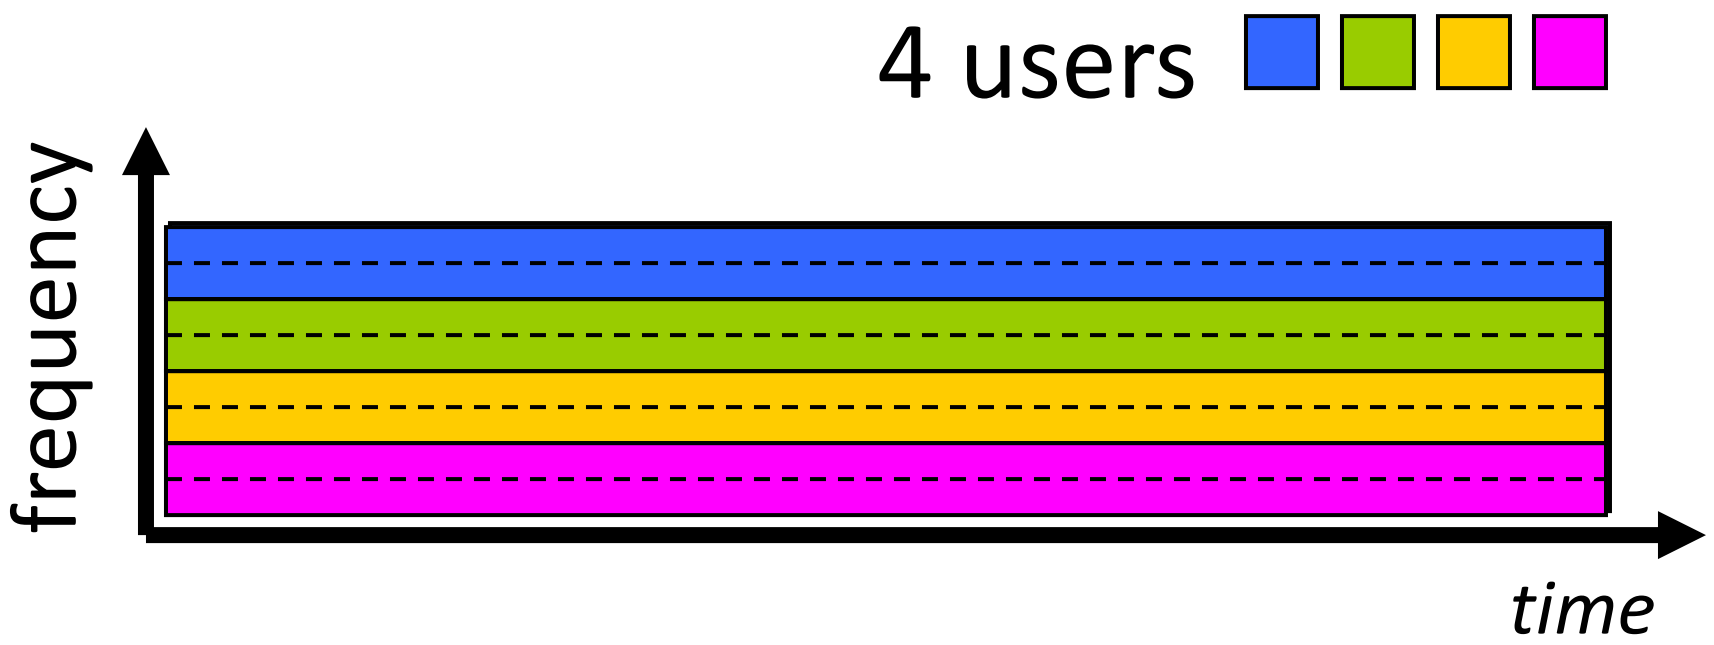

Time Division Multiplexing (TDM)

- time divided into slots
- each call allocated periodic slot(s), can transmit at maximum rate of (wider) frequency band (only) during its time slot(s)

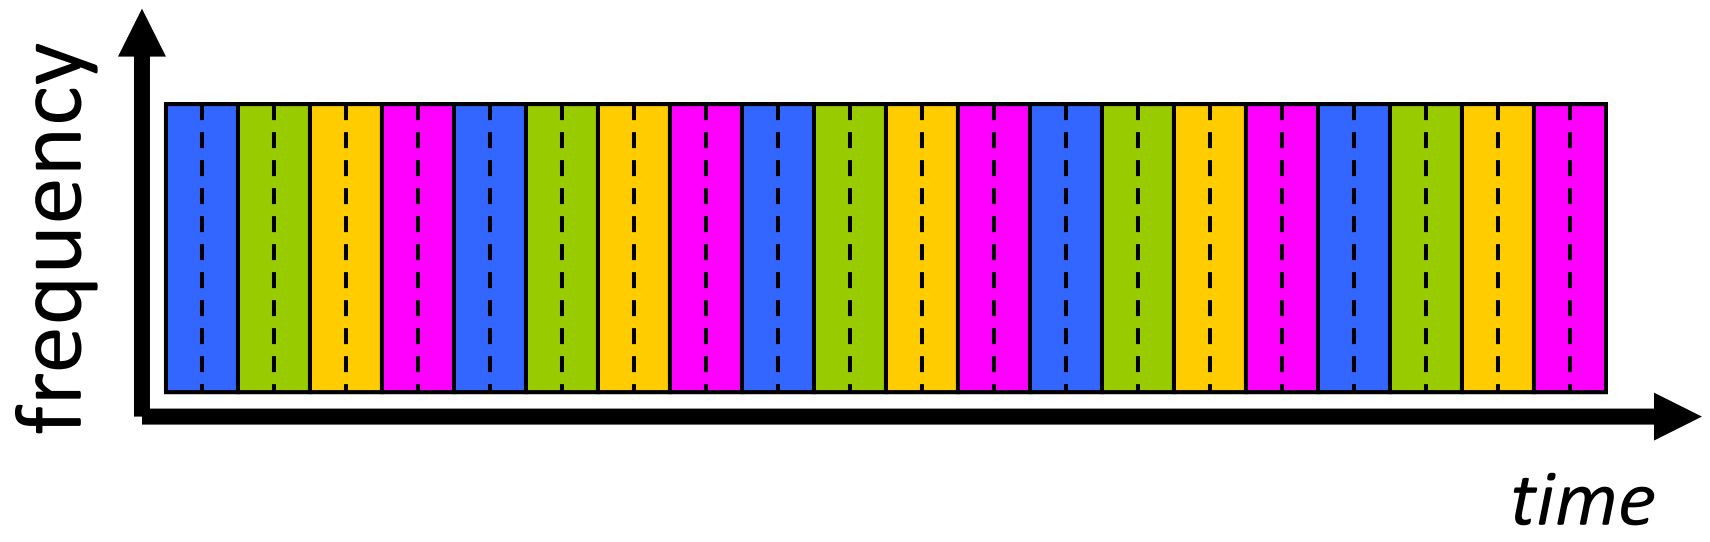

Numerical Example

• How long does it take to send a file of 80 Kbytes from host A to host B over a circuit-switched network?

- All links are 1.536 Mbps
- Each link uses TDM with 24 slots/sec
- Time to establish end-to-end circuit is 500 msec

Let's work it out!

Numerical Example: Solution

- 80 Kbytes is 640,000 bits

- NOTE: networks in bits, end systems in bytes
- NOTE: 8 bits to a byte

- Each circuit has a rate of 1.536Mbps / 24
  => 1536000/24 = 64000bps

- So, it takes 640000 bits / 64000 bps = 10 seconds to transmit the file

- Need to add the circuit establishment time (½ second)
- So, 10.5 seconds

Packet switching versus circuit switching

example:

- 1 Gb/s link
- each user:
  - 100 Mb/s when "active"
  - active 10% of time

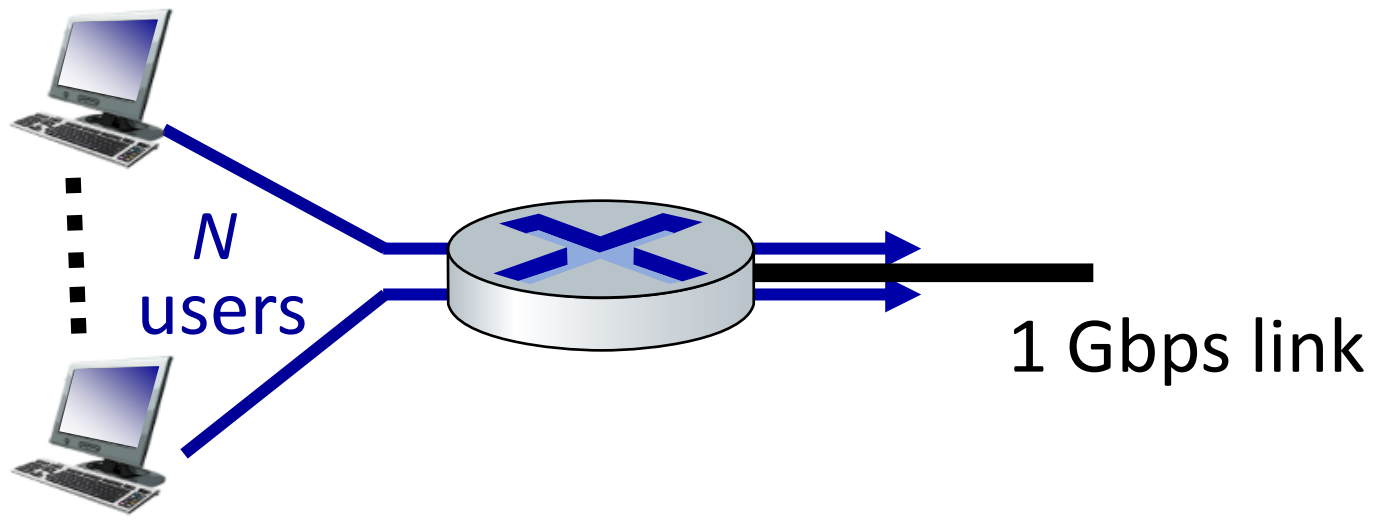

Q: how many users can use this network under circuit-switching and packet switching?

- *circuit-switching:* 10 users
- *packet switching:* with 35 users, probability > 10 active at same time is less than .0004 *

Q: how did we get value 0.0004?

A: HW problem (for those with course in probability only)

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive

Packet switching versus circuit switching

Is packet switching a “slam dunk winner”?

- great for “bursty” data – sometimes has data to send, but at other times not
  - resource sharing
  - simpler, no call setup
- excessive congestion possible: packet delay and loss due to buffer overflow
  - protocols needed for reliable data transfer, congestion control
- *Q:* How to provide circuit-like behavior with packet-switching?
  - “It’s complicated.” We’ll study various techniques that try to make packet switching as “circuit-like” as possible.

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet switching)?

Internet structure: a "network of networks"

- hosts connect to Internet via access Internet Service Providers (ISPs)
- access ISPs in turn must be interconnected
  - so that *any* two hosts *(anywhere!)* can send packets to each other
- resulting network of networks is very complex
  - evolution driven by economics, national policies

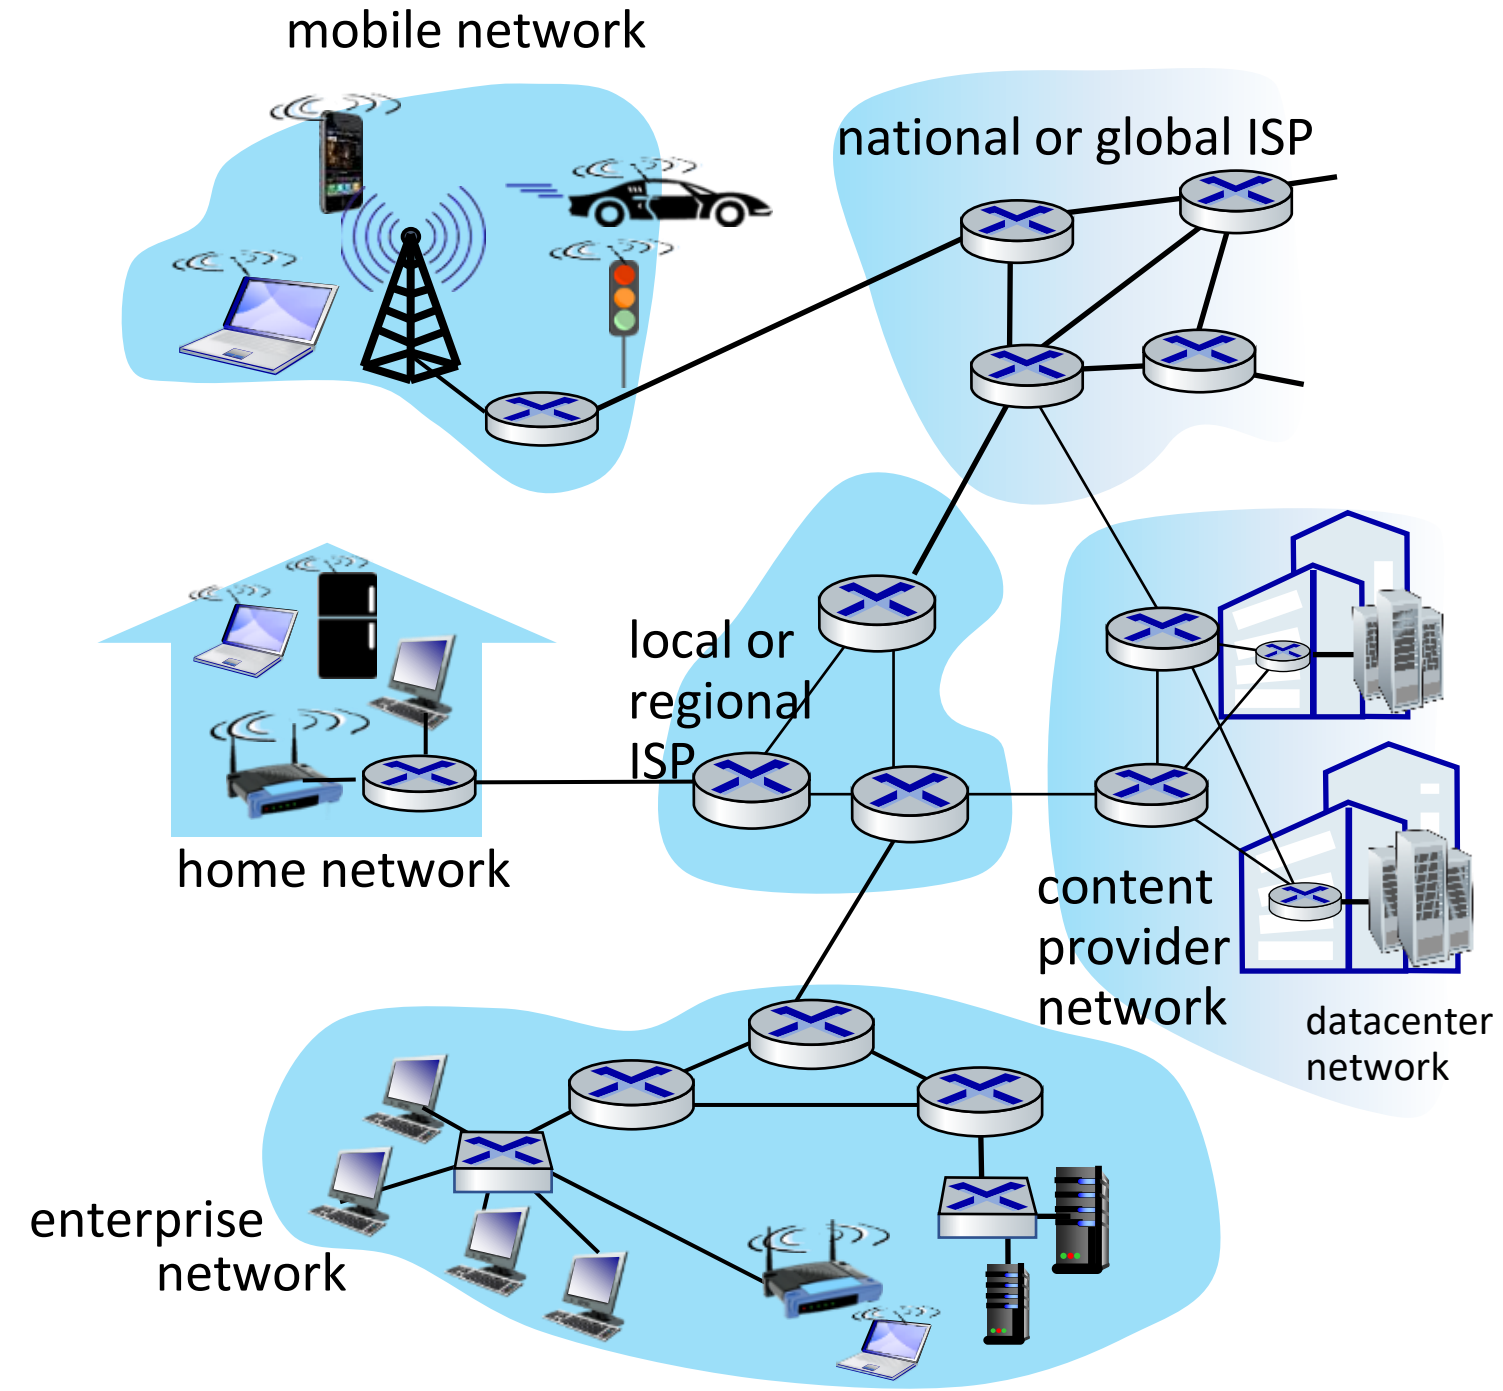

Let's take a stepwise approach to describe current Internet structure

Internet structure: a "network of networks"

Question: given *millions* of access ISPs, how to connect them together?

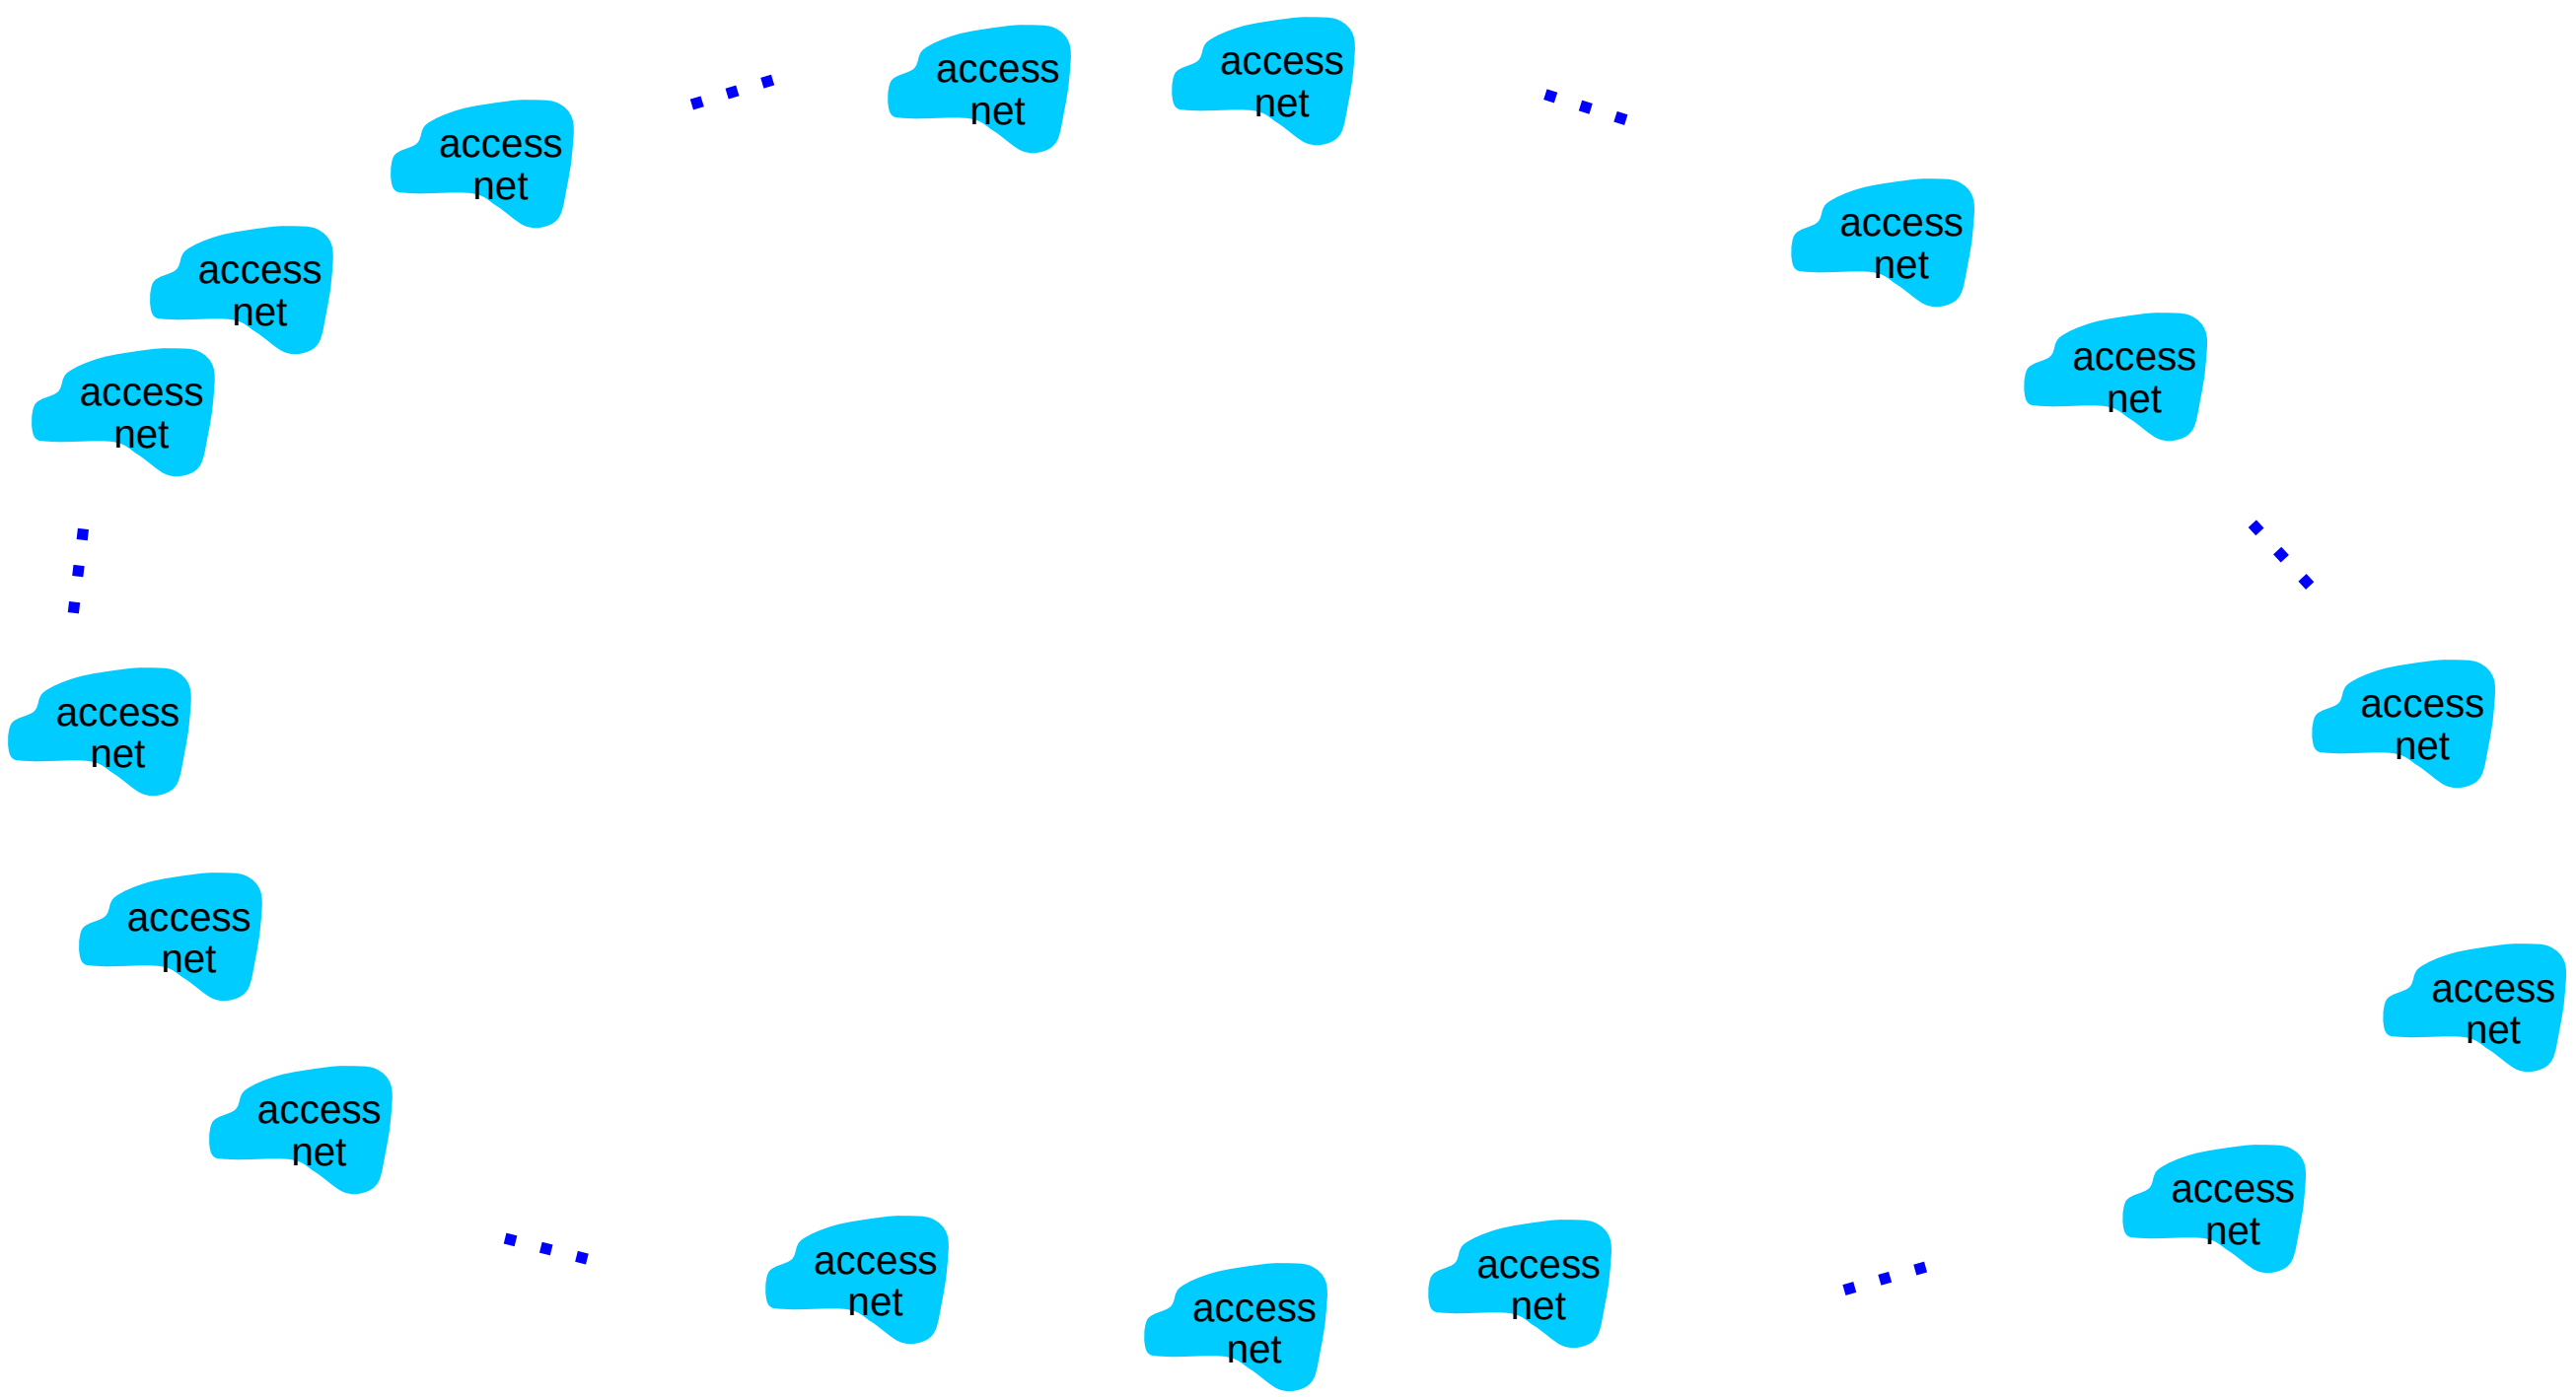

Internet structure: a "network of networks"

Question: given *millions* of access ISPs, how to connect them together?

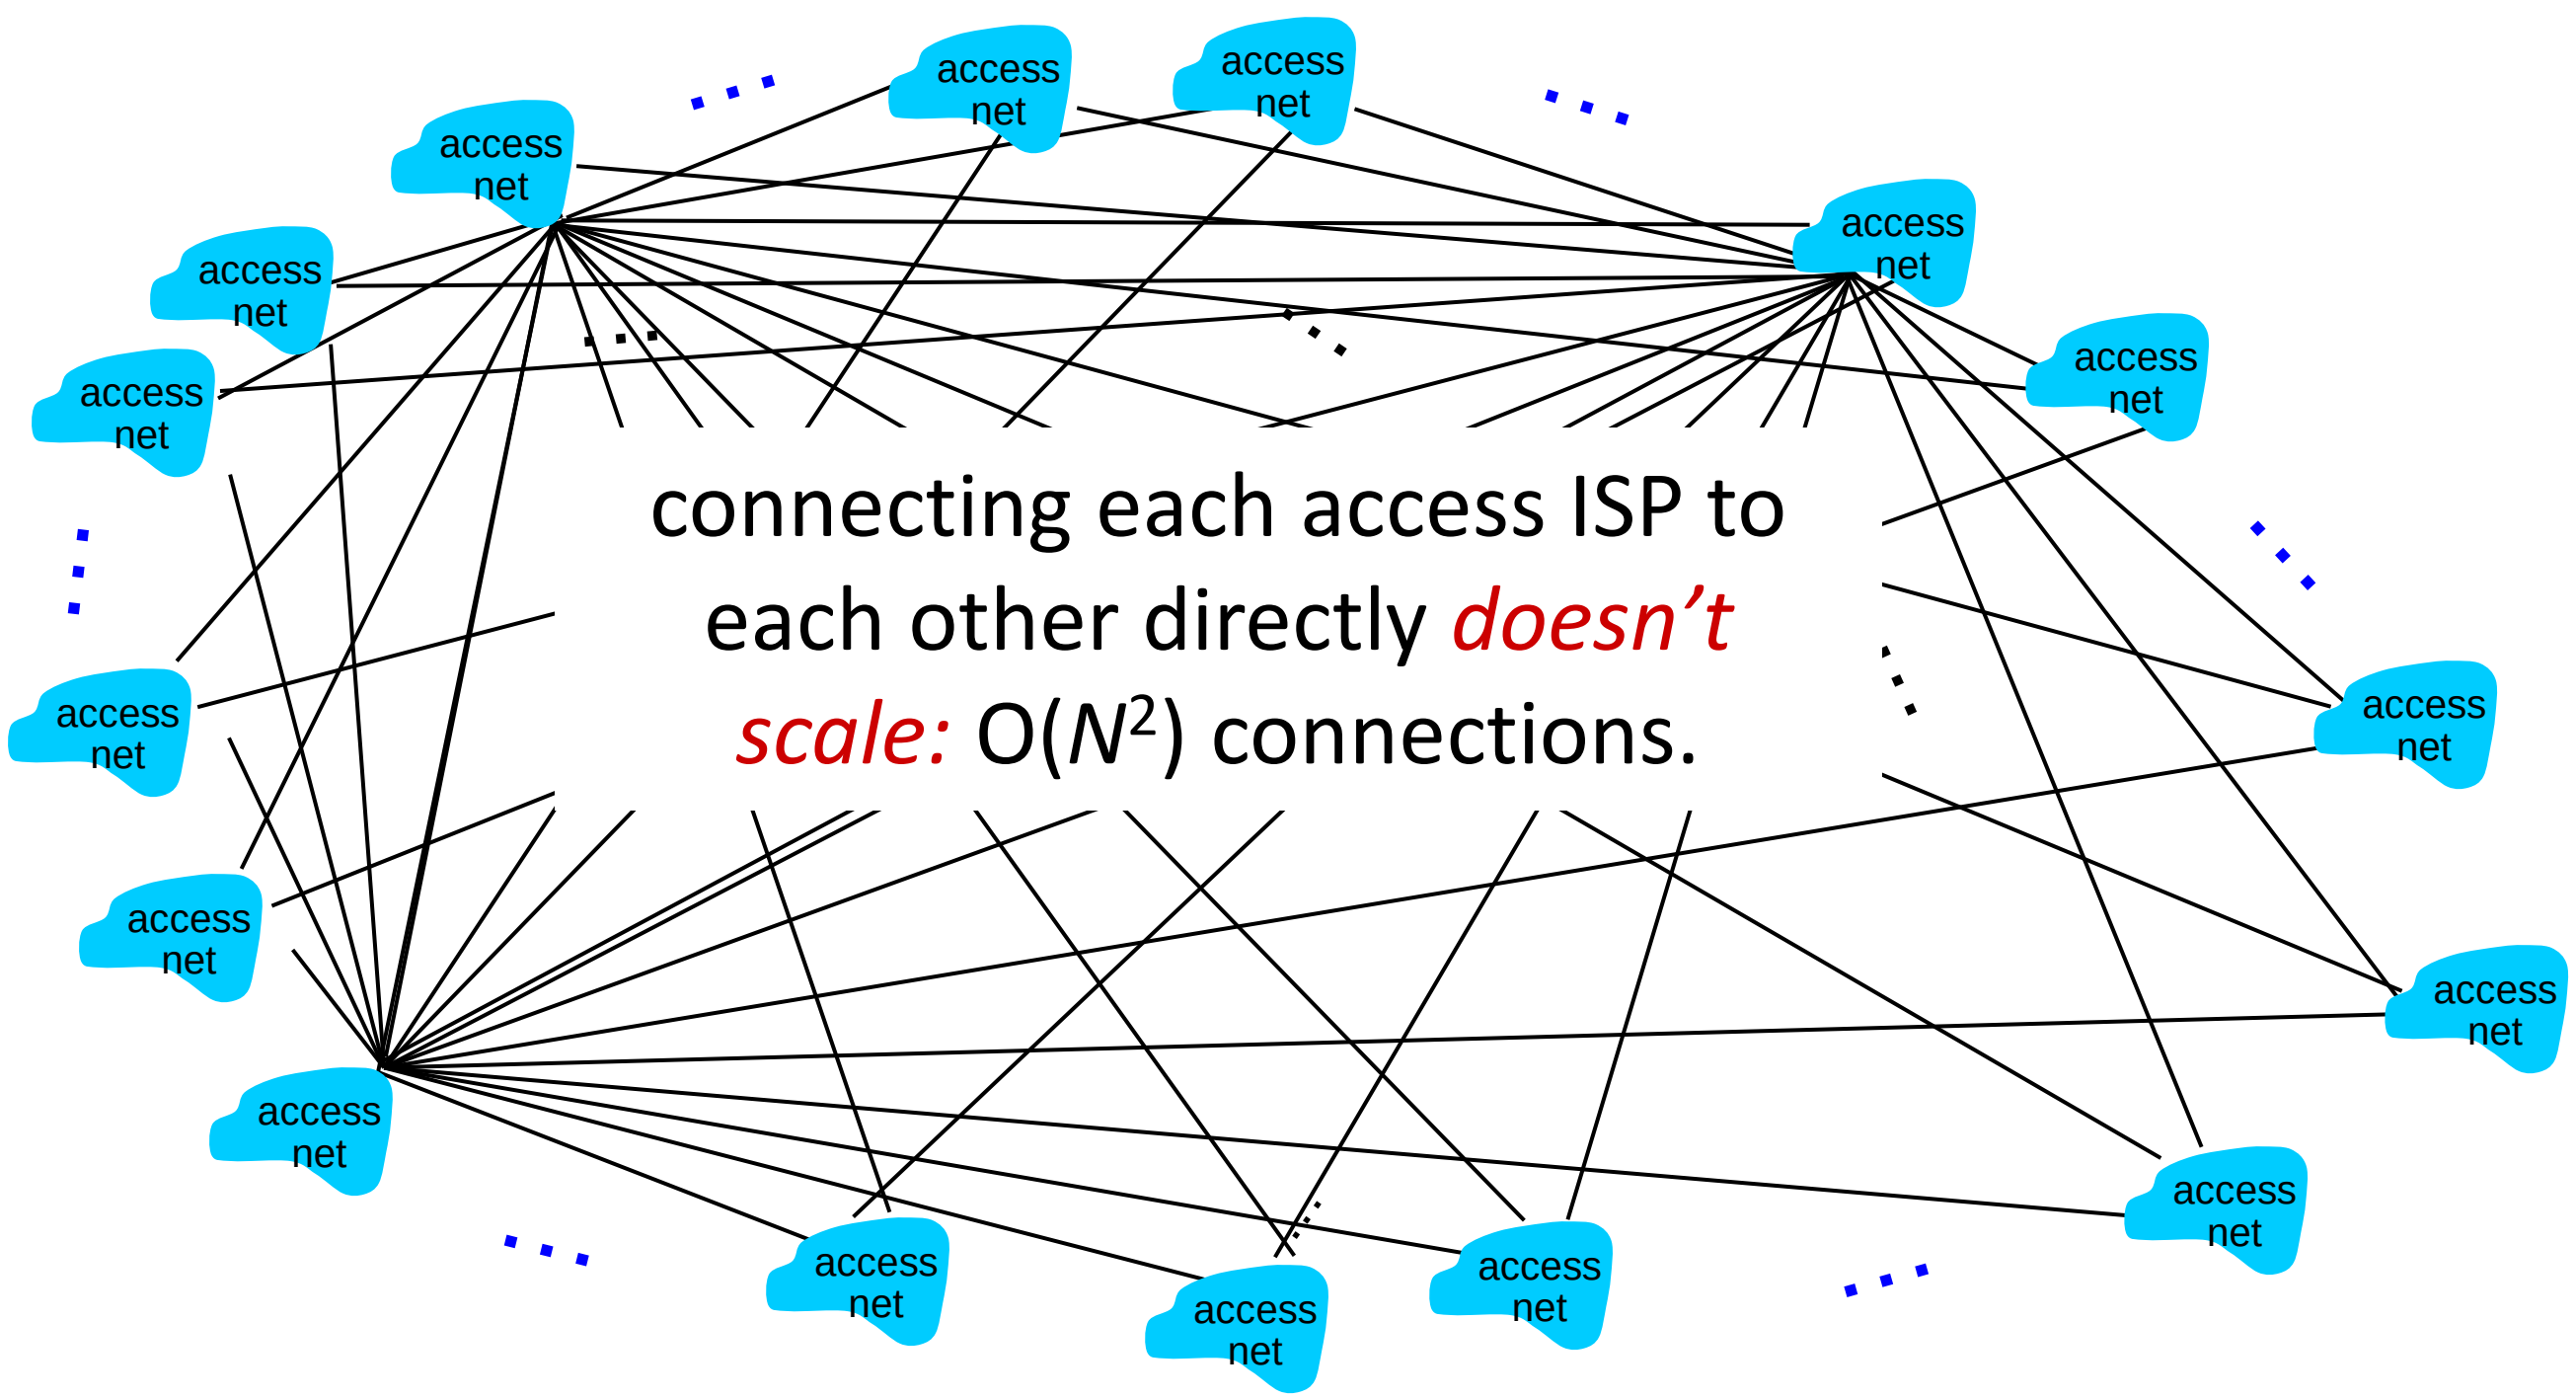

Network Structure (Example: Telephone Network)

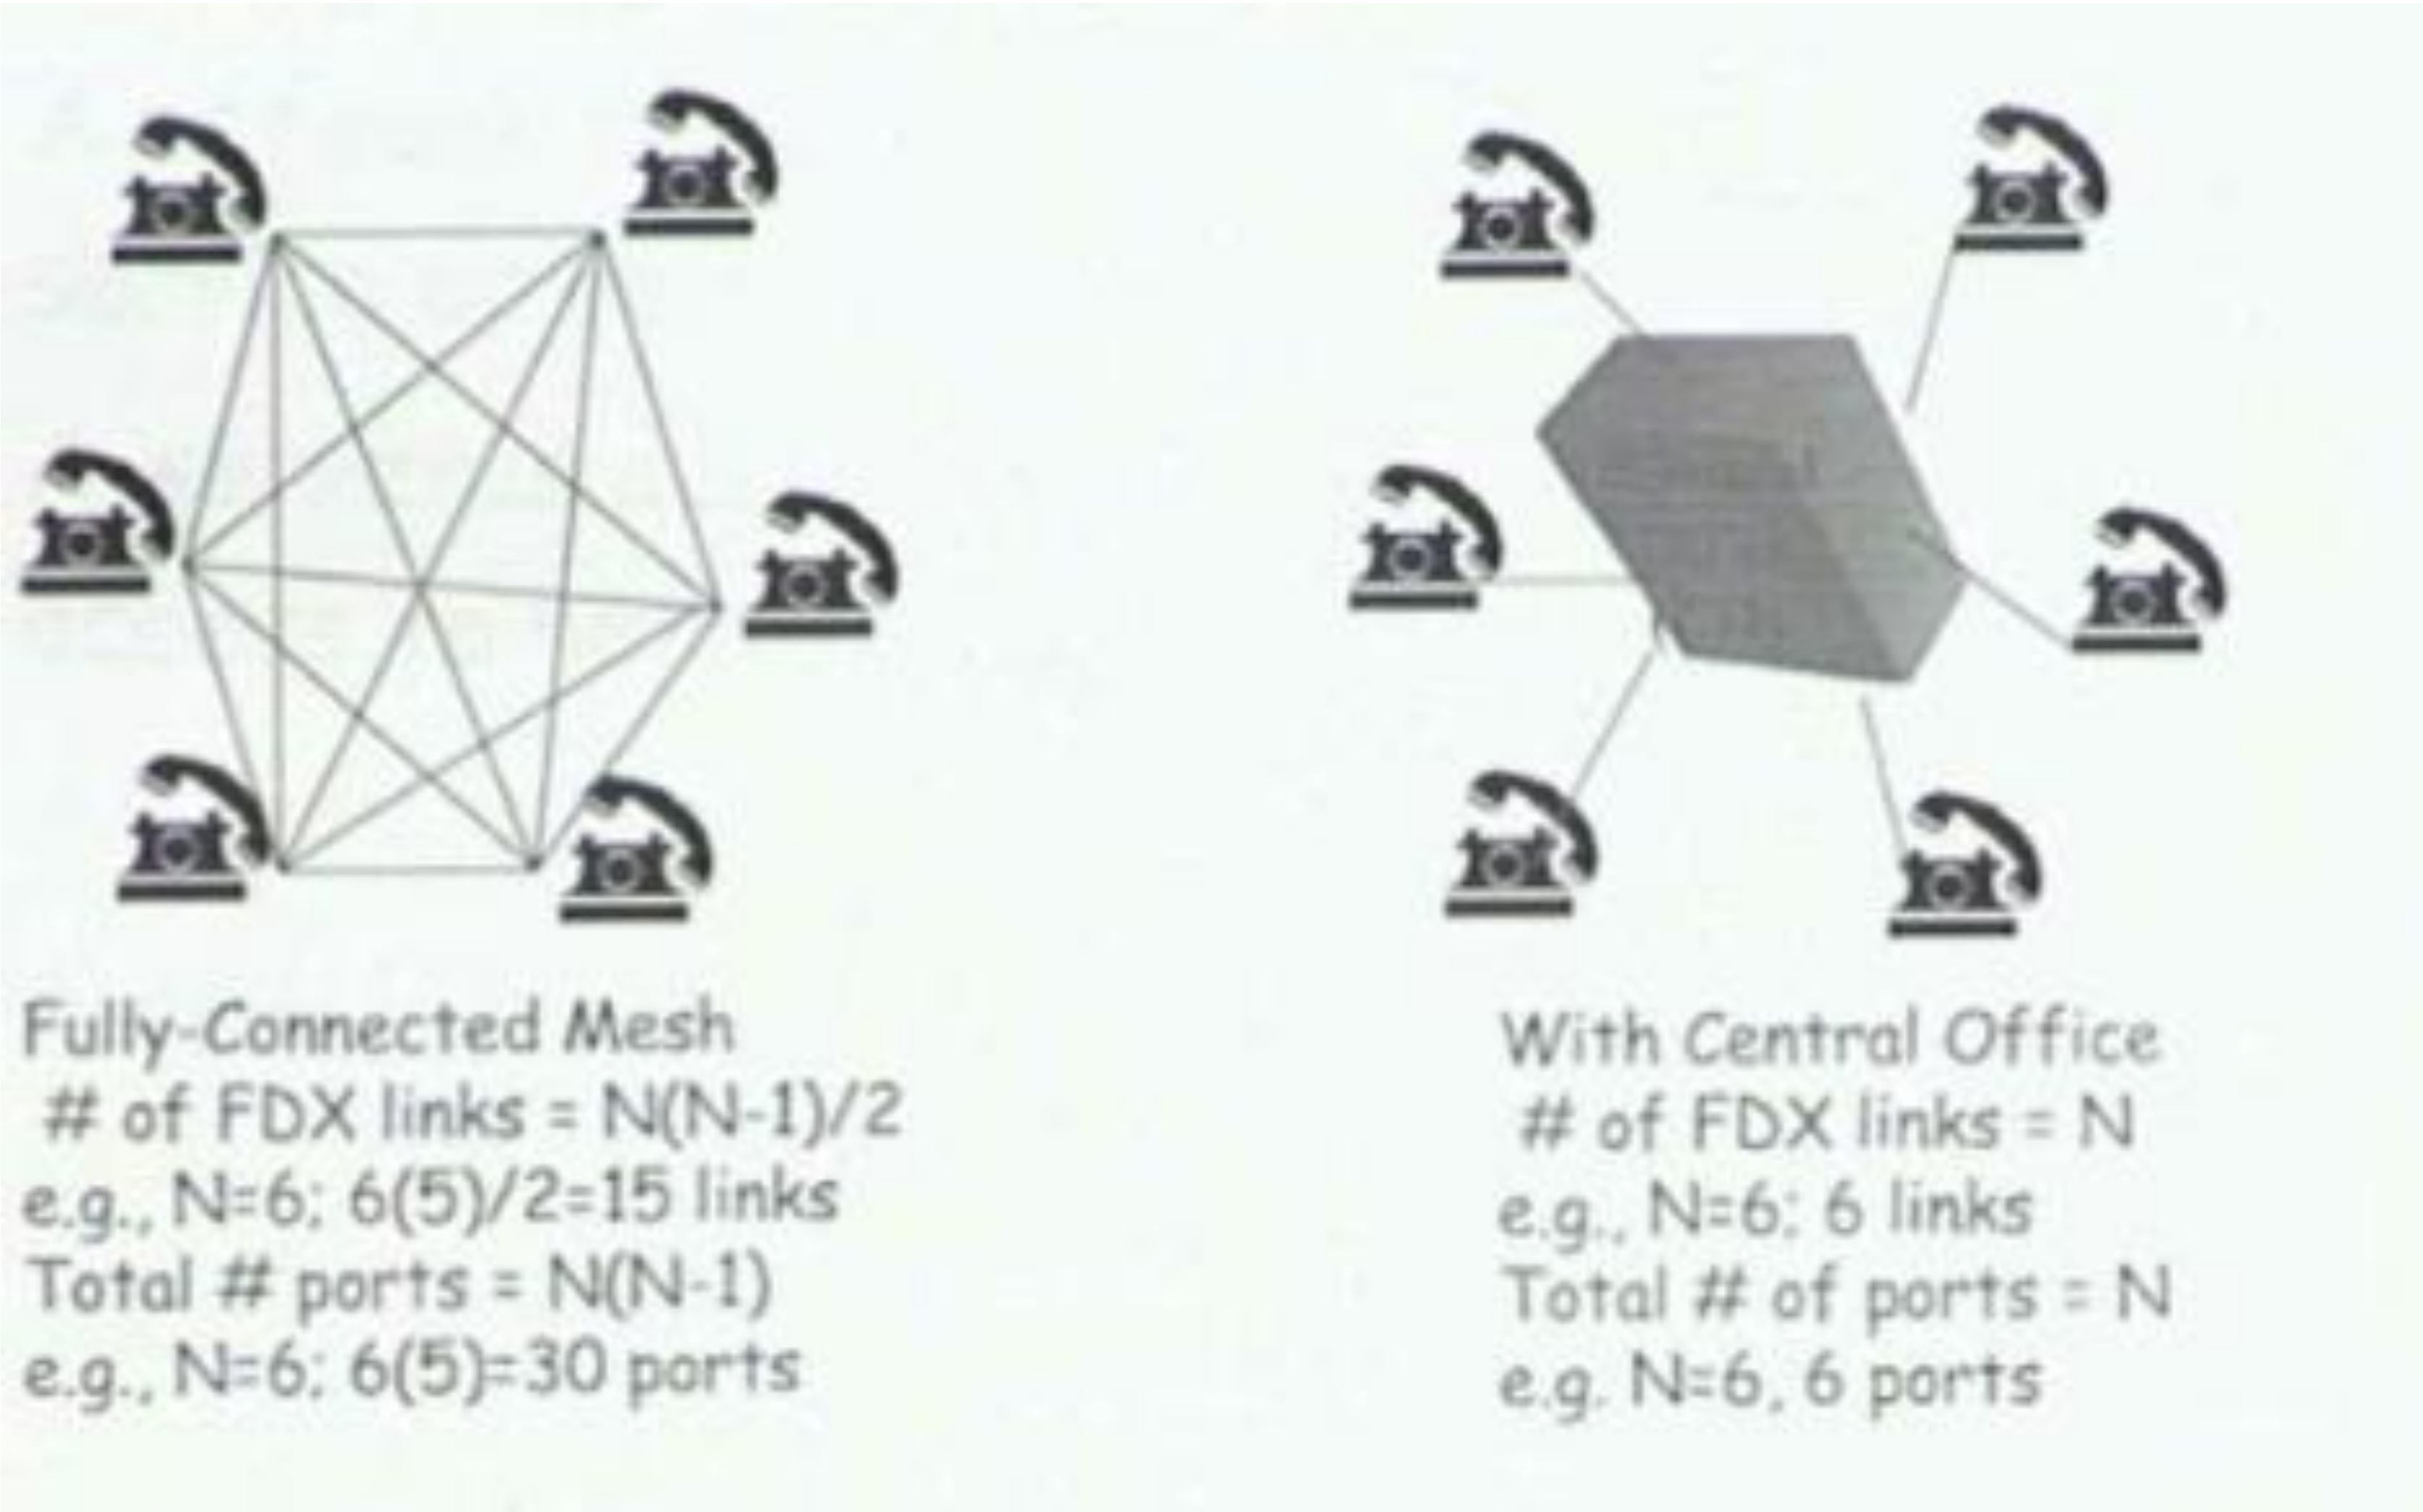

Internet structure: a "network of networks"

Option: connect each access ISP to one global transit ISP?
Customer and provider ISPs have economic agreement.

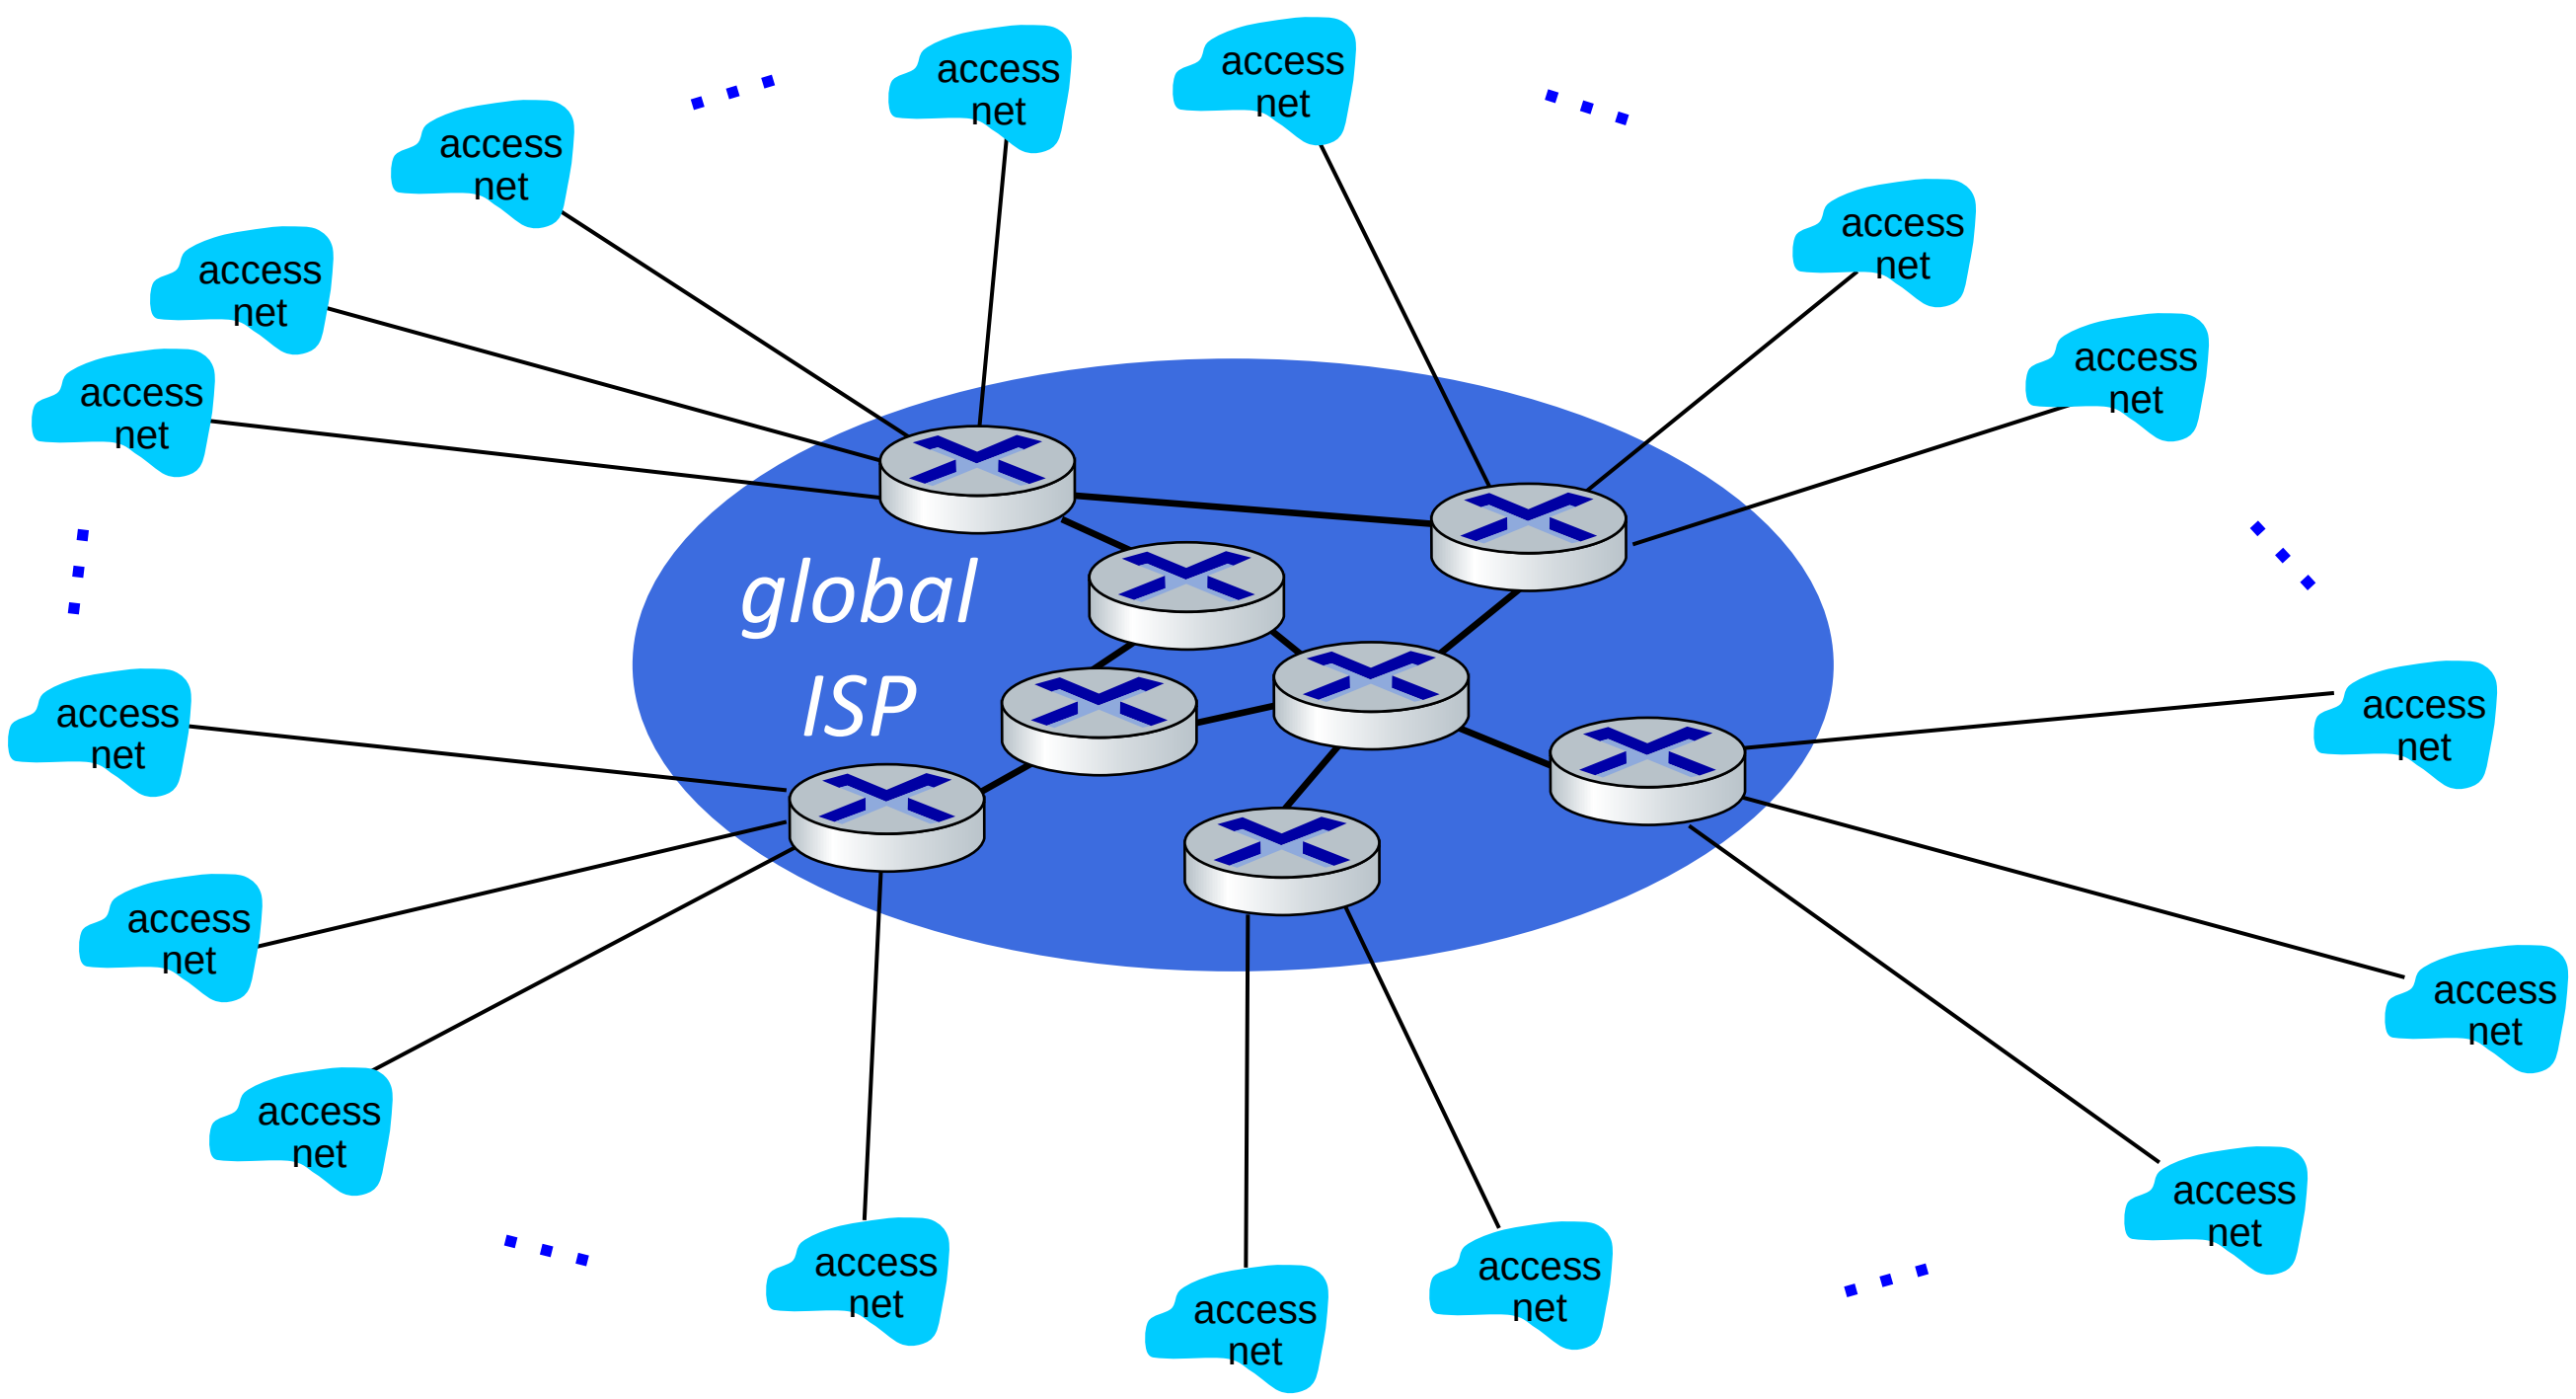

Internet structure: a "network of networks"

But if one global ISP is viable business, there will be competitors ….

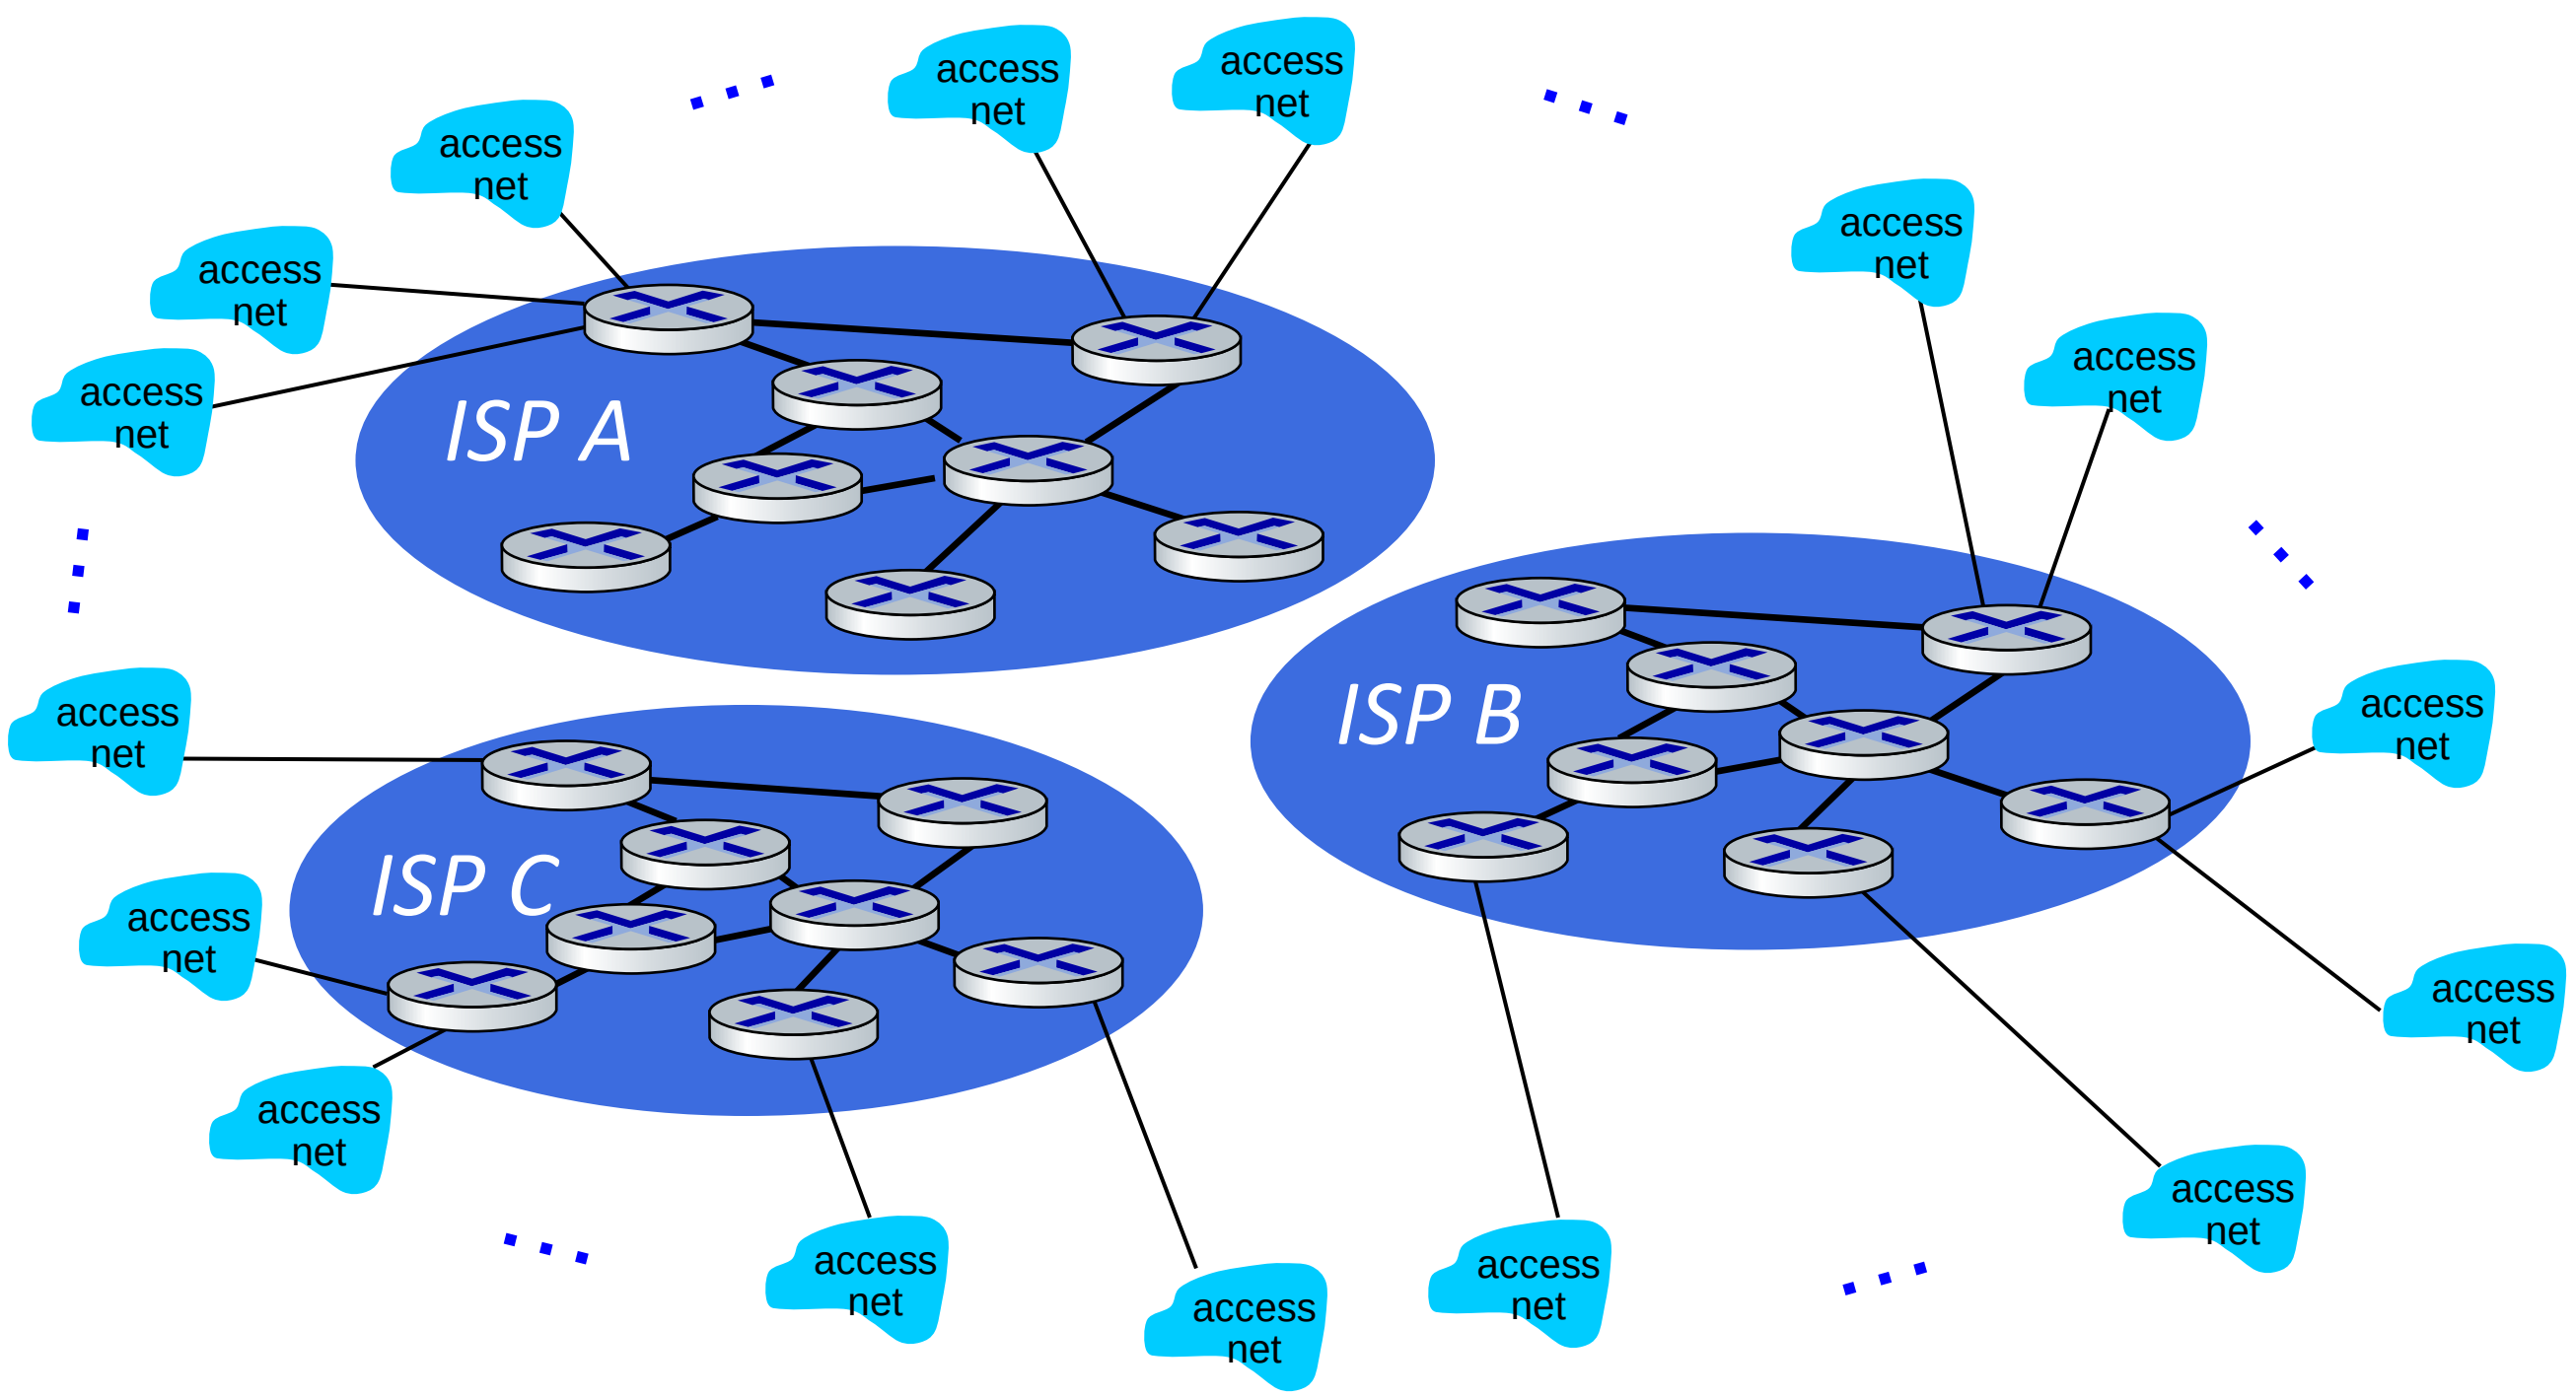

Internet structure: a “network of networks”

But if one global ISP is viable business, there will be competitors …. who will want to be connected

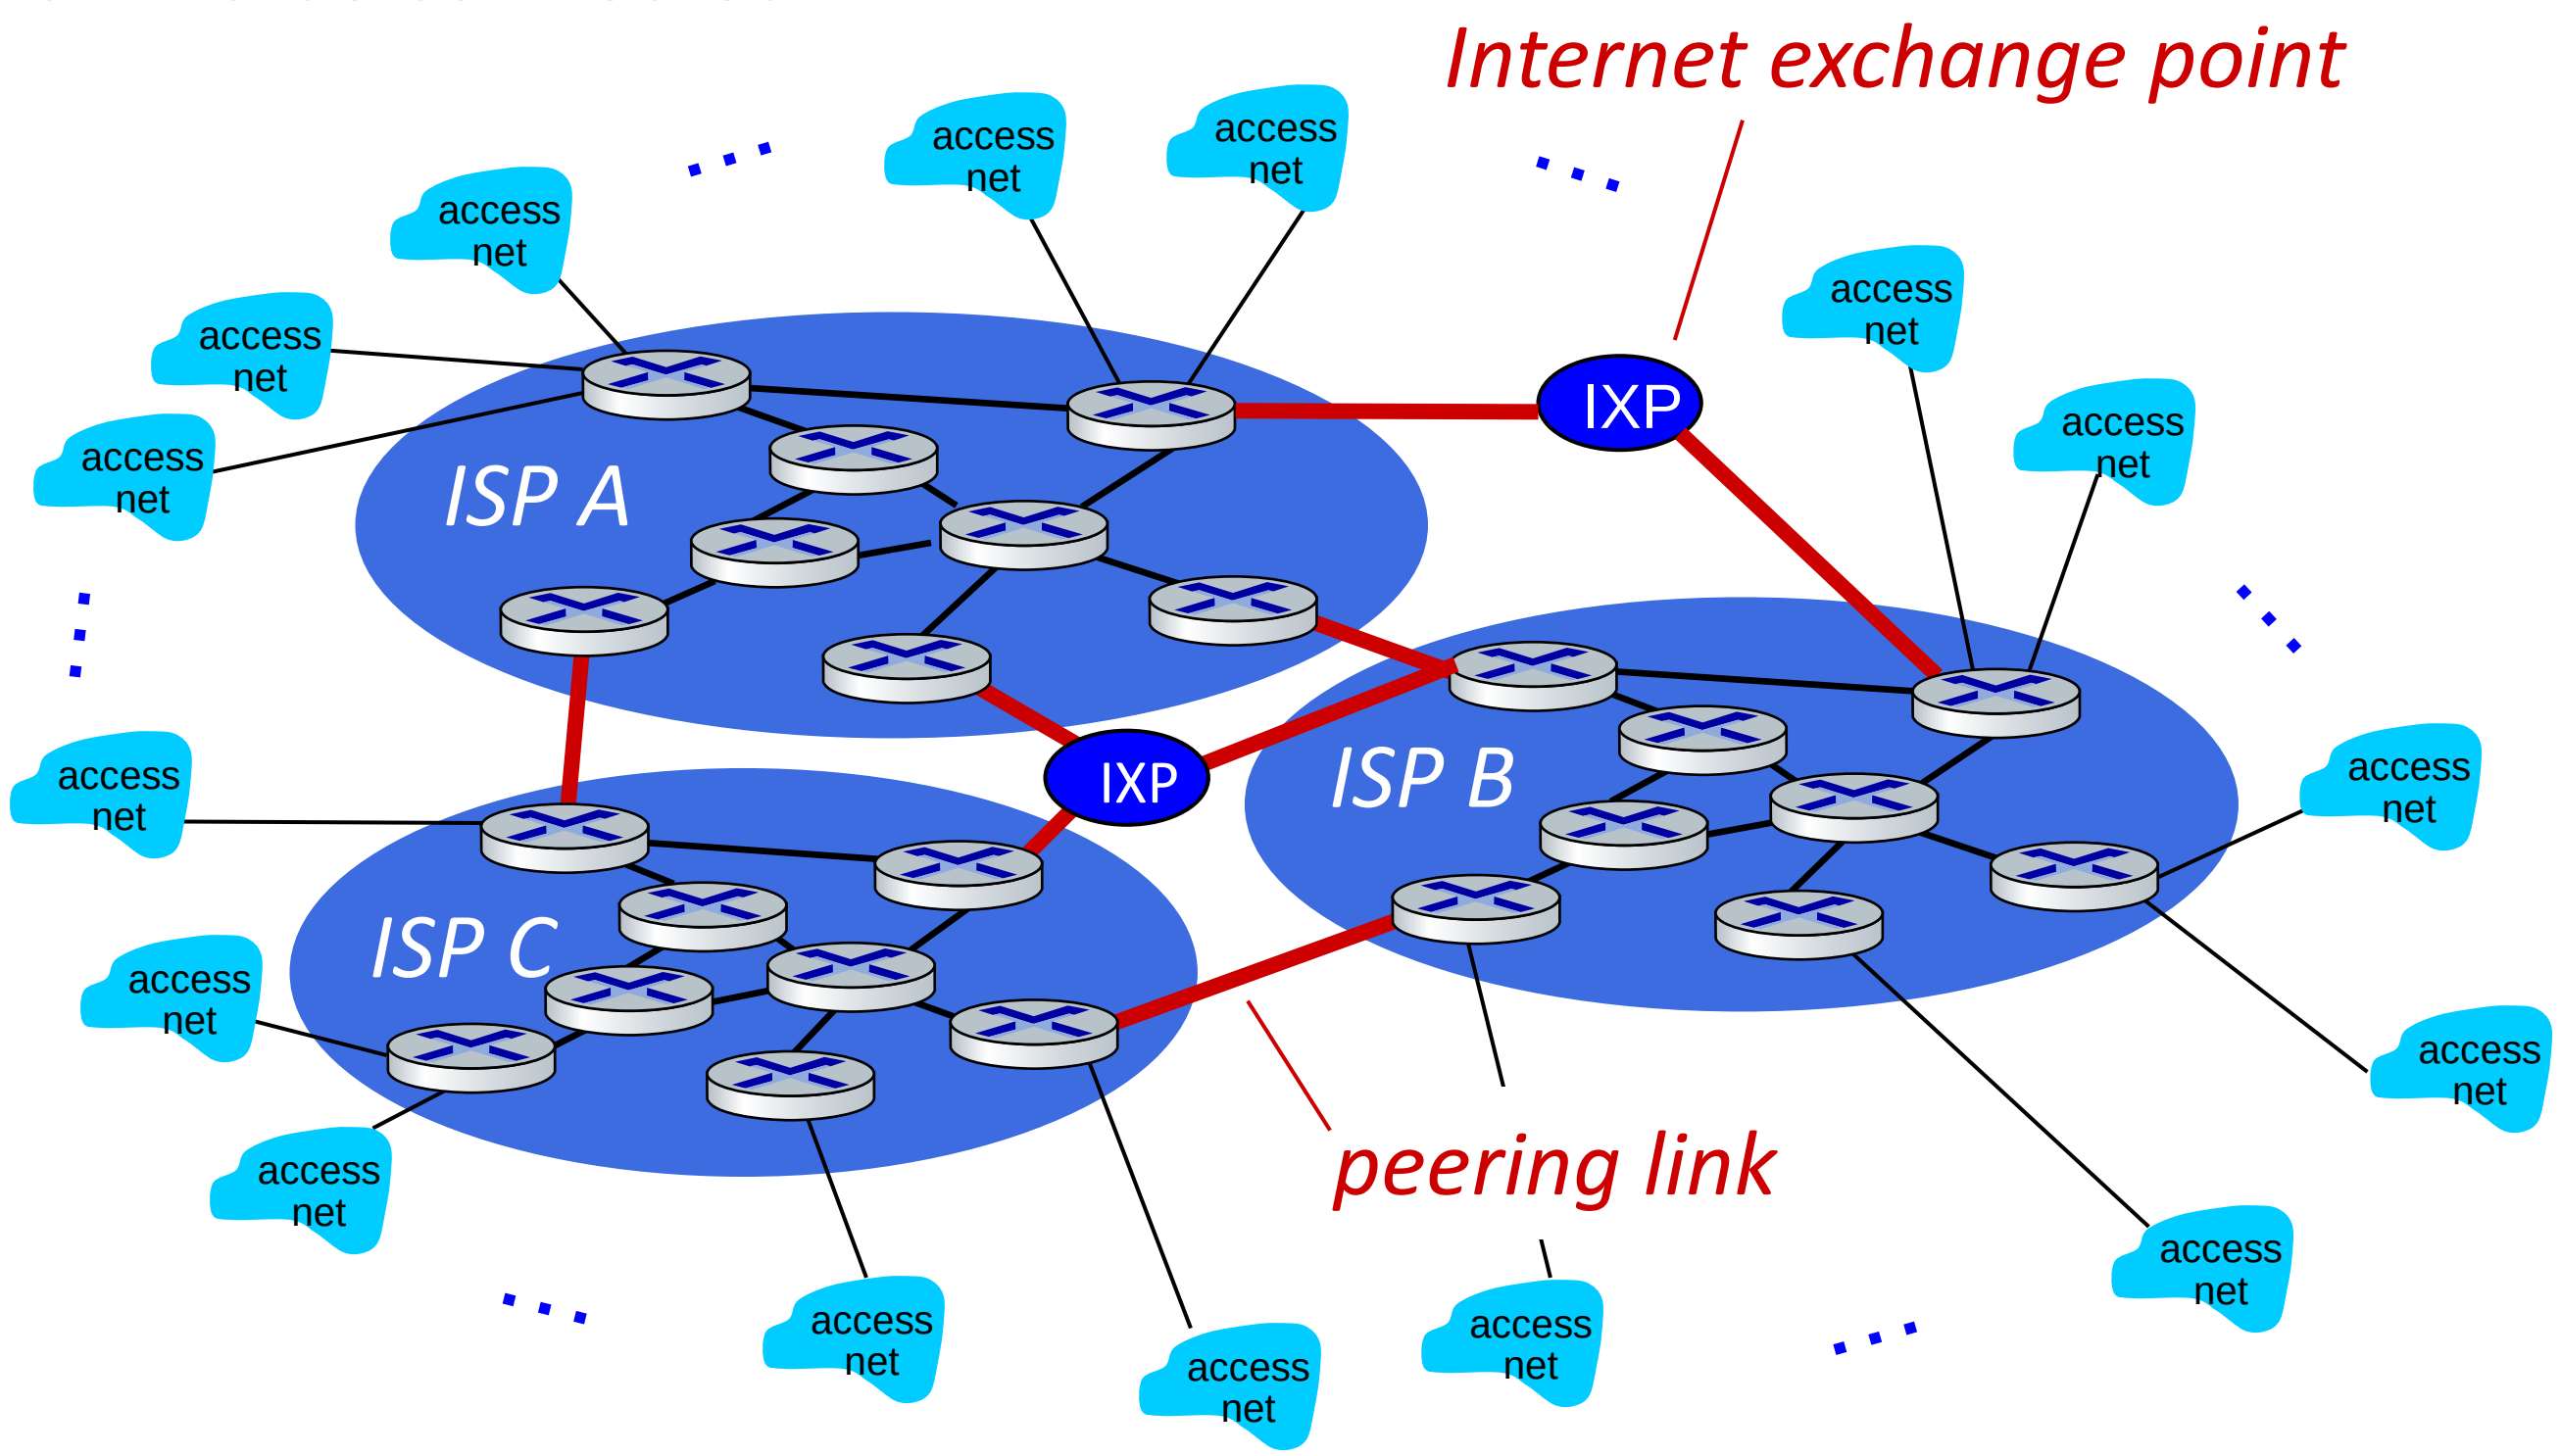

Internet structure: a "network of networks"

… and regional networks may arise to connect access nets to ISPs

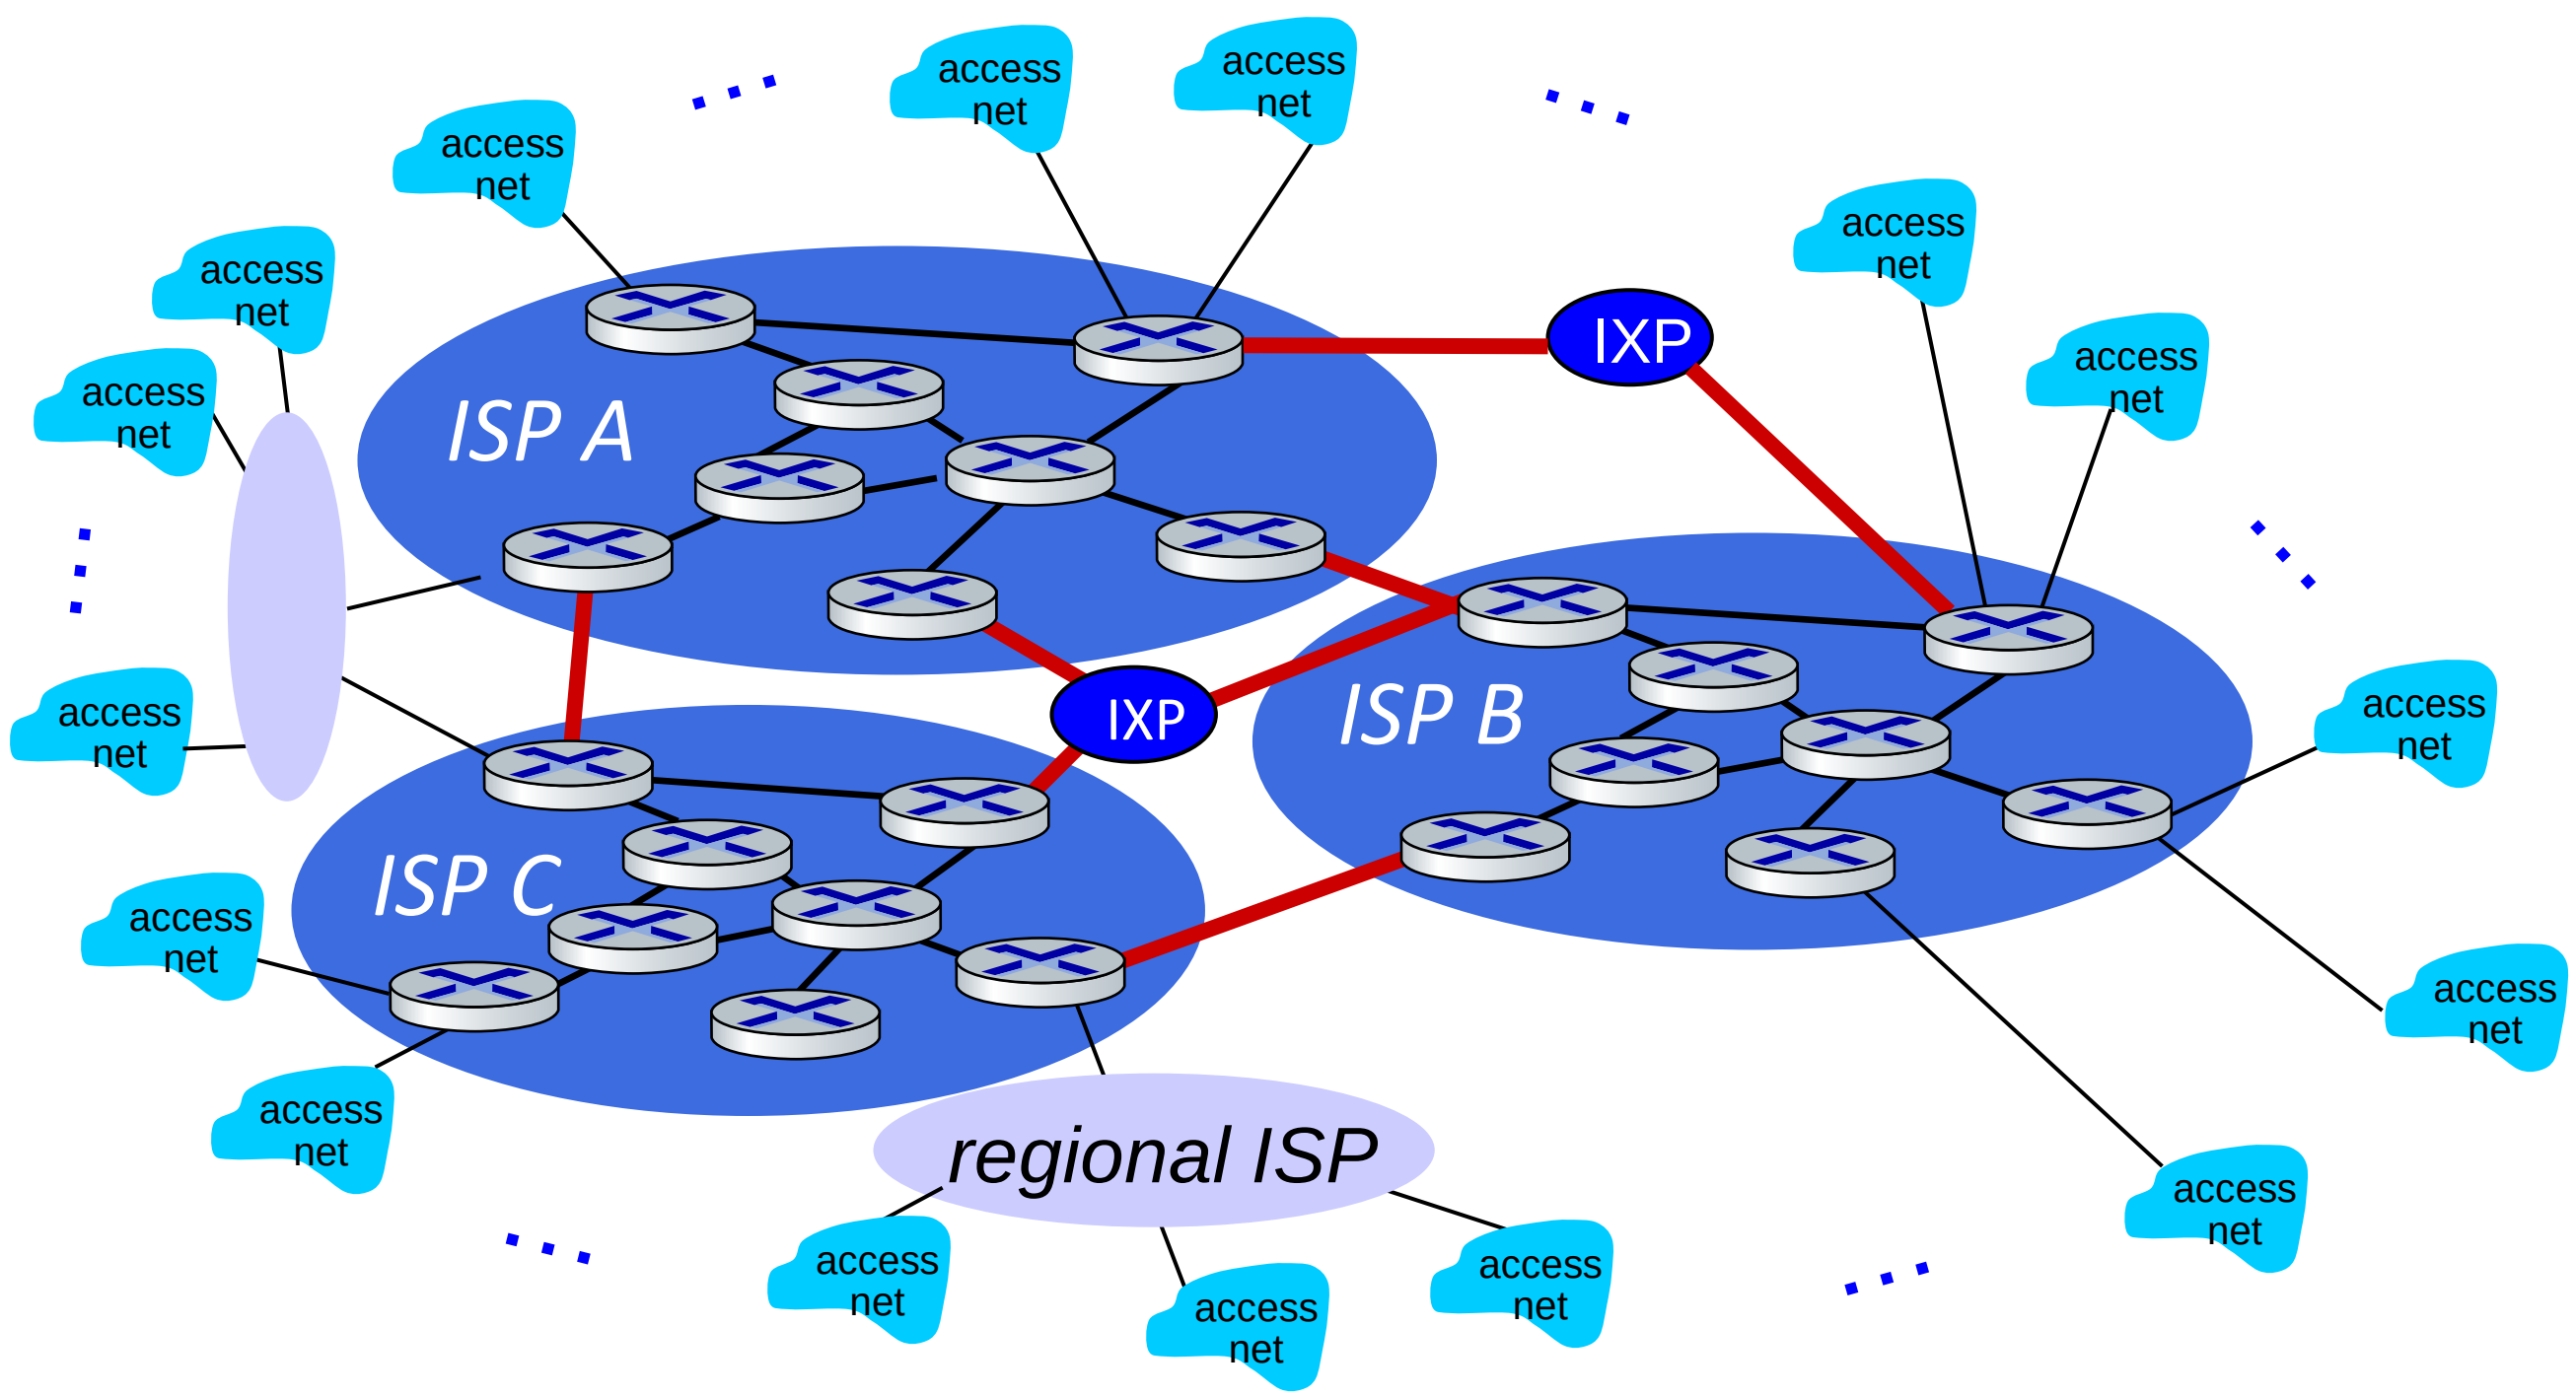

Internet structure: a "network of networks"

... and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

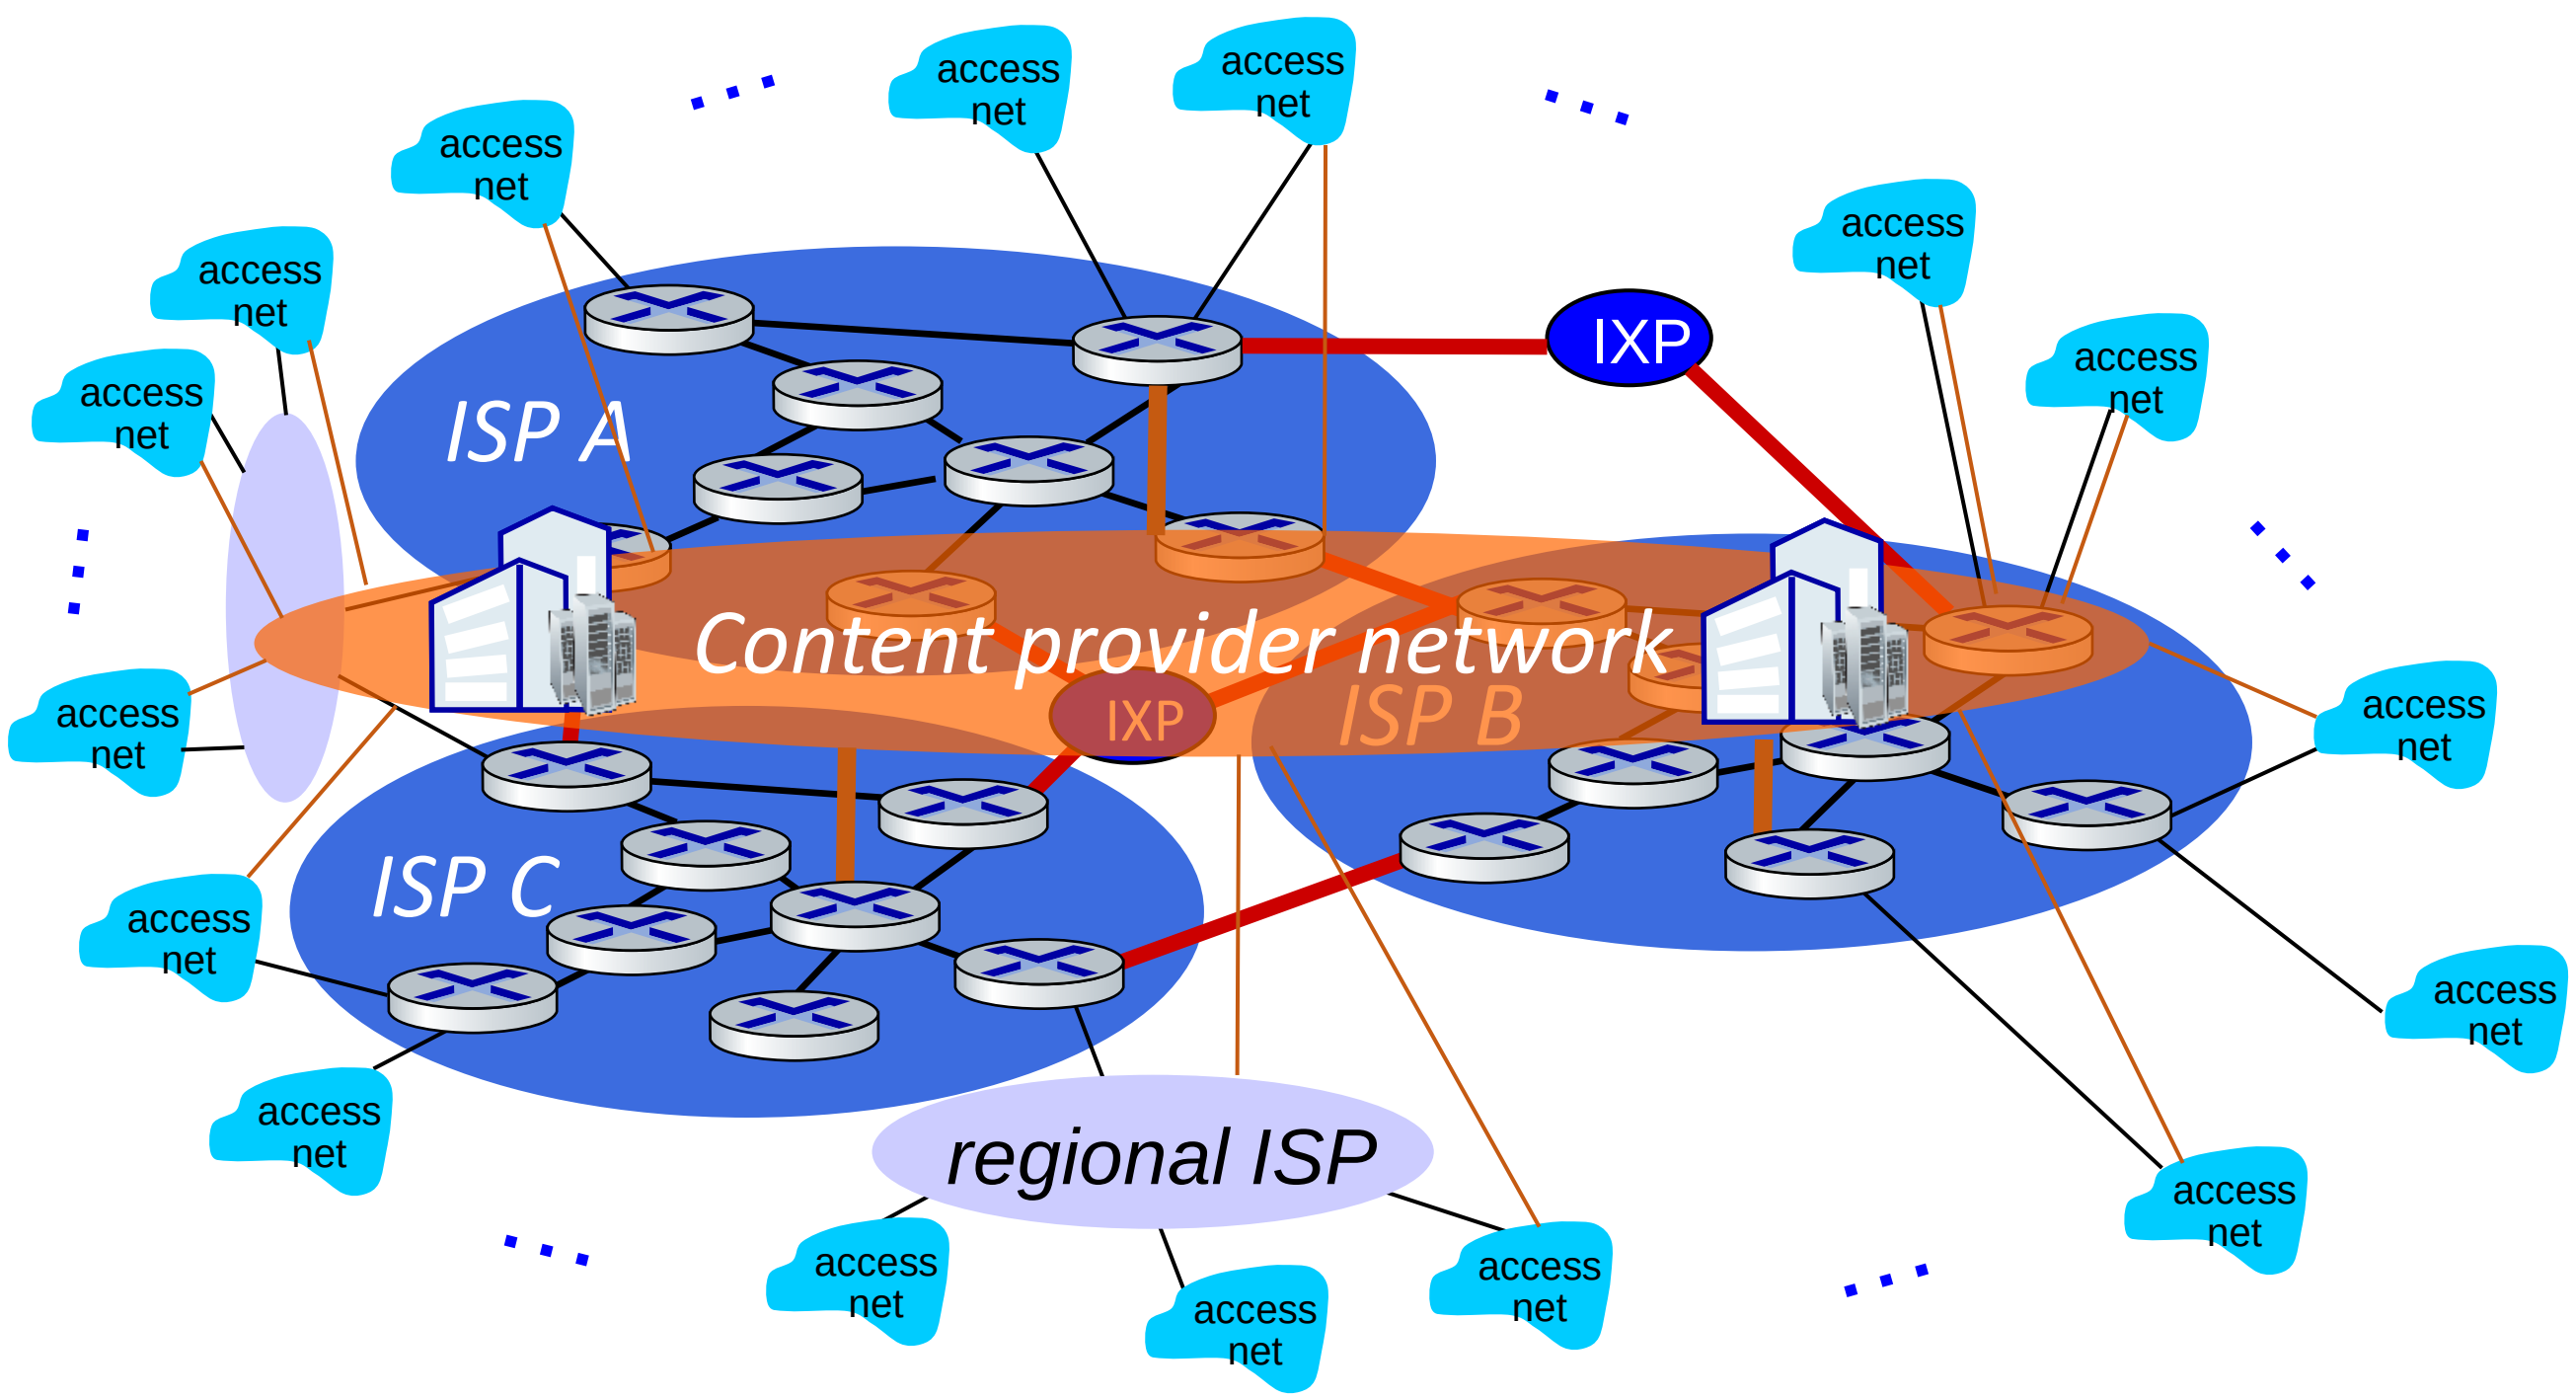

Internet structure: a "network of networks"

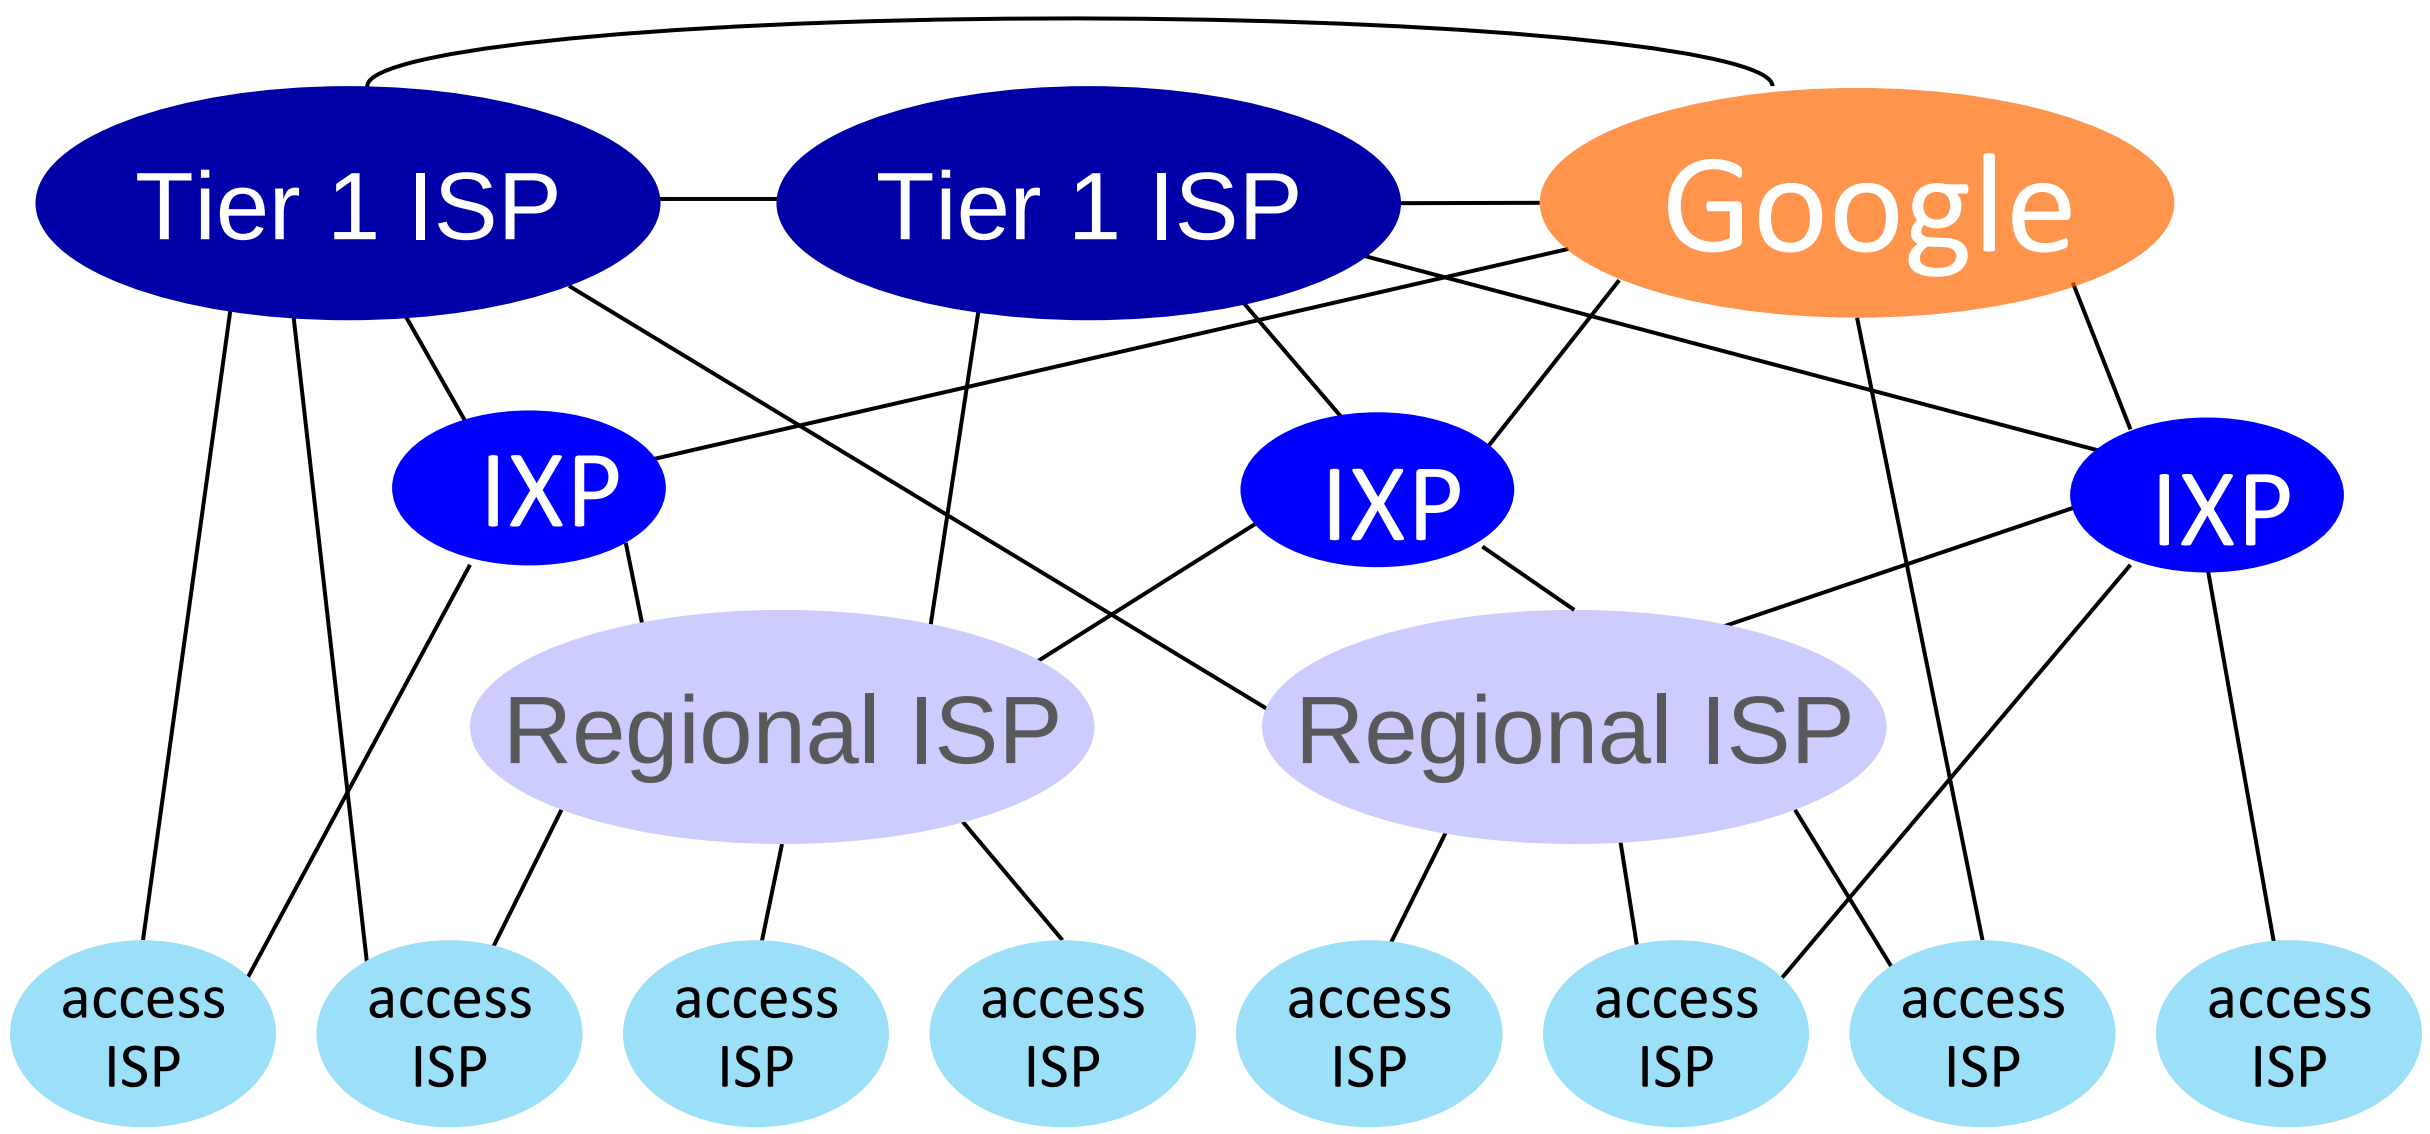

At "center": small # of well-connected large networks

- "tier-1" commercial ISPs (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
- content provider networks (e.g., Google, Facebook): private network that connects its data centers to Internet, often bypassing tier-1, regional ISPs

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

How do we evaluate a network?

Performance Metrics

- Delay
- Loss
- Throughput

How do packet delay and loss occur?

- packets *queue* in router buffers, waiting for turn for transmission
  - queue length grows when arrival rate to link (temporarily) exceeds output link capacity
- packet *loss* occurs when memory to hold queued packets fills up

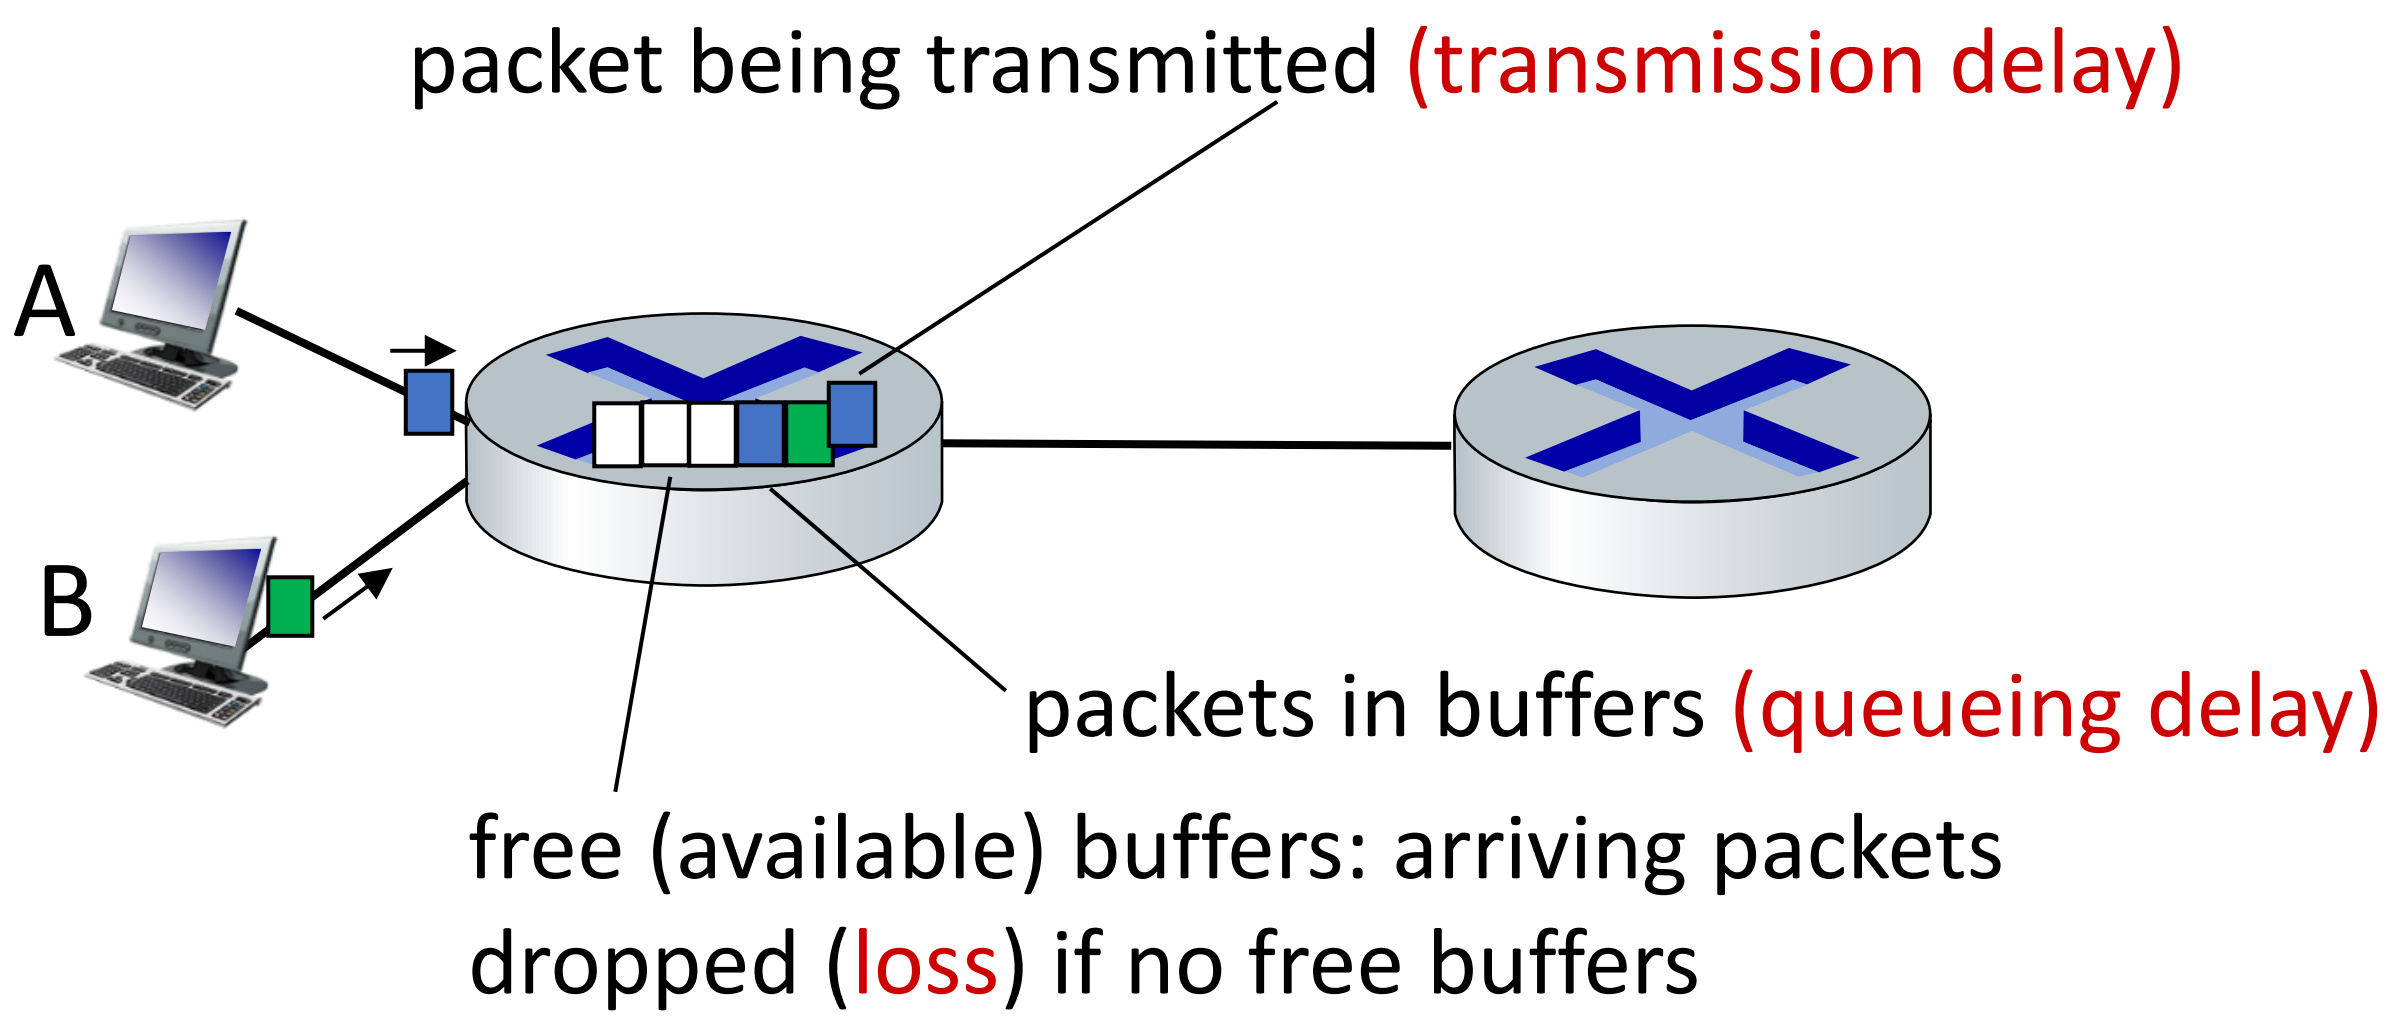

Delay

- How long does it take to send a packet from its source to destination?

Delay

- Consists of four components
  - *queuing delay*
  - *processing delay*
  - *transmission delay*
  - *propagation delay*

due to traffic mix and Switch / router internals

due to link properties

Packet delay: four sources

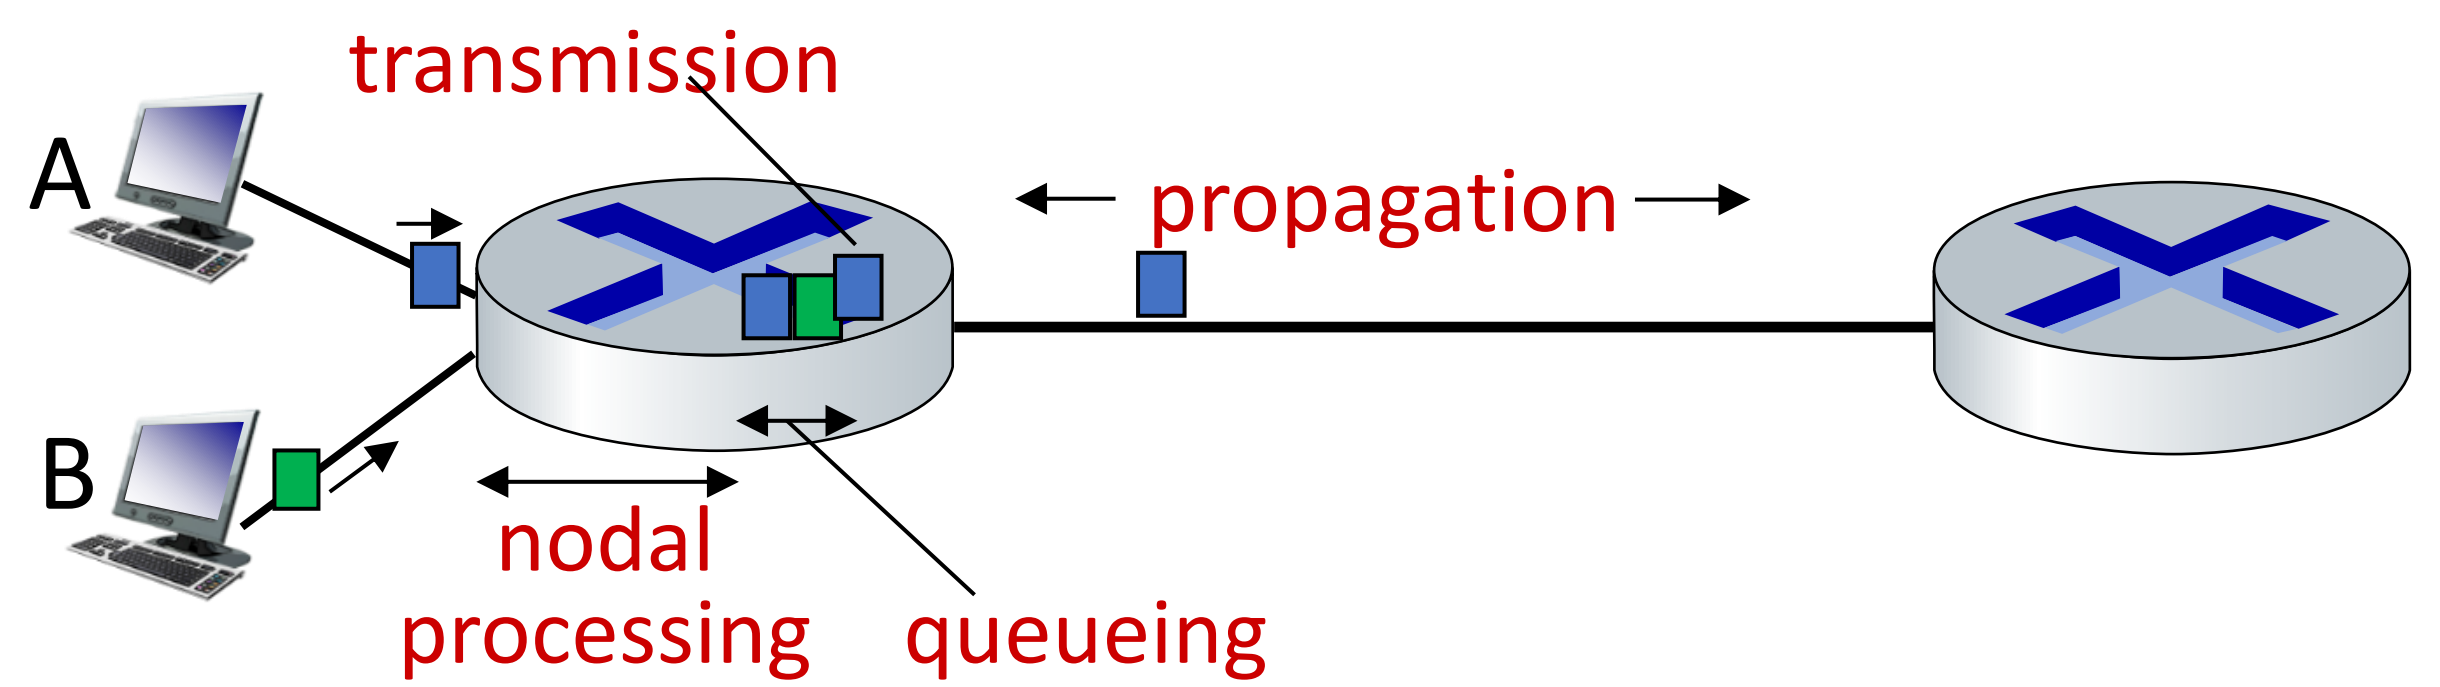

$$d_{nodal} = d_{proc} + d_{queue} + d_{trans} + d_{prop}$$

d_{proc}: nodal processing

- check bit errors
- determine output link
- typically < microsecs

d_{queue}: queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

Packet delay: four sources

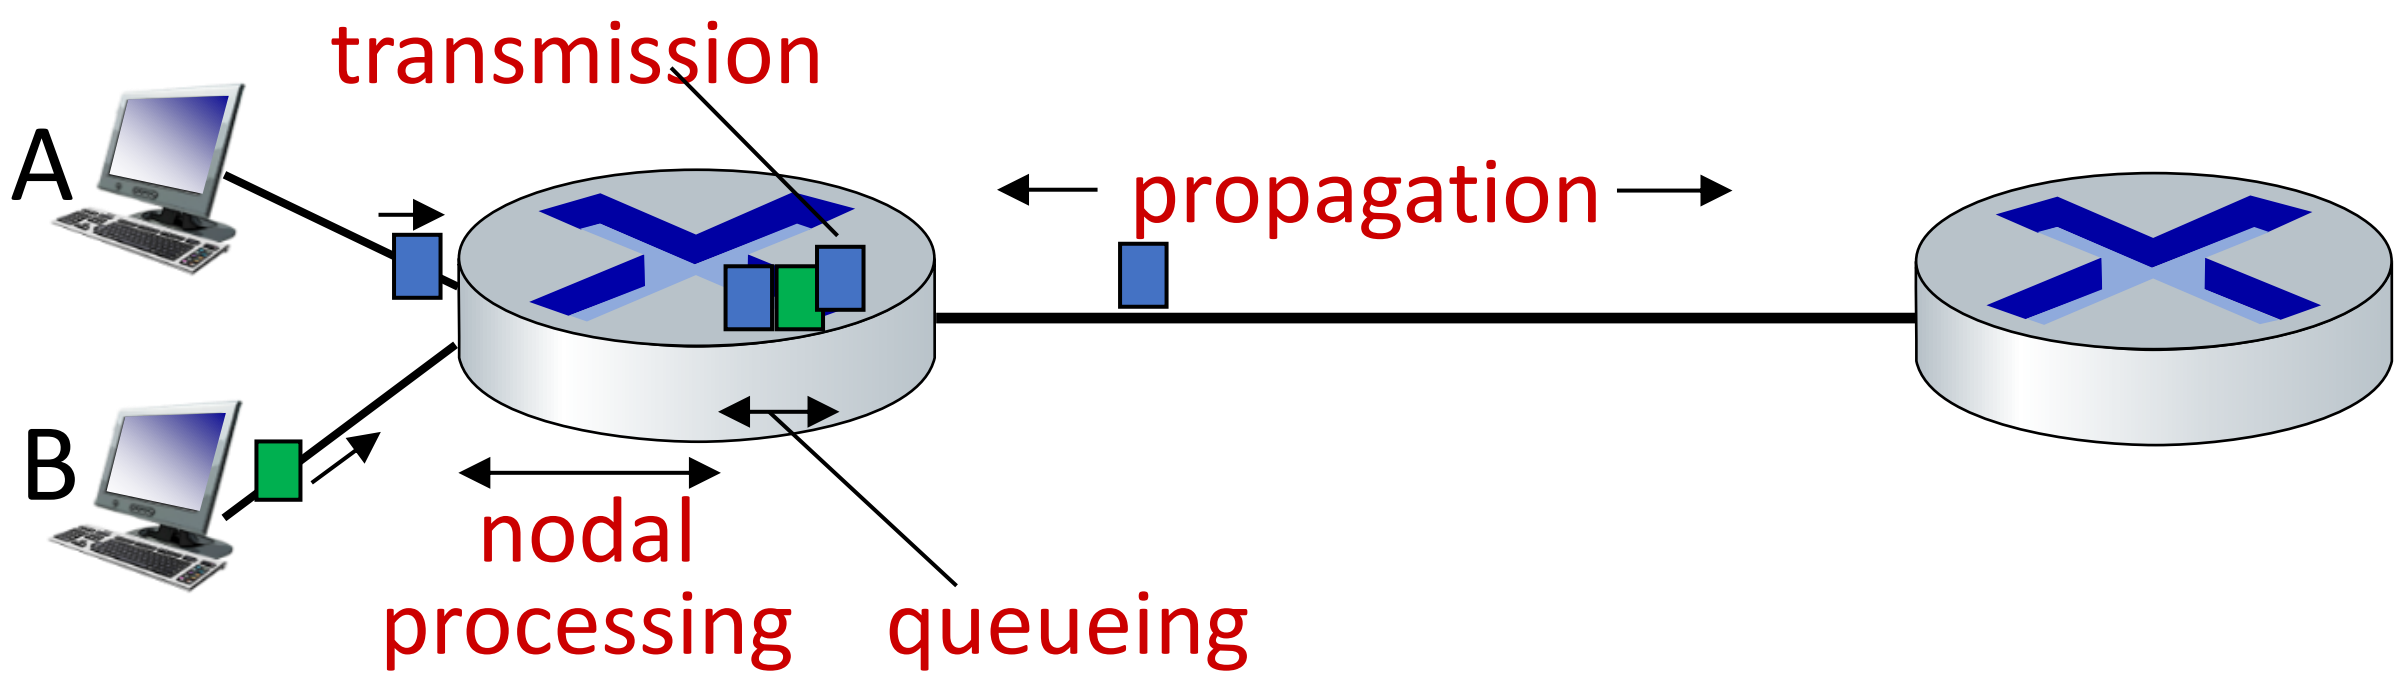

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

d_{trans}: transmission delay:

- L: packet length (bits)
- R: link *transmission rate (bps)*
- $d_{trans} = L/R$

d_{prop}: propagation delay:

- d: length of physical link
- s: propagation speed (~2x10^8 m/sec)
- $d_{\text{prop}} = d/s$

d_{trans} and d_{prop}
very different

Caravan analogy

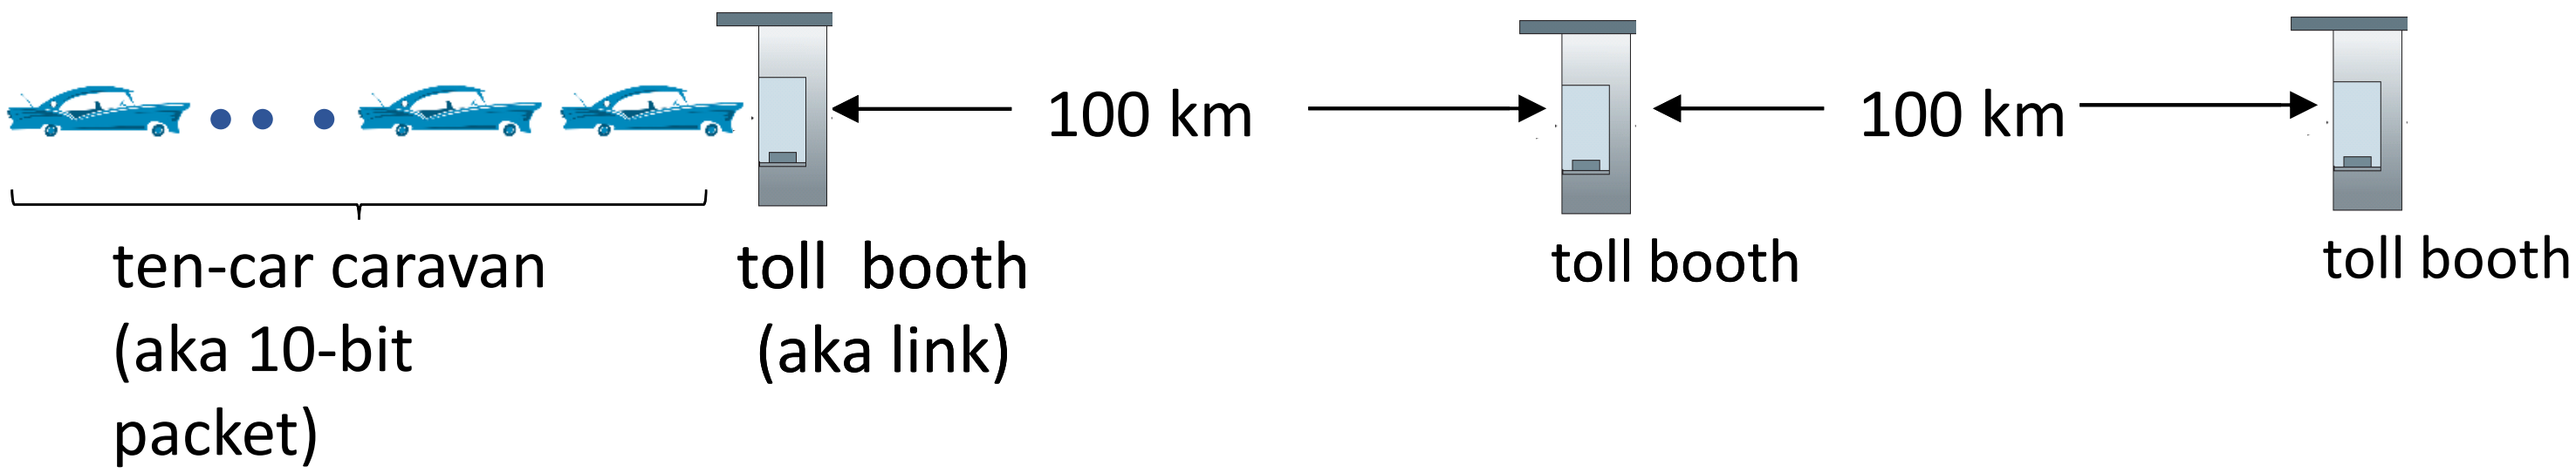

- car ~ bit; caravan ~ packet; toll service ~ link transmission
- toll booth takes 12 sec to service car (bit transmission time)
- "propagate" at 100 km/hr
- *Q:* How long until caravan is lined up before 2nd toll booth?
- time to "push" entire caravan through toll booth onto highway = 12*10 = 120 sec (total transmission delay for caravan = packet)
- time for last car to propagate from 1st to 2nd toll both: 100km/(100km/hr) = 1 hr (propagation delay)
- *A:* 62 minutes

Caravan analogy

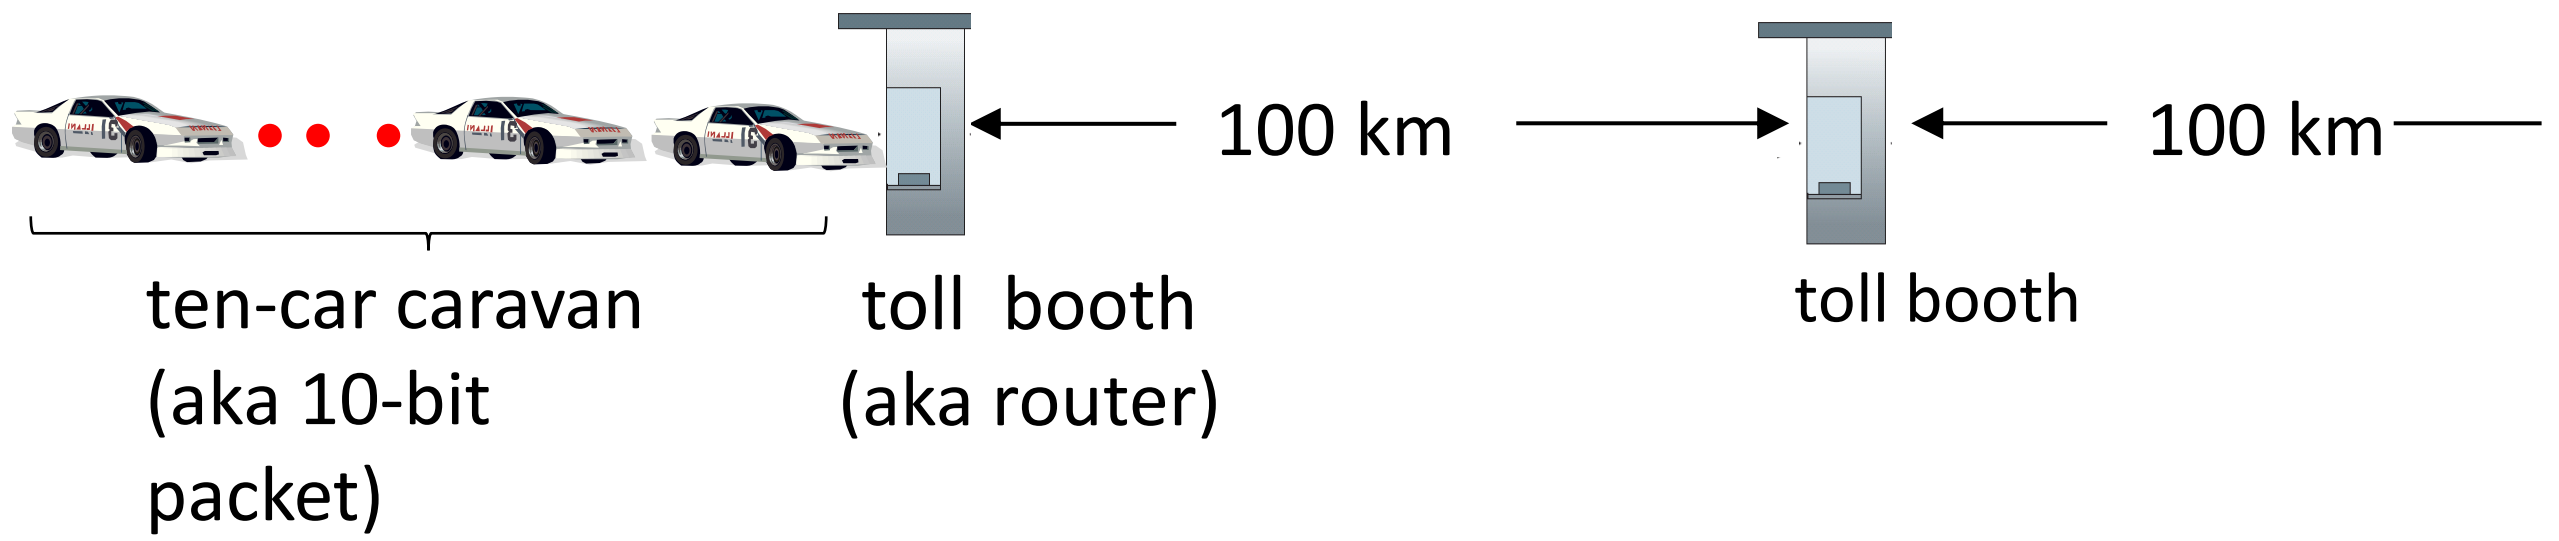

- suppose cars now "propagate" at 1000 km/hr
- and suppose toll booth now takes one min to service a car
- *Q: Will cars arrive to 2nd booth before all cars serviced at first booth?*

  A: Yes! after 7 min, first car arrives at second booth; three cars still at first booth (propagation delay = d / s = 100 km / 1000 km per hour = 0.1 hour = 6 minutes)

Packet queueing delay (revisited) – Traffic Intensity

- *a:* average packet arrival rate
- *L:* packet length (bits)
- *R:* link bandwidth (bit transmission rate)

$$\frac{L \cdot a}{R} : \quad \frac{\text{arrival rate of bits}}{\text{service rate of bits}} \quad \textit{“traffic intensity”}$$

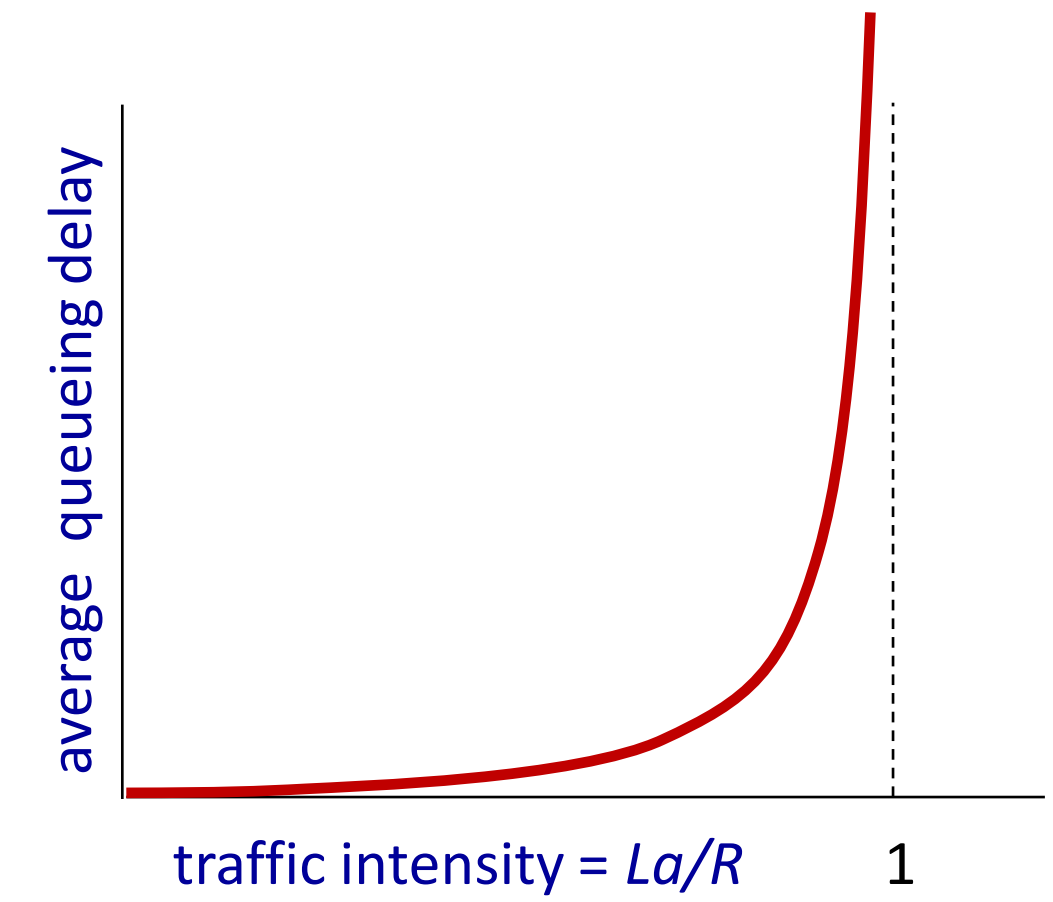

- *La/R* ~ 0: avg. queueing delay small
- *La/R* -> 1: avg. queueing delay large
- *La/R* > 1: more “work” arriving is more than can be serviced - average delay infinite!

La/R ~ 0

La/R -> 1