

Robust Controller Synthesis

Thijs Lenssen and Amritam Das

Abstract—

Index Terms—PDEs, Robust Control, LMIs;

I. INTRODUCTION

This paper uses PN PI operators inspired by the works [2], [5], [13]. Then it IQC extends the results from [1], [4], [11]. [3] also covers robust control using dual iq

II. PRELIMINARIES

A. Notation

$L_2^n[a, b]$ denotes the set of $\mathbb{R}^n$ -valued, Lebesgue square-integrable equivalence classes of functions on the spatial domain $[a, b] \subset \mathbb{R}$. The space $\mathbb{R}L_2^n[a, b]$ denotes the Cartesian product $\mathbb{R}^{n_1} \times L_2^{n_2}[a, b]$, where $\mathbf{n} = \begin{bmatrix} n_1 \\ n_2 \end{bmatrix}$, with inner product

$$\left\langle \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}, \begin{bmatrix} y_1 \\ y_2 \end{bmatrix} \right\rangle_{\mathbb{R}L_2} := x_1^\top y_1 + \langle x_2, y_2 \rangle_{L_2}.$$

When clear from context, we occasionally omit the subscript and simply write $\langle \cdot, \cdot \rangle := \langle \cdot, \cdot \rangle_{\mathbb{R}L_2}$. Since the only spatial domain considered here is $[a, b]$, we typically omit the domain and write L_2^n or $\mathbb{R}L_2^n$, further omitting dimensions when clear from context. For a normed space X and Banach space Y , $\mathcal{L}(X, Y)$ denotes the Banach space of bounded linear operators from X to Y with induced norm

$$\|P\|_{\mathcal{L}(X, Y)} = \sup_{\|x\|=1} \|Px\|_Y,$$

and $\mathcal{L}(X) := \mathcal{L}(X, X)$. Our notational convention is to write functions in **bold** (e.g., $\mathbf{x}$, indicating $\mathbf{x} \in \mathbb{R}L_2$) and operators in calligraphic font (e.g., $\mathcal{P} \in \mathcal{L}(\mathbb{R}L_2)$). For a Hilbert space X and operator $\mathcal{A} \in \mathcal{L}(X)$, the adjoint $\mathcal{A}^*$ is defined by

$$\langle \mathbf{x}, \mathcal{A}\mathbf{y} \rangle_X = \langle \mathcal{A}^*\mathbf{x}, \mathbf{y} \rangle_X, \quad \forall \mathbf{x}, \mathbf{y} \in X.$$

For any matrix or operator A with a specified 2×2 block partition, $(A)_{ij}$ denotes its (i, j) block for $i, j \in \{1, 2\}$. When the blocks of a named object are used repeatedly, we abbreviate $A_{ij} := (A)_{ij}$. Thus, these subscripts refer to blocks in the specified partition rather than to scalar entries. The space $L_2^n[0, \infty)$ denotes $\mathbb{R}^n$ -valued square-integrable signals defined on the temporal domain $[0, \infty)$, so that $x(t) \in \mathbb{R}^n$. Similarly, $\mathbb{R}L_2^n[0, \infty)$ denotes $\mathbb{R}L_2$ -valued square-integrable temporal signals. For suitably differentiable $\mathbf{x} \in \mathbb{R}L_2^n[0, \infty)$, we write $\dot{\mathbf{x}} := \frac{\partial \mathbf{x}}{\partial t}$. For a Hilbert space $\mathbf{H}$, we denote by $\mathbf{L}_\mathbf{H}$

the space of square-integrable functions $u : [0, \infty) \rightarrow \mathbf{H}$ with inner product

$$\langle \mathbf{u}, \mathbf{v} \rangle_{\mathbf{L}_\mathbf{H}} = \int_0^\infty \langle \mathbf{u}(t), \mathbf{v}(t) \rangle_{\mathbf{H}} dt.$$

We define the extended space $\mathbf{L}_{e, \mathbf{H}}$ to consist of functions $u : [0, \infty) \rightarrow \mathbf{H}$ such that

$$\int_0^T \|\mathbf{u}(t)\|_{\mathbf{H}}^2 dt < \infty \quad \forall T \geq 0.$$

We use $\mathbf{L}_{e, [a, b]}$ and $\mathbf{L}_{[a, b]}$ to denote $\mathbf{L}_{e, \mathbf{H}}$ and $\mathbf{L}_\mathbf{H}$ with $\mathbf{H} = \mathbb{R}L_2[a, b]$. For any Hilbert space $\mathbf{H}$, the truncation operator $p_T : \mathbf{L}_{e, \mathbf{H}} \rightarrow \mathbf{L}_{e, \mathbf{H}}$ is defined for $\mathbf{y} \in \mathbf{L}_{e, \mathbf{H}}$ by

$$(p_T \mathbf{y})(t) = \begin{cases} \mathbf{y}(t), & 0 \leq t \leq T, \\ 0, & \text{otherwise.} \end{cases}$$

such that $(p_T \mathbf{y})(t) \in \mathbf{L}_\mathbf{H}$ for all $T \geq 0$.

Definition 1. Let $\mathbf{H}$ and $\mathbf{G}$ be Hilbert spaces. For all $T \geq 0$, an operator $G : \mathbf{L}_\mathbf{H} \rightarrow \mathbf{L}_\mathbf{G}$ is:

- **Causal** if $p_T G = p_T G p_T$.
- **Bounded on $\mathbf{L}_\mathbf{H}$** if $\|G\mathbf{v}\|_{\mathbf{L}_\mathbf{G}} \leq C \|\mathbf{v}\|_{\mathbf{L}_\mathbf{H}}$ for some $C \geq 0$ and all $\mathbf{v} \in \mathbf{L}_\mathbf{H}$.
- **Bounded on $\mathbf{L}_{e, \mathbf{H}}$** if $\|p_T G\mathbf{v}\|_{\mathbf{L}_\mathbf{G}} \leq C \|p_T \mathbf{v}\|_{\mathbf{L}_\mathbf{H}}$ for some $C \geq 0$ and all $\mathbf{v} \in \mathbf{L}_{e, \mathbf{H}}$.

Finally, we will note some operations. For a given $\mathcal{K} \in \mathcal{L}(\mathbb{R}L_2^n, \mathbb{R}L_2^m)$, we define the operator $\mathcal{M}_\mathcal{K} : \mathbf{L}_{e, [a, b]}^n \rightarrow \mathbf{L}_{e, [a, b]}^m$ to compactly represent a multiplication operator. For $\mathbf{u} = [u_1 \ \cdots \ u_N]^\top$ with $\mathbf{u} \in \mathbb{R}L_2$, its action at time t is given by the block structure of $\mathcal{K}_{ij}$:

$$(\mathcal{M}_\mathcal{K} \mathbf{u})(t) := \begin{bmatrix} \mathcal{K}_{11} & \cdots & \mathcal{K}_{1n} \\ \vdots & \ddots & \vdots \\ \mathcal{K}_{m1} & \cdots & \mathcal{K}_{mn} \end{bmatrix} \begin{bmatrix} \mathbf{u}_1 \\ \vdots \\ \mathbf{u}_n \end{bmatrix} (t). \quad (1)$$

B. Partial Integral Equations (PIEs)

Partial Integral operators, also known as PI operators, are a class of bounded linear integral operators that are defined jointly on a vector space and Hilbert space.

Definition 2. We say $\mathcal{P} \in \Pi_4^{m \times n} \subset \mathcal{L}(\mathbb{R}L_2^n, \mathbb{R}L_2^m)$, denoted by $\Pi \begin{bmatrix} P & Q_1 \\ Q_2 & \{R\} \end{bmatrix}$, if there exist a matrix P and matrix polynomials Q_1, Q_2, R_0, R_1 , and R_2 (of compatible dimension) such that,

$$\left[\left(\Pi \begin{bmatrix} P & Q_1 \\ Q_2 & \{R\} \end{bmatrix} \right) \begin{bmatrix} x \\ \mathbf{x} \end{bmatrix} \right] (s) := \begin{bmatrix} Px + \int_a^b Q_1(s) \mathbf{x}(s) ds \\ Q_2(s)x + \mathcal{R}\mathbf{x}(s) \end{bmatrix},$$

$$(\mathcal{R}\mathbf{x})(s) = R_0(s)\mathbf{x}(s) + \int_a^s R_1(s, \theta)\mathbf{x}(\theta) d\theta + \int_s^b R_2(s, \theta)\mathbf{x}(\theta) d\theta.$$

T. Lenssen and A. Das are with the Control Systems Group, Eindhoven University of Technology, The Netherlands. Email addresses: t.m.lenssen@student.tue.nl, am.das@tue.nl
Corresponding author: am.das@tue.nl

The vector space of PI operators, given compatible dimensions, are closed under composition, addition, adjoint and concatenation – implying that Π_4 is a composition algebra [10].

Definition 3. (LPIs) For given PI operators $\{\mathcal{E}_{i,j}, \mathcal{F}_{i,j}, \mathcal{G}_i\}$ and a convex linear functional $\mathcal{L}(\cdot)$, a linear PI inequality is a convex optimization of the following form

$$\begin{aligned} & \min_{P_i, Q_{1i}, Q_{2i}, R_{0i}, R_{1i}, R_{2i}} \mathcal{L}(\{P_i, Q_{1i}, Q_{2i}, R_{0i}, R_{1i}, R_{2i}\}) \\ \text{s.t. } & \sum_{j=1}^K \mathcal{E}_{ij}^* \Pi \begin{bmatrix} P_i & Q_{1i} \\ Q_{2i} & R_i \end{bmatrix} \mathcal{F}_{ij} + \mathcal{G}_i \succeq 0 \end{aligned} \quad (2)$$

Only LMIs are required to solve an optimization problem involving LPIs. These definitions are based on [7]

Definition 4 (PIE System). Given the PIE system $G\{\mathcal{T}, \mathcal{A}, \mathcal{B}, \mathcal{C}, \mathcal{D}\}$ with PI operators $\mathcal{T}, \mathcal{A}, \mathcal{B}, \mathcal{C}$, and $\mathcal{D}$ of compatible dimensions, and signals $w(t) \in \mathbb{R}L_2^{n_w}[a, b]$, we say $\mathbf{x}(t) \in \mathbb{R}L_2[a, b]^{n_x}$ and $z(t) \in \mathbb{R}L_2^{n_z}[a, b]$ satisfy the PIE with initial condition $\mathbf{x}_0$ if

$$\begin{bmatrix} \partial_t(\mathcal{T}\mathbf{x})(t) \\ z(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A} & \mathcal{B} \\ \mathcal{C} & \mathcal{D} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ w(t) \end{bmatrix} \quad (3)$$

for all $t \geq 0$ and $\mathcal{T}\mathbf{x}(0) = \mathcal{T}\mathbf{x}_0$. Additionally, for signals $\underline{w}(t) \in \mathbb{R}L_2[a, b]^{n_z}$ of compatible dimensions, we say $\underline{\mathbf{x}}(t) \in \mathbb{R}L_2[a, b]^{n_x}$ and $\underline{z}(t) \in L_2[a, b]^{n_w}$ satisfy the dual PIE, $G^\top$, with initial condition $\underline{\mathbf{x}}_0$ if

$$\begin{bmatrix} \mathcal{T}^*\dot{\underline{\mathbf{x}}}(t) \\ \underline{z}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}^* & \mathcal{C}^* \\ \mathcal{B}^* & \mathcal{D}^* \end{bmatrix} \begin{bmatrix} \underline{\mathbf{x}}(t) \\ \underline{w}(t) \end{bmatrix}, \quad (4)$$

for all $t \geq 0$ and $\mathcal{T}^*\underline{\mathbf{x}}(0) = \mathcal{T}^*\underline{\mathbf{x}}_0$.

Definition 5 (Bounded Internally Stable PIE). Let G be a PIE system as in Definition 4. We say G is internally stable and bounded with decay rate $\alpha > 0$, $M > 0$, and L_2 -gain $\gamma > 0$ if

- The homogeneous part $\partial_t(\mathcal{T}\mathbf{x})(t) = \mathcal{A}\mathbf{x}(t)$, with $\mathcal{T}\mathbf{x}(0) = \mathcal{T}\mathbf{x}_0$ is exponentially stable such that, for every admissible initial condition $\mathbf{x}_0 \in \mathbb{R}L_2$

$$\|\mathcal{T}\mathbf{x}(t)\|_{\mathbf{L}_{[a,b]}} \leq M\|\mathcal{T}\mathbf{x}_0\|_{\mathbf{L}_{[a,b]}} e^{-\alpha t}, \quad \forall t \geq 0.$$

- With zero initial condition $\mathbf{x}(0) = 0$, then for any input w and output z ,

$$\|p_T z\|_{\mathbf{L}_{[a,b]}} \leq \gamma \|p_T w\|_{\mathbf{L}_{[a,b]}}, \quad \forall T \geq 0, \quad \forall w \in \mathbf{L}_{e,[a,b]}^{n_w}.$$

Then $G \in \mathcal{G}_2^{n_z \times n_w}$. Clearly, $RH_\infty \subset \mathcal{G}_2$ [15]. Also $G^\top \in \mathcal{G}_2$ with the same decay rate, $\mathbf{L}_{[a,b]}$ -gain, and M [7].

Definition 6 (Linear Fractional Transformation (LFT)). Let G be a causal system or operator with a specified 2×2 block partition, and let H be compatible with either two ports or one port. Write

$$\begin{bmatrix} y_{11} \\ y_{12} \end{bmatrix} = G \begin{bmatrix} u_{11} \\ u_{12} \end{bmatrix}.$$

The Redheffer star products [6] are the following well-posed interconnections.

- If H has two ports,

$$\begin{bmatrix} y_{21} \\ y_{22} \end{bmatrix} = H \begin{bmatrix} u_{21} \\ u_{22} \end{bmatrix},$$

then

$$G \star H : \begin{bmatrix} u_{12} \\ u_{21} \end{bmatrix} \mapsto \begin{bmatrix} y_{12} \\ y_{21} \end{bmatrix}, \quad u_{11} = y_{22}, \quad u_{22} = y_{11},$$

$$H \star G : \begin{bmatrix} u_{11} \\ u_{22} \end{bmatrix} \mapsto \begin{bmatrix} y_{11} \\ y_{22} \end{bmatrix}, \quad u_{21} = y_{12}, \quad u_{12} = y_{21}.$$

- If H has one port, $y_H = H u_H$, then

$$G \star H : u_{12} \mapsto y_{12}, \quad u_{11} = y_H, \quad u_H = y_{11},$$

$$H \star G : u_{11} \mapsto y_{11}, \quad u_H = y_{12}, \quad u_{12} = y_H.$$

C. PIETOOLS

PIETOOLS is a MATLAB toolbox used for declaration, manipulation and solving LPIs [9]. For learning how to use PIETOOLS and its functionalities visit PIETOOLS homepage.

III. IQC-BASED FRAMEWORK FOR ROBUST STABILITY AND PERFORMANCE ANALYSIS

This section develops a comprehensive framework for analyzing stability and performance of interconnected systems in a Hilbert space, utilizing IQCs as the primary analytical tool. We begin by establishing the mathematical foundation for system interconnections and formalizing the key concepts of stability and performance. The IQC methodology is then systematically developed to characterize system uncertainties and derive rigorous conditions that guarantee robust stability and performance.

A. Description of uncertain systems in a Hilbert-space

We consider operators that map external inputs to external outputs through a feedback interconnection between a linear (infinite dimensional) operator P and Δ . This interconnection structure is formally defined as follows

Definition 7 (Generalized Plant). Given operators $P_\Delta : \mathbf{L}_{e,[a,b]}^{n_{w\Delta}} \rightarrow \mathbf{L}_{e,[a,b]}^{n_{z\Delta}}$, $P_{\Delta p} : \mathbf{L}_{e,[a,b]}^{n_{w_p}} \rightarrow \mathbf{L}_{e,[a,b]}^{n_{z_{\Delta p}}}$, $P_{p\Delta} : \mathbf{L}_{e,[a,b]}^{n_{w\Delta}} \rightarrow \mathbf{L}_{e,[a,b]}^{n_{z_p}}$, $P_p : \mathbf{L}_{e,[a,b]}^{n_{w_p}} \rightarrow \mathbf{L}_{e,[a,b]}^{n_{z_p}}$, and $\Delta : \mathbf{L}_{e,[a,b]}^{n_{z\Delta}} \rightarrow \mathbf{L}_{e,[a,b]}^{n_{w\Delta}}$, define

$$\begin{bmatrix} z_\Delta \\ z_p \end{bmatrix} = P \begin{bmatrix} w_\Delta \\ w_p \end{bmatrix} = \begin{bmatrix} P_\Delta & P_{\Delta p} \\ P_{p\Delta} & P_p \end{bmatrix} \begin{bmatrix} w_\Delta \\ w_p \end{bmatrix}, \quad w_\Delta = \Delta z_\Delta. \quad (5)$$

for input $w_p \in \mathbf{L}_{e,[a,b]}^{n_{w_p}}$ and output $z_p \in \mathbf{L}_{e,[a,b]}^{n_{z_p}}$, there exist internal signals $z_\Delta \in \mathbf{L}_{e,[a,b]}^{n_{z\Delta}}$ and $w_\Delta \in \mathbf{L}_{e,[a,b]}^{n_{w\Delta}}$ satisfying the interconnected system $z_p = (P \star \Delta)w_p$.

The interconnection structure described above captures the feedback interaction between the nominal system P and the uncertainty Δ , where w_p and z_p represent external inputs and performance outputs, respectively, while w_Δ and z_Δ form the internal feedback loop through the uncertainty. Before analyzing stability and performance, we must first ensure the well-posedness of the interconnection, such that solutions exist, are unique, and depend causally on inputs.

Definition 8. We say that the uncertain interconnection $P \star \Delta$ is **well-posed** if:

- **Existence and Uniqueness:** For any $w \in \mathbf{L}_{e,[a,b]}$, there exist unique $z \in \mathbf{L}_{e,[a,b]}$, $z_\Delta \in \mathbf{L}_{e,[a,b]}$ and $w_\Delta \in \mathbf{L}_{e,[a,b]}$ such that, z , w , z_Δ , w_Δ satisfy the interconnection.
- **Causality:** If z_Δ , w_Δ and $\hat{z}_\Delta$, $\hat{w}_\Delta$ satisfy the interconnection, then $p_T(z_\Delta - \hat{z}_\Delta) = 0$ and $p_T(w_\Delta - \hat{w}_\Delta) = 0$, for all $T \geq 0$.

Having established the class of uncertain systems and their well-posedness, we now develop a framework to guarantee robust stability and performance for the class of systems defined in Definition 7.

B. Robust stability and performance

Traditional control system design often treats stability and performance shaping as separate objectives with distinct constraints. However, Integral Quadratic Constraints (IQCs) provide a unified framework where these trade-offs can be captured within a single constraint [11]. We now define what it means for the system to remain stable despite uncertainties. Robust stability requires that the system is well-posed for all admissible uncertainties and that the input-output map remains bounded. This involves removal of the performance channels in (5), and introducing auxiliary signals z_0 and w_0 .

Definition 9. The interconnection

$$z_\Delta = P_\Delta w_\Delta + z_0, \quad w_\Delta = \Delta z_\Delta + w_0,$$

with $z_0, w_0 \in \mathbf{L}_{e,[a,b]}$, is said to be **robustly stable** if:

- 1) The uncertain system is well-posed for all $\Delta \in \Delta$.
- 2) The map from $\begin{bmatrix} z_0 \\ w_0 \end{bmatrix}$ to $\begin{bmatrix} z_\Delta \\ w_\Delta \end{bmatrix}$ is bounded on $\mathbf{L}_{e,[a,b]}$ for all $\Delta \in \Delta$.

Within the IQC framework, the stability of an interconnection $P \star \Delta$ is certified by verifying that the uncertainty operator Δ satisfies a quadratic constraint defined by an appropriate multiplier. This leads to the following formal definition

Definition 10. An uncertainty operator $\Delta : \mathbf{L}_{e,[a,b]}^{n_{z_\Delta}} \rightarrow \mathbf{L}_{e,[a,b]}^{n_{w_\Delta}}$ is said to satisfy the hard uncertainty IQC $(\Psi_\Delta, \mathcal{M}_{\mathcal{V}_\Delta})$ defined by the dynamic operator $\Psi_\Delta : \mathbf{L}_{e,[a,b]}^{n_{z_\Delta} + n_{w_\Delta}} \rightarrow \mathbf{L}_{e,[a,b]}^{n_{z_\Delta} + n_{w_\Delta}}$ multiplication operator $\mathcal{M}_{\mathcal{V}_\Delta}$, parameterized by $\mathcal{V}_\Delta = \mathcal{V}_\Delta^* \in \mathcal{L}(\mathbb{R}L_2, \mathbb{R}L_2)$ if the inequality holds for all $z_\Delta \in \mathbf{L}_{e,[a,b]}$ and all $T \geq 0$,

$$\left\langle p_T \Psi_\Delta \begin{bmatrix} z_\Delta \\ \Delta z_\Delta \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_\Delta} \Psi_\Delta \begin{bmatrix} z_\Delta \\ \Delta z_\Delta \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \geq 0. \quad (6)$$

Moreover, let $\mathcal{V}_\Delta \{ \mathcal{Q}_\Delta, \mathcal{S}_\Delta, \mathcal{R}_\Delta \}$ be parameterized as,

$$\mathcal{V}_\Delta = \begin{bmatrix} \mathcal{Q}_\Delta & \mathcal{S}_\Delta \\ \mathcal{S}_\Delta^* & \mathcal{R}_\Delta \end{bmatrix}$$

Beyond stability, we are interested in ensuring that the system meets certain performance specifications in the presence of uncertainty. Robust performance extends the notion of robust stability by additionally requiring that a performance metric is satisfied.

Definition 11. Robust performance is achieved if the interconnection $P \star \Delta$ is **robustly stable** for some hard performance IQC $(\Psi_p, \mathcal{M}_{\mathcal{V}_p})$ defined by the dynamic operator $\Psi_p : \mathbf{L}_{e,[a,b]}^{n_{z_p} + n_{w_p}} \rightarrow \mathbf{L}_{e,[a,b]}^{n_{z_p} + n_{w_p}}$ and multiplication operator $\mathcal{M}_{\mathcal{V}_p}$, parameterized by $\mathcal{V}_p = \mathcal{V}_p^* \in \mathcal{L}(\mathbb{R}L_2, \mathbb{R}L_2)$ with $\mathcal{Q}_p \succeq 0$. For $w_p \in \mathbf{L}_{e,[a,b]}^{n_{w_p}}$. Then there exists a sufficiently small $\epsilon > 0$ such that, for all such w_p and all $T \geq 0$,

$$\left\langle p_T \Psi_p \begin{bmatrix} P \star \Delta \\ I \end{bmatrix} w_p, p_T \mathcal{M}_{\mathcal{V}_p} \Psi_p \begin{bmatrix} P \star \Delta \\ I \end{bmatrix} w_p \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w_p\|_{\mathbf{L}_{[a,b]}}^2.$$

Moreover, let $\mathcal{V}_p \{ \mathcal{Q}_p, \mathcal{S}_p, \mathcal{R}_p \}$ be parameterized as,

$$\mathcal{V}_p = \begin{bmatrix} \mathcal{Q}_p & \mathcal{S}_p \\ \mathcal{S}_p^* & \mathcal{R}_p \end{bmatrix}$$

In this framework, the multipliers $\mathcal{M}_{\mathcal{V}_\Delta}$ and $\mathcal{M}_{\mathcal{V}_p}$ serve distinct but complementary roles. The hard uncertainty IQC $(\Psi_\Delta, \mathcal{M}_{\mathcal{V}_\Delta})$ characterizes the behavior of uncertainties, nonlinearities, and other perturbations captured by the operator Δ , ensuring that the IQC is satisfied for the class of admissible disturbances. In contrast, the hard performance IQC $(\Psi_p, \mathcal{M}_{\mathcal{V}_p})$ encodes performance requirements for the nominal system, such as L_2 -gain, passivity conditions, or other desired input-output properties. Together, these multipliers enable simultaneous verification of robust stability against perturbations and achievement of specified performance objectives.

C. Theorem for joint robust stability and performance

We now present the theoretical result that provides conditions for simultaneous robust stability and performance verification. For brevity we will refer to the hard IQC as,

$$\left\langle p_T \Psi \begin{bmatrix} Pw \\ w \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}} \Psi \begin{bmatrix} Pw \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2 \quad (7)$$

Let Ψ_Δ and Ψ_p have a 2×2 block partition and define $\Psi_{ij} := \text{diag}((\Psi_\Delta)_{ij}, (\Psi_p)_{ij})$ for $i, j \in \{1, 2\}$. Let $w^\top = [w_\Delta^\top \ w_p^\top]$ and $z^\top = [z_\Delta^\top \ z_p^\top]$. Moreover, define $\mathcal{Q} = \text{diag}(\mathcal{Q}_\Delta, \mathcal{Q}_p)$, $\mathcal{S} = \text{diag}(\mathcal{S}_\Delta, \mathcal{S}_p)$, and $\mathcal{R} = \text{diag}(\mathcal{R}_\Delta, \mathcal{R}_p)$, then $\mathcal{V} \{ \mathcal{Q}, \mathcal{S}, \mathcal{R} \}$.

Theorem 1 (Robust Stability and Performance). Let P , $\Delta \in \Delta$ be given, and there exists $\Psi_\Delta, \mathcal{M}_{\mathcal{V}_\Delta}$, such that,

- The interconnection $P \star \Delta$ is well-posed for all $\Delta \in \Delta$
- The IQC in Definition 10 is satisfied for all $\Delta \in \Delta$.

Then the interconnection $P \star \Delta$ is **robustly stable** and **robust performance** is achieved with respect to some Ψ_p and $\mathcal{M}_{\mathcal{V}_p}$, in Definition 11, with $\mathcal{Q}_p \succeq 0$, if,

$$\left\langle p_T \Psi \begin{bmatrix} Pw \\ w \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}} \Psi \begin{bmatrix} Pw \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2 \quad (8)$$

for all $w_\Delta \in \mathbf{L}_{e,[a,b]}^{n_{w_\Delta}}$, $w_p \in \mathbf{L}_{e,[a,b]}^{n_{w_p}}$ and $T \geq 0$.

Proof. See Appendix A.1 ■

Theorem 1 establishes a framework for deriving Linear PI Inequalities (LPIs), which are used in assessing the robust performance of a system.

IV. IQC DUALITY

In this work we assume that the generalized plant $P \in \mathcal{G}_2^{\mathbf{n}_z \times \mathbf{n}_w}$ is a PIE system, that admits a state-space representation. This work builds on the duality results in [7] which shows that the state-feedback controller results in a convex optimization problem. We find that this duality result can be extended to the case of dynamic filters, where we want to know the properties of the dual dynamic filter. This is particularly useful when examining the effect of uncertainties on the system when performing state-feedback controller synthesis, when using IQCs. The works from Seiler and Venkataraman [8], [13] show that, after J -spectral factorization, the dual of a dynamic filter can be found using the Potapov-Ginzburg transform. This section extends these results to PIE systems, and shows that the dual of a PIE system with a dynamic filter can be found using the Potapov-Ginzburg transform, identical to the work from Venkataraman.

A. Duality under Dynamical Filtering

We begin by restating the main theorem from [7].

Theorem 2 (Dual L_2 -gain [7, Thm. 9]). *For a PIE system with corresponding PI operators $P\{\mathcal{T}, \mathcal{A}, \mathcal{B}, \mathcal{C}, \mathcal{D}\} \in \mathcal{G}_2$, the following statements are equivalent.*

- 1) For any $w \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_w}$, and $\mathbf{x}(0) = 0$, P satisfies $\|p_T z\| \leq \|p_T w\|$.
- 2) For any $\underline{w} \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_z}$, and $\underline{\mathbf{x}}(0) = 0$, $P^\top$ satisfies $\|p_T \underline{z}\| \leq \|p_T \underline{w}\|$.

Relating an IQC to this gain duality requires two transformations. First, write $\begin{bmatrix} \tilde{z} \\ \tilde{w} \end{bmatrix} := \Theta \begin{bmatrix} z \\ w \end{bmatrix}$. A J -spectral factorization gives, for every $T \geq 0$,

$$\left\langle p_T \Psi \begin{bmatrix} z \\ w \end{bmatrix}, p_T \mathcal{M}_V \Psi \begin{bmatrix} z \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} = \|p_T \tilde{z}\|_{\mathbf{L}_{[a,b]}}^2 - \|p_T \tilde{w}\|_{\mathbf{L}_{[a,b]}}^2.$$

Thus the IQC quadratic form becomes the difference between the filtered output and input signals. Second, when $z = Pw$, the Potapov-Ginzburg transform produces an invertible change of coordinates Γ such that

$$\Theta \begin{bmatrix} P \\ I \end{bmatrix} w = \begin{bmatrix} P \star \Theta^\dagger \\ I \end{bmatrix} \Gamma w.$$

The lower block gives $\tilde{w} = \Gamma w$, while the upper block gives $\tilde{z} = (P \star \Theta^\dagger) \tilde{w}$. Consequently, the IQC inequality becomes an L_2 -gain inequality for $P \star \Theta^\dagger$, to which Theorem 2 applies.

Definition 12 (J -Spectral Factorization and Dual Filter [13]). *Let $(\Psi, \mathcal{M}_V)$ be a hard IQC, let*

$$J_{\mathbf{n}_z, \mathbf{n}_w} := \begin{bmatrix} I_{\mathbf{n}_z} & 0 \\ 0 & -I_{\mathbf{n}_w} \end{bmatrix},$$

and let $\Theta, \Theta^{-1} \in \mathcal{G}_2$. The pair $(\Theta, J_{\mathbf{n}_z, \mathbf{n}_w})$ is a J -spectral factorization of $(\Psi, \mathcal{M}_V)$ if,

$$\begin{aligned} & \left\langle p_T \Psi \begin{bmatrix} z \\ w \end{bmatrix}, p_T \mathcal{M}_V \Psi \begin{bmatrix} z \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \\ &= \left\langle p_T \Theta \begin{bmatrix} z \\ w \end{bmatrix}, p_T J_{\mathbf{n}_z, \mathbf{n}_w} \Theta \begin{bmatrix} z \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}}. \end{aligned} \quad (9)$$

Define the matrix $\hat{J} := \begin{bmatrix} 0 & I \\ -I & 0 \end{bmatrix}$. The dual filter associated with Θ is defined by

$$\mathbf{D}(\Theta) := (\hat{J}^* \Theta^\top \hat{J})^{-1}. \quad (10)$$

Note $\mathbf{D}(\Theta) \in \mathcal{G}_2$.

Finding a J -spectral factorization is the first step in applying the duality theory. For the construction of a J -spectral factorization, we partition

$$\Theta = \begin{bmatrix} \Theta_z & \Theta_{zw} \\ \Theta_{wz} & \Theta_w \end{bmatrix}.$$

The associated primal and dual filtered signals are

$$\Theta \begin{bmatrix} z(t) \\ w(t) \end{bmatrix} = \begin{bmatrix} \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix}, \quad \mathbf{D}(\Theta) \begin{bmatrix} \underline{z}(t) \\ \underline{w}(t) \end{bmatrix} = \begin{bmatrix} \underline{\tilde{z}}(t) \\ \underline{\tilde{w}}(t) \end{bmatrix}. \quad (11)$$

The J -spectral factorization for the primal IQC leads to the state-space realization

$$\begin{bmatrix} \mathcal{T}_\Theta \dot{\mathbf{x}}_\Theta(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_\Theta & \mathcal{B}_\Theta^z & \mathcal{B}_\Theta^w \\ \mathcal{C}_\Theta^z & \mathcal{D}_\Theta^z & \mathcal{D}_\Theta^{zw} \\ \mathcal{C}_\Theta^w & \mathcal{D}_\Theta^{wz} & \mathcal{D}_\Theta^w \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Theta(t) \\ z(t) \\ w(t) \end{bmatrix}, \quad (12)$$

where the entries are PI operators of appropriate dimension. The second step is the required graph rearrangement, given by the Potapov-Ginzburg transform. We use the following construction from [13].

Definition 13. (*Potapov-Ginzburg Transform*) Given $\Theta : \begin{bmatrix} z \\ w \end{bmatrix} \rightarrow \begin{bmatrix} \tilde{z} \\ \tilde{w} \end{bmatrix}$ as in Definition 12, the Potapov-Ginzburg transform denoted by $\Theta^\dagger : \begin{bmatrix} \tilde{w} \\ \tilde{z} \end{bmatrix} \rightarrow \begin{bmatrix} w \\ z \end{bmatrix}$ is defined by

$$\Theta^\dagger = \begin{bmatrix} \Theta_{zw} \Theta_w^{-1} & \Theta_z - \Theta_{zw} \Theta_w^{-1} \Theta_{wz} \\ \Theta_w^{-1} & -\Theta_w^{-1} \Theta_{wz} \end{bmatrix}, \quad (13)$$

The transform identifies the filtered graph of P with the graph of $P \star \Theta^\dagger$, under an invertible change of coordinates. The next lemma establishes this relation for both the primal and dual interconnections.

Lemma 1. (*Potapov-Ginzburg Transform Equivalence*) Let $\Theta, \mathbf{D}(\Theta) \in \mathcal{G}_2$ as in Definition 12. Moreover, let $(P \star \Theta^\dagger) \in \mathcal{G}_2$ and $(P^\top \star (\Theta^\dagger)^\top) \in \mathcal{G}_2$ be well-posed PIE systems, such that

$$(\mathcal{D}_\Theta^{wz} \mathcal{D} + \mathcal{D}_\Theta^w)^{-1}, \quad (\mathcal{D}_\Theta^z - \mathcal{D}_\Theta^{zw} (\mathcal{D}_\Theta^w)^{-1} \mathcal{D}_\Theta^{wz})^{-1}$$

exist and are closed under inversion. Then, there exists invertible coordinate transformations $\Gamma, \Gamma^{-1} \in \Pi_4$ on the primal side and $\underline{\Gamma}, \underline{\Gamma}^{-1} \in \Pi_4$ on the dual side such that

- $\Theta \begin{bmatrix} P \\ I \end{bmatrix} w = \begin{bmatrix} P \star \Theta^\dagger \\ I \end{bmatrix} \Gamma w$ for all $w \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_w}$.
- $\mathbf{D}(\Theta) \begin{bmatrix} P^\top \\ I \end{bmatrix} \underline{w} = \begin{bmatrix} P^\top \star (\Theta^\dagger)^\top \\ I \end{bmatrix} \underline{\Gamma} \underline{w}$ for all $\underline{w} \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_z}$.

Proof. See Appendix A.2. ■

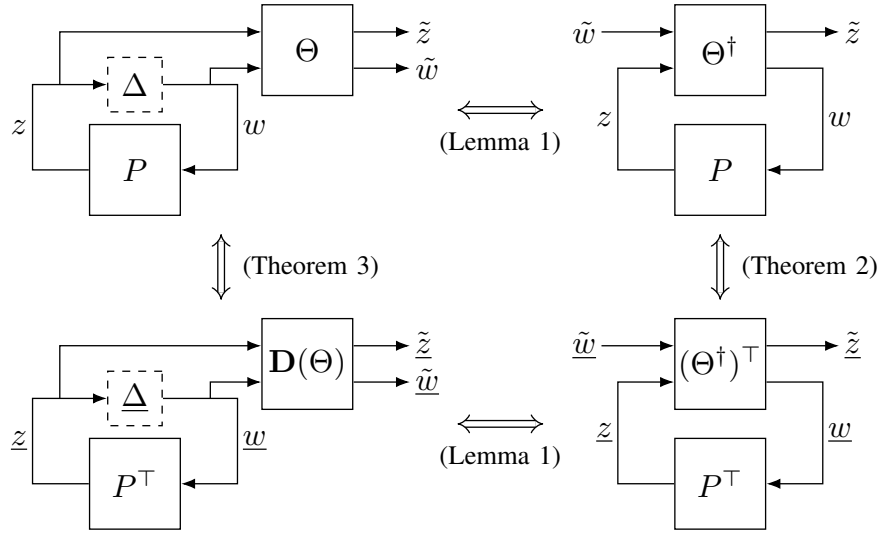


Fig. 1. Commutative diagram for primal and dual dynamic filtering under the Potapov–Ginzburg transform. [13]

B. Application on Dual IQC

Lemma 1 places the primal and dual filtered graphs in the form required by Theorem 2. Combining these results shows that strict feasibility can be tested on either the primal system or its dual.

Theorem 3 (Primal–Dual IQC Feasibility). *Let P be a PIE realization of Definition 7, and let $(\Theta, J_{\mathbf{n}_z, \mathbf{n}_w})$ be a J -spectral factorization of the primal hard IQC. Let sufficiently small $\epsilon > 0$ and $\underline{\epsilon} > 0$ denote the primal and dual feasibility margins. Then the primal feasibility condition*

$$\left\langle p_T \Theta \begin{bmatrix} z \\ w \end{bmatrix}, p_T J_{\mathbf{n}_z, \mathbf{n}_w} \Theta \begin{bmatrix} z \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2, \quad (14)$$

$$z = Pw, \quad \forall w \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_w}, \quad \forall T \geq 0,$$

holds if and only if the dual feasibility condition

$$\left\langle p_T \mathbf{D}(\Theta) \begin{bmatrix} \underline{z} \\ \underline{w} \end{bmatrix}, p_T J_{\mathbf{n}_w, \mathbf{n}_z} \mathbf{D}(\Theta) \begin{bmatrix} \underline{z} \\ \underline{w} \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\underline{\epsilon} \|p_T \underline{w}\|_{\mathbf{L}_{[a,b]}}^2, \quad (15)$$

$$\underline{z} = P^\top \underline{w}, \quad \forall \underline{w} \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_z}, \quad \forall T \geq 0,$$

holds for $\underline{\epsilon} > 0$.

Proof. See Appendix A.3. ■

The preceding theorem transfers feasibility between the dual and primal systems. To turn either description into a computational certificate for robust stability and performance, we combine it with the PIE KYP condition.

Theorem 4. *Let the realization of P satisfy Definition 7. Let $\Delta \in \underline{\Delta}$ and there exist **either**, a primal hard IQC $(\Psi, \mathcal{M}_\Psi)$, with $\Psi \in \Pi_4$, or a dual hard IQC $(\underline{\Psi}, \mathcal{M}_{\underline{\Psi}})$, with $\underline{\Psi} \in \Pi_4$, such that,*

- The interconnection $P \star \Delta$ is well-posed for all $\Delta \in \underline{\Delta}$.
- The IQC in Definition 10 is satisfied for all $\Delta \in \underline{\Delta}$.
- The primal hard IQC $(\Psi, \mathcal{M}_\Psi)$ has a $(\Theta, J_{\mathbf{n}_z, \mathbf{n}_w})$ factorization.

- The dual hard IQC $(\underline{\Psi}, \mathcal{M}_{\underline{\Psi}})$ has a $(\mathbf{D}(\Theta), J_{\mathbf{n}_w, \mathbf{n}_z})$ factorization.

Suppose that **either** of the two statements hold for some $Q \succeq 0$ and $\mathcal{P} = \mathcal{P}^* \succeq 0 \in \Pi_4$.

- $\begin{bmatrix} \mathcal{T}^* \mathcal{P} \mathcal{A} + (*) & \mathcal{T}^* \mathcal{P} \mathcal{B} \\ \mathcal{B}^* \mathcal{P} \mathcal{T} & \epsilon I \end{bmatrix} + \begin{bmatrix} \mathcal{C}^* \\ \mathcal{D}^* \end{bmatrix} \mathcal{V} \begin{bmatrix} \mathcal{C} & \mathcal{D} \end{bmatrix} \preceq 0 \quad (16)$

- $\begin{bmatrix} \underline{\mathcal{T}}^* \underline{\mathcal{P}} \underline{\mathcal{A}} + (*) & \underline{\mathcal{T}}^* \underline{\mathcal{P}} \underline{\mathcal{B}} \\ \underline{\mathcal{B}}^* \underline{\mathcal{P}} \underline{\mathcal{T}} & \underline{\epsilon} I \end{bmatrix} + \begin{bmatrix} \underline{\mathcal{C}}^* \\ \underline{\mathcal{D}}^* \end{bmatrix} \underline{\mathcal{V}} \begin{bmatrix} \underline{\mathcal{C}} & \underline{\mathcal{D}} \end{bmatrix} \preceq 0 \quad (17)$

Then for any $w, \underline{w} \in \mathbf{L}_{e,[a,b]}$, satisfies either

$$\Psi \begin{bmatrix} P \\ I \end{bmatrix} w := \left\{ \begin{bmatrix} \mathcal{T} \dot{\mathbf{x}}(t) \\ \tilde{z}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A} & \mathcal{B} \\ \mathcal{C} & \mathcal{D} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ w(t) \end{bmatrix} \right\} \quad (18)$$

or

$$\underline{\Psi} \begin{bmatrix} P^\top \\ I \end{bmatrix} \underline{w} := \left\{ \begin{bmatrix} \underline{\mathcal{T}} \dot{\underline{\mathbf{x}}}(t) \\ \underline{\tilde{z}}(t) \end{bmatrix} = \begin{bmatrix} \underline{\mathcal{A}} & \underline{\mathcal{B}} \\ \underline{\mathcal{C}} & \underline{\mathcal{D}} \end{bmatrix} \begin{bmatrix} \underline{\mathbf{x}}(t) \\ \underline{w}(t) \end{bmatrix} \right\} \quad (19)$$

Then the interconnection $P \star \Delta$ with $\mathbf{x}(0) = 0$ is robustly stable and robust performance is achieved.

Proof. See Appendix A.4. ■

Remark 1. Note that we do not require information about the dual uncertainty $\underline{\Delta}$, only the primal uncertainty Δ .

C. Classes of J -Spectral Factorizations

J -spectral factorizations exist for many performance and uncertainty multipliers. Following [12], we collect the relevant multiplier families as classes.

1) *Classes of J -Spectral Factorizations for Performance Multipliers:*

Class 1 (Induced L_2 -gain). The primal hard performance IQC is $(\Psi_p, \mathcal{M}_{\Psi_p})$, where

$$\Psi_p := \begin{bmatrix} I_{\mathbf{n}_{zp}} & 0 \\ 0 & I_{\mathbf{n}_{wp}} \end{bmatrix}, \quad (20)$$

$$\mathcal{V}_p := \begin{bmatrix} \gamma^{-1} I_{\mathbf{n}_{zp}} & 0 \\ 0 & -\gamma I_{\mathbf{n}_{wp}} \end{bmatrix}, \quad \gamma > 0.$$

Robust performance then guarantees $\sup_{\Delta \in \mathbf{\Delta}} \|G \star \Delta\|_{\mathbf{L}_{[a,b]}} \leq \gamma$, for all $w_p \in \mathbf{L}_{e,[a,b]}^{n_{w_p}}$. Its $(\Theta, J_{n_{z_p}, n_{w_p}})$ factorization is given by

$$\Theta := \begin{bmatrix} \gamma^{-\frac{1}{2}} I_{n_{z_p}} & 0 \\ 0 & \gamma^{\frac{1}{2}} I_{n_{w_p}} \end{bmatrix}. \quad (21)$$

The corresponding dual hard performance IQC is $(\underline{\Psi}_p, \mathcal{M}_{\underline{\mathcal{V}}_p})$, where

$$\begin{aligned} \underline{\Psi}_p &:= \begin{bmatrix} I_{n_{w_p}} & 0 \\ 0 & I_{n_{z_p}} \end{bmatrix}, \\ \underline{\mathcal{V}}_p &:= \begin{bmatrix} \gamma^{-1} I_{n_{w_p}} & 0 \\ 0 & -\gamma I_{n_{z_p}} \end{bmatrix}, \quad \gamma > 0. \end{aligned} \quad (22)$$

Class 2 (Passivity). The primal hard performance IQC is $(\Psi_p, \mathcal{M}_{\mathcal{V}_p})$, where

$$\Psi_p := \begin{bmatrix} I_n & 0 \\ 0 & I_n \end{bmatrix}, \quad \mathcal{V}_p := \begin{bmatrix} 0 & I_n \\ I_n & 0 \end{bmatrix}. \quad (23)$$

Robust performance means that $G \star \Delta$ is strictly input passive for all $\Delta \in \mathbf{\Delta}$, and $w_p \in \mathbf{L}_{e,[a,b]}^{n_{w_p}}$. Its $(\Theta, J_{n,n})$ factorization is given by

$$\Theta := \frac{1}{\sqrt{2}} \begin{bmatrix} I_n & I_n \\ I_n & -I_n \end{bmatrix}. \quad (24)$$

The corresponding dual hard performance IQC is $(\underline{\Psi}_p, \mathcal{M}_{\underline{\mathcal{V}}_p})$, where

$$\underline{\Psi}_p := \begin{bmatrix} I_n & 0 \\ 0 & I_n \end{bmatrix}, \quad \underline{\mathcal{V}}_p := \begin{bmatrix} 0 & I_n \\ I_n & 0 \end{bmatrix}. \quad (25)$$

2) *Classes of J-Spectral Factorizations for Uncertainty Multipliers on Finite Dimensional Channels:* Many finite-dimensional hard uncertainty IQCs have a strict positive-negative (PN) multiplier structure.

Definition 14 (Strict PN hard IQC [8]). The hard IQC $(\Psi_\Delta, \mathcal{M}_{V_\Delta})$, with $\Psi_\Delta : L_{2e,[0,\infty)}^{n_{z_\Delta} + n_{w_\Delta}} \rightarrow L_{2e,[0,\infty)}^{n_{z_\Delta} + n_{w_\Delta}}$ and $V_\Delta = V_\Delta^\top$ a real matrix of compatible dimensions, is strict positive-negative if there exists $\epsilon > 0$ such that, for all $z_\Delta \in L_{2e,[0,\infty)}^{n_{z_\Delta}}$, $w_\Delta \in L_{2e,[0,\infty)}^{n_{w_\Delta}}$, and $T \geq 0$,

$$\begin{aligned} \left\langle p_T \Psi_\Delta \begin{bmatrix} z_\Delta \\ 0 \end{bmatrix}, p_T V_\Delta \Psi_\Delta \begin{bmatrix} z_\Delta \\ 0 \end{bmatrix} \right\rangle_{L_2} &\geq \epsilon \|p_T z_\Delta\|_{L_2}^2, \\ \left\langle p_T \Psi_\Delta \begin{bmatrix} 0 \\ w_\Delta \end{bmatrix}, p_T V_\Delta \Psi_\Delta \begin{bmatrix} 0 \\ w_\Delta \end{bmatrix} \right\rangle_{L_2} &\leq -\epsilon \|p_T w_\Delta\|_{L_2}^2. \end{aligned}$$

Moreover, in this finite-dimensional setting, [8] shows that if the primal IQC is a strict PN multiplier, then a J-spectral factorization exists according to Definition 12. This factorization is doubly hard, and all solutions $P = P^\top$ to the associated KYP lemma satisfy $P \geq 0$. Also, [13] shows that the primal IQC is a strict PN multiplier if and only if the corresponding dual multiplier is a strict PN multiplier. Classes 1, 2, 3, 5, 8, and 11 in [12] are strict PN multipliers. Classes 4, 6, 7, 12, 13, 14, and 15 are strict PN after imposing the additional constraints. We give an example of a strict PN multiplier below, and refer to [12] for the complete list.

Class 3 (Real repeated scalar parameters on finite-dimensional channels). Consider the finite-dimensional uncertainty class $\mathbf{\Delta} := \{\delta I : \delta \in \mathbb{R}, |\delta| \leq \alpha\}$, where $\alpha > 0$. With the

convention $w_\Delta(t) = \delta z_\Delta(t)$, and $w_\Delta, z_\Delta \in L_{2e,[0,\infty)}^n$, choose $\psi \in RH_\infty^{n_v \times n}$ and define the primal hard uncertainty IQC $(\Psi_\Delta, \mathcal{M}_{V_\Delta})$ by

$$\Psi_\Delta := \begin{bmatrix} \psi & 0 \\ 0 & \psi \end{bmatrix}, \quad V_\Delta := \begin{bmatrix} \alpha Q & S \\ S^\top & -\alpha^{-1} Q \end{bmatrix}. \quad (26)$$

Here $Q, S \in \mathbb{R}^{n_v \times n_v}$ are matrices satisfying

$$Q = Q^\top \succ 0, \quad S = -S^\top, \quad (27)$$

so $V_\Delta = V_\Delta^\top \in \mathbb{R}^{2n_v \times 2n_v}$. Since a multiplier is strict PN if and only if its dual multiplier is strict PN [13], the dual hard uncertainty IQC $(\underline{\Psi}_\Delta, \mathcal{M}_{\underline{V}_\Delta})$ can be parameterized in the same form. For $\underline{\psi} \in RH_\infty^{n_v \times n}$, define

$$\underline{\Psi}_\Delta := \begin{bmatrix} \underline{\psi} & 0 \\ 0 & \underline{\psi} \end{bmatrix}, \quad \underline{V}_\Delta := \begin{bmatrix} \alpha \underline{Q} & \underline{S} \\ \underline{S}^\top & -\alpha^{-1} \underline{Q} \end{bmatrix}, \quad (28)$$

where $\underline{Q}, \underline{S} \in \mathbb{R}^{n_v \times n_v}$ are matrices satisfying

$$\underline{Q} = \underline{Q}^\top \succ 0, \quad \underline{S} = -\underline{S}^\top. \quad (29)$$

Thus $\underline{V}_\Delta = \underline{V}_\Delta^\top \in \mathbb{R}^{2n_v \times 2n_v}$, and $(\underline{\Psi}_\Delta, \mathcal{M}_{\underline{V}_\Delta})$ is also strict PN. Both pairs admit the required hard J-spectral factorizations, while their static parts V_Δ and $\underline{V}_\Delta$ remain explicit decision variables for synthesis.

3) *Classes of J-Spectral Factorizations for Uncertainty Multipliers on Infinite Dimensional Channels:* As we do not have J-spectral factorization results for dynamic infinite-dimensional PN hard uncertainty IQCs, we limit the real repeated scalar IQC from [11] to $\Psi_\Delta = I$ and $\underline{\Psi}_\Delta = I$. This is a conservative choice, but it allows us to use the duality results in this paper. Also in the case of state-feedback controller synthesis, we need to use the same assumption.

Class 4 (Real repeated scalar parameters on infinite-dimensional channels). Consider the infinite-dimensional uncertainty class $\mathbf{\Delta} := \{\delta I : \delta \in \mathbb{R}, |\delta| \leq \alpha\}$, where $\alpha > 0$. With the convention $w_\Delta(t) = \delta z_\Delta(t)$, $w_\Delta, z_\Delta \in \mathbf{L}_{e,[a,b]}^n$, define the primal hard uncertainty IQC $(I, \mathcal{M}_{V_\Delta})$ by

$$\mathcal{V}_\Delta := \begin{bmatrix} \alpha Q & S \\ S^\top & -\alpha^{-1} Q \end{bmatrix}. \quad (30)$$

Here $Q, S \in \Pi_4^{n \times n}$ are PI operators satisfying

$$Q = Q^\top \succ 0, \quad S = -S^\top, \quad (31)$$

so $\mathcal{V}_\Delta = \mathcal{V}_\Delta^\top \in \Pi_4^{2n \times 2n}$. Using the approximation in ??, define the dual hard uncertainty IQC $(I, \mathcal{M}_{\underline{\mathcal{V}}_\Delta})$ by

$$\underline{\mathcal{V}}_\Delta := \begin{bmatrix} \alpha \underline{Q} & \underline{S} \\ \underline{S}^\top & -\alpha^{-1} \underline{Q} \end{bmatrix}, \quad (32)$$

where $\underline{Q}, \underline{S} \in \Pi_4^{n \times n}$ are PI operators satisfying

$$\underline{Q} = \underline{Q}^\top \succ 0, \quad \underline{S} = -\underline{S}^\top. \quad (33)$$

Thus $\underline{\mathcal{V}}_\Delta = \underline{\mathcal{V}}_\Delta^\top \in \Pi_4^{2n \times 2n}$ is also strict static PN PI operator. Both pairs admit the required hard J-spectral factorizations, while their static parts $\mathcal{V}_\Delta$ and $\underline{\mathcal{V}}_\Delta$ remain explicit decision variables for synthesis.

Another class for which we can find the dual representation is the class of sector-bounded uncertainties, also from [11]

Class 5 (Sector-bounded uncertainties on infinite-dimensional channels). Consider the infinite-dimensional uncertainty class

$\Delta := \{\phi : \mathbb{R} \rightarrow \mathbb{R} \mid (\phi(v) - \alpha v)(\beta v - \phi(v)) \geq 0, \forall v \in \mathbb{R}\}$, where $\alpha < \beta$. With the convention $w_\Delta(s, t) = \phi(z_\Delta(s, t))$, let $w_\Delta, z_\Delta \in \mathbf{L}_{e,[a,b]}^n$ for all $s \in [a, b]$ and $t > 0$. Define the primal hard uncertainty IQC $(I, \mathcal{M}_{\mathcal{V}_\Delta})$ by

$$\mathcal{V}_\Delta := \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix}^* \begin{bmatrix} 0 & \mathcal{S} \\ \mathcal{S} & 0 \end{bmatrix} \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix},$$

where $\mathcal{S} \in \Pi_4^{n \times n}$ is a multiplication PI operator satisfying

$$(\mathcal{S}\mathbf{x})(s, t) := S_0(s)\mathbf{x}(s, t), \quad S_0(s) \succ 0, \quad s \in [a, b].$$

Its $(\Theta, J_{n,n})$ factorization is given by,

$$\Theta := \frac{1}{\sqrt{2}} \begin{bmatrix} I & \mathcal{S} \\ I & -\mathcal{S} \end{bmatrix} \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix}$$

The corresponding dual hard uncertainty IQC is $(I, \mathcal{M}_{\mathcal{V}_\Delta})$, where

$$\mathcal{V}_\Delta := \frac{1}{(\beta - \alpha)^2} \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix}^* \begin{bmatrix} 0 & \mathcal{S} \\ \mathcal{S} & 0 \end{bmatrix} \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix}$$

with $\mathcal{S} = \mathcal{S}^{-1}$.

Proof. See Appendix A.5.

V. APPLICATION OF DUAL IQC

Theorem 4 provides a robust-performance certificate for PIE systems in terms of the dual IQC. For analysis, this merely reformulates the primal certificate, since primal-dual equivalence preserves feasibility. The principal benefit of the dual formulation therefore appears in controller synthesis. Both controller constructions below use the same synthesis LPI, obtained by applying (17) to the corresponding closed-loop PIE. The choice of dual uncertainty filter changes only the realization of the controller recovered from this LPI. A related application of IQC duality to convex feedforward controller synthesis is given by Venkataraman and Seiler [13].

Let P , with zero initial condition $\mathbf{x}(0) = 0$, have exogenous input w , control input u , performance output z , and PIE realization

$$\begin{bmatrix} \partial_t(\mathcal{T}_P \mathbf{x}_P(t)) \\ z(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_P & \mathcal{B}_P & \mathcal{B}_u \\ \mathcal{C}_P & \mathcal{D}_P & \mathcal{D}_{zu} \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ w(t) \\ u(t) \end{bmatrix}. \quad (34)$$

We will consider cases of $u(t) = \mathcal{K}_P \mathbf{x}_P(t) + \mathcal{K}_\Psi \mathbf{x}_\Psi(t)$. Also, if $\Psi_\Delta \neq I$ we assume that $\mathbf{D}(\Psi_\Delta)$ exists, i.e. roughly speaking $\Psi_\Delta^* \mathcal{M}_{\mathcal{V}} \Psi_\Delta = \Psi_\Delta^* \mathcal{M}_{\mathcal{U}}^* J \mathcal{M}_{\mathcal{U}} \Psi_\Delta$, with $\mathcal{U}^{-1} \in \Pi_4$ and $\Psi_\Delta^{-1} \in \mathcal{G}_2$, such that $\underline{\Psi}_\Delta^* \mathcal{M}_{\mathcal{U}}^* J \underline{\Psi}_\Delta \mathcal{M}_{\mathcal{U}} = \mathbf{D}(\Psi_\Delta)^* \mathcal{M}_{\mathbf{D}(\mathcal{U})}^* J \mathbf{D}(\Psi_\Delta) \mathcal{M}_{\mathbf{D}(\mathcal{U})}$. Then $\mathcal{K} \star \mathcal{P}$ takes the form

$$\begin{bmatrix} \mathcal{T}_P \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ z(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_P + \mathcal{B}_u \mathcal{K}_P & \mathcal{B}_u \mathcal{K}_\Psi & \mathcal{B}_P \\ \mathcal{A}_\Psi + \mathcal{B}_\Psi^z (\mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P) & \mathcal{B}_\Psi^z \mathcal{D}_{zu} \mathcal{K}_\Psi & \mathcal{B}_\Psi^z \mathcal{D}_P + \mathcal{B}_\Psi^w \\ \mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P & \mathcal{D}_{zu} \mathcal{K}_\Psi & \mathcal{D}_P \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ w(t) \end{bmatrix}. \quad (35)$$

Write the realization of Ψ as

$$\begin{bmatrix} \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_\Psi & \mathcal{B}_\Psi^z & \mathcal{B}_\Psi^w \\ \mathcal{C}_\Psi^z & \mathcal{D}_\Psi^{zw} & \mathcal{D}_\Psi^{zw} \\ \mathcal{C}_\Psi^w & \mathcal{D}_\Psi^{wz} & \mathcal{D}_\Psi^w \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Psi(t) \\ z(t) \\ w(t) \end{bmatrix}. \quad (36)$$

As in (48), the realization $\Psi \begin{bmatrix} (\mathcal{K} \star \mathcal{P}) \\ I \end{bmatrix} w$ takes the form

$$\begin{bmatrix} \mathcal{T}_P \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_P + \mathcal{B}_u \mathcal{K}_P & \mathcal{B}_u \mathcal{K}_\Psi & \mathcal{B}_P \\ \mathcal{B}_\Psi^z (\mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P) & \mathcal{A}_\Psi + \mathcal{B}_\Psi^z \mathcal{D}_{zu} \mathcal{K}_\Psi & \mathcal{B}_\Psi^z \mathcal{D}_P + \mathcal{B}_\Psi^w \\ \mathcal{D}_\Psi^z (\mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P) & \mathcal{C}_\Psi^z + \mathcal{D}_\Psi^z \mathcal{D}_{zu} \mathcal{K}_\Psi & \mathcal{D}_\Psi^z \mathcal{D}_P + \mathcal{D}_\Psi^{zw} \\ \mathcal{D}_\Psi^{wz} (\mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P) & \mathcal{C}_\Psi^w + \mathcal{D}_\Psi^{wz} \mathcal{D}_{zu} \mathcal{K}_\Psi & \mathcal{D}_\Psi^{wz} \mathcal{D}_P + \mathcal{D}_\Psi^w \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ w(t) \end{bmatrix}. \quad (37)$$

Thus $\underline{\Psi} \begin{bmatrix} (\mathcal{K} \star \mathcal{P})^\top \\ I \end{bmatrix} w$ takes the form

Theorem 5. Let the realization of P satisfy Definition 7. Let $\Delta \in \Delta$, there exist dual hard IQC $(\underline{\Psi}, \mathcal{M}_{\mathcal{V}})$, such that,

- The interconnection $P \star \Delta$ is well-posed for all $\Delta \in \Delta$.
- The IQC in Definition 10 is satisfied for all $\Delta \in \Delta$.
- The dual hard IQC $(\underline{\Psi}, \mathcal{M}_{\mathcal{V}})$ has a $(\mathbf{D}(\Theta), J_{n_w, n_z})$ factorization.

Moreover there exist, $\mathcal{Z}, \mathcal{P} \in \Pi_4$ with $\mathcal{P} = \mathcal{P}^* \succ 0$, such that the following statement holds

$$\begin{bmatrix} \mathcal{T}^* \mathcal{P} \mathcal{A} + (*) & \mathcal{T}^* \mathcal{P} \mathcal{B} \\ \underline{\mathcal{B}}^* \mathcal{P} \mathcal{T} & \underline{\mathcal{C}} I \end{bmatrix} + \begin{bmatrix} \mathcal{C}^* \\ \underline{\mathcal{D}}^* \end{bmatrix} \underline{\mathcal{V}} \begin{bmatrix} \mathcal{C} & \underline{\mathcal{D}} \end{bmatrix} \preceq 0 \quad (38)$$

A. $\underline{\Psi}_\Delta = I$ controller realization

When $\Psi_\Delta = I$ and $\underline{\Psi}_\Delta = I$, no multiplier state is required in the controller. For a state-feedback operator $\mathcal{K}_P$, set $u(t) = \mathcal{K}_P \mathbf{x}_P(t)$. The resulting closed-loop PIE $\mathcal{K} \star \mathcal{P}$ is

$$\begin{bmatrix} \partial_t(\mathcal{T}_P \mathbf{x}_P(t)) \\ z(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_P + \mathcal{B}_u \mathcal{K}_P & \mathcal{B}_P \\ \mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P & \mathcal{D}_P \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ w(t) \end{bmatrix}. \quad (39)$$

B. Dynamic-filter controller realization

Following [14], assume that the uncertainty Δ is known and that $z_\Delta, w_\Delta = \Delta z_\Delta$, and w_p are available to the controller. For $\underline{\Psi}_\Delta \neq I$, find the realization of $\Psi_\Delta = \mathbf{D}(\underline{\Psi}_\Delta)$,

$$\begin{bmatrix} \mathcal{T}_{\Psi_\Delta} \dot{\mathbf{x}}_{\Psi_\Delta}(t) \\ y(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_{\Psi_\Delta} & \mathcal{B}_{\Psi_\Delta}^z & \mathcal{B}_{\Psi_\Delta}^w \\ I & 0 & 0 \end{bmatrix} \begin{bmatrix} \mathbf{x}_{\Psi_\Delta}(t) \\ z_\Delta(t) \\ w_\Delta(t) \end{bmatrix}. \quad (40)$$

We impose the zero initial condition $\mathbf{x}_{\Psi_\Delta}(0) = 0$. The second block row gives $y(t) = \mathbf{x}_{\Psi_\Delta}(t)$. The complete controller has the PIE realization

$$\begin{bmatrix} \mathcal{T}_{\Psi_\Delta} \dot{\mathbf{x}}_{\Psi_\Delta}(t) \\ u(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_{\Psi_\Delta} & 0 & \mathcal{B}_{\Psi_\Delta}^z & \mathcal{B}_{\Psi_\Delta}^w \\ \mathcal{K}_\Psi & \mathcal{K}_P & 0 & 0 \end{bmatrix} \begin{bmatrix} \mathbf{x}_{\Psi_\Delta}(t) \\ \mathbf{x}(t) \\ z_\Delta(t) \\ w_\Delta(t) \end{bmatrix}. \quad (41)$$

Hence $\mathbf{x}_{\Psi_\Delta}$ is the controller state, $\mathbf{x}, z_\Delta$, and w_Δ are its external inputs, and u is its output.

VI. NUMERICAL EXAMPLES

VII. CONCLUSION

REFERENCES

- [1] A. Das, S. Shivakumar, M. Peet, and S. Weiland. Robust Analysis of Uncertain ODE-PDE Systems Using PI Multipliers, PIEs and LPIs. In 2020 59th IEEE Conference on Decision and Control (CDC), pages 634–639, 2020.
- [2] Bin Hu, Márcio J. Lacerda, and Peter Seiler. Robustness analysis of uncertain discrete-time systems with dissipation inequalities and integral quadratic constraints. *International Journal of Robust and Nonlinear Control*, 27(11):1940–1962, 2017.

- [3] I. Köse and C. Scherer. Robust L_2 -gain feedforward control of uncertain systems using dynamic IQCs. *International Journal of Robust and Nonlinear Control*, 19(11):1224–1247, 2009.
- [4] Thijs Lenssen, Aleksandr Talitckii, Matthew Peet, and Amritam Das. A μ -Analysis and Synthesis Framework for Partial Integral Equations using IQCs, 2025.
- [5] Harald Pfifer and Peter Seiler. Less conservative robustness analysis of linear parameter varying systems using integral quadratic constraints. *International Journal of Robust and Nonlinear Control*, 26(16):3580–3594, 2016.
- [6] R. M. Redheffer. On a certain linear fractional transformation. *Journal of Mathematics and Physics*, 39(1-4):269–286, 1960.
- [7] M. Peet S. Shivakumar, A. Das. Dual Representations and H_∞ -Optimal Control of Partial Differential Equations. *IEEE*, Volume(Issue):Start–End, 2026.
- [8] Peter Seiler. Stability analysis with dissipation inequalities and integral quadratic constraints. *IEEE Transactions on Automatic Control*, 60(6):1704–1709, 2015.
- [9] S. Shivakumar, A. Das, and M. Peet. PIETOOLS: A Matlab Toolbox for Manipulation and Optimization of Partial Integral Operators. In *2020 American Control Conference (ACC)*, pages 2667–2672, 2020.
- [10] S. Shivakumar, A. Das, S. Weiland, and M. Peet. Extension of the Partial Integral Equation Representation to GPDE Input–Output Systems. *IEEE Transactions on Automatic Control*, 70(5):3240–3255, 2025.
- [11] A. Talitckii, M. Peet, and P. Seiler. Integral Quadratic Constraints with Infinite-Dimensional Channels. In *2023 American Control Conference (ACC)*, pages 1576–1583, 2023.
- [12] J. Veenman, C. Scherer, and H. Köroğlu. Robust stability and performance analysis based on integral quadratic constraints. *European Journal of Control*, 31:1–32, 2016.
- [13] Raghu Venkataraman and Peter Seiler. Convex LPV synthesis of estimators and feedforwards using duality and integral quadratic constraints. *International Journal of Robust and Nonlinear Control*, 28(3):953–975, 2018.
- [14] Chengzhi Yuan and Fen Wu. Dynamic iq-based control of uncertain lft systems with time-varying state delay. *IEEE Transactions on Cybernetics*, 46(12):3320–3329, 2016.
- [15] Kemin Zhou, John Comstock Doyle, Keith Glover, et al. *Robust and optimal control*, volume 40. Prentice hall New Jersey, 1996.

APPENDIX A MATHEMATICAL PROOFS

A. Proof of Theorem 1

Suppose that (8) holds. This implies,

$$\begin{aligned} & \left\langle p_T \Psi_\Delta \begin{bmatrix} P_\Delta \\ I \end{bmatrix} w_\Delta, p_T \mathcal{M}_{\mathcal{V}_\Delta} \Psi_\Delta \begin{bmatrix} P_\Delta \\ I \end{bmatrix} w_\Delta \right\rangle_{\mathbf{L}_{[a,b]}} \\ & + \left\langle p_T \Psi_p \begin{bmatrix} P_p \Delta \\ 0 \end{bmatrix} w_\Delta, p_T \mathcal{M}_{\mathcal{V}_p} \Psi_p \begin{bmatrix} P_p \Delta \\ 0 \end{bmatrix} w_\Delta \right\rangle_{\mathbf{L}_{[a,b]}} \\ & \leq -\epsilon \|p_T w_\Delta\|_{\mathbf{L}_{[a,b]}}^2. \end{aligned}$$

Since $\mathcal{Q}_p \succeq 0$, we can then infer,

$$\left\langle p_T \Psi_\Delta \begin{bmatrix} P_\Delta w_\Delta \\ w_\Delta \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_\Delta} \Psi_\Delta \begin{bmatrix} P_\Delta w_\Delta \\ w_\Delta \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w_\Delta\|_{\mathbf{L}_{[a,b]}}^2.$$

Then, using Theorem 6 in [11], we find that **robust stability** is guaranteed. Moreover, rewriting (8) as,

$$\begin{aligned} & \left\langle p_T \Psi_\Delta \begin{bmatrix} z_\Delta \\ w_\Delta \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_\Delta} \Psi_\Delta \begin{bmatrix} z_\Delta \\ w_\Delta \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \\ & + \left\langle p_T \Psi_p \begin{bmatrix} z_p \\ w_p \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_p} \Psi_p \begin{bmatrix} z_p \\ w_p \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \\ & \leq -\epsilon (\|p_T w_\Delta\|_{\mathbf{L}_{[a,b]}}^2 + \|p_T w_p\|_{\mathbf{L}_{[a,b]}}^2), \end{aligned}$$

and given that Ψ_Δ and $\mathcal{M}_{\mathcal{V}_\Delta}$ satisfy the IQC in Definition 10 leads to,

$$\left\langle p_T \Psi_p \begin{bmatrix} z_p \\ w_p \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_p} \Psi_p \begin{bmatrix} z_p \\ w_p \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w_p\|_{\mathbf{L}_{[a,b]}}^2.$$

Thus by Definition 11 **robust performance** is achieved.

B. Proof of Lemma 1

We first show the primal derivation explicitly. To show sufficiency, first augment the primal system with the Potapov–Ginzburg transform of the primal filter, i.e. $P \star \Theta^\dagger$. $\Theta^\dagger$ admits the state-space representation

$$\begin{bmatrix} \mathcal{T}_\Theta \dot{\mathbf{x}}_\Theta(t) \\ \tilde{z}(t) \\ w(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_\Theta^\dagger & \mathcal{B}_\Theta^{\dagger, \tilde{w}} & \mathcal{B}_\Theta^{\dagger, z} \\ \mathcal{C}_\Theta^{\dagger, z} & \mathcal{D}_\Theta^{\dagger, z\tilde{w}} & \mathcal{D}_\Theta^{\dagger, z} \\ \mathcal{C}_\Theta^{\dagger, w} & \mathcal{D}_\Theta^{\dagger, w\tilde{w}} & \mathcal{D}_\Theta^{\dagger, wz} \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Theta(t) \\ \tilde{w}(t) \\ z(t) \end{bmatrix}. \quad (42)$$

With $W_\Theta := (\mathcal{D}_\Theta^w)^{-1}$, the transformed blocks are

$$\begin{aligned} \mathcal{A}_\Theta^\dagger &:= \mathcal{A}_\Theta - \mathcal{B}_\Theta^w W_\Theta \mathcal{C}_\Theta^w, & \mathcal{B}_\Theta^{\dagger, \tilde{w}} &:= \mathcal{B}_\Theta^w W_\Theta, \\ \mathcal{B}_\Theta^{\dagger, z} &:= \mathcal{B}_\Theta^z - \mathcal{B}_\Theta^w W_\Theta \mathcal{D}_\Theta^{wz}, & \mathcal{C}_\Theta^{\dagger, z} &:= \mathcal{C}_\Theta^z - \mathcal{D}_\Theta^{zw} W_\Theta \mathcal{C}_\Theta^w, \\ \mathcal{D}_\Theta^{\dagger, z} &:= \mathcal{D}_\Theta^z - \mathcal{D}_\Theta^{zw} W_\Theta \mathcal{D}_\Theta^{wz}, & \mathcal{D}_\Theta^{\dagger, z\tilde{w}} &:= \mathcal{D}_\Theta^{zw} W_\Theta, \\ \mathcal{C}_\Theta^{\dagger, w} &:= -W_\Theta \mathcal{C}_\Theta^w, & \mathcal{D}_\Theta^{\dagger, w\tilde{w}} &:= W_\Theta, \\ \mathcal{D}_\Theta^{\dagger, wz} &:= -W_\Theta \mathcal{D}_\Theta^{wz}. \end{aligned}$$

Substitution of $z = \mathcal{C}\mathbf{x} + \mathcal{D}w$ into (42) and solving for w gives the algebraic loop

$$w = \Lambda_w \mathcal{D}_\Theta^{\dagger, wz} \mathcal{C}\mathbf{x} + \Lambda_w \mathcal{C}_\Theta^{\dagger, w} \mathbf{x}_\Theta + \Lambda_w \mathcal{D}_\Theta^{\dagger, w\tilde{w}} \tilde{w}. \quad (43)$$

Define the algebraic loops

$$\Lambda_w := (I - \mathcal{D}_\Theta^{\dagger, wz} \mathcal{D})^{-1}, \quad \Lambda_z := (I - \mathcal{D} \mathcal{D}_\Theta^{\dagger, wz})^{-1}.$$

Since $(\mathcal{D}_\Theta^{wz} \mathcal{D} + \mathcal{D}_\Theta^w)^{-1} = (\mathcal{D}_\Theta^w)^{-1} (I + (\mathcal{D}_\Theta^w)^{-1} \mathcal{D}_\Theta^{wz} \mathcal{D})^{-1} = (\mathcal{D}_\Theta^w)^{-1} (I - \mathcal{D}_\Theta^{\dagger, wz} \mathcal{D})^{-1}$ invertible, Λ_w, Λ_z invertible. Substituting (43) into (3) gives

$$\mathcal{T}\dot{\mathbf{x}} = (\mathcal{A} + \mathcal{B} \Lambda_w \mathcal{D}_\Theta^{\dagger, wz} \mathcal{C}) \mathbf{x} + \mathcal{B} \Lambda_w \mathcal{C}_\Theta^{\dagger, w} \mathbf{x}_\Theta + \mathcal{B} \Lambda_w \mathcal{D}_\Theta^{\dagger, w\tilde{w}} \tilde{w}.$$

Using $\mathcal{D} \Lambda_w = \Lambda_z \mathcal{D}$ and $I + \mathcal{D} \Lambda_w \mathcal{D}_\Theta^{\dagger, wz} = \Lambda_z$, we obtain

$$z = \Lambda_z \mathcal{C}\mathbf{x} + \Lambda_z \mathcal{D} \mathcal{C}_\Theta^{\dagger, w} \mathbf{x}_\Theta + \Lambda_z \mathcal{D} \mathcal{D}_\Theta^{\dagger, w\tilde{w}} \tilde{w}. \quad (44)$$

Substitution into the equations for $\dot{\mathbf{x}}_\Theta$ and $\tilde{z}$ yields $P \star \Theta^\dagger$

$$\begin{bmatrix} \mathcal{T}\dot{\mathbf{x}}(t) \\ \mathcal{T}_\Theta \dot{\mathbf{x}}_\Theta(t) \\ \tilde{z}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A} + \mathcal{B}\Lambda_w \mathcal{D}_\Theta^{\dagger, wz} \mathcal{C} & \mathcal{B}\Lambda_w \mathcal{C}_\Theta^{\dagger, w} & \mathcal{B}\Lambda_w \mathcal{D}_\Theta^{\dagger, w\tilde{w}} \\ \mathcal{B}_\Theta^{\dagger, z} \Lambda_z \mathcal{C} & \mathcal{A}_\Theta^\dagger + \mathcal{B}_\Theta^{\dagger, z} \Lambda_z \mathcal{D}\mathcal{C}_\Theta^{\dagger, w} & \mathcal{B}_\Theta^{\dagger, \tilde{w}} + \mathcal{B}_\Theta^{\dagger, z} \Lambda_z \mathcal{D}\mathcal{D}_\Theta^{\dagger, w\tilde{w}} \\ \mathcal{D}_\Theta^{\dagger, z} \Lambda_z \mathcal{C} & \mathcal{C}_\Theta^{\dagger, z} + \mathcal{D}_\Theta^{\dagger, z} \Lambda_z \mathcal{D}\mathcal{C}_\Theta^{\dagger, w} & \mathcal{D}_\Theta^{\dagger, z\tilde{w}} + \mathcal{D}_\Theta^{\dagger, z} \Lambda_z \mathcal{D}\mathcal{D}_\Theta^{\dagger, w\tilde{w}} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ \tilde{w}(t) \end{bmatrix} \quad (45)$$

Define also

$$\Lambda_c := (\mathcal{D}_\Theta^{wz} \mathcal{D} + \mathcal{D}_\Theta^w)^{-1}.$$

The invertible congruence transformation used directly on (45) is

$$\begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ \mathcal{D}_\Theta^{wz} \mathcal{C} & \mathcal{C}_\Theta^w & \Lambda_c^{-1} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ w(t) \end{bmatrix} \quad \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ w(t) \end{bmatrix} = \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ -\Lambda_c \mathcal{D}_\Theta^{wz} \mathcal{C} & -\Lambda_c \mathcal{C}_\Theta^w & \Lambda_c \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ \tilde{w}(t) \end{bmatrix} \quad (46)$$

The third row of (46) is

$$\tilde{w} = \mathcal{D}_\Theta^{wz} \mathcal{C} \mathbf{x} + \mathcal{C}_\Theta^w \mathbf{x}_\Theta + (\mathcal{D}_\Theta^{wz} \mathcal{D} + \mathcal{D}_\Theta^w) w. \quad (47)$$

Using $z = \mathcal{C} \mathbf{x} + \mathcal{D} w$, this is equivalently

$$\tilde{w} = \mathcal{C}_\Theta^w \mathbf{x}_\Theta + \mathcal{D}_\Theta^{wz} z + \mathcal{D}_\Theta^w w,$$

which is the scaled input row of $\Theta \begin{bmatrix} P \\ I \end{bmatrix} w$. We now apply (46) directly to (45). The plant row of (45) gives

$$\begin{aligned} \mathcal{T}\dot{\mathbf{x}} &= (\mathcal{A} + \mathcal{B}\Lambda_w \mathcal{D}_\Theta^{\dagger, wz} \mathcal{C}) \mathbf{x} + \mathcal{B}\Lambda_w \mathcal{C}_\Theta^{\dagger, w} \mathbf{x}_\Theta + \mathcal{B}\Lambda_w \mathcal{D}_\Theta^{\dagger, w\tilde{w}} \tilde{w} \\ &= \mathcal{A} \mathbf{x} + \mathcal{B}(\Lambda_w \mathcal{D}_\Theta^{\dagger, wz} \mathcal{C} \mathbf{x} + \Lambda_w \mathcal{C}_\Theta^{\dagger, w} \mathbf{x}_\Theta + \Lambda_w \mathcal{D}_\Theta^{\dagger, w\tilde{w}} \tilde{w}) \\ &= \mathcal{A} \mathbf{x} + \mathcal{B} w, \end{aligned}$$

where the last equality uses (43). The filter state row of (45) gives

$$\begin{aligned} \mathcal{T}_\Theta \dot{\mathbf{x}}_\Theta &= \mathcal{B}_\Theta^{\dagger, z} \Lambda_z \mathcal{C} \mathbf{x} + (\mathcal{A}_\Theta^\dagger + \mathcal{B}_\Theta^{\dagger, z} \Lambda_z \mathcal{D}\mathcal{C}_\Theta^{\dagger, w}) \mathbf{x}_\Theta \\ &\quad + (\mathcal{B}_\Theta^{\dagger, \tilde{w}} + \mathcal{B}_\Theta^{\dagger, z} \Lambda_z \mathcal{D}\mathcal{D}_\Theta^{\dagger, w\tilde{w}}) \tilde{w} \\ &= \mathcal{A}_\Theta^\dagger \mathbf{x}_\Theta + \mathcal{B}_\Theta^{\dagger, \tilde{w}} \tilde{w} + \mathcal{B}_\Theta^{\dagger, z} (\Lambda_z \mathcal{C} \mathbf{x} + \Lambda_z \mathcal{D}\mathcal{C}_\Theta^{\dagger, w} \mathbf{x}_\Theta + \Lambda_z \mathcal{D}\mathcal{D}_\Theta^{\dagger, w\tilde{w}} \tilde{w}) \\ &= \mathcal{A}_\Theta^\dagger \mathbf{x}_\Theta + \mathcal{B}_\Theta^{\dagger, \tilde{w}} \tilde{w} + \mathcal{B}_\Theta^{\dagger, z} z \\ &= (\mathcal{A}_\Theta - \mathcal{B}_\Theta^w W_\Theta \mathcal{C}_\Theta^w) \mathbf{x}_\Theta + \mathcal{B}_\Theta^w W_\Theta (\mathcal{C}_\Theta^w \mathbf{x}_\Theta + \mathcal{D}_\Theta^{wz} z + \mathcal{D}_\Theta^w w) \\ &\quad + (\mathcal{B}_\Theta^z - \mathcal{B}_\Theta^w W_\Theta \mathcal{D}_\Theta^{wz}) z \\ &= \mathcal{A}_\Theta \mathbf{x}_\Theta + \mathcal{B}_\Theta^z z + \mathcal{B}_\Theta^w w. \end{aligned}$$

The output row of (45), $W_\Theta = (\mathcal{D}_\Theta^w)^{-1}$ and using (44) gives

$$\begin{aligned} \tilde{z} &= \mathcal{D}_\Theta^{\dagger, z} \Lambda_z \mathcal{C} \mathbf{x} + (\mathcal{C}_\Theta^{\dagger, z} + \mathcal{D}_\Theta^{\dagger, z} \Lambda_z \mathcal{D}\mathcal{C}_\Theta^{\dagger, w}) \mathbf{x}_\Theta \\ &\quad + (\mathcal{D}_\Theta^{\dagger, z\tilde{w}} + \mathcal{D}_\Theta^{\dagger, z} \Lambda_z \mathcal{D}\mathcal{D}_\Theta^{\dagger, w\tilde{w}}) \tilde{w} \\ &= \mathcal{C}_\Theta^{\dagger, z} \mathbf{x}_\Theta + \mathcal{D}_\Theta^{\dagger, z\tilde{w}} \tilde{w} + \mathcal{D}_\Theta^{\dagger, z} (\Lambda_z \mathcal{C} \mathbf{x} + \Lambda_z \mathcal{D}\mathcal{C}_\Theta^{\dagger, w} \mathbf{x}_\Theta + \Lambda_z \mathcal{D}\mathcal{D}_\Theta^{\dagger, w\tilde{w}} \tilde{w}) \\ &= \mathcal{C}_\Theta^{\dagger, z} \mathbf{x}_\Theta + \mathcal{D}_\Theta^{\dagger, z\tilde{w}} \tilde{w} + \mathcal{D}_\Theta^{\dagger, z} z \\ &= (\mathcal{C}_\Theta^z - \mathcal{D}_\Theta^{zw} W_\Theta \mathcal{C}_\Theta^w) \mathbf{x}_\Theta + \mathcal{D}_\Theta^{zw} W_\Theta (\mathcal{C}_\Theta^w \mathbf{x}_\Theta + \mathcal{D}_\Theta^{wz} z + \mathcal{D}_\Theta^w w) \\ &\quad + (\mathcal{D}_\Theta^z - \mathcal{D}_\Theta^{zw} W_\Theta \mathcal{D}_\Theta^{wz}) z \\ &= \mathcal{C}_\Theta^z \mathbf{x}_\Theta + \mathcal{D}_\Theta^z z + \mathcal{D}_\Theta^{zw} w. \end{aligned}$$

Substituting $z = \mathcal{C} \mathbf{x} + \mathcal{D} w$ in these recovered rows gives

$$\begin{bmatrix} \mathcal{T}\dot{\mathbf{x}}(t) \\ \mathcal{T}_\Theta \dot{\mathbf{x}}_\Theta(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A} & 0 & \mathcal{B} \\ \mathcal{B}_\Theta^z \mathcal{C} & \mathcal{A}_\Theta & \mathcal{B}_\Theta^z \mathcal{D} + \mathcal{B}_\Theta^w \\ \mathcal{D}_\Theta^z \mathcal{C} & \mathcal{C}_\Theta^z & \mathcal{D}_\Theta^z \mathcal{D} + \mathcal{D}_\Theta^{zw} \\ \mathcal{D}_\Theta^{wz} \mathcal{C} & \mathcal{C}_\Theta^w & \mathcal{D}_\Theta^{wz} \mathcal{D} + \mathcal{D}_\Theta^w \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ w(t) \end{bmatrix}. \quad (48)$$

The realization in (48) is the direct augmentation $\Theta \begin{bmatrix} P \\ I \end{bmatrix} w$. For necessity, applying the inverse of (46) to (48) recovers (45).

Thus we find $\Theta \begin{bmatrix} P \\ I \end{bmatrix} w = \begin{bmatrix} P \star \Theta^\dagger \\ I \end{bmatrix} \Gamma w$ for all $w \in \mathbf{L}_{e, [a, b]}^{\mathbf{n}_w}$.

Dual side. The inverse relation $\mathbf{D}(\Theta)^{-1} = \hat{J}^* \Theta^\top \hat{J}$ has realization

$$\begin{bmatrix} \mathcal{T}_\Theta^* \dot{\mathbf{x}}_\Theta(t) \\ \underline{z}(t) \\ \underline{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_\Theta^* & -\mathcal{C}_\Theta^{w*} & \mathcal{C}_\Theta^{z*} \\ -\mathcal{B}_\Theta^{w*} & \mathcal{D}_\Theta^{w*} & -\mathcal{D}_\Theta^{zw*} \\ \mathcal{B}_\Theta^{z*} & -\mathcal{D}_\Theta^{wz*} & \mathcal{D}_\Theta^{z*} \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Theta(t) \\ \underline{\tilde{z}}(t) \\ \underline{\tilde{w}}(t) \end{bmatrix}. \quad (49)$$

Define the dual feedthrough block

$$\underline{\mathcal{D}}_\Theta := \begin{bmatrix} \mathcal{D}_\Theta^{w*} & -\mathcal{D}_\Theta^{zw*} \\ -\mathcal{D}_\Theta^{wz*} & \mathcal{D}_\Theta^{z*} \end{bmatrix}. \quad (50)$$

Solving the algebraic rows of (49) gives the realization of $\mathbf{D}(\Theta)$:

$$\begin{bmatrix} \mathcal{T}_\Theta^* \dot{\mathbf{x}}_\Theta(t) \\ \underline{\tilde{z}}(t) \\ \underline{\tilde{w}}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_\Theta^* - [-\mathcal{C}_\Theta^{w*} & \mathcal{C}_\Theta^{z*}] \underline{\mathcal{D}}_\Theta^{-1} \begin{bmatrix} -\mathcal{B}_\Theta^{w*} \\ \mathcal{B}_\Theta^{z*} \end{bmatrix} & [-\mathcal{C}_\Theta^{w*} & \mathcal{C}_\Theta^{z*}] \underline{\mathcal{D}}_\Theta^{-1} \\ -\underline{\mathcal{D}}_\Theta^{-1} \begin{bmatrix} -\mathcal{B}_\Theta^{w*} \\ \mathcal{B}_\Theta^{z*} \end{bmatrix} & \underline{\mathcal{D}}_\Theta^{-1} \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Theta(t) \\ \underline{z}(t) \\ \underline{w}(t) \end{bmatrix}. \quad (51)$$

Solving the second block row for $\underline{\tilde{z}}$ and substituting in the first and third block rows gives the Potapov–Ginzburg realization of the dual filter

$$\begin{bmatrix} \mathcal{T}_\Theta^* \dot{\mathbf{x}}_\Theta(t) \\ \underline{\tilde{z}}(t) \\ \underline{w}(t) \end{bmatrix} = \begin{bmatrix} (\mathcal{A}_\Theta^\dagger)^* & (\mathcal{C}_\Theta^{\dagger,z})^* & (\mathcal{C}_\Theta^{\dagger,w})^* \\ (\mathcal{B}_\Theta^{\dagger,w})^* & (\mathcal{D}_\Theta^{\dagger,zw})^* & (\mathcal{D}_\Theta^{\dagger,w\tilde{w}})^* \\ (\mathcal{B}_\Theta^{\dagger,z})^* & (\mathcal{D}_\Theta^{\dagger,z})^* & (\mathcal{D}_\Theta^{\dagger,wz})^* \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Theta(t) \\ \underline{\tilde{w}}(t) \\ \underline{z}(t) \end{bmatrix}. \quad (52)$$

Augmenting (52) with $P^\top$, define

$$\underline{\Lambda}_c := ([0 \quad I] \underline{\mathcal{D}}_\Theta^{-1} \begin{bmatrix} \mathcal{D}^* \\ I \end{bmatrix})^{-1} = (((\mathcal{D}_\Theta^{\dagger,z})^*)^{-1} (I - (\mathcal{D}_\Theta^{\dagger,wz})^* \mathcal{D}^*))^{-1}.$$

The congruence transformations, $\underline{\Gamma}$ and $\underline{\Gamma}^{-1}$, respectively, which recover the direct dual systems are

$$\begin{aligned} \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ \underline{\tilde{w}}(t) \end{bmatrix} &= \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ [0 \quad I] \underline{\mathcal{D}}_\Theta^{-1} \begin{bmatrix} \mathcal{B}^* \\ 0 \end{bmatrix} & -[0 \quad I] \underline{\mathcal{D}}_\Theta^{-1} \begin{bmatrix} -\mathcal{B}_\Theta^{w*} \\ \mathcal{B}_\Theta^{z*} \end{bmatrix} & \underline{\Lambda}_c^{-1} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ \underline{\tilde{w}}(t) \end{bmatrix}, \\ \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ \underline{w}(t) \end{bmatrix} &= \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ -\underline{\Lambda}_c [0 \quad I] \underline{\mathcal{D}}_\Theta^{-1} \begin{bmatrix} \mathcal{B}^* \\ 0 \end{bmatrix} & \underline{\Lambda}_c [0 \quad I] \underline{\mathcal{D}}_\Theta^{-1} \begin{bmatrix} -\mathcal{B}_\Theta^{w*} \\ \mathcal{B}_\Theta^{z*} \end{bmatrix} & \underline{\Lambda}_c \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}_\Theta(t) \\ \underline{\tilde{w}}(t) \end{bmatrix}. \end{aligned} \quad (53)$$

The well-posedness of $P^\top \star (\Theta^\dagger)^\top$ gives the required invertibility of $I - (\mathcal{D}_\Theta^{\dagger,wz})^* \mathcal{D}^*$, and the dual well-posedness assumption gives the invertibility of $(\mathcal{D}_\Theta^{\dagger,z})^*$. Hence $\underline{\Lambda}_c$ is well defined. Thus we find that $\mathbf{D}(\Theta)^\dagger = (\Theta^\dagger)^\top$ and $\mathbf{D}(\Theta) \begin{bmatrix} P^\top \\ I \end{bmatrix} \underline{w} = \begin{bmatrix} P^\top \star (\Theta^\dagger)^\top \\ I \end{bmatrix} \underline{\Gamma} \underline{w}$ for all $\underline{w} \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_z}$.

C. Proof of Theorem 3

Assume that the primal statement of the theorem holds. Then there exists a sufficiently small $\epsilon > 0$ such that

$$\left\langle p_T \Theta \begin{bmatrix} P \\ I \end{bmatrix} w, p_T J_{\mathbf{n}_z, \mathbf{n}_w} \Theta \begin{bmatrix} P \\ I \end{bmatrix} w \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2 \quad (54)$$

for all $w \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_w}$ and $T \geq 0$. By lemma 1, the system $\Theta \begin{bmatrix} P \\ I \end{bmatrix}$ has a realization of the form

$$\left\langle p_T \begin{bmatrix} P \star \Theta^\dagger \\ I \end{bmatrix} \Gamma w, p_T J_{\mathbf{n}_z, \mathbf{n}_w} \begin{bmatrix} P \star \Theta^\dagger \\ I \end{bmatrix} \Gamma w \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2 \quad (55)$$

substituting $\tilde{w} = \Gamma w$, $\Gamma^{-1} \tilde{w} = w$, gives

$$\left\langle p_T \begin{bmatrix} P \star \Theta^\dagger \\ I \end{bmatrix} \tilde{w}, p_T J_{\mathbf{n}_z, \mathbf{n}_w} \begin{bmatrix} P \star \Theta^\dagger \\ I \end{bmatrix} \tilde{w} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T \Gamma^{-1} \tilde{w}\|_{\mathbf{L}_{[a,b]}}^2 \quad (56)$$

Since Γ is causal and bounded, $\|p_T \tilde{w}\|_{\mathbf{L}_{[a,b]}} \leq \|\Gamma\|_{\mathcal{L}(\mathbf{L}_{[a,b]})} \|p_T \Gamma^{-1} \tilde{w}\|_{\mathbf{L}_{[a,b]}}$, and therefore

$$\|p_T (P \star \Theta^\dagger) \tilde{w}\|_{\mathbf{L}_{[a,b]}}^2 \leq (1 - \frac{\epsilon}{\|\Gamma\|_{\mathcal{L}(\mathbf{L}_{[a,b]})}^2}) \|p_T \tilde{w}\|_{\mathbf{L}_{[a,b]}}^2. \quad (57)$$

Then by Theorem 2, and $(P \star \Theta^\dagger)^\top = P^\top \star (\Theta^\dagger)^\top$, we find

$$\|p_T(P^\top \star (\Theta^\dagger)^\top) \tilde{w}\|_{\mathbf{L}_{[a,b]}}^2 \leq (1 - \frac{\epsilon}{\|\Gamma\|_{\mathcal{L}(\mathbf{L}_{[a,b])}}^2}) \|p_T \tilde{w}\|_{\mathbf{L}_{[a,b]}}^2 \quad (58)$$

recovering the dual statement of the theorem

$$\left\langle p_T \begin{bmatrix} P^\top \star (\Theta^\dagger)^\top \\ I \end{bmatrix} \tilde{w}, p_T J_{\mathbf{n}_w, \mathbf{n}_z} \begin{bmatrix} P^\top \star (\Theta^\dagger)^\top \\ I \end{bmatrix} \tilde{w} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\frac{\epsilon}{\|\Gamma\|_{\mathcal{L}(\mathbf{L}_{[a,b])}}^2} \|p_T \tilde{w}\|_{\mathbf{L}_{[a,b]}}^2 \quad (59)$$

then $\tilde{w} = \Gamma w$, $\Gamma^{-1} \tilde{w} = w$ gives

$$\left\langle p_T \begin{bmatrix} P^\top \star (\Theta^\dagger)^\top \\ I \end{bmatrix} \Gamma w, p_T J_{\mathbf{n}_w, \mathbf{n}_z} \begin{bmatrix} P^\top \star (\Theta^\dagger)^\top \\ I \end{bmatrix} \Gamma w \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\frac{\epsilon}{\|\Gamma\|_{\mathcal{L}(\mathbf{L}_{[a,b])}}^2} \|p_T \Gamma w\|_{\mathbf{L}_{[a,b]}}^2 \quad (60)$$

Since Γ^{-1} is causal and bounded, $\|p_T w\|_{\mathbf{L}_{[a,b]}} \leq \|\Gamma^{-1}\|_{\mathbf{L}_{[a,b]}} \|p_T \Gamma w\|_{\mathbf{L}_{[a,b]}}$, and this gives the dual statement

$$\left\langle p_T \mathbf{D}(\Theta) \begin{bmatrix} P^\top \\ I \end{bmatrix} w, p_T J_{\mathbf{n}_w, \mathbf{n}_z} \mathbf{D}(\Theta) \begin{bmatrix} P^\top \\ I \end{bmatrix} w \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2 \quad (61)$$

where

$$\epsilon := \frac{\epsilon}{\|\Gamma\|_{\mathcal{L}(\mathbf{L}_{[a,b])}}^2 \|\Gamma^{-1}\|_{\mathcal{L}(\mathbf{L}_{[a,b])}}^2} > 0. \quad (62)$$

Conversely, starting from the dual statement and reversing the same argument gives the corresponding primal margin

$$\epsilon := \frac{\epsilon}{\|\Gamma\|_{\mathcal{L}(\mathbf{L}_{[a,b])}}^2 \|\Gamma^{-1}\|_{\mathcal{L}(\mathbf{L}_{[a,b])}}^2} > 0. \quad (63)$$

D. Proof of Theorem 4

If the primal LPI holds, the standard KYP integration gives the hard IQC

$$\left\langle p_T \Psi \begin{bmatrix} z \\ w \end{bmatrix}, p_T \mathcal{M}_\Psi \Psi \begin{bmatrix} z \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2.$$

Theorem 1 then gives the result. It remains to consider the dual LPI. Define $V(\mathbf{x}) = \langle \mathcal{T}\mathbf{x}, \mathcal{P}\mathcal{T}\mathbf{x} \rangle_{\mathbf{L}_{[a,b]}} \geq 0$. For any $w \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_z}$, suppose $\tilde{z}$ satisfies (19) for some $\mathbf{x} \in \mathbf{L}_{e,[a,b]}^{\mathbf{n}_x}$. By (19), we have

$$\left\langle \begin{bmatrix} \mathbf{x}(t) \\ w(t) \end{bmatrix}, \begin{bmatrix} \mathcal{T}^* \mathcal{P} \mathcal{A} + (*) & \mathcal{T}^* \mathcal{P} \mathcal{B} \\ \mathcal{B}^* \mathcal{P} \mathcal{T} & \epsilon I \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ w(t) \end{bmatrix} \right\rangle + \langle \tilde{z}(t), \mathcal{V} \tilde{z}(t) \rangle \leq 0. \quad (64)$$

After integrating in time, we obtain

$$\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2 + \langle p_T \tilde{z}, p_T \mathcal{V} \tilde{z} \rangle_{\mathbf{L}_{[a,b]}} \leq -V(\mathbf{x}(T)) + V(\mathbf{x}(0)).$$

Since $\mathbf{x}(0) = 0$ and $V(\mathbf{x}(T)) \geq 0$,

$$\left\langle p_T \underline{\Psi} \begin{bmatrix} \tilde{z} \\ w \end{bmatrix}, p_T \mathcal{M}_{\underline{\Psi}} \underline{\Psi} \begin{bmatrix} \tilde{z} \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2.$$

Using the $(\mathbf{D}(\Theta), J_{\mathbf{n}_w, \mathbf{n}_z})$ factorization, this is

$$\left\langle p_T \mathbf{D}(\Theta) \begin{bmatrix} \tilde{z} \\ w \end{bmatrix}, p_T J_{\mathbf{n}_w, \mathbf{n}_z} \mathbf{D}(\Theta) \begin{bmatrix} \tilde{z} \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2.$$

By Theorem 3, there exists $\epsilon > 0$ such that

$$\left\langle p_T \Theta \begin{bmatrix} z \\ w \end{bmatrix}, p_T J_{\mathbf{n}_z, \mathbf{n}_w} \Theta \begin{bmatrix} z \\ w \end{bmatrix} \right\rangle_{\mathbf{L}_{[a,b]}} \leq -\epsilon \|p_T w\|_{\mathbf{L}_{[a,b]}}^2.$$

Using the $(\Theta, J_{\mathbf{n}_z, \mathbf{n}_w})$ factorization gives the primal hard IQC, and Theorem 1 gives robust stability and robust performance.

E. Proof of Class 5

We use the multiplicative property of the dual operation such that $\mathbf{D}(\Theta_1\Theta_2) = \mathbf{D}(\Theta_1)\mathbf{D}(\Theta_2)$ for any two invertible Θ_1 and Θ_2 . Since $S_0 \succeq 0$, $\mathcal{S}$ is invertible with $S_0^{-1} \succeq 0$. Applying this property to the two factors of Θ in Class 5 gives

$$\begin{aligned}\mathbf{D}(\Theta) &= \mathbf{D}\left(\frac{1}{\sqrt{2}} \begin{bmatrix} I & \mathcal{S} \\ I & -\mathcal{S} \end{bmatrix}\right) \mathbf{D}\left(\begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix}\right) \\ &= \frac{1}{\sqrt{2}(\beta - \alpha)} \begin{bmatrix} -\mathcal{S}^{-1} & -I \\ -\mathcal{S}^{-1} & I \end{bmatrix} \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix}.\end{aligned}$$

Therefore,

$$\begin{aligned}\mathbf{D}(\Theta)^* J_{\mathbf{n},\mathbf{n}} \mathbf{D}(\Theta) &= \frac{1}{2(\beta - \alpha)^2} \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix}^* \begin{bmatrix} -\mathcal{S}^{-1} & -\mathcal{S}^{-1} \\ -I & I \end{bmatrix} J_{\mathbf{n},\mathbf{n}} \begin{bmatrix} -\mathcal{S}^{-1} & -I \\ -\mathcal{S}^{-1} & I \end{bmatrix} \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix} \\ &= \frac{1}{(\beta - \alpha)^2} \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix}^* \begin{bmatrix} 0 & \mathcal{S}^{-1} \\ \mathcal{S}^{-1} & 0 \end{bmatrix} \begin{bmatrix} \beta I & -I \\ -\alpha I & I \end{bmatrix} = \mathcal{V}_\Delta,\end{aligned}$$

where the final equality substitutes $\underline{\mathcal{S}} = \mathcal{S}^{-1}$.

F. Derivation of the Dual Filtered Controller Realization

$$\begin{bmatrix} \partial_t(\mathcal{T}_P \mathbf{x}_P)(t) \\ z(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_P & \mathcal{B}_P & \mathcal{B}_u \\ \mathcal{C}_P & \mathcal{D}_P & \mathcal{D}_{zu} \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ w(t) \\ u(t) \end{bmatrix}. \quad (65)$$

substitute $u(t) = \mathcal{K}_P \mathbf{x}_P(t) + \mathcal{K}_\Psi \mathbf{x}_\Psi(t)$,

$$\begin{bmatrix} \partial_t(\mathcal{T}_P \mathbf{x}_P)(t) \\ z(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_P + \mathcal{B}_u \mathcal{K}_P & \mathcal{B}_u \mathcal{K}_\Psi & \mathcal{B}_P \\ \mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P & \mathcal{D}_{zu} \mathcal{K}_\Psi & \mathcal{D}_P \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ w(t) \end{bmatrix}. \quad (66)$$

Now give the system $\Psi \begin{bmatrix} K \star P \\ I \end{bmatrix} w$,

$$\begin{bmatrix} \mathcal{T}_P \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_P + \mathcal{B}_u \mathcal{K}_P & \mathcal{B}_u \mathcal{K}_\Psi & \mathcal{B}_P \\ \mathcal{B}_\Psi^z (\mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P) & \mathcal{A}_\Psi + \mathcal{B}_\Psi^z \mathcal{D}_{zu} \mathcal{K}_\Psi & \mathcal{B}_\Psi^z \mathcal{D}_P + \mathcal{B}_\Psi^w \\ \mathcal{D}_\Psi^z (\mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P) & \mathcal{C}_\Psi^z + \mathcal{D}_\Psi^z \mathcal{D}_{zu} \mathcal{K}_\Psi & \mathcal{D}_\Psi^z \mathcal{D}_P + \mathcal{D}_\Psi^{zw} \\ \mathcal{D}_\Psi^{wz} (\mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P) & \mathcal{C}_\Psi^w + \mathcal{D}_\Psi^{wz} \mathcal{D}_{zu} \mathcal{K}_\Psi & \mathcal{D}_\Psi^{wz} \mathcal{D}_P + \mathcal{D}_\Psi^w \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ w(t) \end{bmatrix}. \quad (67)$$

We now repeat the proof of Lemma 1. Define

$$\begin{aligned}\mathcal{A}_K &:= \mathcal{A}_P + \mathcal{B}_u \mathcal{K}_P, & \mathcal{B}_K &:= \mathcal{B}_u \mathcal{K}_\Psi, \\ \mathcal{C}_K &:= \mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P, & \mathcal{D}_K &:= \mathcal{D}_{zu} \mathcal{K}_\Psi.\end{aligned} \quad (68)$$

Then

$$\begin{aligned}\mathcal{T}_P \dot{\mathbf{x}}_P &= \mathcal{A}_K \mathbf{x}_P + \mathcal{B}_K \mathbf{x}_\Psi + \mathcal{B}_P w, \\ z &= \mathcal{C}_K \mathbf{x}_P + \mathcal{D}_K \mathbf{x}_\Psi + \mathcal{D}_P w.\end{aligned} \quad (69)$$

The Potapov–Ginzburg transform $\Psi^\dagger$ has realization

$$\begin{bmatrix} \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \\ w(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_\Psi^\dagger & \mathcal{B}_\Psi^{\dagger, \tilde{w}} & \mathcal{B}_\Psi^{\dagger, z} \\ \mathcal{C}_\Psi^{\dagger, z} & \mathcal{D}_\Psi^{\dagger, z \tilde{w}} & \mathcal{D}_\Psi^{\dagger, z} \\ \mathcal{C}_\Psi^{\dagger, w} & \mathcal{D}_\Psi^{\dagger, w \tilde{w}} & \mathcal{D}_\Psi^{\dagger, wz} \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Psi(t) \\ \tilde{w}(t) \\ z(t) \end{bmatrix}. \quad (70)$$

With $W_\Psi := (\mathcal{D}_\Psi^w)^{-1}$, the transformed blocks are

$$\begin{aligned}\mathcal{A}_\Psi^\dagger &:= \mathcal{A}_\Psi - \mathcal{B}_\Psi^w W_\Psi \mathcal{C}_\Psi^w, & \mathcal{B}_\Psi^{\dagger, \tilde{w}} &:= \mathcal{B}_\Psi^w W_\Psi, \\ \mathcal{B}_\Psi^{\dagger, z} &:= \mathcal{B}_\Psi^z - \mathcal{B}_\Psi^w W_\Psi \mathcal{D}_\Psi^{wz}, & \mathcal{C}_\Psi^{\dagger, z} &:= \mathcal{C}_\Psi^z - \mathcal{D}_\Psi^{zw} W_\Psi \mathcal{C}_\Psi^w, \\ \mathcal{D}_\Psi^{\dagger, z} &:= \mathcal{D}_\Psi^z - \mathcal{D}_\Psi^{zw} W_\Psi \mathcal{D}_\Psi^{wz}, & \mathcal{D}_\Psi^{\dagger, z \tilde{w}} &:= \mathcal{D}_\Psi^{zw} W_\Psi, \\ \mathcal{C}_\Psi^{\dagger, w} &:= -W_\Psi \mathcal{C}_\Psi^w, & \mathcal{D}_\Psi^{\dagger, w \tilde{w}} &:= W_\Psi, \\ \mathcal{D}_\Psi^{\dagger, wz} &:= -W_\Psi \mathcal{D}_\Psi^{wz}.\end{aligned}$$

Substitution of the second row of (69) into (70) and solving for w gives

$$w = \Lambda_w \mathcal{D}_\Psi^{\dagger, wz} \mathcal{C}_K \mathbf{x}_P + \Lambda_w (\mathcal{C}_\Psi^{\dagger, w} + \mathcal{D}_\Psi^{\dagger, wz} \mathcal{D}_K) \mathbf{x}_\Psi + \Lambda_w \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \tilde{w}, \quad (71)$$

where

$$\Lambda_w := (I - \mathcal{D}_\Psi^{\dagger, wz} \mathcal{D}_P)^{-1}, \quad \Lambda_z := (I - \mathcal{D}_P \mathcal{D}_\Psi^{\dagger, wz})^{-1}. \quad (72)$$

Since

$$(\mathcal{D}_\Psi^{wz} \mathcal{D}_P + \mathcal{D}_\Psi^w)^{-1} = (\mathcal{D}_\Psi^w)^{-1} (I + (\mathcal{D}_\Psi^w)^{-1} \mathcal{D}_\Psi^{wz} \mathcal{D}_P)^{-1} = (\mathcal{D}_\Psi^w)^{-1} (I - \mathcal{D}_\Psi^{\dagger, wz} \mathcal{D}_P)^{-1}$$

is invertible, Λ_w and Λ_z are invertible. Substituting (71) into the first row of (69) gives

$$\begin{aligned} \mathcal{T}_P \dot{\mathbf{x}}_P &= (\mathcal{A}_K + \mathcal{B}_P \Lambda_w \mathcal{D}_\Psi^{\dagger, wz} \mathcal{C}_K) \mathbf{x}_P \\ &\quad + (\mathcal{B}_K + \mathcal{B}_P \Lambda_w (\mathcal{C}_\Psi^{\dagger, w} + \mathcal{D}_\Psi^{\dagger, wz} \mathcal{D}_K)) \mathbf{x}_\Psi \\ &\quad + \mathcal{B}_P \Lambda_w \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \tilde{w}. \end{aligned}$$

Using $\mathcal{D}_P \Lambda_w = \Lambda_z \mathcal{D}_P$ and $I + \mathcal{D}_P \Lambda_w \mathcal{D}_\Psi^{\dagger, wz} = \Lambda_z$, we obtain

$$z = \Lambda_z \mathcal{C}_K \mathbf{x}_P + \Lambda_z (\mathcal{D}_K + \mathcal{D}_P \mathcal{C}_\Psi^{\dagger, w}) \mathbf{x}_\Psi + \Lambda_z \mathcal{D}_P \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \tilde{w}. \quad (73)$$

Substitution into the equations for $\dot{\mathbf{x}}_\Psi$ and $\tilde{z}$ yields $(K \star P) \star \Psi^\dagger$:

$$\begin{bmatrix} \mathcal{T}_P \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_K + \mathcal{B}_P \Lambda_w \mathcal{D}_\Psi^{\dagger, wz} \mathcal{C}_K & \mathcal{B}_K + \mathcal{B}_P \Lambda_w (\mathcal{C}_\Psi^{\dagger, w} + \mathcal{D}_\Psi^{\dagger, wz} \mathcal{D}_K) & \mathcal{B}_P \Lambda_w \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \\ \mathcal{B}_\Psi^{\dagger, z} \Lambda_z \mathcal{C}_K & \mathcal{A}_\Psi^\dagger + \mathcal{B}_\Psi^{\dagger, z} \Lambda_z (\mathcal{D}_K + \mathcal{D}_P \mathcal{C}_\Psi^{\dagger, w}) & \mathcal{B}_\Psi^{\dagger, \tilde{w}} + \mathcal{B}_\Psi^{\dagger, z} \Lambda_z \mathcal{D}_P \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \\ \mathcal{D}_\Psi^{\dagger, z} \Lambda_z \mathcal{C}_K & \mathcal{C}_\Psi^{\dagger, z} + \mathcal{D}_\Psi^{\dagger, z} \Lambda_z (\mathcal{D}_K + \mathcal{D}_P \mathcal{C}_\Psi^{\dagger, w}) & \mathcal{D}_\Psi^{\dagger, z\tilde{w}} + \mathcal{D}_\Psi^{\dagger, z} \Lambda_z \mathcal{D}_P \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ \tilde{w}(t) \end{bmatrix}. \quad (74)$$

Define also

$$\Lambda_c := (\mathcal{D}_\Psi^{wz} \mathcal{D}_P + \mathcal{D}_\Psi^w)^{-1}. \quad (75)$$

The invertible coordinate transformation for (74) is

$$\begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ \mathcal{D}_\Psi^{wz} \mathcal{C}_K & \mathcal{C}_\Psi^w + \mathcal{D}_\Psi^{wz} \mathcal{D}_K & \Lambda_c^{-1} \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ w(t) \end{bmatrix}, \quad \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ w(t) \end{bmatrix} = \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ -\Lambda_c \mathcal{D}_\Psi^{wz} \mathcal{C}_K & -\Lambda_c (\mathcal{C}_\Psi^w + \mathcal{D}_\Psi^{wz} \mathcal{D}_K) & \Lambda_c \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ \tilde{w}(t) \end{bmatrix}. \quad (76)$$

The third row of (76) is

$$\begin{aligned} \tilde{w} &= \mathcal{D}_\Psi^{wz} \mathcal{C}_K \mathbf{x}_P + (\mathcal{C}_\Psi^w + \mathcal{D}_\Psi^{wz} \mathcal{D}_K) \mathbf{x}_\Psi \\ &\quad + (\mathcal{D}_\Psi^{wz} \mathcal{D}_P + \mathcal{D}_\Psi^w) w. \end{aligned} \quad (77)$$

Using $z = \mathcal{C}_K \mathbf{x}_P + \mathcal{D}_K \mathbf{x}_\Psi + \mathcal{D}_P w$, this is equivalently

$$\tilde{w} = \mathcal{C}_\Psi^w \mathbf{x}_\Psi + \mathcal{D}_\Psi^{wz} z + \mathcal{D}_\Psi^w w,$$

which is the filtered input row of $\Psi \begin{bmatrix} K \star P \\ I \end{bmatrix} w$.

Applying (76) to (74), the plant row gives

$$\begin{aligned} \mathcal{T}_P \dot{\mathbf{x}}_P &= \mathcal{A}_K \mathbf{x}_P + \mathcal{B}_K \mathbf{x}_\Psi \\ &\quad + \mathcal{B}_P (\Lambda_w \mathcal{D}_\Psi^{\dagger, wz} \mathcal{C}_K \mathbf{x}_P + \Lambda_w (\mathcal{C}_\Psi^{\dagger, w} + \mathcal{D}_\Psi^{\dagger, wz} \mathcal{D}_K) \mathbf{x}_\Psi + \Lambda_w \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \tilde{w}) \\ &= \mathcal{A}_K \mathbf{x}_P + \mathcal{B}_K \mathbf{x}_\Psi + \mathcal{B}_P w, \end{aligned}$$

where the last equality uses (71). The filter-state row gives

$$\begin{aligned} \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi &= \mathcal{A}_\Psi^\dagger \mathbf{x}_\Psi + \mathcal{B}_\Psi^{\dagger, \tilde{w}} \tilde{w} + \mathcal{B}_\Psi^{\dagger, z} (\Lambda_z \mathcal{C}_K \mathbf{x}_P + \Lambda_z (\mathcal{D}_K + \mathcal{D}_P \mathcal{C}_\Psi^{\dagger, w}) \mathbf{x}_\Psi + \Lambda_z \mathcal{D}_P \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \tilde{w}) \\ &= \mathcal{A}_\Psi^\dagger \mathbf{x}_\Psi + \mathcal{B}_\Psi^{\dagger, \tilde{w}} \tilde{w} + \mathcal{B}_\Psi^{\dagger, z} z \\ &= (\mathcal{A}_\Psi - \mathcal{B}_\Psi^w W_\Psi \mathcal{C}_\Psi^w) \mathbf{x}_\Psi \\ &\quad + \mathcal{B}_\Psi^w W_\Psi (\mathcal{C}_\Psi^w \mathbf{x}_\Psi + \mathcal{D}_\Psi^{wz} z + \mathcal{D}_\Psi^w w) \\ &\quad + (\mathcal{B}_\Psi^z - \mathcal{B}_\Psi^w W_\Psi \mathcal{D}_\Psi^{wz}) z \\ &= \mathcal{A}_\Psi \mathbf{x}_\Psi + \mathcal{B}_\Psi^z z + \mathcal{B}_\Psi^w w. \end{aligned}$$

Likewise, the output row gives

$$\begin{aligned}
\tilde{z} &= \mathcal{C}_\Psi^{\dagger,z} \mathbf{x}_\Psi + \mathcal{D}_\Psi^{\dagger,z\tilde{w}} \tilde{w} + \mathcal{D}_\Psi^{\dagger,z} (\Lambda_z \mathcal{C}_K \mathbf{x}_P + \Lambda_z (\mathcal{D}_K + \mathcal{D}_P \mathcal{C}_\Psi^{\dagger,w}) \mathbf{x}_\Psi + \Lambda_z \mathcal{D}_P \mathcal{D}_\Psi^{\dagger,w\tilde{w}} \tilde{w}) \\
&= \mathcal{C}_\Psi^{\dagger,z} \mathbf{x}_\Psi + \mathcal{D}_\Psi^{\dagger,z\tilde{w}} \tilde{w} + \mathcal{D}_\Psi^{\dagger,z} z \\
&= (\mathcal{C}_\Psi^z - \mathcal{D}_\Psi^{zw} W_\Psi \mathcal{C}_\Psi^w) \mathbf{x}_\Psi \\
&\quad + \mathcal{D}_\Psi^{zw} W_\Psi (\mathcal{C}_\Psi^w \mathbf{x}_\Psi + \mathcal{D}_\Psi^{wz} z + \mathcal{D}_\Psi^{ww} w) \\
&\quad + (\mathcal{D}_\Psi^z - \mathcal{D}_\Psi^{zw} W_\Psi \mathcal{D}_\Psi^{wz}) z \\
&= \mathcal{C}_\Psi^z \mathbf{x}_\Psi + \mathcal{D}_\Psi^z z + \mathcal{D}_\Psi^{zw} w.
\end{aligned}$$

Substituting $z = \mathcal{C}_K \mathbf{x}_P + \mathcal{D}_K \mathbf{x}_\Psi + \mathcal{D}_P w$ into these recovered rows gives

$$\begin{bmatrix} \mathcal{T}_P \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_K & \mathcal{B}_K & \mathcal{B}_P \\ \mathcal{B}_\Psi^z \mathcal{C}_K & \mathcal{A}_\Psi + \mathcal{B}_\Psi^z \mathcal{D}_K & \mathcal{B}_\Psi^z \mathcal{D}_P + \mathcal{B}_\Psi^w \\ \mathcal{D}_\Psi^z \mathcal{C}_K & \mathcal{C}_\Psi^z + \mathcal{D}_\Psi^z \mathcal{D}_K & \mathcal{D}_\Psi^z \mathcal{D}_P + \mathcal{D}_\Psi^{zw} \\ \mathcal{D}_\Psi^{wz} \mathcal{C}_K & \mathcal{C}_\Psi^w + \mathcal{D}_\Psi^{wz} \mathcal{D}_K & \mathcal{D}_\Psi^{wz} \mathcal{D}_P + \mathcal{D}_\Psi^{ww} \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ w(t) \end{bmatrix}. \quad (78)$$

This is the direct augmentation $\Psi \begin{bmatrix} K \star P \\ I \end{bmatrix} w$. Conversely, applying the inverse of (76) to (78) recovers (74). Therefore,

$$\Psi \begin{bmatrix} K \star P \\ I \end{bmatrix} w = \begin{bmatrix} K \star P \star \Psi^\dagger \\ I \end{bmatrix} \Gamma w. \quad (79)$$

Dual side. For the transpose argument, keep the filter-state signal as an explicit port before closing the interconnection. Introduce the extended Potapov–Ginzburg filter

$$\begin{bmatrix} \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ y_\Psi(t) \\ \tilde{z}(t) \\ w(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_\Psi^\dagger & \mathcal{B}_\Psi^{\dagger,\tilde{w}} & \mathcal{B}_\Psi^{\dagger,z} \\ I & 0 & 0 \\ \mathcal{C}_\Psi^{\dagger,z} & \mathcal{D}_\Psi^{\dagger,z\tilde{w}} & \mathcal{D}_\Psi^{\dagger,z} \\ \mathcal{C}_\Psi^{\dagger,w} & \mathcal{D}_\Psi^{\dagger,w\tilde{w}} & \mathcal{D}_\Psi^{\dagger,wz} \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Psi(t) \\ \tilde{w}(t) \\ z(t) \end{bmatrix}, \quad y_\Psi = \mathbf{x}_\Psi. \quad (80)$$

The controller-plant block is then the open system

$$\begin{aligned} \mathcal{T}_P \dot{\mathbf{x}}_P &= \mathcal{A}_K \mathbf{x}_P + \mathcal{B}_K y_\Psi + \mathcal{B}_P w, \\ z &= \mathcal{C}_K \mathbf{x}_P + \mathcal{D}_K y_\Psi + \mathcal{D}_P w. \end{aligned} \quad (81)$$

The primal Potapov–Ginzburg augmentation is the feedback interconnection of (80) and (81) with $y_\Psi = \mathbf{x}_\Psi$ and with the common z, w signals.

The inverse relation $\mathbf{D}(\Psi)^{-1} = \hat{J}^* \Psi^\top \hat{J}$ has realization

$$\begin{bmatrix} \mathcal{T}_\Psi^* \dot{\underline{\mathbf{x}}}_\Psi(t) \\ \underline{z}(t) \\ \underline{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_\Psi^* & -\mathcal{C}_\Psi^{w*} & \mathcal{C}_\Psi^{z*} \\ -\mathcal{B}_\Psi^{w*} & \mathcal{D}_\Psi^{w*} & -\mathcal{D}_\Psi^{zw*} \\ \mathcal{B}_\Psi^{z*} & -\mathcal{D}_\Psi^{wz*} & \mathcal{D}_\Psi^{z*} \end{bmatrix} \begin{bmatrix} \underline{\mathbf{x}}_\Psi(t) \\ \underline{\tilde{z}}(t) \\ \underline{\tilde{w}}(t) \end{bmatrix}. \quad (82)$$

Taking the adjoint of the extended filter (80) gives

$$\begin{aligned} \mathcal{T}_\Psi^* \dot{\underline{\mathbf{x}}}_\Psi &= \underline{y}_\Psi + (\mathcal{A}_\Psi^\dagger)^* \underline{\mathbf{x}}_\Psi + (\mathcal{C}_\Psi^{\dagger,z})^* \underline{\tilde{w}} + (\mathcal{C}_\Psi^{\dagger,w})^* \underline{z}, \\ \underline{\tilde{z}} &= (\mathcal{B}_\Psi^{\dagger,\tilde{w}})^* \underline{\mathbf{x}}_\Psi + (\mathcal{D}_\Psi^{\dagger,z\tilde{w}})^* \underline{\tilde{w}} + (\mathcal{D}_\Psi^{\dagger,w\tilde{w}})^* \underline{z}, \\ \underline{w} &= (\mathcal{B}_\Psi^{\dagger,z})^* \underline{\mathbf{x}}_\Psi + (\mathcal{D}_\Psi^{\dagger,z})^* \underline{\tilde{w}} + (\mathcal{D}_\Psi^{\dagger,wz})^* \underline{z}. \end{aligned} \quad (83)$$

Taking the adjoint of (81) gives

$$\begin{aligned} \mathcal{T}_P^* \dot{\underline{\mathbf{x}}}_P &= \mathcal{A}_K^* \underline{\mathbf{x}}_P + \mathcal{C}_K^* \underline{w}, \\ \begin{bmatrix} \underline{y}_\Psi \\ \underline{z} \end{bmatrix} &= \begin{bmatrix} \mathcal{B}_K^* \\ \mathcal{B}_P^* \end{bmatrix} \underline{\mathbf{x}}_P + \begin{bmatrix} \mathcal{D}_K^* \\ \mathcal{D}_P^* \end{bmatrix} \underline{w}. \end{aligned} \quad (84)$$

The transpose of the closed augmentation is obtained by connecting the adjoint ports in (83) and (84). Thus $\underline{y}_\Psi$ and $\underline{z}$ in the extended-filter adjoint are the two outputs of the plant adjoint in (84). The algebraic row is therefore

$$\underline{w} = (\mathcal{B}_\Psi^{\dagger,z})^* \underline{\mathbf{x}}_\Psi + (\mathcal{D}_\Psi^{\dagger,z})^* \underline{\tilde{w}} + (\mathcal{D}_\Psi^{\dagger,wz})^* (\mathcal{B}_P^* \underline{\mathbf{x}}_P + \mathcal{D}_P^* \underline{w}).$$

Solving for $\underline{w}$ gives

$$\underline{w} = \Lambda_z^* (\mathcal{D}_\Psi^{\dagger,wz})^* \mathcal{B}_P^* \underline{\mathbf{x}}_P + \Lambda_z^* (\mathcal{B}_\Psi^{\dagger,z})^* \underline{\mathbf{x}}_\Psi + \Lambda_z^* (\mathcal{D}_\Psi^{\dagger,z})^* \underline{\tilde{w}}. \quad (85)$$

Using $\Lambda_z^*(\mathcal{D}_\Psi^{\dagger,wz})^* = (\mathcal{D}_\Psi^{\dagger,wz})^* \Lambda_w^*$ and $I + \mathcal{D}_P^* \Lambda_z^*(\mathcal{D}_\Psi^{\dagger,wz})^* = \Lambda_w^*$, substitution of (85), together with the two rows for $\underline{y}_\Psi$ and $\underline{z}$ in (84), gives the realization of $(\mathcal{K} \star \mathcal{P} \star \Psi^\dagger)^\top$:

$$\begin{bmatrix} \mathcal{T}_P^* \underline{\dot{x}}_P(t) \\ \mathcal{T}_\Psi^* \underline{\dot{x}}_\Psi(t) \\ \underline{\dot{z}}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_K^* + \mathcal{C}_K^* (\mathcal{D}_\Psi^{\dagger,wz})^* \Lambda_w^* \mathcal{B}_P^* & \mathcal{C}_K^* \Lambda_z^* (\mathcal{D}_\Psi^{\dagger,z})^* & \mathcal{C}_K^* \Lambda_z^* (\mathcal{D}_\Psi^{\dagger,z})^* \\ \mathcal{B}_K^* + ((\mathcal{C}_\Psi^{\dagger,w})^* + \mathcal{D}_K^* (\mathcal{D}_\Psi^{\dagger,wz})^*) \Lambda_w^* \mathcal{B}_P^* & (\mathcal{A}_\Psi^{\dagger})^* + (\mathcal{D}_K^* + (\mathcal{C}_\Psi^{\dagger,w})^* \mathcal{D}_P^*) \Lambda_z^* (\mathcal{B}_\Psi^{\dagger,z})^* & (\mathcal{C}_\Psi^{\dagger,z})^* + (\mathcal{D}_K^* + (\mathcal{C}_\Psi^{\dagger,w})^* \mathcal{D}_P^*) \Lambda_z^* (\mathcal{D}_\Psi^{\dagger,z})^* \\ (\mathcal{D}_\Psi^{\dagger,w\tilde{w}})^* \Lambda_w^* \mathcal{B}_P^* & (\mathcal{B}_\Psi^{\dagger,\tilde{w}})^* + (\mathcal{D}_\Psi^{\dagger,w\tilde{w}})^* \mathcal{D}_P^* \Lambda_z^* (\mathcal{B}_\Psi^{\dagger,z})^* & (\mathcal{D}_\Psi^{\dagger,z\tilde{w}})^* + (\mathcal{D}_\Psi^{\dagger,w\tilde{w}})^* \mathcal{D}_P^* \Lambda_z^* (\mathcal{D}_\Psi^{\dagger,z})^* \end{bmatrix} \begin{bmatrix} \underline{x}_P(t) \\ \underline{x}_\Psi(t) \\ \underline{\tilde{w}}(t) \end{bmatrix}. \quad (86)$$

Define the dual feedthrough block

$$\underline{\mathcal{D}}_\Psi := \begin{bmatrix} \mathcal{D}_\Psi^{w*} & -\mathcal{D}_\Psi^{zw*} \\ -\mathcal{D}_\Psi^{wz*} & \mathcal{D}_\Psi^{z*} \end{bmatrix} \quad (87)$$

and, assuming the direct dual filtered algebraic loop is well posed,

$$\underline{\Lambda}_c := \left(\begin{bmatrix} 0 & I \end{bmatrix} \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{D}_P^* \\ I \end{bmatrix} \right)^{-1}. \quad (88)$$

The congruence transformations, $\underline{\Gamma}$ and $\underline{\Gamma}^{-1}$, respectively, for (86) are

$$\begin{aligned} \begin{bmatrix} \underline{x}_P(t) \\ \underline{x}_\Psi(t) \\ \underline{\tilde{w}}(t) \end{bmatrix} &= \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ [0 \quad I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{B}_P^* \\ 0 \end{bmatrix} & -[0 \quad I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} -\mathcal{B}_\Psi^{w*} \\ \mathcal{B}_\Psi^{z*} \end{bmatrix} & \underline{\Lambda}_c^{-1} \end{bmatrix} \begin{bmatrix} \underline{x}_P(t) \\ \underline{x}_\Psi(t) \\ \underline{w}(t) \end{bmatrix}, \\ \begin{bmatrix} \underline{x}_P(t) \\ \underline{x}_\Psi(t) \\ \underline{w}(t) \end{bmatrix} &= \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ -\underline{\Lambda}_c [0 \quad I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{B}_P^* \\ 0 \end{bmatrix} & \underline{\Lambda}_c [0 \quad I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} -\mathcal{B}_\Psi^{w*} \\ \mathcal{B}_\Psi^{z*} \end{bmatrix} & \underline{\Lambda}_c \end{bmatrix} \begin{bmatrix} \underline{x}_P(t) \\ \underline{x}_\Psi(t) \\ \underline{\tilde{w}}(t) \end{bmatrix}. \end{aligned} \quad (89)$$

From the block inverse formula,

$$\begin{bmatrix} 0 & I \end{bmatrix} \underline{\mathcal{D}}_\Psi^{-1} = [-((\mathcal{D}_\Psi^{\dagger,z})^*)^{-1} (\mathcal{D}_\Psi^{\dagger,wz})^* \quad ((\mathcal{D}_\Psi^{\dagger,z})^*)^{-1}]. \quad (90)$$

Thus

$$\underline{\Lambda}_c^{-1} = ((\mathcal{D}_\Psi^{\dagger,z})^*)^{-1} (I - (\mathcal{D}_\Psi^{\dagger,wz})^* \mathcal{D}_P^*), \quad \underline{\Lambda}_c = \Lambda_z^* (\mathcal{D}_\Psi^{\dagger,z})^*. \quad (91)$$

The third row of the inverse congruence transformation is precisely (85), after using (90) and (91). The algebraic rows of (82) give

$$\begin{bmatrix} \underline{\tilde{z}} \\ \underline{\tilde{w}} \end{bmatrix} = -\underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} -\mathcal{B}_\Psi^{w*} \\ \mathcal{B}_\Psi^{z*} \end{bmatrix} \underline{x}_\Psi + \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \underline{z} \\ \underline{w} \end{bmatrix}. \quad (92)$$

Using (92), the filter state row of (86) recovers

$$\begin{aligned} \mathcal{T}_\Psi^* \underline{\dot{x}}_\Psi &= \mathcal{B}_K^* \underline{x}_P + \mathcal{D}_K^* \underline{w} + (\mathcal{A}_\Psi^{\dagger})^* \underline{x}_\Psi + (\mathcal{C}_\Psi^{\dagger,z})^* \underline{\tilde{w}} + (\mathcal{C}_\Psi^{\dagger,w})^* \underline{\tilde{z}} \\ &= \mathcal{B}_K^* \underline{x}_P + \mathcal{D}_K^* \underline{w} + \mathcal{A}_\Psi^* \underline{x}_\Psi + \begin{bmatrix} -\mathcal{C}_\Psi^{w*} & \mathcal{C}_\Psi^{z*} \end{bmatrix} \begin{bmatrix} \underline{\tilde{z}} \\ \underline{\tilde{w}} \end{bmatrix} \\ &= \left(\mathcal{B}_K^* + \begin{bmatrix} -\mathcal{C}_\Psi^{w*} & \mathcal{C}_\Psi^{z*} \end{bmatrix} \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{B}_P^* \\ 0 \end{bmatrix} \right) \underline{x}_P \\ &\quad + \left(\mathcal{A}_\Psi^* - \begin{bmatrix} -\mathcal{C}_\Psi^{w*} & \mathcal{C}_\Psi^{z*} \end{bmatrix} \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} -\mathcal{B}_\Psi^{w*} \\ \mathcal{B}_\Psi^{z*} \end{bmatrix} \right) \underline{x}_\Psi \\ &\quad + \left(\mathcal{D}_K^* + \begin{bmatrix} -\mathcal{C}_\Psi^{w*} & \mathcal{C}_\Psi^{z*} \end{bmatrix} \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{D}_P^* \\ I \end{bmatrix} \right) \underline{w}. \end{aligned} \quad (93)$$

Finally, (92) and (84) give

$$\begin{aligned} \underline{\tilde{z}} &= [I \quad 0] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{B}_P^* \\ 0 \end{bmatrix} \underline{x}_P - [I \quad 0] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} -\mathcal{B}_\Psi^{w*} \\ \mathcal{B}_\Psi^{z*} \end{bmatrix} \underline{x}_\Psi + [I \quad 0] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{D}_P^* \\ I \end{bmatrix} \underline{w}, \\ \underline{\tilde{w}} &= [0 \quad I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{B}_P^* \\ 0 \end{bmatrix} \underline{x}_P - [0 \quad I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} -\mathcal{B}_\Psi^{w*} \\ \mathcal{B}_\Psi^{z*} \end{bmatrix} \underline{x}_\Psi + [0 \quad I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{D}_P^* \\ I \end{bmatrix} \underline{w}. \end{aligned} \quad (94)$$

Collecting (84), (93), and (94) gives

$$\begin{bmatrix} \mathcal{T}_P \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_K^* & 0 & \mathcal{C}_K^* \\ \mathcal{B}_K^* + [-\mathcal{C}_\Psi^{w*} \ \mathcal{C}_\Psi^{z*}] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{B}_P^* \\ 0 \end{bmatrix} & \mathcal{A}_\Psi^* - [-\mathcal{C}_\Psi^{w*} \ \mathcal{C}_\Psi^{z*}] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} -\mathcal{B}_\Psi^{w*} \\ \mathcal{B}_\Psi^{z*} \end{bmatrix} & \mathcal{D}_K^* + [-\mathcal{C}_\Psi^{w*} \ \mathcal{C}_\Psi^{z*}] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{D}_P^* \\ I \end{bmatrix} \\ [I \ 0] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{B}_P^* \\ 0 \end{bmatrix} & -[I \ 0] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} -\mathcal{B}_\Psi^{w*} \\ \mathcal{B}_\Psi^{z*} \end{bmatrix} & [I \ 0] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{D}_P^* \\ I \end{bmatrix} \\ [0 \ I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{B}_P^* \\ 0 \end{bmatrix} & -[0 \ I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} -\mathcal{B}_\Psi^{w*} \\ \mathcal{B}_\Psi^{z*} \end{bmatrix} & [0 \ I] \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} \mathcal{D}_P^* \\ I \end{bmatrix} \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ \underline{w}(t) \end{bmatrix}. \quad (95)$$

To write (95) in Potapov–Ginzburg coordinates, use the following block rows of $\underline{\mathcal{D}}_\Psi^{-1}$, obtained from the block inverse formula:

$$\begin{aligned} [0 \ I] \underline{\mathcal{D}}_\Psi^{-1} &= \begin{bmatrix} -((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (\mathcal{D}_\Psi^\dagger, wz)^* & ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} \end{bmatrix}, \\ [I \ 0] \underline{\mathcal{D}}_\Psi^{-1} &= \begin{bmatrix} (\mathcal{D}_\Psi^\dagger, w\tilde{w})^* - (\mathcal{D}_\Psi^\dagger, z\tilde{w})^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (\mathcal{D}_\Psi^\dagger, wz)^* & (\mathcal{D}_\Psi^\dagger, z\tilde{w})^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} \end{bmatrix}, \\ [-\mathcal{C}_\Psi^{w*} \ \mathcal{C}_\Psi^{z*}] \underline{\mathcal{D}}_\Psi^{-1} &= \begin{bmatrix} (\mathcal{C}_\Psi^\dagger, w)^* - (\mathcal{C}_\Psi^\dagger, z)^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (\mathcal{D}_\Psi^\dagger, wz)^* & (\mathcal{C}_\Psi^\dagger, z)^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} \end{bmatrix}. \end{aligned}$$

Moreover, the definitions of the transformed blocks imply

$$(\mathcal{A}_\Psi^\dagger)^* = \mathcal{A}_\Psi^* + (\mathcal{C}_\Psi^\dagger, w)^* \mathcal{B}_\Psi^{w*}, \quad (\mathcal{B}_\Psi^\dagger, z)^* = \mathcal{B}_\Psi^{z*} + (\mathcal{D}_\Psi^\dagger, wz)^* \mathcal{B}_\Psi^{w*}.$$

Substituting these identities in each block row of (95) yields

$$\begin{bmatrix} \mathcal{T}_P \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_K^* & 0 & \mathcal{C}_K^* \\ \mathcal{B}_K^* + ((\mathcal{C}_\Psi^\dagger, w)^* - (\mathcal{C}_\Psi^\dagger, z)^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (\mathcal{D}_\Psi^\dagger, wz)^*) \mathcal{B}_P^* & (\mathcal{A}_\Psi^\dagger)^* - (\mathcal{C}_\Psi^\dagger, z)^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (\mathcal{B}_\Psi^\dagger, z)^* & \mathcal{D}_K^* + (\mathcal{C}_\Psi^\dagger, w)^* \mathcal{D}_P^* + (\mathcal{C}_\Psi^\dagger, z)^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (I - (\mathcal{D}_\Psi^\dagger, wz)^* \mathcal{D}_P^*) \\ ((\mathcal{D}_\Psi^\dagger, w\tilde{w})^* - (\mathcal{D}_\Psi^\dagger, z\tilde{w})^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (\mathcal{D}_\Psi^\dagger, wz)^*) \mathcal{B}_P^* & (\mathcal{B}_\Psi^\dagger, \tilde{w})^* - (\mathcal{D}_\Psi^\dagger, z\tilde{w})^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (\mathcal{B}_\Psi^\dagger, z)^* & (\mathcal{D}_\Psi^\dagger, w\tilde{w})^* \mathcal{D}_P^* + (\mathcal{D}_\Psi^\dagger, z\tilde{w})^* ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (I - (\mathcal{D}_\Psi^\dagger, wz)^* \mathcal{D}_P^*) \\ -((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (\mathcal{D}_\Psi^\dagger, wz)^* \mathcal{B}_P^* & -((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (\mathcal{B}_\Psi^\dagger, z)^* & ((\mathcal{D}_\Psi^\dagger, z)^*)^{-1} (I - (\mathcal{D}_\Psi^\dagger, wz)^* \mathcal{D}_P^*) \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ \underline{w}(t) \end{bmatrix}. \quad (96)$$

This is the direct augmentation $\mathbf{D}(\Psi) \begin{bmatrix} (\mathcal{K} \star P)^\top \\ I \end{bmatrix} \underline{w}$. Conversely, applying the inverse of (89) to (95) recovers (86). Therefore,

$$\mathbf{D}(\Psi) \begin{bmatrix} (\mathcal{K} \star P)^\top \\ I \end{bmatrix} \underline{w} = \begin{bmatrix} (\mathcal{K} \star P \star \Psi^\dagger)^\top \\ I \end{bmatrix} \underline{\Gamma w}. \quad (97)$$

G. Derivation of the Dual Filtered Controller Realization for $\mathcal{D}_P = 0$

This is the zero-feedthrough copy of the preceding derivation. Set $\mathcal{D}_P = 0$ and define

$$\begin{aligned} \mathcal{A}_K &:= \mathcal{A}_P + \mathcal{B}_u \mathcal{K}_P, & \mathcal{B}_K &:= \mathcal{B}_u \mathcal{K}_\Psi, \\ \mathcal{C}_K &:= \mathcal{C}_P + \mathcal{D}_{zu} \mathcal{K}_P, & \mathcal{D}_K &:= \mathcal{D}_{zu} \mathcal{K}_\Psi. \end{aligned}$$

Then

$$\begin{aligned} \mathcal{T}_P \dot{\mathbf{x}}_P &= \mathcal{A}_K \mathbf{x}_P + \mathcal{B}_K \mathbf{x}_\Psi + \mathcal{B}_P w, \\ z &= \mathcal{C}_K \mathbf{x}_P + \mathcal{D}_K \mathbf{x}_\Psi. \end{aligned}$$

The Potapov–Ginzburg transform $\Psi^\dagger$ has the same realization as in (70). Substitution of the output row above into that realization gives, with no algebraic loop,

$$w = \mathcal{D}_\Psi^{\dagger, wz} \mathcal{C}_K \mathbf{x}_P + (\mathcal{C}_\Psi^{\dagger, w} + \mathcal{D}_\Psi^{\dagger, wz} \mathcal{D}_K) \mathbf{x}_\Psi + \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \tilde{w}.$$

Thus $\Lambda_w = \Lambda_z = I$, and $(K \star P) \star \Psi^\dagger$ is

$$\begin{bmatrix} \mathcal{T}_P \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_K + \mathcal{B}_P \mathcal{D}_\Psi^{\dagger, wz} \mathcal{C}_K & \mathcal{B}_K + \mathcal{B}_P (\mathcal{C}_\Psi^{\dagger, w} + \mathcal{D}_\Psi^{\dagger, wz} \mathcal{D}_K) & \mathcal{B}_P \mathcal{D}_\Psi^{\dagger, w\tilde{w}} \\ \mathcal{B}_\Psi^{\dagger, z} \mathcal{C}_K & \mathcal{A}_\Psi^\dagger + \mathcal{B}_\Psi^{\dagger, z} \mathcal{D}_K & \mathcal{B}_\Psi^{\dagger, \tilde{w}} \\ \mathcal{D}_\Psi^{\dagger, z} \mathcal{C}_K & \mathcal{C}_\Psi^{\dagger, z} + \mathcal{D}_\Psi^{\dagger, z} \mathcal{D}_K & \mathcal{D}_\Psi^{\dagger, z\tilde{w}} \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ \tilde{w}(t) \end{bmatrix}.$$

Moreover

$$\Lambda_c = (\mathcal{D}_\Psi^w)^{-1} = W_\Psi,$$

and the coordinate transformation is

$$\begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ \mathcal{D}_\Psi^{wz} \mathcal{C}_K & \mathcal{C}_\Psi^w + \mathcal{D}_\Psi^{wz} \mathcal{D}_K & \Lambda_c^{-1} \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ w(t) \end{bmatrix}.$$

The third row is

$$\tilde{w} = \mathcal{D}_\Psi^{wz} \mathcal{C}_K \mathbf{x}_P + (\mathcal{C}_\Psi^w + \mathcal{D}_\Psi^{wz} \mathcal{D}_K) \mathbf{x}_\Psi + \mathcal{D}_\Psi^w w,$$

which is equivalently

$$\tilde{w} = \mathcal{C}_\Psi^w \mathbf{x}_\Psi + \mathcal{D}_\Psi^{wz} z + \mathcal{D}_\Psi^w w.$$

Applying the inverse coordinate transformation recovers the direct augmentation

$$\begin{bmatrix} \mathcal{T}_P \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_K & \mathcal{B}_K & \mathcal{B}_P \\ \mathcal{B}_\Psi^z \mathcal{C}_K & \mathcal{A}_\Psi + \mathcal{B}_\Psi^z \mathcal{D}_K & \mathcal{B}_\Psi^w \\ \mathcal{D}_\Psi^z \mathcal{C}_K & \mathcal{C}_\Psi^z + \mathcal{D}_\Psi^z \mathcal{D}_K & \mathcal{D}_\Psi^{zw} \\ \mathcal{D}_\Psi^{wz} \mathcal{C}_K & \mathcal{C}_\Psi^w + \mathcal{D}_\Psi^{wz} \mathcal{D}_K & \mathcal{D}_\Psi^w \end{bmatrix} \begin{bmatrix} \mathbf{x}_P(t) \\ \mathbf{x}_\Psi(t) \\ w(t) \end{bmatrix}.$$

Hence

$$\Psi \begin{bmatrix} K \star P \\ I \end{bmatrix} w = \begin{bmatrix} K \star P \star \Psi^\dagger \\ I \end{bmatrix} \Gamma w.$$

On the dual side, take the adjoint of the zero-feedthrough Potapov–Ginzburg realization above. This gives the transposed Potapov–Ginzburg system

$$\begin{bmatrix} \mathcal{T}_P^* \dot{\mathbf{x}}_P(t) \\ \mathcal{T}_\Psi^* \dot{\mathbf{x}}_\Psi(t) \\ \tilde{z}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_K^* + \mathcal{C}_K^* (\mathcal{D}_\Psi^{\dagger, wz})^* \mathcal{B}_P^* & \mathcal{C}_K^* (\mathcal{B}_\Psi^{\dagger, z})^* & \mathcal{C}_K^* (\mathcal{D}_\Psi^{\dagger, z})^* \\ \mathcal{B}_K^* + ((\mathcal{C}_\Psi^{\dagger, w})^* + \mathcal{D}_K^* (\mathcal{D}_\Psi^{\dagger, wz})^*) \mathcal{B}_P^* & (\mathcal{A}_\Psi^{\dagger})^* + \mathcal{D}_K^* (\mathcal{B}_\Psi^{\dagger, z})^* & (\mathcal{C}_\Psi^{\dagger, z})^* + \mathcal{D}_K^* (\mathcal{D}_\Psi^{\dagger, z})^* \\ (\mathcal{D}_\Psi^{\dagger, w\tilde{w}})^* \mathcal{B}_P^* & (\mathcal{B}_\Psi^{\dagger, \tilde{w}})^* & (\mathcal{D}_\Psi^{\dagger, z\tilde{w}})^* \end{bmatrix} \begin{bmatrix} \underline{\mathbf{x}}_P(t) \\ \underline{\mathbf{x}}_\Psi(t) \\ \underline{\tilde{w}}(t) \end{bmatrix}.$$

Furthermore,

$$\underline{\Lambda}_c = \left(\begin{bmatrix} 0 & I \end{bmatrix} \underline{\mathcal{D}}_\Psi^{-1} \begin{bmatrix} 0 \\ I \end{bmatrix} \right)^{-1} = (\mathcal{D}_\Psi^{\dagger, z})^*.$$

The corresponding congruence transformations are

$$\begin{bmatrix} \underline{\mathbf{x}}_P(t) \\ \underline{\mathbf{x}}_\Psi(t) \\ \underline{\tilde{w}}(t) \end{bmatrix} = \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ -((\mathcal{D}_\Psi^{\dagger, z})^*)^{-1} (\mathcal{D}_\Psi^{\dagger, wz})^* \mathcal{B}_P^* & -((\mathcal{D}_\Psi^{\dagger, z})^*)^{-1} (\mathcal{B}_\Psi^{\dagger, z})^* & ((\mathcal{D}_\Psi^{\dagger, z})^*)^{-1} \end{bmatrix} \begin{bmatrix} \underline{\mathbf{x}}_P(t) \\ \underline{\mathbf{x}}_\Psi(t) \\ \underline{w}(t) \end{bmatrix},$$

$$\begin{bmatrix} \underline{\mathbf{x}}_P(t) \\ \underline{\mathbf{x}}_\Psi(t) \\ \underline{w}(t) \end{bmatrix} = \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ (\mathcal{D}_\Psi^{\dagger, wz})^* \mathcal{B}_P^* & (\mathcal{B}_\Psi^{\dagger, z})^* & (\mathcal{D}_\Psi^{\dagger, z})^* \end{bmatrix} \begin{bmatrix} \underline{\mathbf{x}}_P(t) \\ \underline{\mathbf{x}}_\Psi(t) \\ \underline{\tilde{w}}(t) \end{bmatrix}.$$

The third row of the inverse transformation gives the input conversion

$$\underline{w} = (\mathcal{D}_\Psi^{\dagger, wz})^* \mathcal{B}_P^* \underline{\mathbf{x}}_P + (\mathcal{B}_\Psi^{\dagger, z})^* \underline{\mathbf{x}}_\Psi + (\mathcal{D}_\Psi^{\dagger, z})^* \underline{\tilde{w}}.$$

Applying this transformation gives the direct dual filtered realization obtained from (95) by replacing $\begin{bmatrix} \mathcal{D}_P^* \\ I \end{bmatrix}$ with $\begin{bmatrix} 0 \\ I \end{bmatrix}$. Equivalently, its Potapov–Ginzburg form is (96) with $\mathcal{D}_P^* = 0$. Therefore

$$\mathbf{D}(\Psi) \begin{bmatrix} (K \star P)^\top \\ I \end{bmatrix} \underline{w} = \begin{bmatrix} (K \star P \star \Psi^\dagger)^\top \\ I \end{bmatrix} \underline{\Gamma} w.$$