
K-UI G1 carrier: actual-size fit sheet

ROUTED BOARD - physical fit and mounting still need your Dreamcast check.

Print this PDF on matching paper: Actual size / 100%; turn off Fit and Shrink.



50 mm horizontal calibration

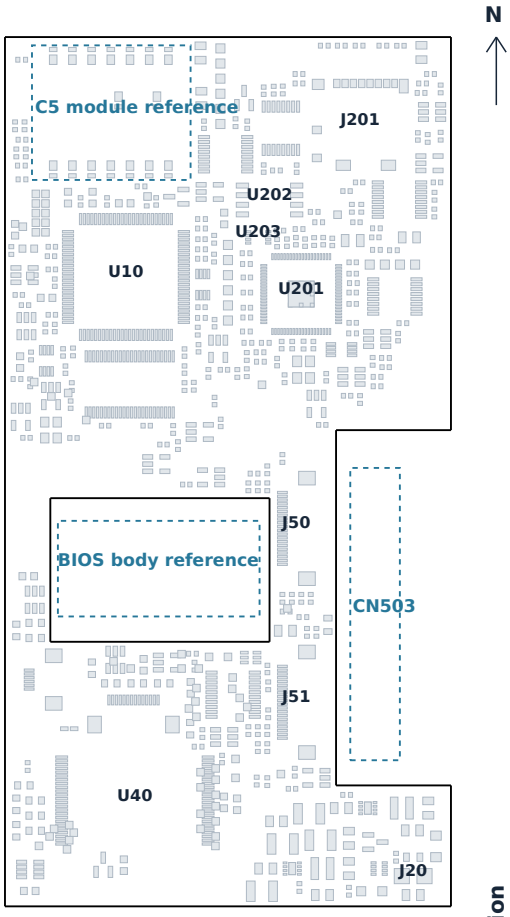



Fit check, before cutting paper

1. Measure BOTH 50 mm bars.
2. Match the BIOS and CN503 outlines.
3. Check the north edge near the AV port.
4. Mark CE501, CE502 and CE504:
   none may hit solid carrier laminate.
5. Keep both thermal-contact chips clear.
6. Mark case posts and possible supports.
7. Check SD access and both flex bends.

Paper geometry is exact; registration is draft.
Black: native carrier edge and openings.
Gray: actual carrier component pads.
Blue dashed: provisional existing hardware.

Carrier: 59 x 115 mm; PCB 0.8 mm.
Nominal underside: motherboard +2.5 mm.
Nominal top: motherboard +3.3 mm.
6 mm zone: connector stack up to 5.6 mm.
Only 0.4 mm before other tolerances.
8 mm zone: C5 plus clamp <=3.7 mm
above seating plane at max PCB thickness.
Tall existing capacitors need clear openings.
Paper fit does not establish stack height.

C5 contacts need a supported 0.90 mm gap
and at least 6.24 N total clamp reaction.
Support and clamp are not yet qualified.

If either bar is wrong, the printer scaled the page. Do not resize board geometry.

No shield cutting is assumed. This sheet is not a fabrication release.

PCB SHA-256: 8c891b8b5a62dc336a8c3707fa846e28394412a2acb061c2c4e02a207ac74ed8