



WELCOME TO Catching Kowa DSL Training

Physical WF

How the service reach to the Home

Copper

1. BRAS
2. ERX

Into CO

1. DSLAM
2. Card
3. Port
4. Cabinet
5. Box
6. Splitter
7. Router

MSAN

1. BRAS
2. Cabinet (in CO)
3. Cabinet (out of CO)
4. Box
5. Splitter
6. Router

Subscription channel

- Customer can subscribe through a lot of channels :
 1. Shops
 2. 16333 (sales team)
 3. Portal (our website)
 4. Click to chat
 5. Social media (face book , twitter and instagram)
 6. Reseller

Line Down



Products---Services Promotions Devices -
▼ test ▼

Global Scripts -
Channels ▼

Internal
Guideline ▼

Customer Support
Tools ▼

Application
Guides ▼

Alo profiles

Freemax new

El king portfolio

Freemax (old) profiles

Premier tariffs

Business

Home dsl packages

Home DSL
Packages

visits - Last Update
4/2025 2:09 PM

Status : **Active** ☐



Line Down

Find in page

Find

ON THIS PAGE

Basic Information

Common Asked Questions

Plans

How to Pay

How to Manage My Account

How to Complain

Siebel

Related Offers

Related VASs

Work Instructions

Related Links

Slow Upload

No Browsing

Slow Browsing

Wlan

Billing

View All

Bill Amount

MSAN-Financial Adjustment

Bad Debts

Orange DSL FeedBack

Money Transfer

Customer Requests

Technical

View All

Technical Assign Visit

TP-LINK WI-FI extender

Voice Problems

MSAN Scripts

DSL - Slow Download

Line Down

1

2

FTTH Tool for MSAN

Request Management

Monitoring Requests

Get Advanced Subscriber
Logs

Get MSAN Status

Get CPE Status

Get Administrative status

Get Configured Speed

Get Cross Connection

Get Port Parameters

Get Port Up Time

Get Port SYNC Rate

Result

getCPEStatus

Dec 17, 2024, 10:13:01 AM

True

Profile:operationStatus: down,

Octopus for copper

0225927611-farag

Account status Enabled

Package 2048/512

Physical Connection

Resource infoSession infoTraffic info

Port information

Port status: Down

Last change: 26/6/2019 02:11 PM

Download (XTU-R)

Upload (XTU-C)

Port Reset

Port Unlock

Update

Line Down Troubleshooting Steps:

- Check the router's Power Led status.

- Ask the customer if the voice is working or not.

 	
--	--

Troubleshooting Step	Script
Ask the customer if s/he has any Junctions or welding or any cutting on his/her main wire	هل حضرتك في اي قطع في السلك التليفون سواء داخل المكان او من البوكس لحد مكان الراوتر
If Yes	اه يوجد قطع
Ask the customer to change the main wire without submitting SR to physical team	هنستأذن حضرتك تتابع مع المصرية للاتصالات لتغيير السلك لان دة بيأثر على جودة خدمة الدي إس إل


Siebel SR:

- Create & close the below SR:

Short Code	Type	Area	Sub Area	Product
39007	Fault For Physical	Line Unstable	Not Solved Cst Intern Conn	ADSL

- If No, check the Line Status:

  Matched (Line Down)	 Not Matched (Wrong Port)
---	---



182

- If Copper: Reset the port.
- If MSAN: Lock & Unlock.



Line is Up




Line is still down




Related Links

- Make sure that customer is connecting Phone line (RJ-11) from Splitter to the Router as below:

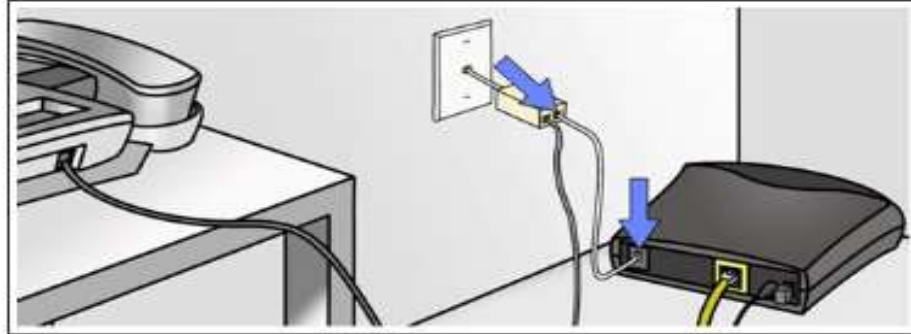

- Check customer splitter wiring:

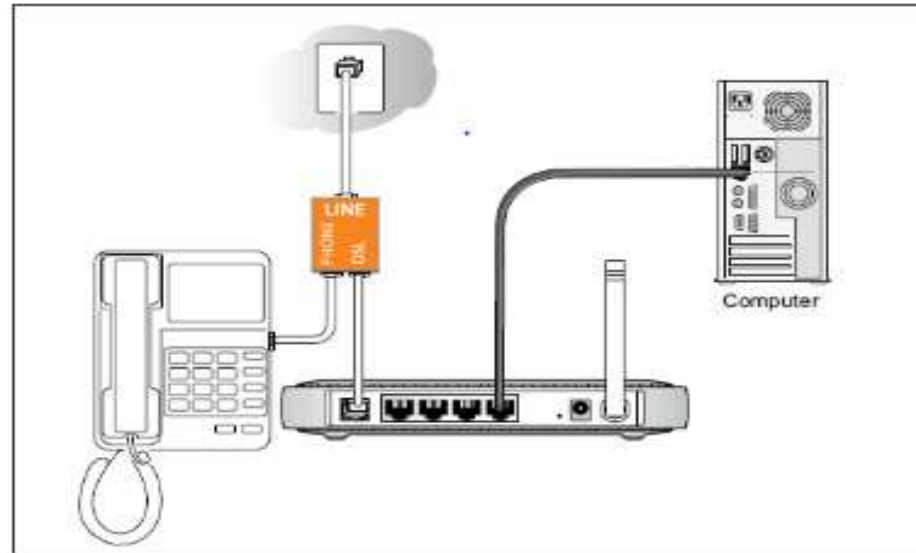


Line is Up



Line is still Down

Sorry, something went wrong.

- **If the customer is calling from DSL service number:**
 - Ask the customer for his/her mobile number.
 - Ask the customer to end the call with you and ask him to answer the call on his/her mobile.
 - Put Not Ready.
 - Call the customer.
 - Connect with him/her without splitter.

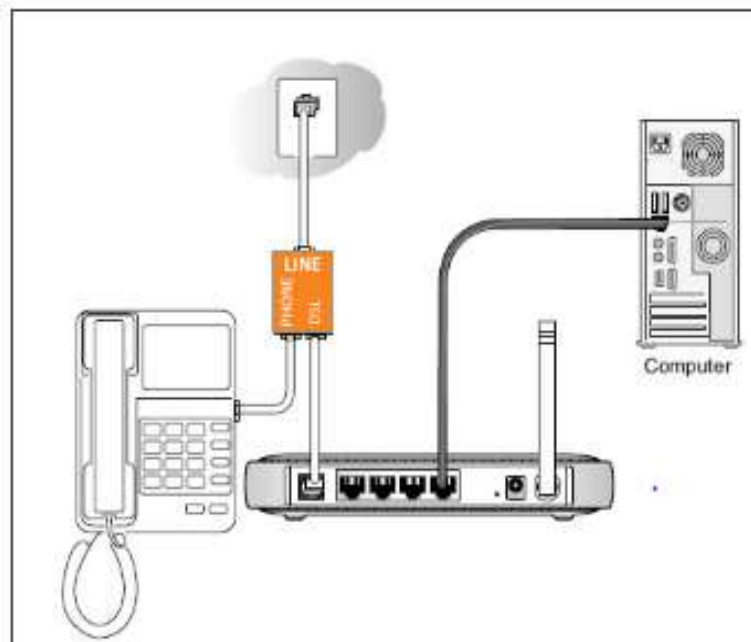

Solved



Not Solved

Script

Script

تمام يا أستاذة/..... أنا سجلت طلب حضرتك وفي حد من الدعم الفني بيتابع الشكوى، وفي خلال 48 ساعة عمل هتكون الخدمة شغاله بصورة طبيعية عند حضرتك هسأأذنك نسيب الراوتر متوصل

Siebel SR

Short Code	Type	Area	Product	Owner Group	SLA	Smart Script
39004	DSL Fault For Physical	Line Down	DSL-Active Account / DSL-Candidate Account	Data Tech Con Support-Physical	48 Whrs	Yes

Escalation Matrix

- In case of exceeding SLA, Send email to Consumer Support DSL-Physical <supportdslphysical-eg@orange.com> to speed up the resolution and you will get a feedback within same working day except Friday & Saturday.

Troubleshooting Step	Script
Ask the customer if s/he has any Junctions or welding or any cutting on his/her main wire	هل حضرتك في اي قطع في السلك التليفون سواء داخل المكان او من البوكس لحد مكان الراوتر
If Yes	اه يوجد قطع
Ask the customer to change the main wire without submitting SR to physical team	هنبستأذن حضرتك تتابع مع المصرية للاتصالات لتغيير السلك لان دة بيأثر على جودة خدمة الدي إس إل

Siebel SR:

- Create & close the below SR:

Short Code	Type	Area	Sub Area	Product
39007	Fault For Physical	Line Unstable	Not Solved Cst Intern Conn	ADSL

- If No, check the Line Status:

 Matched (Line Down)	 Not Matched (Wrong Port)
---	--



41

- Ask the customer if s/he has another phone line to check with Connect DSL Line.



Solved



Not Solved



Related Links



40

Script**Script**

تمام يا أستاذة/..... أنا سجلت طلب حضرتك وفي حد من الدعم الفني بيتابع الشكوى، وفي خلال 48 ساعة عمل هتكون الخدمة شغاله بصورة طبيعية عند حضرتك هسأأذك نسيت الراوتر متوصل

Siebel SR

Short Code	Type	Area	Product	Owner Group	SLA	Smart Script
39014	DSL Fault For Physical	Wrong Port	DSL-Active Account	Data Tech Con Support-Physical	48 Whrs	Yes


Escalation Matrix

- In case of exceeding SLA, Send email to Consumer Support DSL-Physical <supportdslphysical-eg@orange.com> to speed up the resolution and you will get a feedback within same working day except Friday & Saturday.

- Check the router's Power Led status.



- Ask the customer to check with another power source.

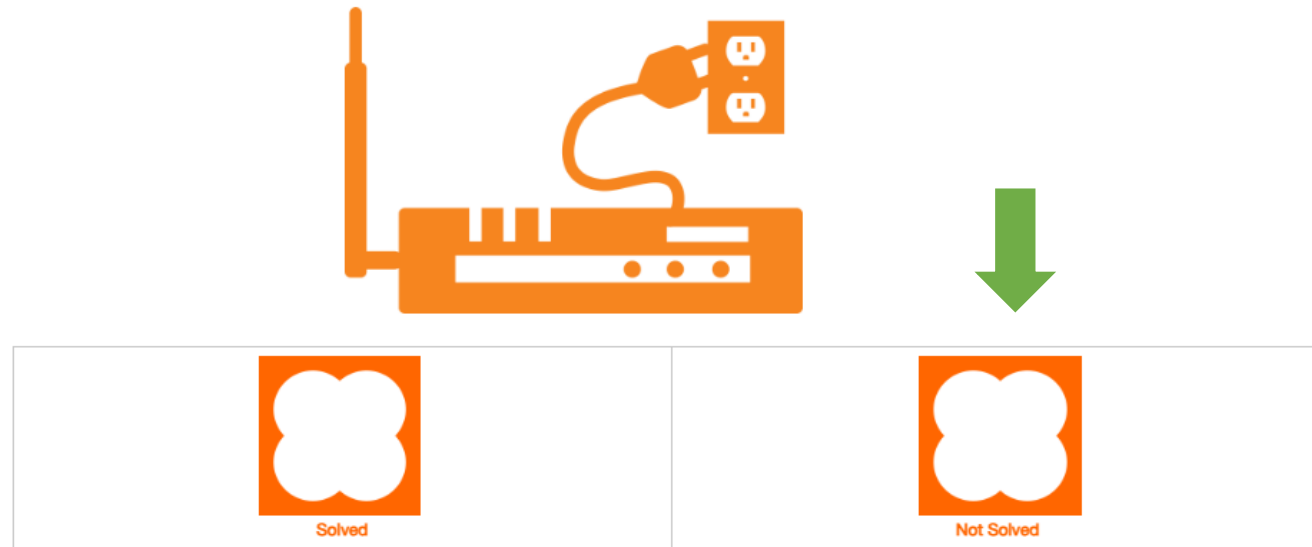

- In case problem is not solved yet, agent should create below Line down SR to be assigned to FBB Technical Consumer Support team.
- In case receiving feedback from Technical team that the router is faulty, Inform the customer that there's fault in his/her router and follow the below:
 - In case the router is from Orange and in warranty period: customer will have the option to replace it.
 - All router's faulty issues should be updated with a written & stamped report from our technician to be able to replace it from the shop.
 - In case the router is not from Orange or out of warranty, agent should upsell the new High-End router to the customer.
 - If the customer accepts; providing the nearest shop and working hours.
 - If the customer rejects; ask her/him to refer to the vendor.

Siebel SR:

Short Code	Type	Area	Product	Subarea	Smart Script
39004	DSL Fault For Physical	DSL Fault For Physical	ADSL	Not Solved Customer-Router	No

Line Down Troubleshooting Steps:

- Check the router's Power Led status.



Fiber Problem

- 1 -Cabinet Offline
- 2- Suspend Due TE bill
- 3 – MSAN Unlock



Products---Services Promotions Devices -
▼ test ▼

Global Scripts -
Channels ▼

Internal
Guideline ▼

Customer Support
Tools ▼

Application
Guides ▼

Alo profiles

Freemax new

El king portfolio

Freemax (old) profiles

Premier tariffs

Business

Home dsl packages

Home DSL
Packages

visits - Last Update
4/2025 2:09 PM

Status : **Active** ☐





Search Products

Randa Ahmed Abdelmoa...



Products--- ▾ Services ▾ Promotions ▾ Devices - test ▾ Global Scripts - Channels ▾ Internal Guideline ▾ Customer Support Tools ▾ Application Guides ▾

Find in page



Find

ON THIS PAGE

Basic Information ?

Common Asked Questions

Plans

How to Pay ?

How to Manage My Account ?

How to Complain

Siebel

Related Offers

Related VASs

Work Instructions

Related Links

Home DSL Packages



0Visits - Last Update 7/6/2025 1:55 PM

Status : Active

☐ عربي

Basic Information

Sr.	Index
1	Guidelines
	1.1.Subscription Channels
	1.2.Home DSL Packages
	1.3.Extensions
	1.4.IP Packages



Find in page



Find

ON THIS PAGE

Basic Information ?

Common Asked Questions

Plans

How to Pay ?

How to Manage My Account ?

How to Complain ?

Siebel

Related Offers

Related VASs

Work Instructions

Related Links

[Mobile Apps Complaints](#) [Quota Consumption Issues](#) [Slow Browsing](#) [WLAN](#) [Slow Upload](#) [No Browsing](#)

Billing

[View All](#) [Candidate Payment Dispute](#) [Bill Not Issued On Time](#) [Customer Paid With Wrong Land Line Number](#) [Active Payment Dispute](#) [Drop Amount](#) [Wrong Contract Entry](#)

Technical

[View All](#) [Resellers Complaint](#) [Change port](#) [MSAN Scripts](#) [FTTH](#) [Technical Assign Visit](#) [TP-LINK Wi-Fi extender](#)



Search Products



Randa Ahmed Abdelmoa...



1

Billing

Home DSL Packages ▾

Technical ▾

Active ▾



 [Cable & Cabinet issue](#)

 [Change port](#)

 [DSL - Slow Download](#)

 [FTTH](#)

 [Haram City](#)

 [Line Down](#)



 [Line Unstable](#)

 [MSAN Scripts](#)

 [Resellers Complaint](#)

 [Technical Assign Visit](#)

 [TP-LINK Wi-Fi extender](#)

 [Voice Problems](#)



Search Products



Randa Ahmed Abdelmoa...



Line Down Troubleshooting Steps:

- Check the router's Power Led status.



Power LED is OK



Power LED is Off or Red



Stolen Cables



Fiber Problem-MSAN





Search Products



Randa Ahmed Abdelmoa...



Products--- ▾ Services ▾ Promotions ▾ Devices - test ▾ Global Scripts - Channels ▾ Internal Guideline ▾ Customer Support Tools ▾ Application Guides ▾

Line Down



Visits - Last Update 4/13/2025 2:51 PM

Status : **Active**



Line Down



Fiber Problem-MSAN



0



• Check Line status:



MSAN Cabinet Offline



Suspended Due To TE Bill



MSAN Unlock

Visits - Last Update 9/17/2024 9:21 AM

Status : **Active**

1

Line Down

2

Fiber Problem-MSAN MSAN cabinet offline

3



0

- Don't make any trouble shooting steps with the customer as most probably that the whole cabinet is physically down.

Siebel SR

Short Code	Type	Area	Product	Owner Group	SLA	Smart Script
39005	DSL Fault For Physical	MSAN Cabinet Offline	ADSL	Data Tech Con Support-Physical	48 Whrs	• Customer Name • Customer Mobile • Cabinet Code

Script**Script**

تمام يا أستاذة..... أنا سجلت طلب حضرتك وفي حد من الدعم الفني بيتايع الشكوى, وفي خلال 48 ساعه عمل هتكون الخدمة شغاله بصورة طبيعية عند حضرتك هستأذنك نسيب الراوتر متوصل

Escalation Matrix

- In case exceeding SLA, Send E-mail to Consumer Support DSL-Physical team to speed up the resolution and you will get a feedback within same working day except Friday & Saturday.



Search Products



Randa Ahmed Abdelmoa...



Products--- ▾ Services ▾ Promotions ▾ Devices - test ▾ Global Scripts - Channels ▾ Internal Guideline ▾ Customer Support Tools ▾ Application Guides ▾

Line Down



Visits - Last Update 4/13/2025 2:51 PM

Status : **Active**



Line Down



Fiber Problem-MSAN



0



- Check Line status:



MSAN Cabinet Offline



Suspended Due To TE Bill



MSAN Unlock



Guidelines

- Agent should check the Voice status & Data status through Assurance Portal:
 - In case both are "Suspended", agent should ask the customer to pay his/her unpaid TE bills.
- In case the customer already paid TE Bills and passed 24 Hrs but still the Voice Status and Data Status on Assurance Portal are (Suspended) as below, agent should ask the customer to refer to TE.

Basic Info VC4

port_TYPE VDSL	VOICE_STATUS ALL_SUSPEND	DATA_STATUS SUSPENDED	SERVICE_ID UBBT
EXCHANGE_NAME NASR2...C;NC2CA;2 مدينة نصر	MSAN_VENDOR HUAWEI	MSAN_CODE 01-1-03-119	DATA_SLOT 17
DATA_PORT 6	TE_SHELF 1	PACKAGE_NAME WE30	VPI 0
VCI 35			

Script

Script

أحب أوضح لحضرتك إن انقطاع الخدمة بسبب وجود فواتير متأخرة لخط التليفون الارضي يرجى الدفع والخدمة هترجع تلقائيا خلال 24 ساعة من الدفع.

Siebel SR

Short Code	Type	Area	Product	Sub Area
39027	DSL Fault For Physical	TE-Cut Off	ADSL	Suspend due to TE bill



Search Products



Randa Ahmed Abdelmoa...



Products--- ▾ Services ▾ Promotions ▾ Devices - test ▾ Global Scripts - Channels ▾ Internal Guideline ▾ Customer Support Tools ▾ Application Guides ▾

Line Down



Visits - Last Update 4/13/2025 2:51 PM

Status : **Active**



Line Down



Fiber Problem-MSAN



0

- Check Line status:



MSAN Cabinet Offline



Suspended Due To TE Bill



MSAN Unlock





Line Down



Fiber Problem-MSAN



MSAN Unlock



0

Guidelines

- Wholesale resellers (Net@Net) customer should refer to his/her reseller.
- If the line is locked, proceed with the unlock action.
- Check the "Download Speed" and match with the customer "Line Profile".
- In case customer has bit rate Mismatch after Unlock, adjust the profile.

Siebel SRs

Short Code	Type	Area	Product	Sub Area
33311	DSL Fault for Line Changes	MSAN Unlock	ADSL	Done/Not Done
40026	DSL Fault For Connectivity	Bit Rate Mismatch	ADSL	Solved

Script

Script in case there is a repetitive lock problem only

احنا بنعتذر لحضرتك عن الانقطاع المتكرر للخدمة وده نتيجة لعطل فنى من جانب المصرية للاتصالات، و حاليا الخط اشتغل

Line Unstable

How to Open Line Unstable WF

The screenshot displays a web application interface. At the top, there is a dark navigation bar with several menu items: "Products---Services Promotions Devices -", "Global Scripts -", "Internal", "Customer Support", and "Application". Each item has a small orange downward arrow next to it. A blue arrow points to the "Products---Services Promotions Devices -" menu item. Below this menu item, a white dropdown menu is open, listing several options: "Alo profiles", "Freemax new", "El king portfolio", "Freemax (old) profiles", "Premier tariffs", "Business", and "Home dsl packages". A blue arrow points to the "Home dsl packages" option. The main content area has a blue background with the text "Home DSL" and "Packages" in large, light-colored font. On the right side of the main content area, there is an illustration of a hand holding a smartphone. At the bottom of the page, there is a grey footer area containing the text "visits - Last Update" and "4/2025 2:09 PM". To the right of this text, there is a status indicator that says "Status : Active" in green, followed by a toggle switch.

Products---Services Promotions Devices - Global Scripts - Internal Customer Support Application
▼ ▼ ▼ test ▼ Channels ▼ Guideline ▼ Tools ▼ Guides ▼

Alo profiles
Freemax new
El king portfolio
Freemax (old) profiles
Premier tariffs
Business
Home dsl packages

Home DSL
Packages

visits - Last Update
4/2025 2:09 PM

Status : Active

1- Press on How to Complain

2- Press on View all

Find in page

Find

ON THIS PAGE

Basic Information

Common Asked Questions

Plans

How to Pay

How to Manage My Account

 **How to Complain**

Siebel

Related Offers

Related VASs

Work Instructions

Related Links

TRANSFER FROM CUSTOMER TO AGENT REQUEST

Slow Upload

No Browasing

Billing

Bill Amount

MSAN-Financial Adjustment

Bad Debts

Technical

Technical Assign Visit

TP-LINK WI-FI extender

Voice Problems

Slow Browasing

Wlan

Orange DSL FeedBack

Money Transfer

Customer Requests

MSAN Scripts

DSL - Slow Download

Line Down

SHARE

View All

View All



3- Choose Line Unstable

Complaints



SHARE

FOLLOW

Home Internet Packag

Technical

Active

>

Cable & Cabinet issue

Line Down

Online Gaming information request

Voice Problems

DSL - Slow Download

line unstable

Technical Assign Visit

Haram City

MSAN Scripts

TP-LINK Wi-Fi extender

Line Unstable Means: the customer has service instability because of physical issue (wires, cabinet, box Or splitter problem).

In this situation customer complains that his line frequently unstable

- Agent should handle line unstable WF normally in case the customer has due invoice to TE and the voice is working in the grace period.
- It's not allowed to resolve any case assigned to consumer support team even if the customer problem is solved, except if the SR was created during global issues.
- In case customer is complaining that the service is not working or unstable:
 - Agent should ask the customer if s/he has any Junctions or welding or any cutting on his/her main wire
 - If yes, agent should advise the customer to change the main wire without submitting SR to physical team.

- If yes, agent should advise the customer to change the main wire without submitting SR to physical team.

Script	<u>Agent:</u>	
	<u>Customer:</u>	هل حضرتك في اي قطع في السلك التليفون سواء داخل المكان او من البوكس لحد مكان الراوتر
	<u>Agent:</u>	اه يوجد قطع هنتأكد حضرتك تتابع مع المصيرية للاتصالات لتغيير السلك لان دة بيأثر على جودة خدمة ال DSL

Siebel SR:

- Create & close the below SR:

Short Code	Type	Area	Sub Area	Product
39007	Fault For Physical	Line Unstable	Not Solved Cst Intern Conn	ADSL

- In case No, Agent should check "Port up time" and it should be less than 6 hours.
- Compare it with the last change date " last IP" on IP tool.


- If both of them were down for less than 6Hs, agent should confirm with the customer that s/he didn't restart the router and check lock and unlock history then follow line unstable TS.
- If the difference between the port up time and the authentication IP is more than 5 minutes, agent should follow "[Connection Unstable WF](#)".
- If the last IP login time is more than 6 Hours agent should handle the customer away from the instability scenario according to the customer's complaint.
- If the customer has a bad line issue & line unstable issue ,agent should follow "[Bad Line WF](#)".

Repetitive Complaints::

- Agents should check SR history for physical problems during 1 week, in case the customer has a repetitive issue in order to know the last step or the reason of the issue.
 - Example: SR last feedback was (Change building cable, change router, etc..)
 - Example: SR last feedback long SLA related to (TE maintenance, etc..).
- In case agent found “Customer is out of service location/not free” feedback from Data Tech Con Support-Physical team in previous SR:
 - Agent should check the line status and inform the customer with Data Tech Con Support-Physical team feedback and create the below SR:

Siebel SR:

Short Code	Type	Area	Product	Owner Group	Smart Script	SLA
39017	Fault For Physical	Assign Visit	ADSL	Data Tech Con Support-Physical	Yes	48 Whrs




Line Unstable



Line comes down upon making/receiving call

- We will choose line unstable in case customer's complain is not related to make/ receive call on Landline
- Agent should advise the customer to keep the router connected and switched on.
- Agent shouldn't take the action to lock and Unlock, Instead agent should check "Lock/Unlock" history and match it with the "Last change" time on FTTH tool to be able to define the instability problem.
- Agent should check line parameters and adjust the profile before assigning SR to the concerned team.
- For MSAN: Verify (Port up time) from FTTH Tool as below:

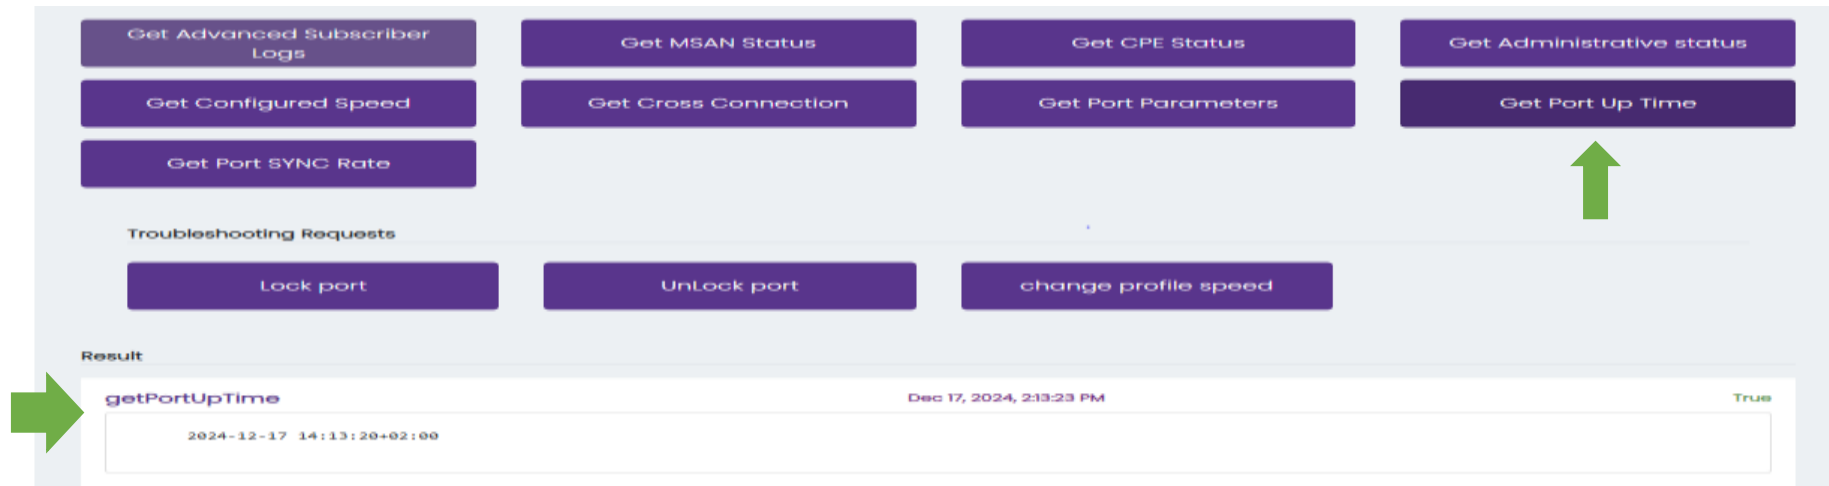

•For Copper: Verify the Date/Time (Last Change Time) from Octopus as below:

Line Information

Copper Line Parameters

Realtime Graph

Port status: Up

Last change: Dec 11, 2024, 1:10:13 PM

Port ResetPort UnlockUpdate

Download (XTU-R)

Upload (XTU-C)

Line Status

Channel Status

IP Tool:



Enter username :

0823863366

GET IP

IPAddress	Logdate
197.162.114.199	12/17/2024 2:13:25 PM

- Check with customer the internal wiring and splitter positions that should be as below:

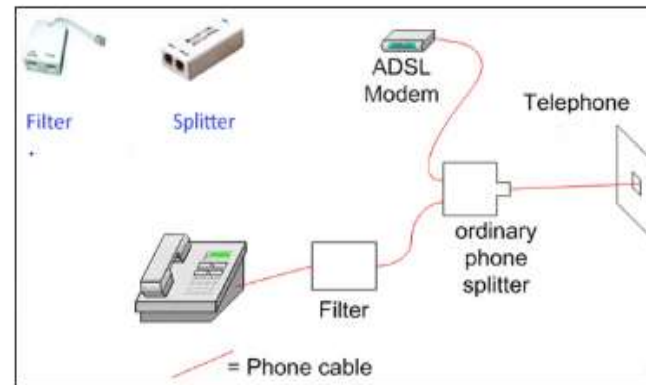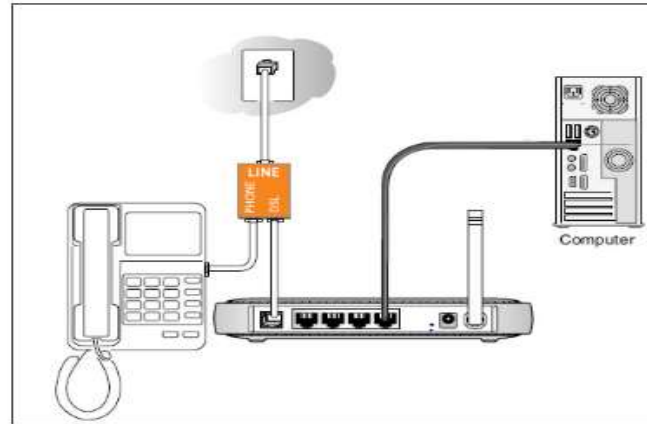

Solved



Not Solved

- If the customer is calling from DSL service number, Advise him/her to connect without splitter after the call if possible.
- In case customer can't check his/her main wire due to using many plugs in the wall, agent should advise the customer to check from the first plug connected on the main wire.

Script:

Script

تمام يا أستاذة/ة..... أنا سجلت طلب حضرتك وفى حد من الدعم الفني هيتايج الشكوى، بستأذن حضرتك نسيب الراوتر متوصل، ولو مفيش أي تأخير من المصرية للاتصالات في خلال 48 ساعة عمل هتكون الخدمة شغاله بصورة طبيعية عند حضرتك.

Siebel SR:

Short Code	Type	Area	Product	Owner Group	Smart Script	SLA
39007	Fault For Physical	Line Unstable	ADSL	Data Tech Con Support-Physical	Yes	48 Whrs

Escalation Matrix:

- In case the customer called and there are no updates on SR and the above estimated time exceeded.
 - Agent should advise the customer to keep the router connected and switched on.
 - No action should be taken with lock and Unlock, till receiving a final feedback from the consumer support team
 - Send email to Consumer Support DSL-Physical team to speed up the resolution and you will get a feedback within same working day except Friday & Saturday.

Repetitive Complaints:

- Agents should check SR history for physical problems during 1 week, in case the customer has a repetitive issue in order to know the last step or the reason of the issue.
 - Example: SR last feedback was (Change building cable, change router, etc..)
 - Example: SR last feedback long SLA related to (TE maintenance, etc..).
- In case agent found "Customer is out of service location/not free" feedback from Data Tech Con Support-Physical team in previous SR:
 - Agent should check the line status and inform the customer with Data Tech Con Support-Physical team feedback and create the below SR:

Stebel SR:

Short Code	Type	Area	Product	Owner Group	Smart Script	SLA
39017	Fault For Physical	Assign Visit	ADSL	Data Tech Con Support-Physical	Yes	48 Whrs




Line Unstable



Line comes down upon making/receiving call

If the customer is calling from DSL service number:

- Ask the customer for his/her mobile number
- Ask customer to end call with you and ask him/her to answer the call on his/her mobile.
- Put Not Ready
- Call the customer
- Connect with him/her without splitter
- Make a call to his number from another line and check ADSL led in the router.

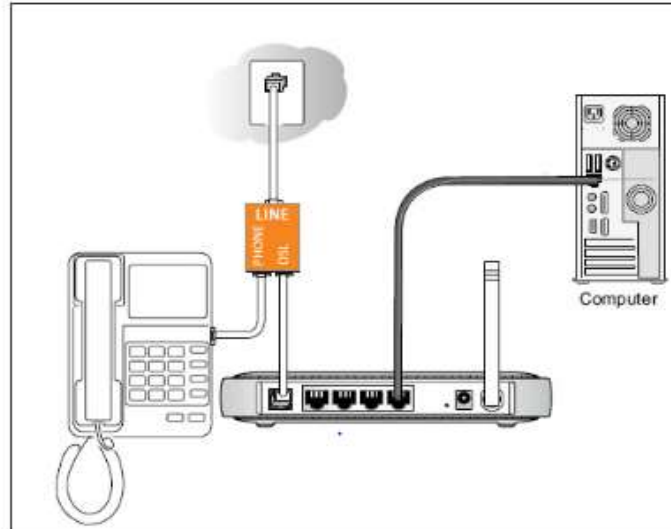

DSL Led is Stable



DSL LED flashing



- Let customer connect everything back again with the splitter and make sure to keep the router connected during the next 48 Whrs.
- Create the following SR:

Siebel SR:

Short Code	Type	Area	Product	Owner Group	SLA	Smart Script
39007	Fault For Physical	Line Unstable	ADSL	Data Tech Con Support-Physical	48 Whrs	Yes

Script:

Script


تمام يا أستاذة/ة..... أنا سجلت طلب حضرتك وفى حد من الدعم الفنى هيتابع الشكوى، يستأذن حضرتك نسيب الراوتر متوصل، ولو مفيش أي تأخير من المصرية للاتصالات فى خلال 48 ساعه عمل هتكون الخدمة شغاله بصورة طبيعية عند حضرتك .

Escalation Matrix:

- In case of exceeding the SLA, Send email to Consumer Support DSL-Physical team to speed up the resolution.

Bad Line Parameters

How to open bad line parameters WF

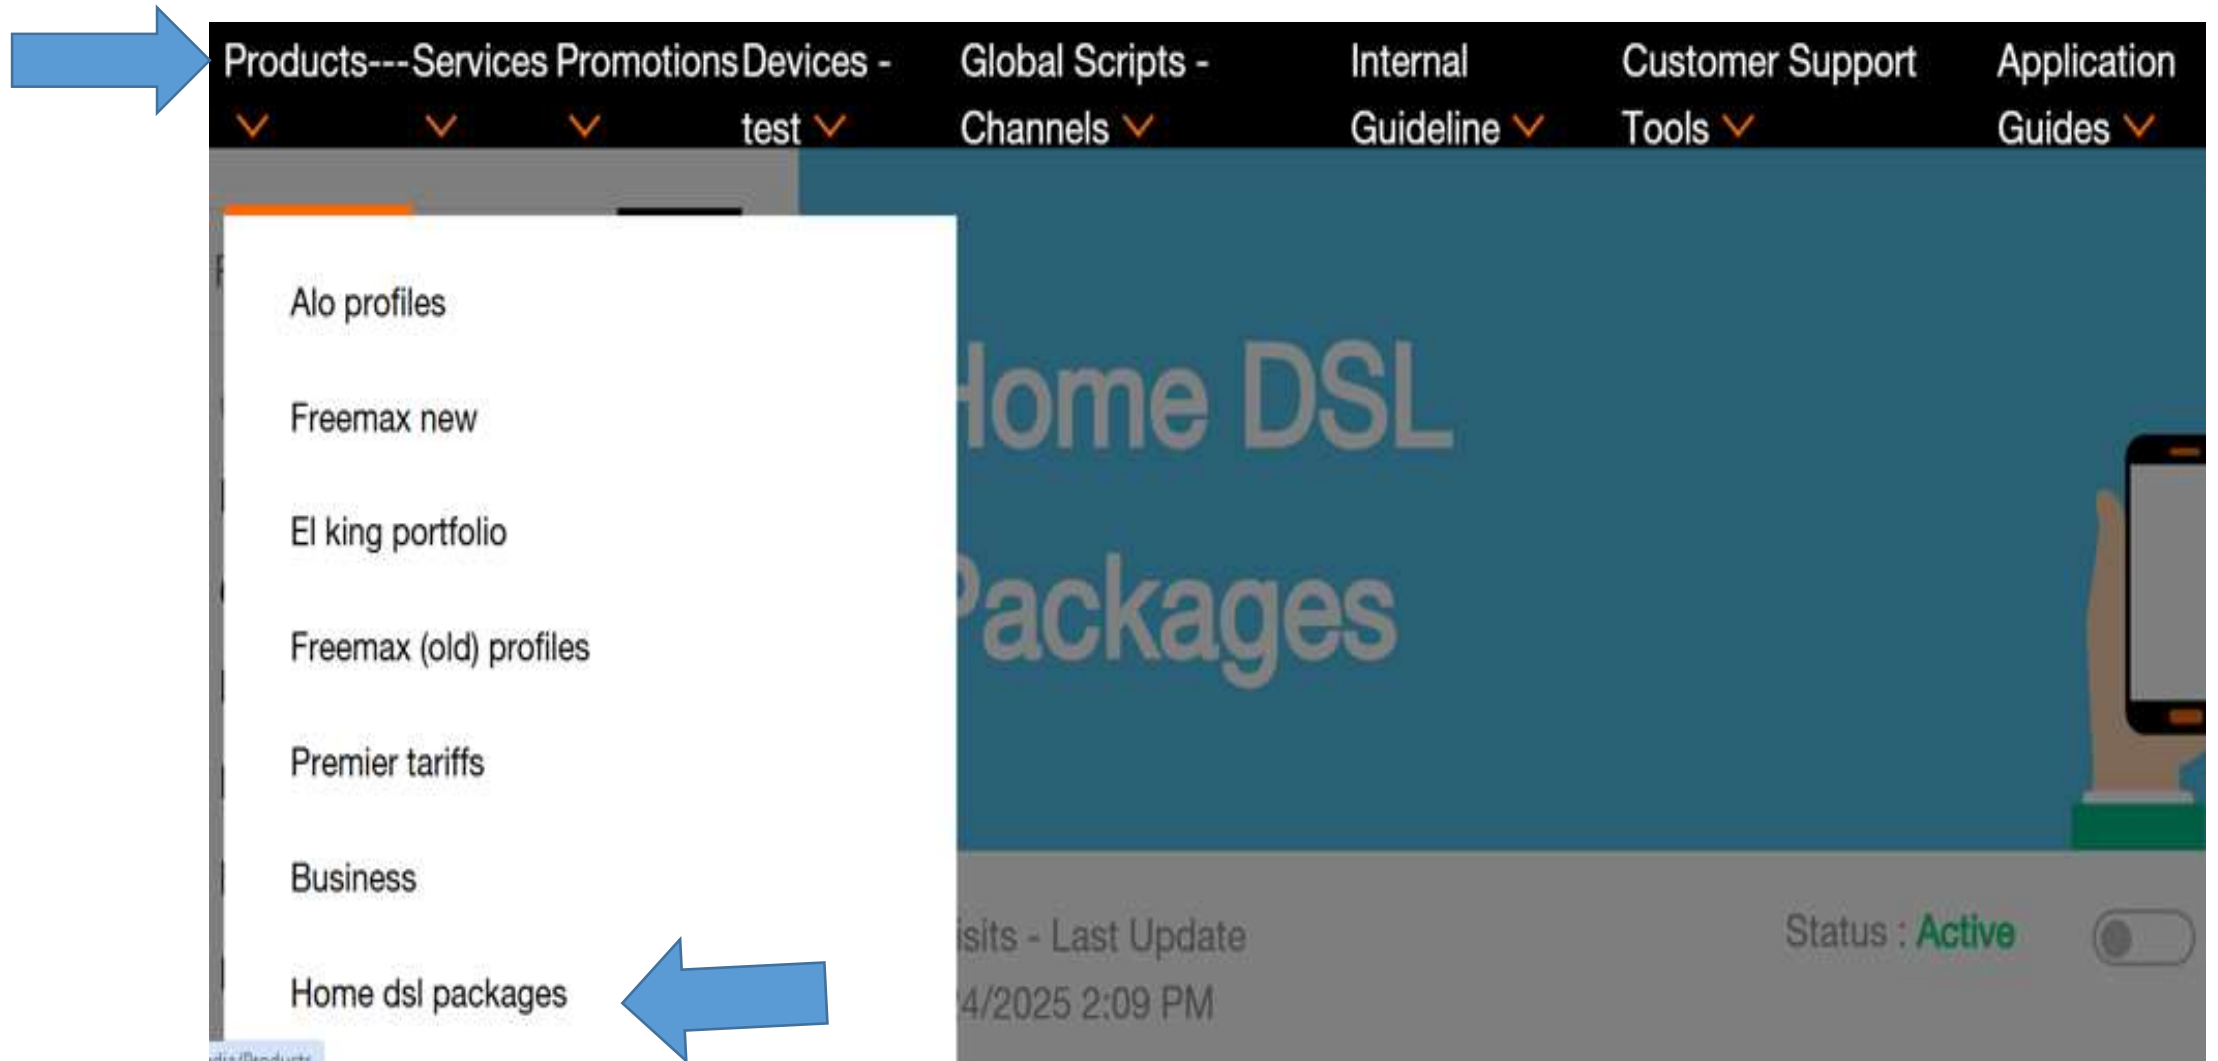

Bad Line Parameters

Find in page



Find

ON THIS PAGE

Basic Information



Common Asked Questions

Plans

How to Pay



How to Manage My Account



How to Complain



Siebel

Related Offers

Related VASs

Work Instructions

Related Links

Billing

View All

Bill Amount

Orange DSL FeedBack

MSAN-Financial Adjustment

Money Transfer

Bad Debts

Customer Requests

Technical

View All

Technical Assign Visit

MSAN Scripts

TP-LINK Wi-Fi extender

DSL - Slow Download

Voice Problems

Line Down



Scenario	Handling
In case customer is complaining from Slow Download	- Check customer's quota consumption through Siebel PCRF as shown below if the package is fully consumed or not. - If not fully consumed, follow the below troubleshooting steps. - If fully consumed, offer upgrading the package/adding extension using the below script and create & close the below SR.

Validate Customer ADSL Account	
Main Package Data	
PackageName	Home Internet 325
CurrentDownload	50726 KB/s
CurrentUpload	5072 KB/s
CustomerQuota	300.0 GB/s
CustomerQuota_expiryDate	2024-09-11T23:59:59Z
CustomerQuota_remainingPercentage	83.0%
CustomerQuota_startDate	2024-08-12T00:00:00Z
CustomerQuota_usagePercentage	17%
RemainingQuota	166.3 GB/s

▪ Script:

Script	حظرتك إستخدام الباقة بالكامل وسنعاك تحديثها كل شهر فور — يمكن تحديث باقة اضافية أو تعلي الباقة لاستعادة السرعة الطبيعية وتقدر تراجع إستهلاكك من خلال موقعنا Dsl.orange.eg أو تطبيق My Orange
--------	---

▪ Siebel SR:

Short Code	Type	Area	Sub Area	Product
40014	DSL Fault For Connectivity	Slow Download	Solved Speed Downgraded	ADSL

  Right QOS	 Wrong QOS
--	--

Bad line parameters : For MSAN Customer

In case no line parameters found on FTTH Tool, agent should check the line parameters in TR069 tool.

In case no profile in TR069 tool, agent should handle according to customer and mentions that in the relevant SR.

Parameter	Accepted Rate
Relative Occupation	From 80% to 85%
Noise Margin	Greater than 60 dB
Bitrate	From 80% to 85% from the max
Accepted Max Attainable Rate	
For Up to 30 Mbps speed	Not less than 36 Mbps (Both Port & Router should be VDSL)
	Not less than 15 Mbps (Port or Router is ADSL)
For Up to 70 Mbps speed	Not less than 55 Mbps
For Up to 100 & 200 Mbps speed	Not less than 85 Mbps

Port type through FTTH Tool

050-2073953 ✕

Basic Info ADSL

phoneNumber	contractedSpeed	woexecutionClosureDate
2073953	30	2024-03-21T20:45:29.000+00:00

Basic Info VC4

port_TYPE	VOICE_STATUS	DATA_STATUS	SERVICE_ID
VDSL	USED	USED	UBBT
EXCHANGE_NAME	MSAN_VENDOR	MSAN_CODE	DATA_SLOT
GODAYEDELHALAH...DK;GHLDK;جديدة الهالة-عرب;GHLDK	ZTE	07-1-257-10	7
DATA_PORT	TE_SHELF	PACKAGE_NAME	VPI
64	1	WE30	0
VCI			
35			

Operate

Get Advanced Subscriber Logs

Get MSAN Status

Get CPE Status

Get Administrative status

Get Configured Speed

Get Cross Connection

Get Port Parameters

Get Port Up Time

Get Port SYNC Rate



Troubleshooting Requests

Lock port

UnLock port

change profile speed

Result

GetPortParameters

Dec 18, 2024, 2:22:06 PM

True

```
adminStatus: up,  
operStatus: up,  
speedUP: 1021,  
speedDown: 7549,  
SNR UP: 115,  
SNR Down: 61,  
TX power UP: 2,  
TX power Down: 144,  
Attainable Rate UP: 1236,  
Attainable Rate Down: 10787,
```

- In case agent found the line parameters in TR069 tool is different than the data found on the FTTH, s/he has to consider the line parameters on TR069 is the right one.
- In case customer asked about his/her line parameters:
 - Agent should communicate to the customer his/her physical line parameters.
- In case customer asked to send it via e-mail or SMS:
 - Agent should communicate to the customer that s/he can get this info from the router page using the below script:

Script	حضرتك تقدر تعرف المعلومات كلها من خلال صفحة الراوتر... تحب اساعدك في الوصول ليها
--------	--

 Accepted	 Not Accepted
--	--



0

- In case of Bad Line Parameters for Copper lines [Press Here](#).
- In case of Bad Line Parameters for MSAN, Check speed profile through Assurance Portal.



Right Speed Profile



Wrong Speed Profile

- Try Port Reset for Copper or Lock & Unlock for MSAN as below:


- **Copper:**

- Press on (Port reset) tab
- Press on (Update) tab



- **MSAN:**

- Press on (Lock port) tab
- Press on (Unlock Port) tab

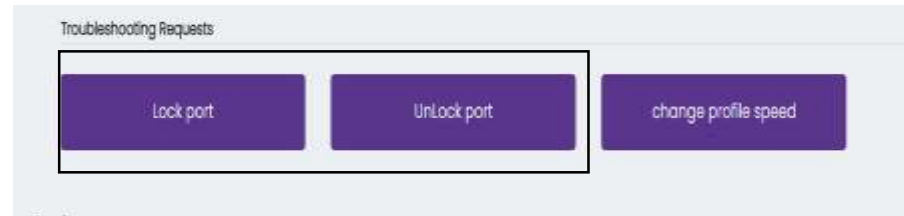


Solved



Not Solved

Below For all Copper & MSAN customers excluding FTTH customers:

- If the customer is calling from any mobile or any number rather than the DSL Service number:
 - Ask the customer to connect without splitter .
- If the customer is calling from the DSL service number:
 - Ask the customer for his/her mobile number.
 - Ask the customer to end the call and answer the incoming call on his/her mobile.
 - Put Not Ready.
 - Call the customer.
 - Connect with him/her without splitter.

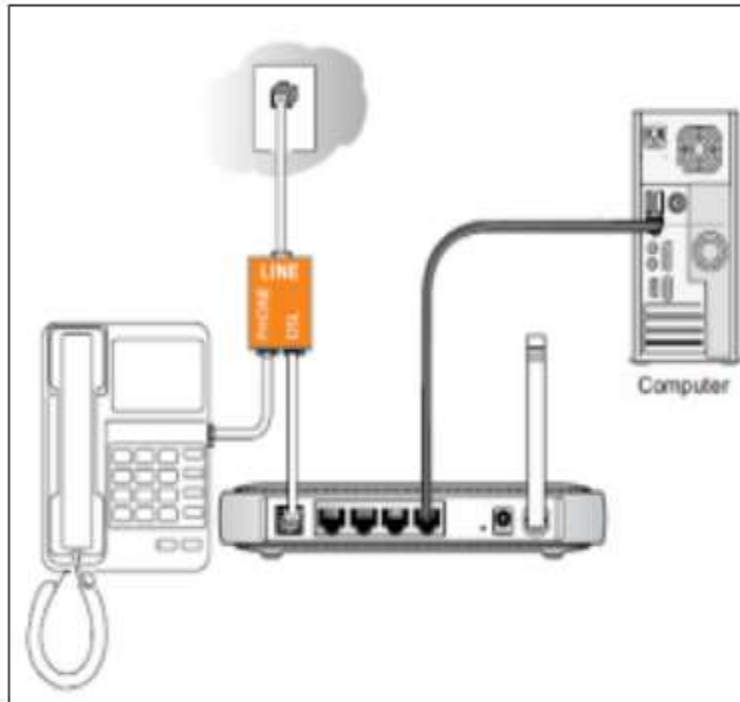

- Note: It's not allowed to resolve any SR assigned to Data Tech Con Support – Physical team even if the customer's problem is solved, except if the SR was created during the global issues.

 Solved	 Not Solved
---	---

- **Script:**


Script	انا سجلت طلب وهيتم المتابعه مع حضرتك في خلال 48 ساعه عمل هستأذنك نسيب الراوتر متوصل ولو مفيش تأخير من المصريه للاتصالات الخدمة هتكون شغاله بصورة طبيعيه.
--------	---

- **Siebel SR:**

Short Code	Type	Area	Product	Owner Group	SLA
39013	Fault For Physical	Bad Line	• DSL-Active Account • DSL-Candidate Account	• Active - Data Tech Con Support Physical • Candidate Cairo & Alex - DSL Installation Team • Candidate Gov - Data Tech Con Support Physical	48 Whrs

- **Escalation matrix:**

- In case the customer called and there are no updates on SR and the above estimated time exceeded:
- Send email to Consumer Support DSL-Physical / DSL Installation team to speed up the resolution and a feedback will be recieved within same working day except Friday & Saturday.




0

- In case of Bad Line Parameters for Copper lines [Press Here](#).
- In case of Bad Line Parameters for MSAN, Check speed profile through Assurance Portal.



Right Speed Profile

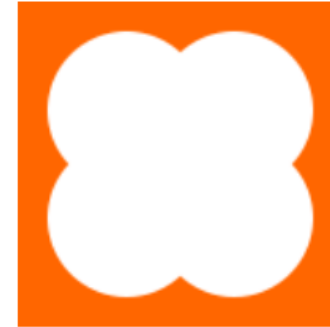

Wrong Speed Profile

Scenario	Handling
Up to 30 Mbps	- Adjust line speed to the suitable speed profile: which shouldn't exceed 85% from the maximum attainable rate or Attainable Rate Down. - Adjust speed profile only in case line has Bitrate mismatch or Physically bad due to wrong speed profile. - Only Profile adjusting in Up To 30 Mbps speed should be done from our front line agents.
Up to 70,100 & 200 Mbps	- It's not allowed to change speed profile for all the mentioned speeds. - Packages up to 200 Mbps will be treated same as 100 Mbps packages: which means that the 85% should be calculated on the 100 Mbps not 200 Mbps. - Agent should check previous Technical SRs history within the last month to validate the maximum line capacity which is provided by Technical team. - In case no maximum line capacity feedback found within 1 month, agent should check Assurance Portal to confirm that the maximum attainable rate or Attainable Rate Down is less than 85 % from the contracted speed. - Agent should follow Bad Line WF.
In case agent found "Maximum Line Capacity" feedback on a previous SR	Agent should create "411007" SR and communicate the following script: بما ان حضرتك مشترك علي سرعه () هتحصل علي اقصي كفاءة ممكنة للخط علما بان الخط حاليا لا يتحمل السرعة المطلوبة وكفاءة الخط الحالية هي (..) ودي افضل كفاءة حاليا لخط حضرتك ..
FTTH	Physically: - In case of opening bad line SR, Issue will be handled according to the received Power average (Check attached FTTH WIs)  FTTH Work Instruction.pptx Connectivity: - For slow Download cases speed test WF should be more than 65 %. - Example: Profile Speed is 200 Mbps, then the accepted rate should be 130 Mbps while testing the speed.



Solved After Adjustment



Not Solved After Adjustment

- Ask the customer to test the speed through speed test to confirm if if the slow problem is totally solved or not.
- If yes, Create and close the below Siebel SR:

Short Code	Type	Area	Sub Area	Product
40026	Fault For Connectivity	Bit Rate Mismatch MSAN	Solved	ADSL

- If No, [Press Here](#).



Solved After Adjustment



Not Solved After Adjustment

- Try Port Reset for Copper or Lock & Unlock for MSAN as below:


- **Copper:**

- Press on (Port reset) tab
- Press on (Update) tab



- **MSAN:**

- Press on (Lock port) tab
- Press on (Unlock Port) tab

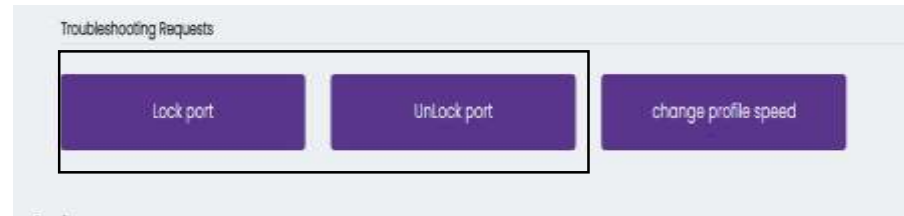


Solved



Not Solved

Below For all Copper & MSAN customers excluding FTTH customers:

- If the customer is calling from any mobile or any number rather than the DSL Service number:
 - Ask the customer to connect without splitter .
- If the customer is calling from the DSL service number:
 - Ask the customer for his/her mobile number.
 - Ask the customer to end the call and answer the incoming call on his/her mobile.
 - Put Not Ready.
 - Call the customer.
 - Connect with him/her without splitter.

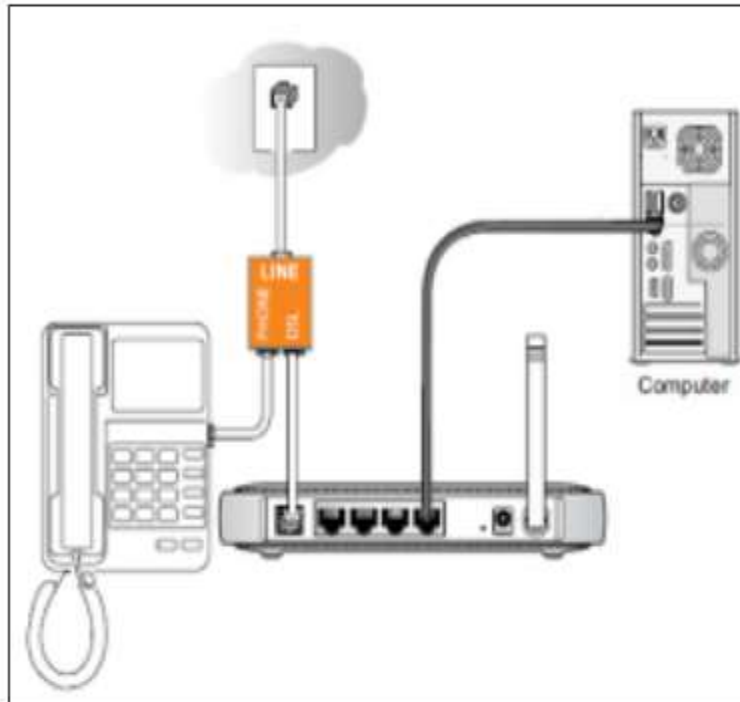

- Note: It's not allowed to resolve any SR assigned to Data Tech Con Support – Physical team even if the customer's problem is solved, except if the SR was created during the global issues.

 Solved	 Not Solved
---	---

- **Script:**

Script	انا سجلت طلب وهيتم المتابعه مع حضرتك في خلال 48 ساعه عمل هستأذنك نسيب الراوتر متوصل ولو مغيث تأخير من المصريه للاتصالات الخدمة هتكون شغاله بصورة طبيعيه.
--------	---

- **Siebel SR:**

Short Code	Type	Area	Product	Owner Group	SLA
39013	Fault For Physical	Bad Line	• DSL-Active Account • DSL-Candidate Account	• Active - Data Tech Con Support Physical • Candidate Cairo & Alex - DSL Installation Team • Candidate Gov - Data Tech Con Support Physical	48 Whrs

- **Escalation matrix:**

- In case the customer called and there are no updates on SR and the above estimated time exceeded:
- Send email to Consumer Support DSL-Physical / DSL Installation team to speed up the resolution and a feedback will be recieved within same working day except Friday & Saturday.

Voice Problems

How to open Voice problems WF

The screenshot displays a web application interface. At the top, a black navigation bar contains several menu items: 'Products---Services Promotions Devices -', 'Global Scripts -', 'Internal', 'Customer Support', and 'Application'. Each item has a small orange downward arrow next to it. A blue arrow points to the 'Products' menu item. Below this, a white dropdown menu is open, listing the following options: 'Alo profiles', 'Freemax new', 'El king portfolio', 'Freemax (old) profiles', 'Premier tariffs', 'Business', and 'Home dsl packages'. A second blue arrow points to the 'Home dsl packages' option. The background of the page is a dark blue banner with the text 'Home DSL Packages' in large, light-colored letters. To the right of the text is an illustration of a hand holding a smartphone. At the bottom of the page, there is a grey footer area containing the text 'Visits - Last Update 4/2025 2:09 PM' and 'Status : Active' with a toggle switch.

Products---Services Promotions Devices -
Global Scripts -
Internal
Customer Support
Application

Alo profiles
Freemax new
El king portfolio
Freemax (old) profiles
Premier tariffs
Business
Home dsl packages

Home DSL
Packages

Visits - Last Update
4/2025 2:09 PM

Status : Active

1- Press on How to Complain

2- Press on View all

The screenshot shows a website's help center interface. On the left is a sidebar with a search bar and a list of categories. A green arrow points to 'How to Complain' in the sidebar. The main content area is divided into sections: 'Transfer from Reseller to another Reseller', 'Slow Upload', 'No Browling', 'Quota Consumption Issues', 'Slow Browling', and 'Wlan'. Below these is a 'Billing' section with links for 'Bill Amount', 'MSAN-Financial Adjustment', and 'Bad Debts', followed by a 'View All' button. The next section is 'Technical', with links for 'Technical Assign Visit', 'TP-LINK WI-FI extender', 'Voice Problems', 'MSAN Scripts', 'DSL - Slow Download', and 'Line Down', followed by another 'View All' button. A green arrow points to the second 'View All' button.

Find in page Find

ON THIS PAGE

- Basic Information
- Common Asked Questions
- Plans
- How to Pay
- How to Manage My Account
- How to Complain
- Siebel
- Related Offers
- Related VASs
- Work Instructions
- Related Links

Transfer from Reseller to another Reseller

- Slow Upload
- No Browling

Quota Consumption Issues

- Slow Browling
- Wlan

Billing View All

- Bill Amount
- MSAN-Financial Adjustment
- Bad Debts

Technical View All

- Technical Assign Visit
- TP-LINK WI-FI extender
- Voice Problems
- MSAN Scripts
- DSL - Slow Download
- Line Down

3- Choose Voice problems

Complaints



Home Internet Packag ▼

Technical ▼

Active ▼



 [Cable & Cabinet issue](#)

 [DSL - Slow Download](#)

 [Haram City](#)

 [Line Down](#)

 [line unstable](#)

 [MSAN Scripts](#)


 [Online Gaming information request](#)

 [Technical Assign Visit](#)

 [TP-LINK Wi-Fi extender](#)

 [Voice Problems](#)



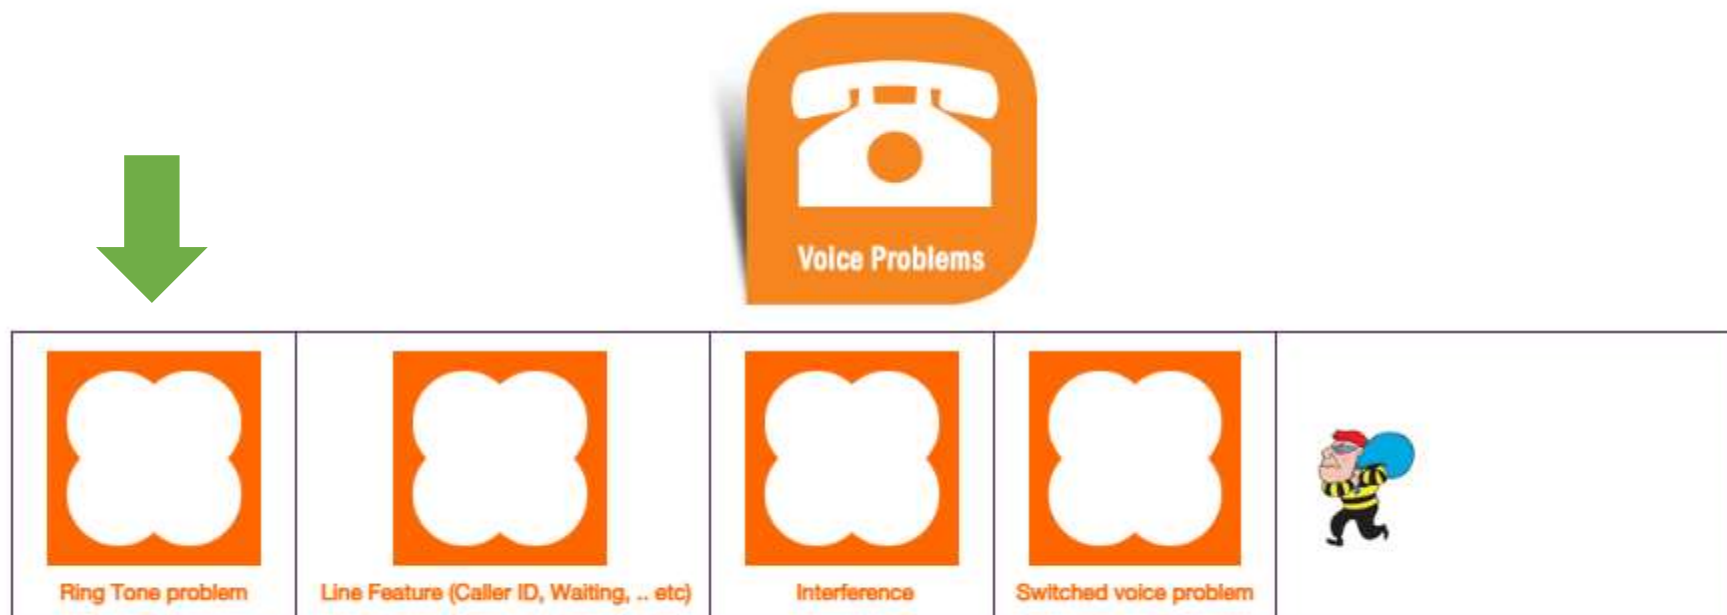

- Ask the customer to try another phone set if possible.



- Let customer connect everything back again with the splitter.
- Create the following Siebel SR:

Siebel SR:

Short Code	Type	Area	Owner Group	SLA	Product
39006	DSL Fault For Physical	Voice Problem	Data Tech Con Support-Physical	48 Whrs	• DSL-Candidate Account • DSL-Active Account

Script upon submitting the new SR:

Script	تمام يا أستاذة/ة..... أنا سجلت طلب حضرتك وفي حد من الدعم الفني هيتابع الشكوى، ولو مفيش أي تأخير من المصرية للاتصالات في خلال 48 ساعة عمل هتكون الحرارة شغاله بصورة طبيعية عند حضرتك
--------	---

Script in case customer called asking for follow up:

Script	في حد من الدعم الفني بيتابع الشكوى، ولو مفيش أي تأخير من المصرية للاتصالات في خلال 48 ساعة عمل من تاريخ تقديم الطلب هتكون الخدمة شغاله بصورة طبيعية عند حضرتك هستأذنك نسيب الراوتر متوصل
--------	--

Escalation Matrix:

- In case exceeding SLA with no feedback on the SR, agent should Send mail to (Consumer Support DSL-Physical) to speed up the resolution. and feedback will be recieved within 1 WD.

Script:

Script	هقدم ل حضرتك طلب استعجال وه يتم الرد في اسرع وقت ممكن.. شكرا لتفهمك
--------	---



 Ring Tone problem	 Line Feature (Caller ID, Waiting, .. etc)	 Interference	 Switched voice problem	
--	---	---	---	---

- Ask the customer to try another phone set if possible.

 Solved	 Not Solved 
--	--

- Let customer connect everything back again with the splitter.
- Create the following Siebel SR:

Siebel SR:

Short Code	Type	Area	Owner Group	SLA	Product
39006	DSL Fault For Physical	Voice Problem	Data Tech Con Support-Physical	48 Whrs	• DSL-Candidate Account • DSL-Active Account

Script upon submitting the new SR:

Script	تمام يا أستاذة/..... أنا سجلت طلب حضرتك وفي حد من الدعم الفني هيتابع الشكوى، ولو مفيش أي تأخير من المصرية للاتصالات في خلال 48 ساعة عمل هتكون الحرارة شغاله بصورة طبيعية عند حضرتك
--------	--

Script in case customer called asking for follow up:


Script	في حد من الدعم الفني بيتابع الشكوى، ولو مفيش أي تأخير من المصرية للاتصالات في خلال 48 ساعة عمل من تاريخ تقديم الطلب هتكون الخدمة شغاله بصورة طبيعية عند حضرتك هستأذك نسيب الراوتر متوصل
--------	---

Escalation Matrix:

- In case exceeding SLA with no feedback on the SR, agent should Send mail to (**Consumer Support DSL-Physical**) to speed up the resolution. and feedback will be recieved within 1 WD.

Script:

Script	هقدم ل حضرتك طلب استعجال وهيتم الرد في اسرع وقت ممكن.. شكرا لتفهمك
--------	--

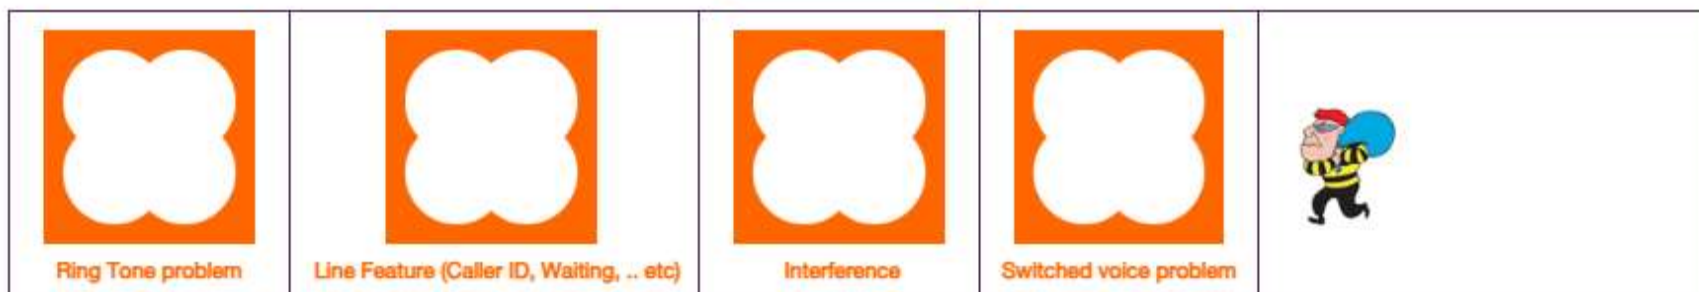

- Ask the customer to try another phone set if possible.



- Let customer connect everything back again with the splitter.
- Create the following Siebel SR:

Siebel SR:

Short Code	Type	Area	Owner Group	SLA	Product
39006	DSL Fault For Physical	Voice Problem	Data Tech Con Support-Physical	48 Whrs	• DSL-Candidate Account • DSL-Active Account

Script upon submitting the new SR:

Script	تمام يا استاذ/ة..... أنا سجلت طلب حضرتك وفى حد من الدعم الفنى هيتابع الشكوى، ولو مفيش أي تأخير من المصرية للاتصالات فى خلال 48 ساعة عمل هتكون الحرارة شغاله بصورة طبيعية عند حضرتك
--------	--

Script in case customer called asking for follow up:

Script	فى حد من الدعم الفنى بيتابع الشكوى، ولو مفيش أي تأخير من المصرية للاتصالات فى خلال 48 ساعة عمل من تاريخ تقديم الطلب هتكون الخدمة شغاله بصورة طبيعية عند حضرتك هستأذك تسبب الراوتر متوصل
--------	---

Escalation Matric:

- In case exceeding SLA with no feedback on the SR, agent should Send mail to (Consumer Support DSL-Physical) to speed up the resolution. and feedback will be recieved within 1 WD.

Script:

Script	هقدم ل حضرتك طلب استعجال وهيتم الرد فى اسرع وقت ممكن،، شكرا لتفهمك
--------	--



				
Ring Tone problem	Line Feature (Caller ID, Waiting, .. etc)	Interference	Switched voice problem	

Handling

- In case the customer has a wrong landline number:
 - Check if the customer is calling us from a different land line number.
 - Check if the customer is migrated to MSAN. [MSAN Scripts](#)
 - Check if the customer doesn't have any other landline number.
 - Create the below SR and add the wrong landline number to the SR notes.

Script

Script	تمام يا أستاذة/ة..... أنا سجلت طلب حضرتك وفى حد من الدعم الفنى هيتابع الشكوى، ولو مغيث أى تأخير من المصرية للاتصالات فى خلال 48 ساعة عمل هتكون الحرارة شغاله بصورة طبيعية عند حضرتك
--------	---

Siebel SR

Short Code	Type	Area	Owner Group	SLA	Product
39006	DSL Fault For Physical	Voice Problem	Data Tech Con Support-Physical	48 Whrs	ADSL

Escalation Matrix

- In case of exceeding SLA with no feedback from Technical team, Send email to (Consumer Support DSL-Physical team) to speed up the resolution and you will get a feedback within same working day except Friday & Saturday.

Script

Script

شقدم لحضرتك طلب استعجال وهينم الرد في اسرع وقت ممكن,, شكرا لتفهمك



 Ring Tone problem	 Line Feature (Caller ID, Waiting, .. etc)	 Interference	 Switched voice problem	 Stolen Cables
--	---	---	---	--



Handling

- In case the cable is still stolen and problem still exists:
 - Ask the customer to call us after solving the voice problem.
 - Create the below SR to confirm the stolen cable.

Script

Script	هسيانك حضرتك سابع مع العصرية للاتصالات لحل مشكلة الكابل ونشرفها بالاتصال مرة ثانية بعد رجوع الحرارة
--------	---

- In case the cable is back and problem solved:
 - Create the below SR in order to clarify the downtime duration.
- Agent should add in SR note that customer has line down due to Stolen Cable.

Script

Scenario	Script
In case of not exceeding SLA	في حد من الدعم الفني سابع التذكير ولو مفيش أي تأخير من العصرية للاتصالات في خلال 48 ساعة عمل من تاريخ تقديم الطلب شكوت الخدمة شفاه بصوره طبعه عند حضرتك هسيانك نسيت الراوتر موصول
In case of exceeding SLA	هقدم ل حضرتك طلب استعجال وهسيم الرد في اسرع وقت ممكن. شكرا لفهمك

Stebel SR

Short Code	Type	Area	Owner Group	SLA	Product
39004	DSL Fault For Physical	Line Down	Data Tech Con Support-Physical	48 Whrs	ADSL


Escalation Matrix

- In case of exceeding SLA, Send email to (Consumer Support DSL-Physical team) to speed up the resolution and you will get a feedback within same working day except Friday & Saturday.

Scenario	Handling
In case the customer has line down and no voice	Follow "No Voice" handling
In case of calling the customer and hearing a ring	It's not an indicator that the voice is working fine
Important note	It's not allowed to resolve any SR assigned to Data Tech Con Support-Physical team even if the customer problem is solved, except if the SR was created during global issues
	- Agents should check SR history for physical problems during 1 week, in case customer has repetitive issue in order to know the last step or the reason of the issue - Example: SR last feedback was (Change building cable, change router, etc..). - Example: SR last feedback long SLA related to (TE maintenance, etc..).

- For **No Voice** & **Noise** complaints verify with customer correct splitter wiring (splitter position according to the main phone line).

- For **No Voice** & **Noise** complaints verify with customer correct splitter wiring (splitter position according to the main phone line).

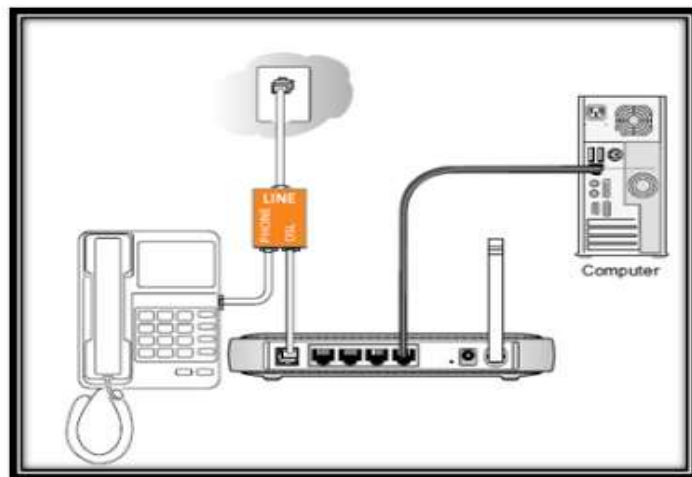

Solved



Not Solved



No Voice



Noise on Voice

- In case customer is complaining from physical issue in his/her voice service:
 - Agent should ask the customer if s/he has any due TE bills or recorded messages while using the voice service.
 - If Yes, agent should advise the customer to pay his /her due amount and call 16333 if the problem still exists after passing 24 hours from the payment.
 - In case customer doesn't know, agent can check TE unpaid bills through 140 Online for postpaid customers [Press Here](#) / My Fawry for Prepaid customers [Press Here](#) using  My Fawry.pptx guide.
 - In case agent found number is not existing or PIN code in 140 online:

Message Appears on 140 Online	Recorded Message & Handling	
برجاء مراجعة السنترال، رقم التليفون غير موجود	• Agent should call the customer on the land line. • In case agent hear one of the below recorded message :	
	• Your call cannot completed at dialed please check the number and dial again.	• This means that customer has 3 or more unpaid bills.
	• This number is not a working number please check the number you are calling.	• This means that customer has 3 or more unpaid bills.
	• This number is temporally out of service please call later.	• This means that customer has 2 unpaid bills.
	• Advise the customer to pay his/her due bills.	
In case customer has a Pin Code in 140 Online	• Agent will know from 140 online that the customer has a Pin code and can't view his/her due bills. • Agent should call the customer on the land line and will hear any of the above recorded messages.	




Solved



Not Solved



- Ask the customer to remove the splitter and attach the main phone line direct without splitter to the phone set.
- In case customer can't check his/her main wire due to using many plugs in the wall, agent should advise the customer to check from the first plug connected on the main wire.

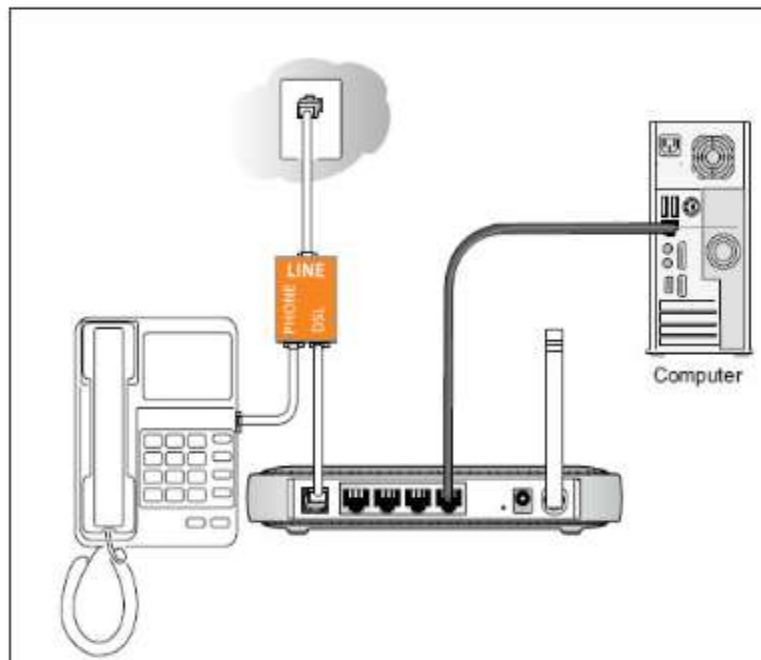

Solved



Not Solved



- Let customer connect everything back again with the splitter.
- Create the following Siebel SR:

Siebel SR:

Short Code	Type	Area	Owner Group	SLA	Product
39006	DSL Fault For Physical	Voice Problem	Data Tech Con Support-Physical	48 Whrs	• DSL-Candidate Account • DSL-Active Account

Script upon submitting the new SR:

Script	تمام يا أستاذة/..... أنا سجلت طلب حضرتك وفي حد من الدعم الفني هيتابع الشكوى، ولو مغيث أي تأخير من المصرية للاتصالات في خلال 48 ساعة عمل هتكون الحرارة شغاله بصورة طبيعية عند حضرتك
---------------	--

Script in case customer called asking for follow up:

Script	في حد من الدعم الفني بيتابع الشكوى، ولو مغيث أي تأخير من المصرية للاتصالات في خلال 48 ساعة عمل من تاريخ تقديم الطلب هتكون الخدمة شغاله بصورة طبيعية عند حضرتك هسأأذك نسيب الراوتر متوصل
---------------	---

Escalation Matrix

- In case exceeding SLA with no feedback on the SR, agent should Send mail to (Consumer Support DSL-Physical) to speed up the resolution. and feedback will be recieved within 1 WD.

Script:

Script

هقدم لحضرتك طلب استعجال وهيتم الرد في اسرع وقت ممكن.. شكرا لتفهمك



No Voice



Noise on Voice



- In case customer is complaining from **Noise** problem while using the phone line:
 - Ask the customer how many phone sets and Micro filters customer is using?
 - Ask the customer if s/he faces the noise on a specific phone set or all the phone sets?
 - Inform the customer to disconnect all the phone sets and keep only one connected.




Solved



Not Solved



- Ask the customer to remove the splitter and attach the main phone line direct without splitter to the phone set.
- In case customer can't check his/her main wire due to using many plugs in the wall, agent should advise the customer to check from the first plug connected on the main wire.

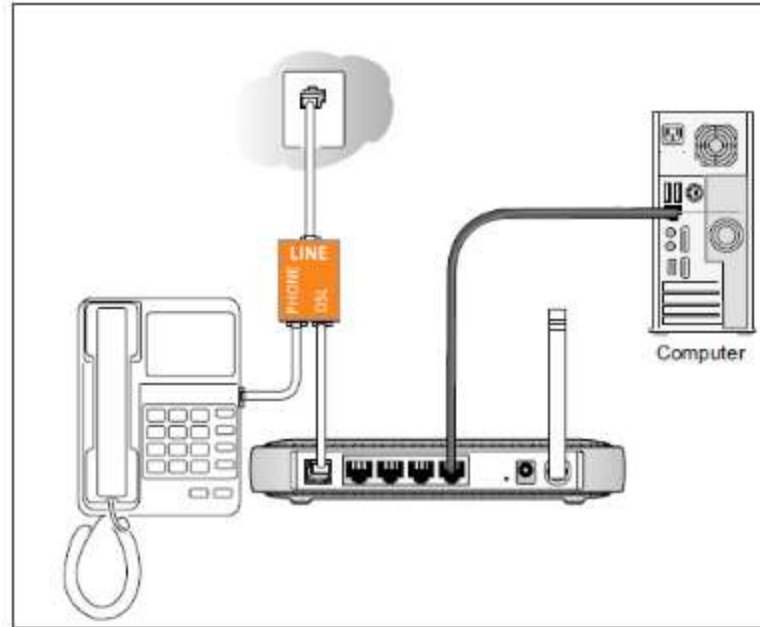

Solved



Not Solved



- Let customer connect everything back again with the splitter.
- Create the following Siebel SR:

Siebel SR:

Short Code	Type	Area	Owner Group	SLA	Product
39006	DSL Fault For Physical	Voice Problem	Data Tech Con Support-Physical	48 Whrs	• DSL-Candidate Account • DSL-Active Account

Script upon submitting the new SR:

Script	تمام يا أستاذة..... أنا سجلت طلب حضرتك وفي حد من الدعم الفني هيتابع الشكوى، ولو مغيث أي تأخير من المصرية للاتصالات في خلال 48 ساعة عمل هتكون الحرارة شغاله بصورة طبيعية عند حضرتك
--------	---

Script in case customer called asking for follow up:

Script	في حد من الدعم الفني بيتابع الشكوى، ولو مغيث أي تأخير من المصرية للاتصالات في خلال 48 ساعة عمل من تاريخ تقديم الطلب هتكون الخدمة شغاله بصورة طبيعية عند حضرتك هستأذذك نسيب الراوتر متوصل
--------	--

Escalation Matrix:

- In case exceeding SLA with no feedback on the SR, agent should Send mail to (Consumer Support DSL-Physical) to speed up the resolution. and feedback will be recieved within 1 WD.

Script:

Script	هقدم ل حضرتك طلب استعجال وهينم الرد في اسرع وقت ممكن،، شكرا لتفهمك
--------	--