


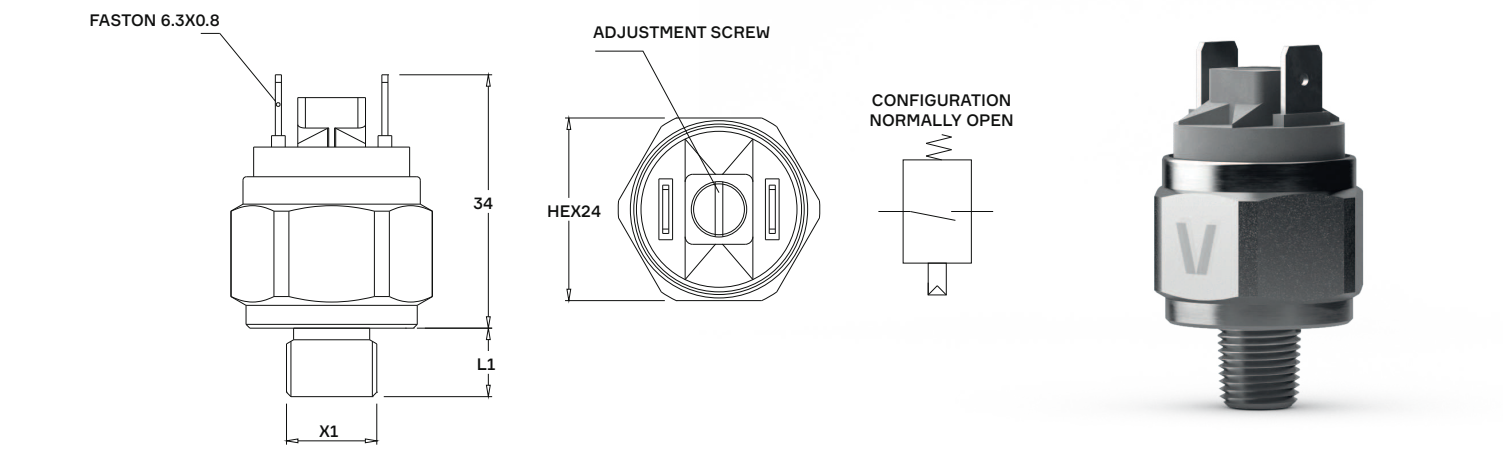

|                    |                   |         |                       |                                                  |                         |                           |                                                                          |
|--------------------|-------------------|---------|-----------------------|--------------------------------------------------|-------------------------|---------------------------|--------------------------------------------------------------------------|
| Overpressure limit | Brass - Diaphragm | 80 bar  | Operating temperature | See the guide to selection of diaphragms / seals |                         | Standard protection level | .F0 Faston Connection - IP00<br>* See the attachment caps and connectors |
|                    | Steel - Diaphragm | 300 bar |                       |                                                  |                         |                           |                                                                          |
| Working pressure   | Brass - Diaphragm | 40 bar  | Max Hysteresis        | Diaphragm version                                | 10% of full scale value |                           |                                                                          |
|                    | Steel - Diaphragm | 180 bar |                       |                                                  |                         |                           |                                                                          |

Select specifications for product coding

↓

|    |                                                                           |                                  |                                       |                                       |                                                                   |                                                          |                                                             |                              |                               |                                |          |
|----|---------------------------------------------------------------------------|----------------------------------|---------------------------------------|---------------------------------------|-------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------|------------------------------|-------------------------------|--------------------------------|----------|
| 1. | Setting Range                                                             |                                  |                                       |                                       |                                                                   |                                                          |                                                             | 01<br>Diaphragm<br>0.5-2 Bar | 02<br>Diaphragm<br>1-8 Bar    | 03<br>Diaphragm<br>5-40 Bar    |          |
| 2. | Electrical Load                                                           |                                  |                                       |                                       |                                                                   |                                                          |                                                             | 5<br>48V / 0,5 A             |                               |                                |          |
| 3. | Electrical Condition                                                      |                                  |                                       |                                       |                                                                   |                                                          |                                                             | A<br>Normally Open           |                               |                                |          |
| 4. | Housing Material                                                          |                                  |                                       |                                       |                                                                   |                                                          |                                                             | B<br>Brass                   | Z<br>Galvanized Steel         |                                |          |
| 5. | Seals                                                                     |                                  |                                       |                                       |                                                                   |                                                          |                                                             | H<br>HNBR                    | E<br>EPDM                     | S<br>MVQ<br>(silicone)         | V<br>FKM |
| 6. | Threads (X1)                                                              | 00<br>1/8"BSPT<br>L1 10 mm       | 01<br>1/4"BSPT<br>L1 12 mm            | 10<br>1/8"BSPP<br>L1 10 mm            | 11<br>1/4"BSPP<br>L1 12 mm                                        | 20<br>M10x1<br>L1 10 mm                                  | 21<br>M10x1K<br>L1 10 mm                                    | 23<br>M12x1.5<br>L1 12 mm    | 40<br>1/8"- 27NPT<br>L1 10 mm | 41<br>1/4" - 18NPT<br>L1 12 mm |          |
| 7. | Customizations<br><small>* See the attachment caps and connectors</small> | .F0<br>Faston Connection<br>IP00 | .01<br>Protection Cap<br>KT011 - IP54 | .02<br>Protection Cap<br>KT012 - IP65 | .97<br>Cable L. 250mm<br>Conn. AMP Superseal<br>1.5 2 ways - IP67 | .98<br>Cable L. 250mm<br>Conn. Deutsch<br>DT04-2P - IP67 | .99<br>Cable L. 250mm<br>Conn. Metri-Pack<br>(MP280) - IP67 | .XX<br>Costumized product    |                               |                                |          |
| 8. | Adjustments (bar)                                                         |                                  |                                       |                                       |                                                                   |                                                          |                                                             | S<br>Rising<br>Setup         | D<br>Falling<br>Setup         |                                |          |

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. |
|----|----|----|----|----|----|----|----|