

Smallest Clamp Meter capable of AC and DC current measurement.

Perfect Fit the Palm of Your Hand!



AC/DC 0.01A~300.0A


(Carrying case included)

- Designed to international safety standard IEC61010-1 CAT. Ⅲ 300V
- Minimum resolution of 0.01A AC/DC
- Capable of measuring AC and DC currents up to 300A
- Data hold function
- Auto-zero function to allow one touch zero adjustment
- Sleep function to save battery consumption
- 24mm-dia tear drop shaped jaws



KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.

Compact, truly portable and high performance digital AC/DC current mini clamp meter.

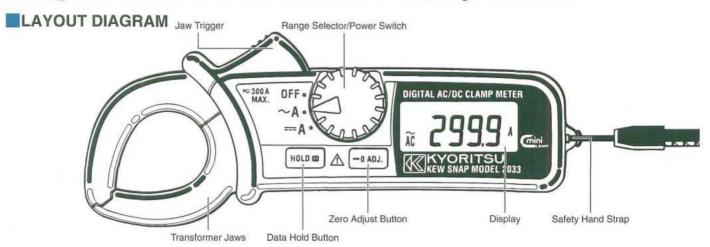

SPECIFICATIONS

●AC/DC Current Ranges (at 23±5°C,RH85% or less)

	Range	Measuring Range	Accuracy
AC Current (Auto Ranging)	40A	0~40.00A	±1.0%rdg±4dgt(50/60Hz) ±2.5%rdg±4dgt(20~1kHz)
	300A	20.0~ 200.0A	±1.5%rdg±4dgt(50/60Hz) ±2.5%rdg±4dgt(20~1kHz)
		200.0~ 300.0A	±3.5%rdg(50/60Hz) ±4.0%rdg(20~1kHz)
DC Current (Auto Ranging)	40A	0~±40.00A	±1.0%rdg±4dgt
	300A	±20.0~ ±200.0A	±1.5%rdg±4dgt
		±200.0~ ±300.0A	±3.0%rdg

Maximum Circuit Voltage	300V AC	
Withstand Voltage	3700V AC for 1 minute	
Response Time	Approx.2 seconds	
Conductor Size	Approx. φ 24mm	
Safety Standard	IEC61010-1 CAT.Ⅲ 300V Pollution Degree2 IEC61010-2-032	
Dimensions	147(L)×59(W)×25(D)mm	
Weight	Approx.100g(batteries included)	
Power Source	1.5V button cell×2 type LR-44 or SR-44	
Accessories	Two LR-44 button cell Carring Case Model 9090 Instruction Manual	
Options	Model 8004,8008(Multi Trans) ★These Multi-Trans can not be used for DC current measurement. Model 8021(Energizer)	

Miniature Clamp Meter Series AC LEAKAGE MINI CLAMP METER AC MINI CLAMP METER KEW SNAP KEW SNAP 20mA/200mA/200A AC 20A/200A AC **MODEL 2431 MODEL 2031** φ24 \$24 FEATURES **FEATURES** Freguency Selector Switch to eliminate the effect of harmonics. Data hold function. Designed to International safety standard IEC61010-1 CAT.II 300V. Data hold function. Auto power-off function. · Auto power-off function. 147(L)×58.5(W)×26(D)mm 149(L)×60(W)×26(D)mm Dimensions Weight Approx.120g(batteries included) Approx.100g(batteries included) Power Source 1.5V button cell × 2 type LR-44 Power Source 1.5V button cell ×2 type LR-44

/!\ Safety Warnings

Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and

completely for correct use.

Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

*The contents of this catalogue may be subject to change without notice.

DISTRIBUTOR



KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.

No.5-20 Nakane 2-chome, Meguro-ku, Tokyo, 152-0031 Japan Phone:(03)3723-0131 Telex:0246-6703 Fax:(03)3723-0152 E-Mail:kew@sh0.po.iijnet.or.jp Cable Address: "KYORITSUKEIKI" TOKYO