MEASURE WITH PRECISION

www.sew.com.tw

5F., NO.105, Jhongcheng Rd., Tucheng Dist.,
New Taipei City 23674, Taiwan (R.O.C.)
TEL: 886-2-22681528
FAX: 886-2-22681529
e-mail: sales@sew.com.tw

SEW

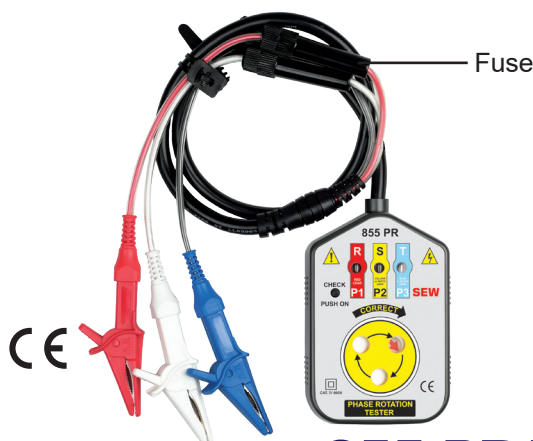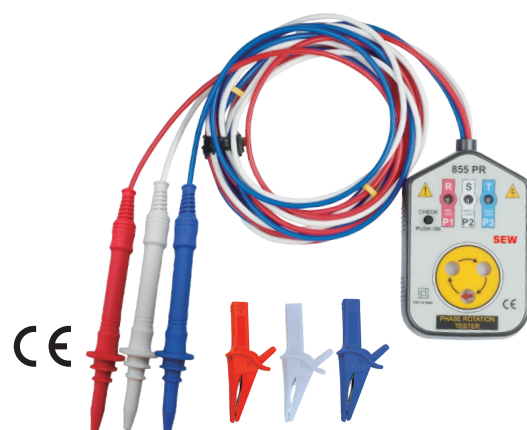# Phase Sequence Indicator(Contact Type)

ST-850

855 PR

FEATURES

● Two functions in one unit: open phase and phase sequence detection
● Lamps indicate at-a-glance if phase is open
● Large alligator clips for easy attachment to switch board terminals
● Checks a wide range of 3-phase power sources
● Special test lead lengths available on request
● Rugged push button switch designed to minimize damage due to heavy use

SPECIFICATIONS

	ST-850	855 PR
Voltage	90V-600V AC	200V-600V AC
Frequency response	50 / 60 Hz	50 / 60 Hz
Operating temperature & humidity	0°C ~ 40°C at 80% Max. relative humidity	
Storage temperature & humidity	-10°C ~ 50°C at 90% Max. relative humidity	
Cord	1.1m each of red(R), white(S) and black(T) cord	
Dimensions	134(L) × 85(W) × 45(D)mm	
Weight	Approx. 510g	Approx. 530g
Safety standard	IEC 1010 CAT II 600V	EN 61010-1 CAT Ⅳ 600V EN 61326-1
Accessories	Instruction manual Soft pouch	

Fuse

855 PRB

...cone wire 2m + Fuse + Alligator(AL-25 CA)
...61010-1 CAT Ⅳ 600V
...61326-1