
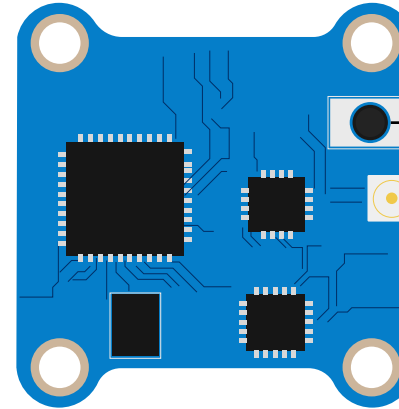


# SucceX-MICRO(M3)

## Pinout

+5V	+5V
GND	VIDEO
GND	AUDIO
GND	RX
GND	TX

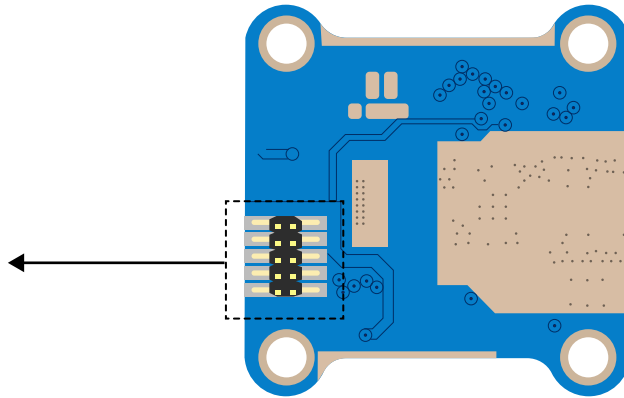

Button

## LED Indicator and Function Button

Long press to switch between the menu, short press to change the setting.

### VTX Menu

Long press Button  
for 2s

**BLUE (Channel):** The LED flashes  
indicate the channel 1 to 8. Short press  
to switch Channel.

Long press Button  
for 2s

**GREEN (Band):** The LED flashes  
indicate the Band A to L. Short press  
to switch Band.

Long press Button  
for 2s

**RED (Output Power):** The LED flashes  
indicate the VTX output power . 1=25mW,  
2=100mW,3=200mW. Short press to  
change output power.

## Frequency Table

Note: Antennas must be installed BEFORE powering on.  
The VTX can be damaged when using without proper cooling.

BAND	CHANNEL							
	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
A	5865M	5845M	5825M	5805M	5785M	5765M	5745M	5725M
B	5733M	5752M	5771M	5790M	5809M	5828M	5847M	5866M
E	5705M	5685M	5665M	5645M	5885M	5905M	5925M	5945M
F	5740M	5760M	5780M	5800M	5820M	5840M	5860M	5880M
R	5658M	5695M	5732M	5769M	5806M	5843M	5880M	5917M
L	5362M	5399M	5436M	5473M	5510M	5547M	5584M	5621M