iFlight BLITZ MINI F745 Instructions

Parameters:

MCU: STM32F745
Gyro: ICM42688
Baro: DPS310
OSD: AT7456E
BEC: Output 5V 2.5A continuous output current, 3A peak current (15 seconds)
BlackBox: 16MB
Uart: 6*UART(UART1、UART2、UART3、UART4、UART5、UART6)
UART1 for VTX HD/Analog
UART2 for Receiver
UART3、UART4、UART5 for GPS or Other devices that require serial ports
UART6 for ESC Telemetry
4×Dshot/PWM outputs
1×I2C
1xSH1.0 9pin connector for HD VTX/Analog VTX&CAM（5V/BAT/G/VO/T1/R1/5V/G/VI)
1xSH1.0 8pin connector for ESC（R6/CUR/M4/M3/M2/M1//BAT/G)
1xSH1.0 6pin connector for Any Receiver or DJI（3V3/R2/5V /G/R2/T2)
1xSH1.0 4pin connector GPS（T4/R4/G/5V)
1xSH1.0 4pin connector LED&Beeper（BUZ-/LED/G/5V)
4×0402 LEDs for FC STATUS (3.3V Red) / (Start Blue) / (5V Green) / (BAT Orange)
Smartaudio&IRCTramp VTX protocol supported
WS2812ledStrip: Yes
Beeper: Yes
Dimensions: 30.5*27mm
Mounting hole: 20*20mm/φ4
Weight: 4.8g

Firmware target:
Betaflight: IFLIGHT_BLITZ_F7_AIO
INAV: /
Ardupilot: arduplane_with_bl

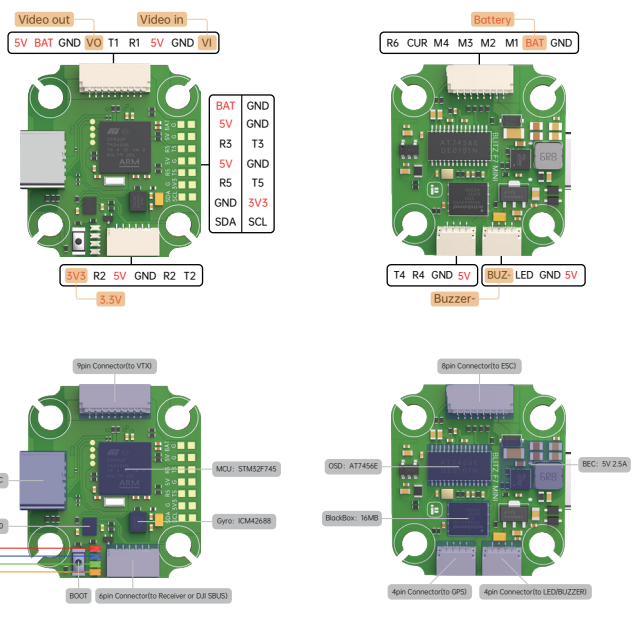

DJI Digital Transmiters: SUBS Protocol

FC plug&play port and setup
compatible to DJI Air Unit and Caddx Vista

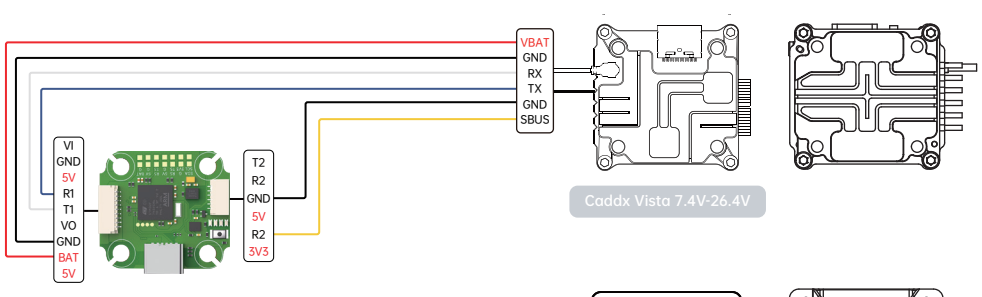

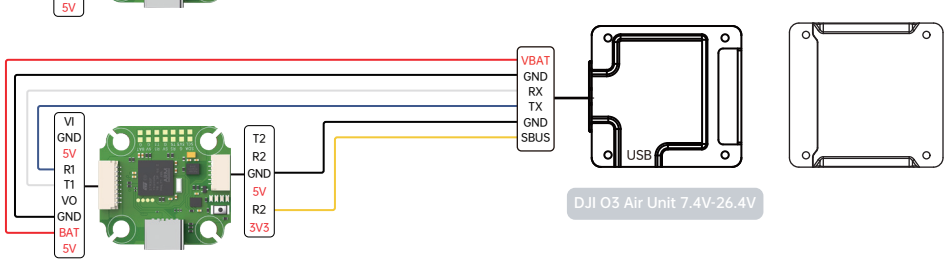

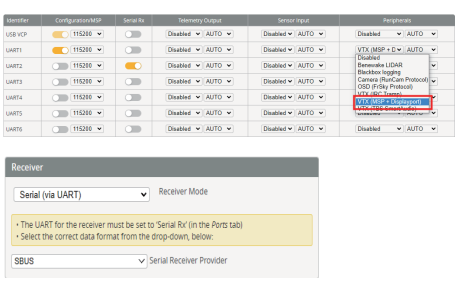

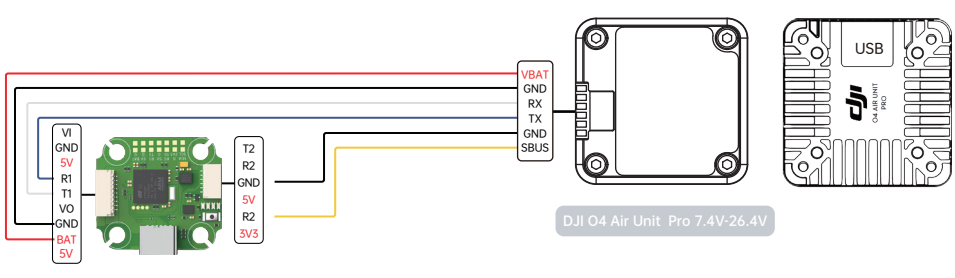

- To enable the air unit OSD under Betaflight 4.4 version, you need to select VTX (MSP+Displayport) in the peripheral port where the air unit signal is connected to the port interface.
- Please check your protocols, otherwise your DJI Radio won't input signals!
  DJI Goggle protocol and Betaflight protocol has to match!
  For lower signallatency use the SBUS BAUD_FAST protocol option on both ends.
- For Betafllght Copy Paste"set sbus_baud_fast=on"into your Beataflight Configurator CLI then hit enter.
  Use"save"and hit enter to save the changes.
  Default: sbus_baud_fast=off, Goggle protocol set to NORMAL

Others Receivers(TBS/ELRS): CRSF Protocol

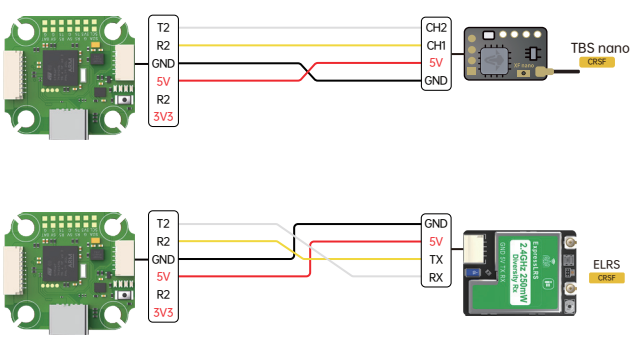

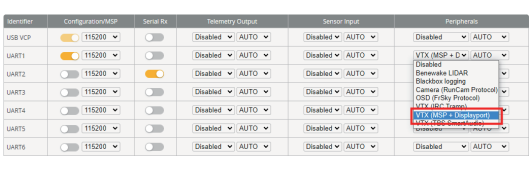

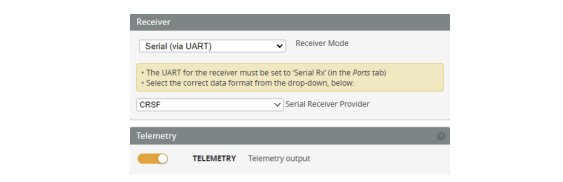

VTX/CAM

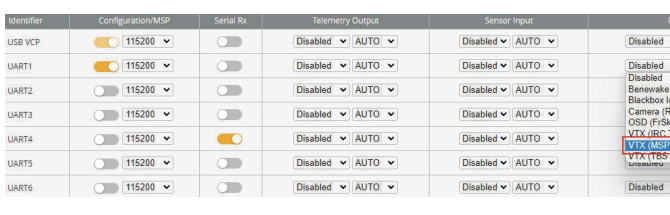

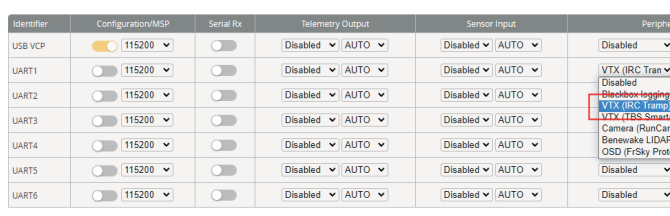

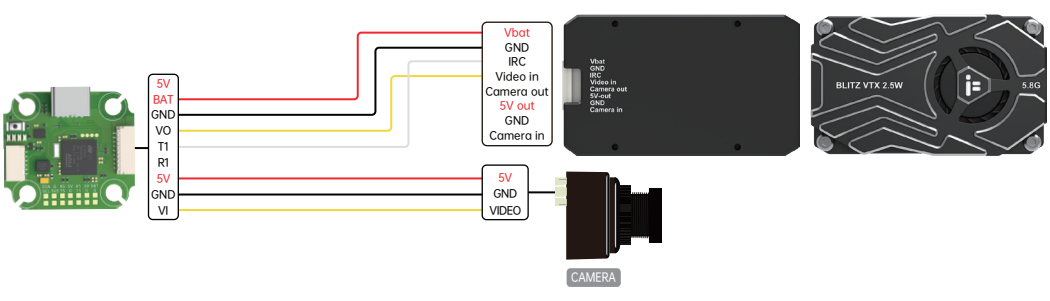

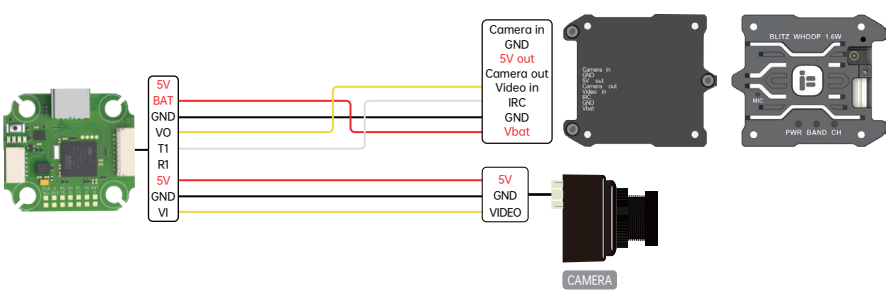

LED/BUZZER

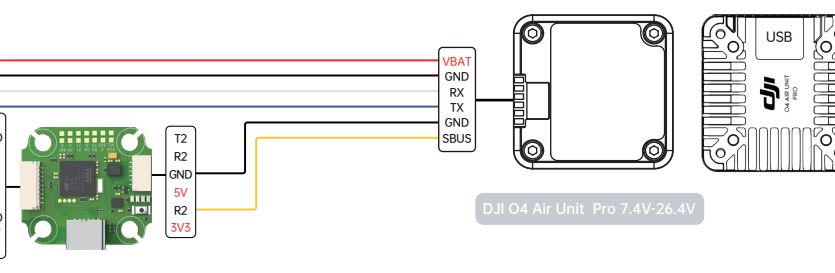

ESC

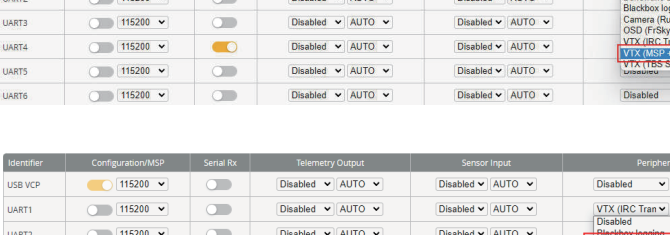

Anti-Spark filter

GPS

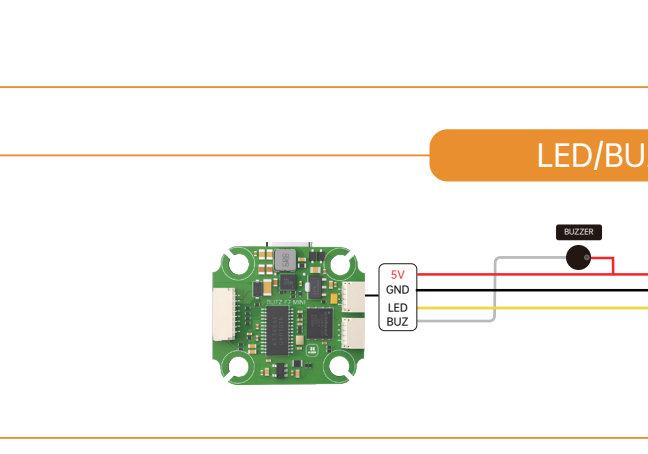

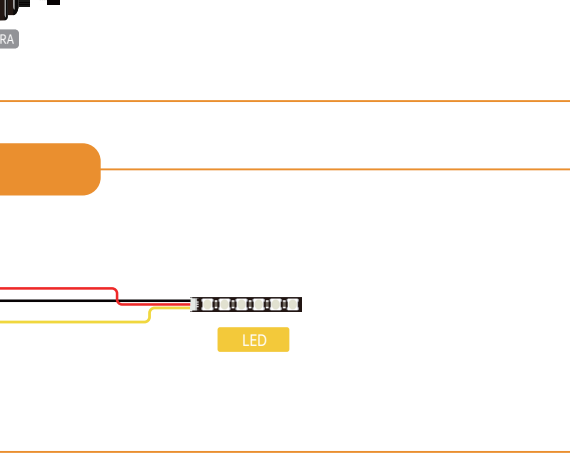
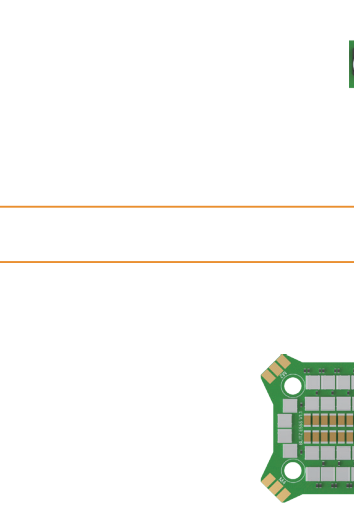
Dimensions/Mounting pattern