

تم تعديل وإعادة تصميم قطع الوصل وجعل المفصل الأوسط ملائم لتركيب محرك MG995

31150-MP

MG995 High Speed Servo Actuator

The unit comes complete with color coded 30cm wire leads with a 3 X 1 pin 0.1" Pitch type female header connector that matches most receivers, including Futaba, JR, GWS, Cirrus, Blue Bird, Blue Arrow, Corona, Berg, Spektrum and Hitec.


This high-speed servo actuator is not code dependant; You can use any servo code, hardware or library to control them. The MG995 Actuator includes arms and hardware to get started.

Specifications

- Weight: 55 g
- Dimension: 40.7 x 19.7 x 42.9 mm approx.
- Stall torque: 8.5 kgf-cm (4.8 V), 10 kgf-cm (6 V)
- Rotation Angle: 120deg. (+- 60 from center)
- Operating speed: 0.2 s/60° (4.8 V), 0.16 s/60° (6 V)
- Operating voltage: 4.8 V to 7.2 V
- Dead band width: 5 µs
- Stable and shock proof double ball bearing design
- Metal Gears for longer life
- Temperature range: 0 °C – 55 °C



mg995

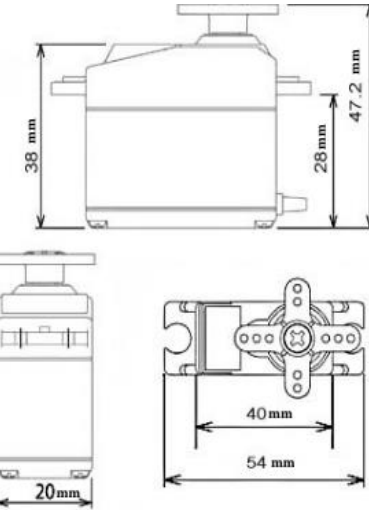

تم تصميم المحرك بشكل تقريبي وفق الأبعاد المعطاة

تم اختياره بسبب خفة الوزن إذ يزن 55 غرام مقارنة بـ 163 غرام وزن محرك LD-260MG

بالإضافة إلى قلة تكلفته وصغر حجمه