



(54) **TRANSMISSION CONFIGURATION INDICATOR STATE SELECTION FOR REFERENCE SIGNALS IN MULTI TRANSMISSION AND RECEPTION POINT OPERATION**

Publication Classification

(51) **Int. Cl.**
H04L 5/00 (2006.01)
H04B 7/06 (2006.01)
H04L 27/26 (2006.01)
(52) **U.S. Cl.**
CPC *H04L 5/0048* (2013.01); *H04B 7/0626* (2013.01); *H04L 27/261* (2013.01)

(71) Applicant: **QUALCOMM Incorporated**, San Diego, CA (US)

(72) Inventors: **Fang YUAN**, Beijing (CN); **Yan ZHOU**, San Diego, CA (US); **Tao LUO**, San Diego, CA (US)

(21) Appl. No.: **18/862,483**

(22) PCT Filed: **Jun. 29, 2022**


(86) PCT No.: **PCT/CN2022/102179**

§ 371 (c)(1),

(2) Date: **Nov. 1, 2024**

(57) **ABSTRACT**

Methods, systems, and devices for wireless communications are described. In multi transmission and reception point (TRP) operation, a user equipment (UE) may communicate with the network via two or more TRPs. Each TRP may be associated with a transmission configuration indicator (TCI) state, which may be indicated by the network to the UE. A UE that has established a communication link with the network via two or more TRPs may receive scheduling information for a set of reference signals (e.g., sounding reference signals or channel state information reference signals). The UE may identify a TCI state to apply to each reference signal of the set of reference signals, and then communicate with the network according to the respective TCI state identified for each reference signal of the set of signals.

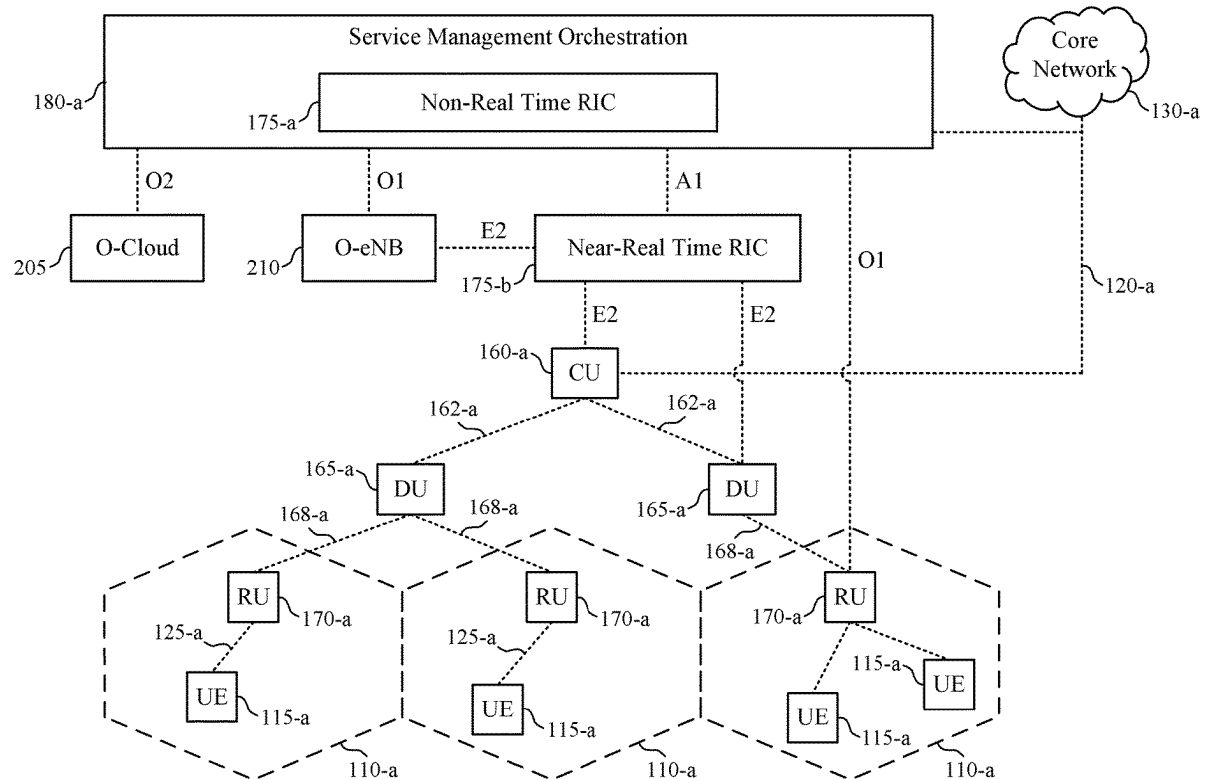

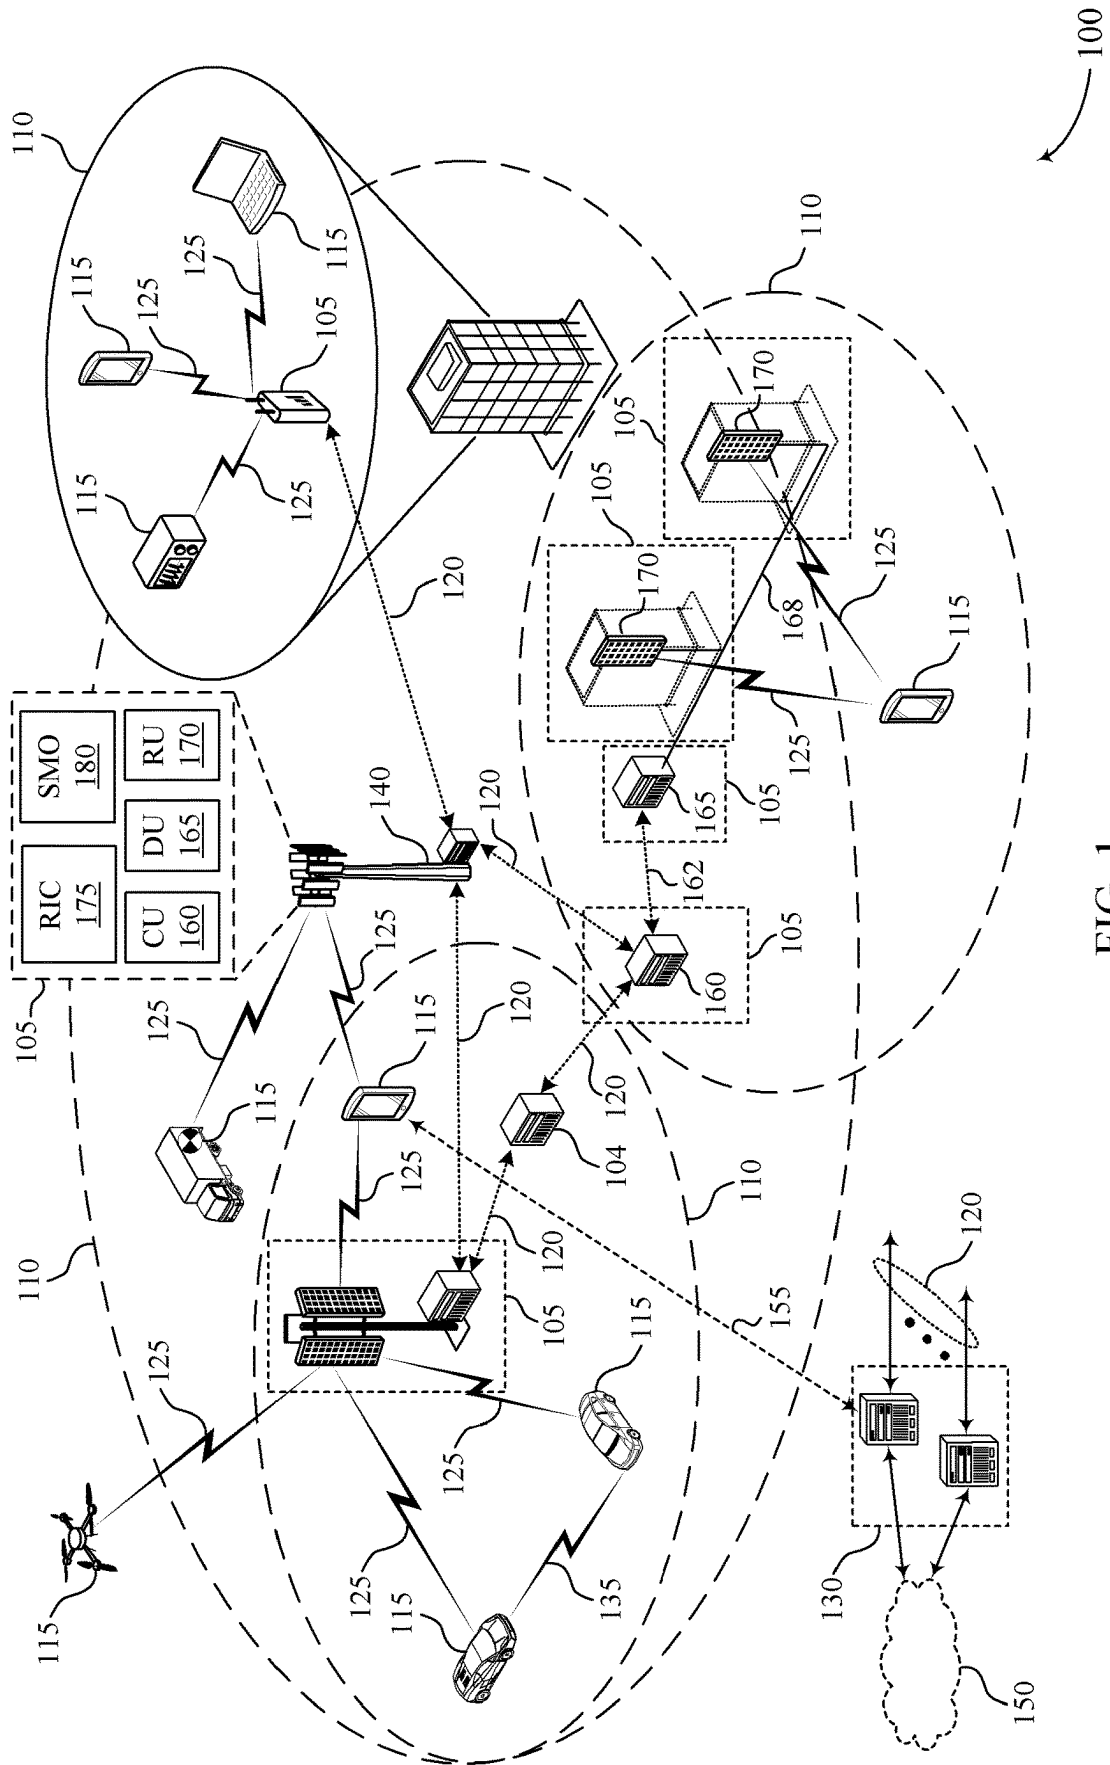


FIG. 1

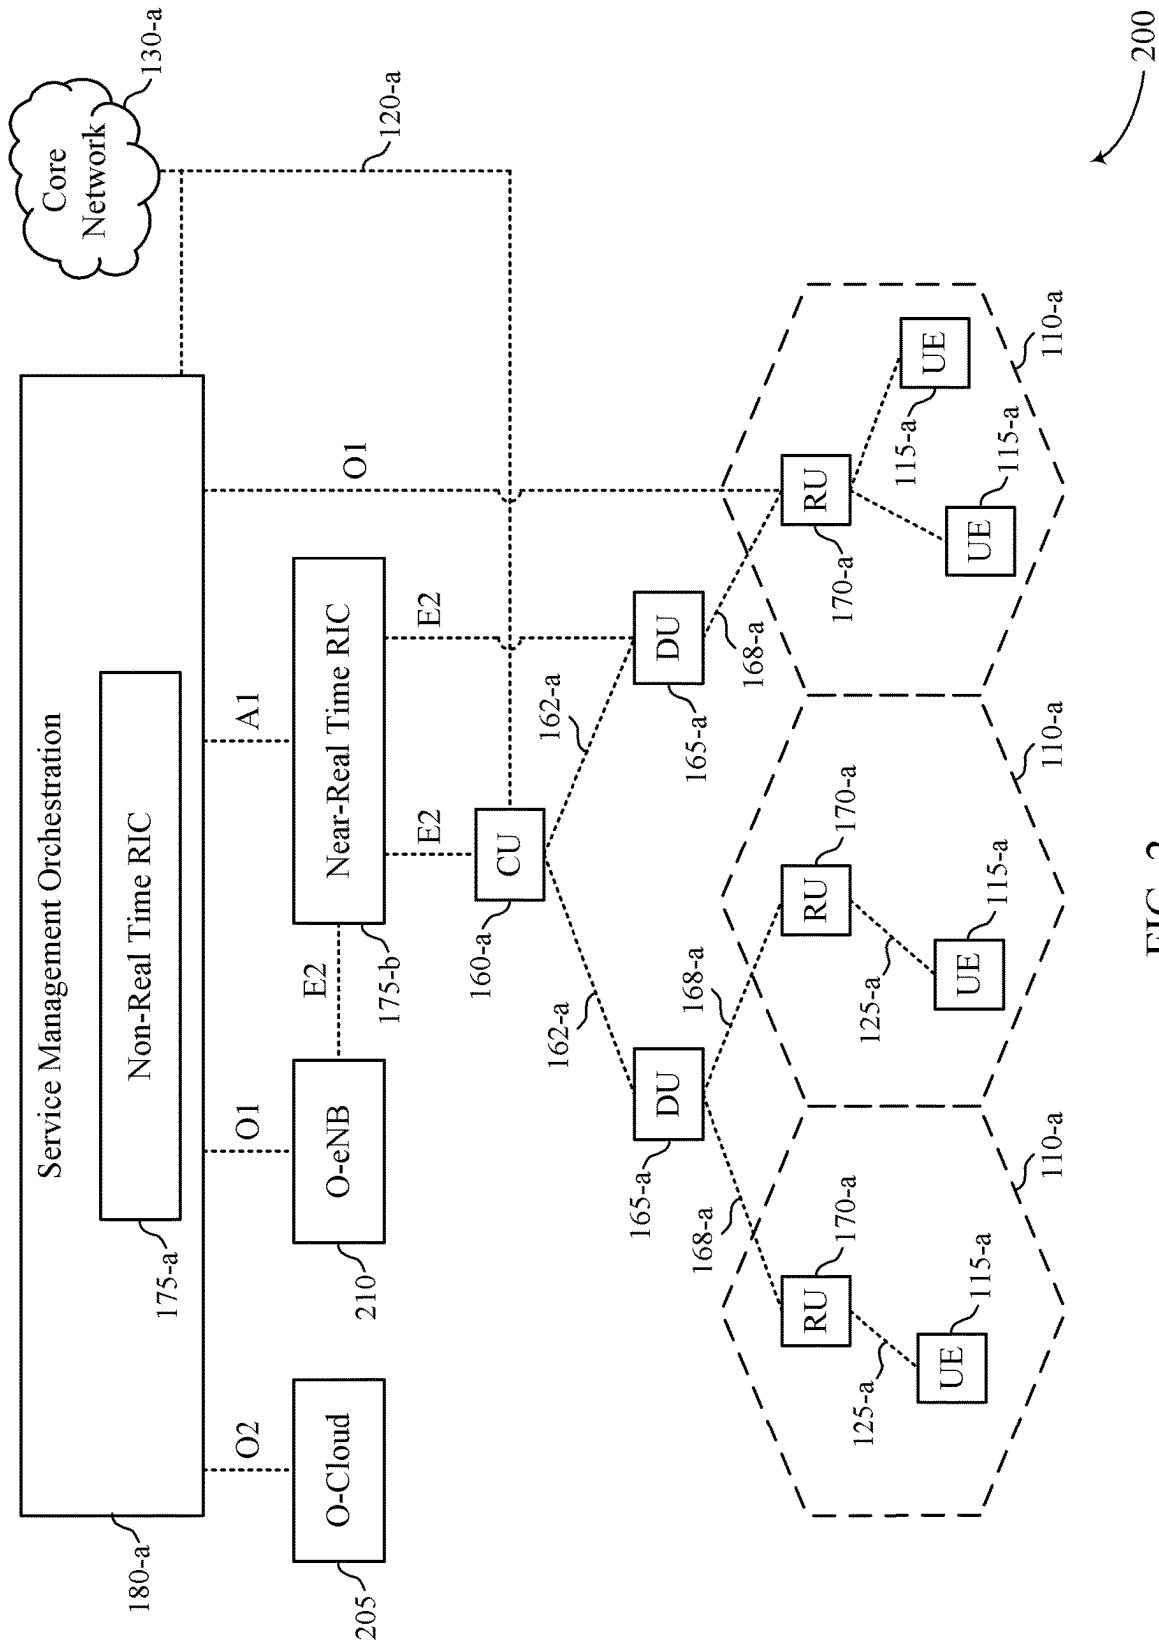


FIG. 2

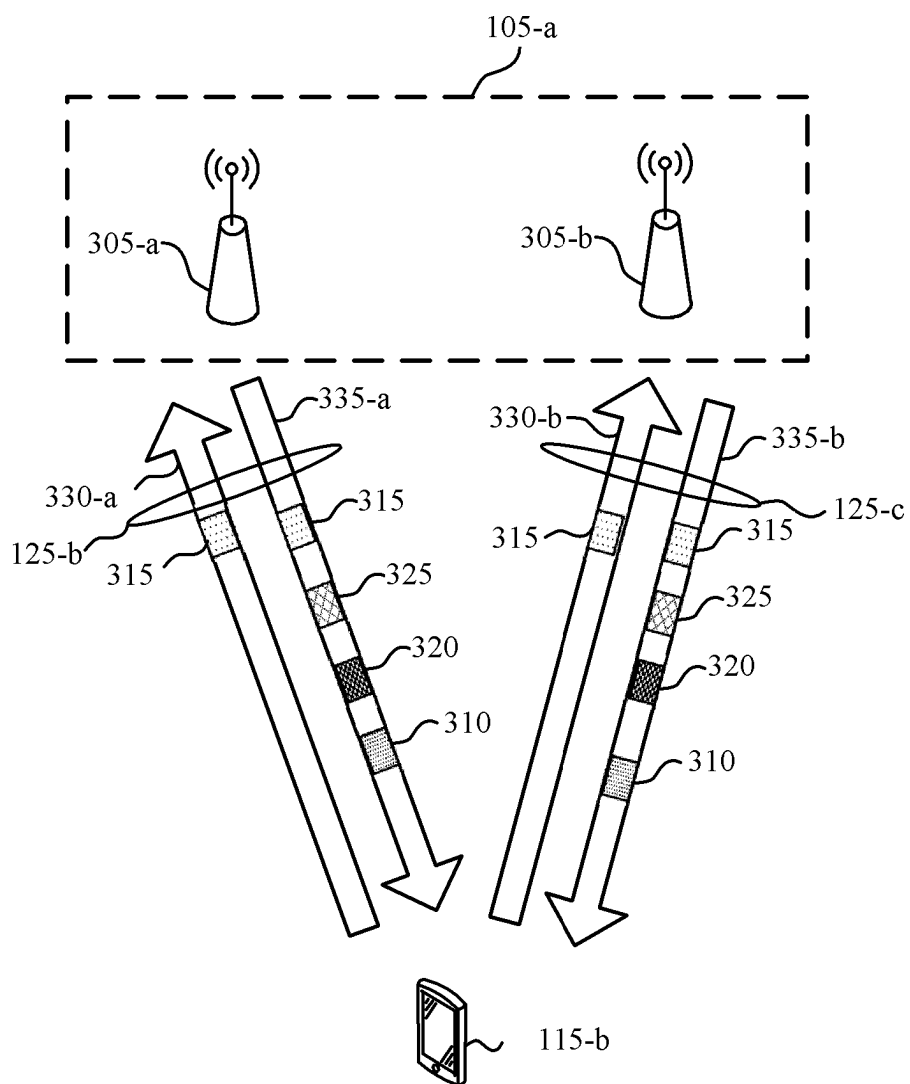


FIG. 3

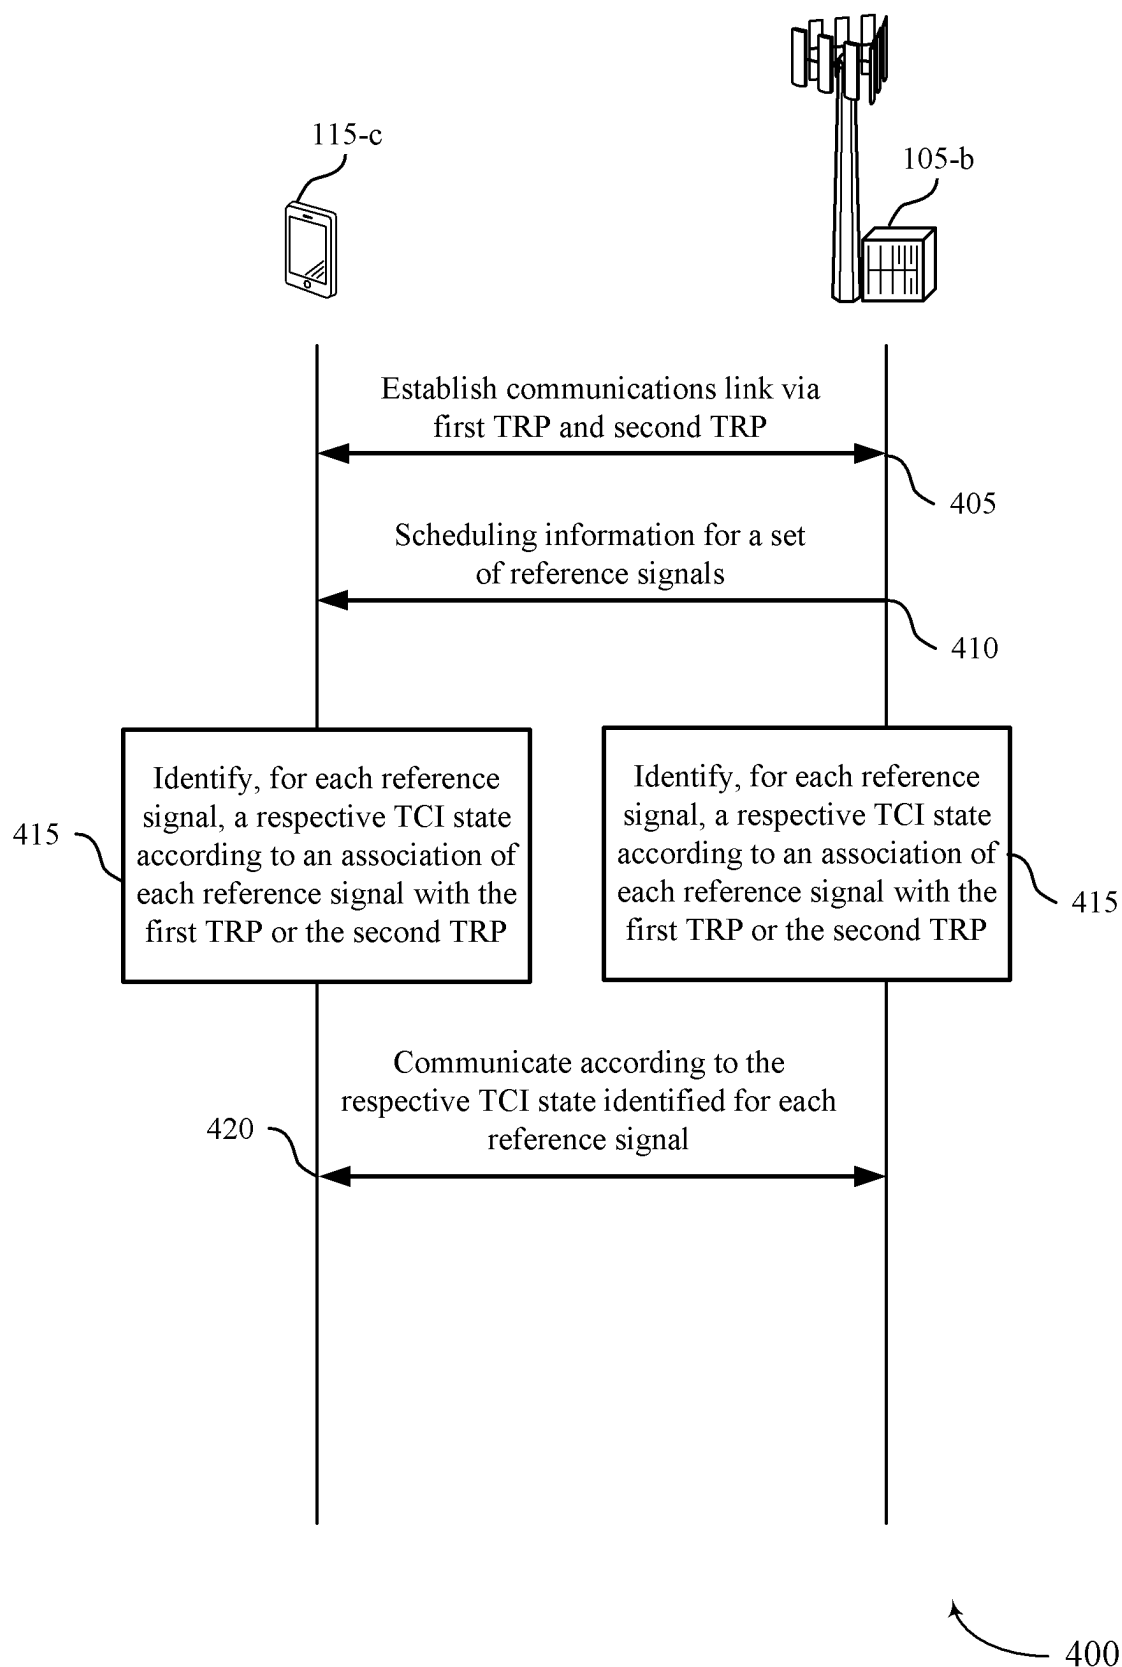


FIG. 4

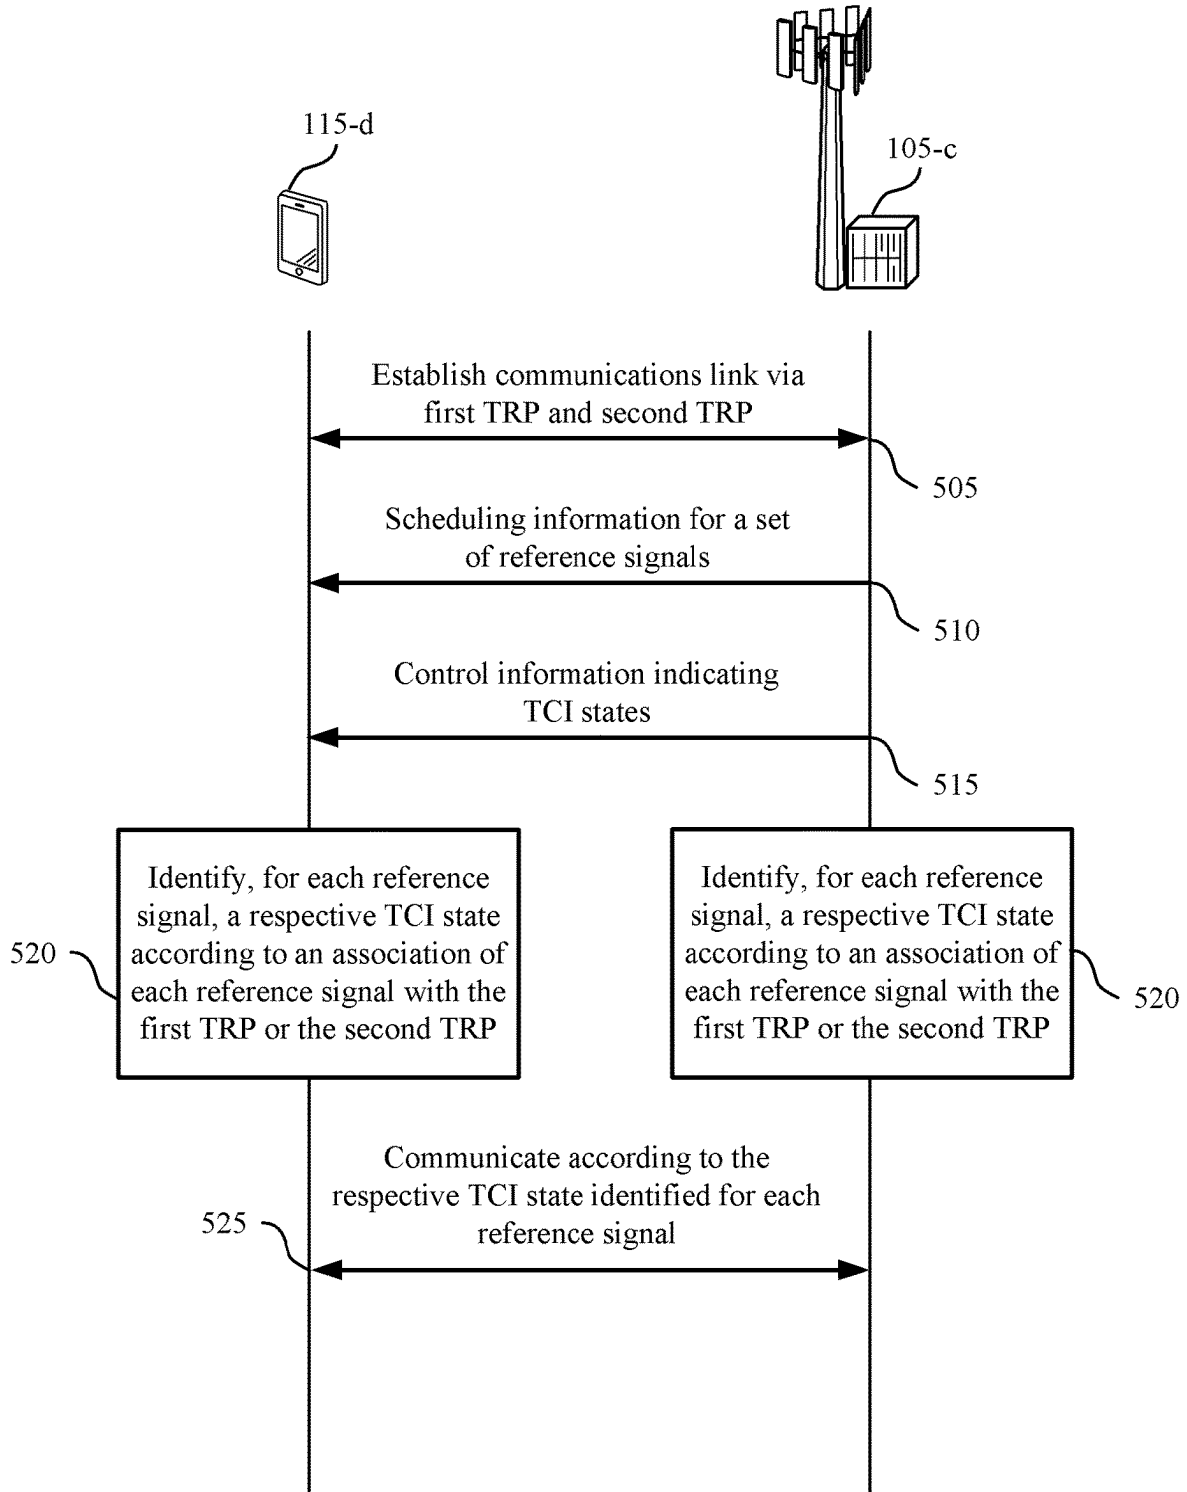


FIG. 5

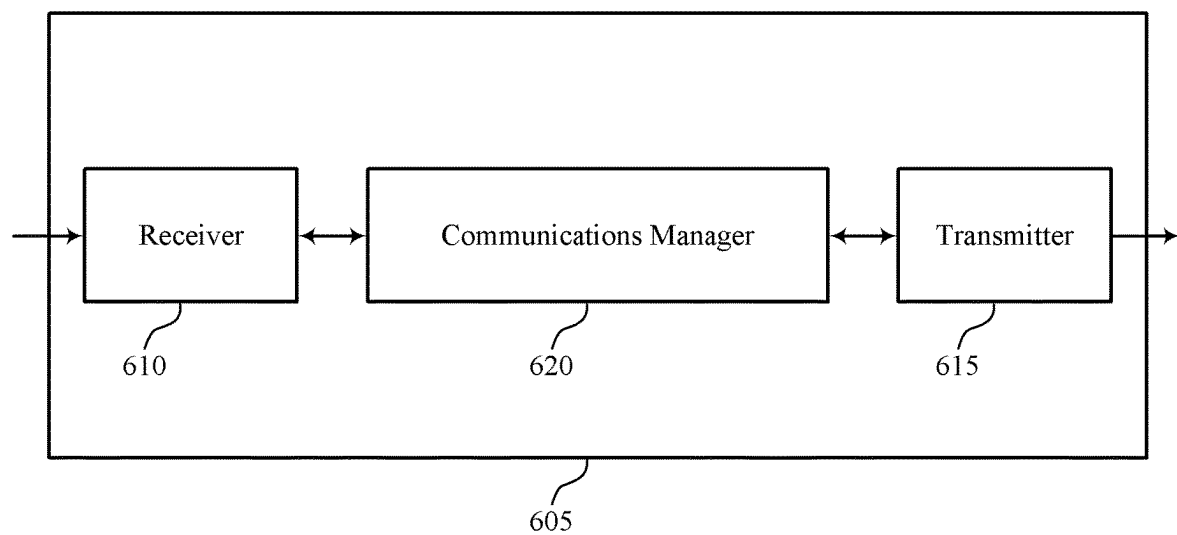


FIG. 6

600

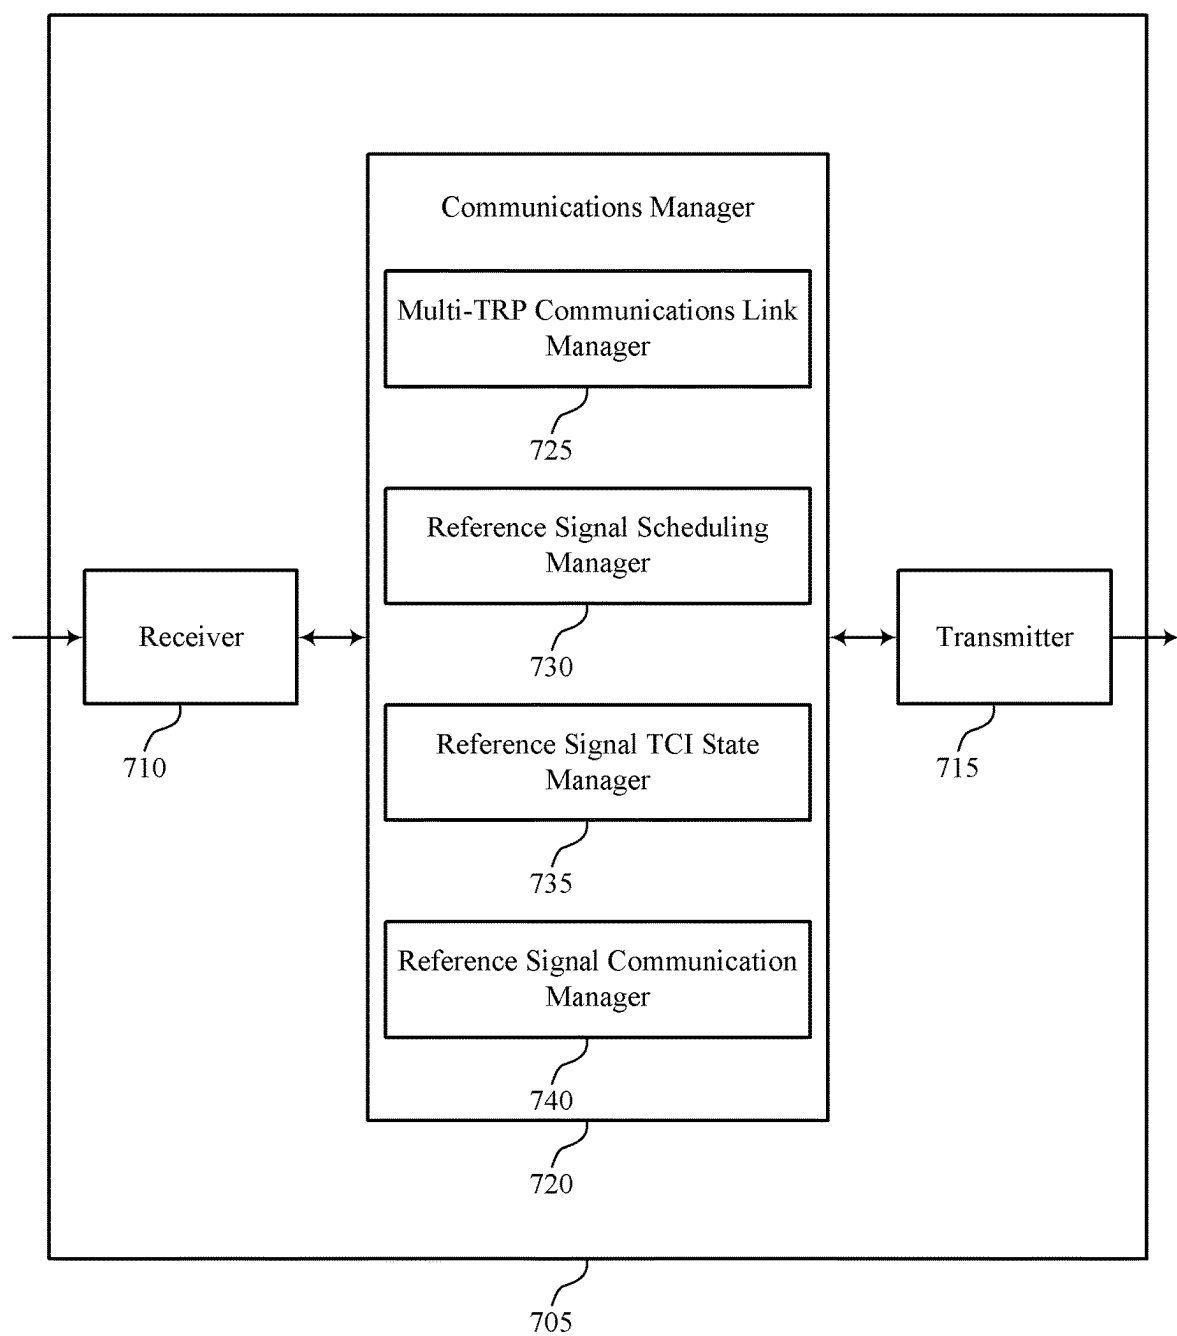


FIG. 7

700

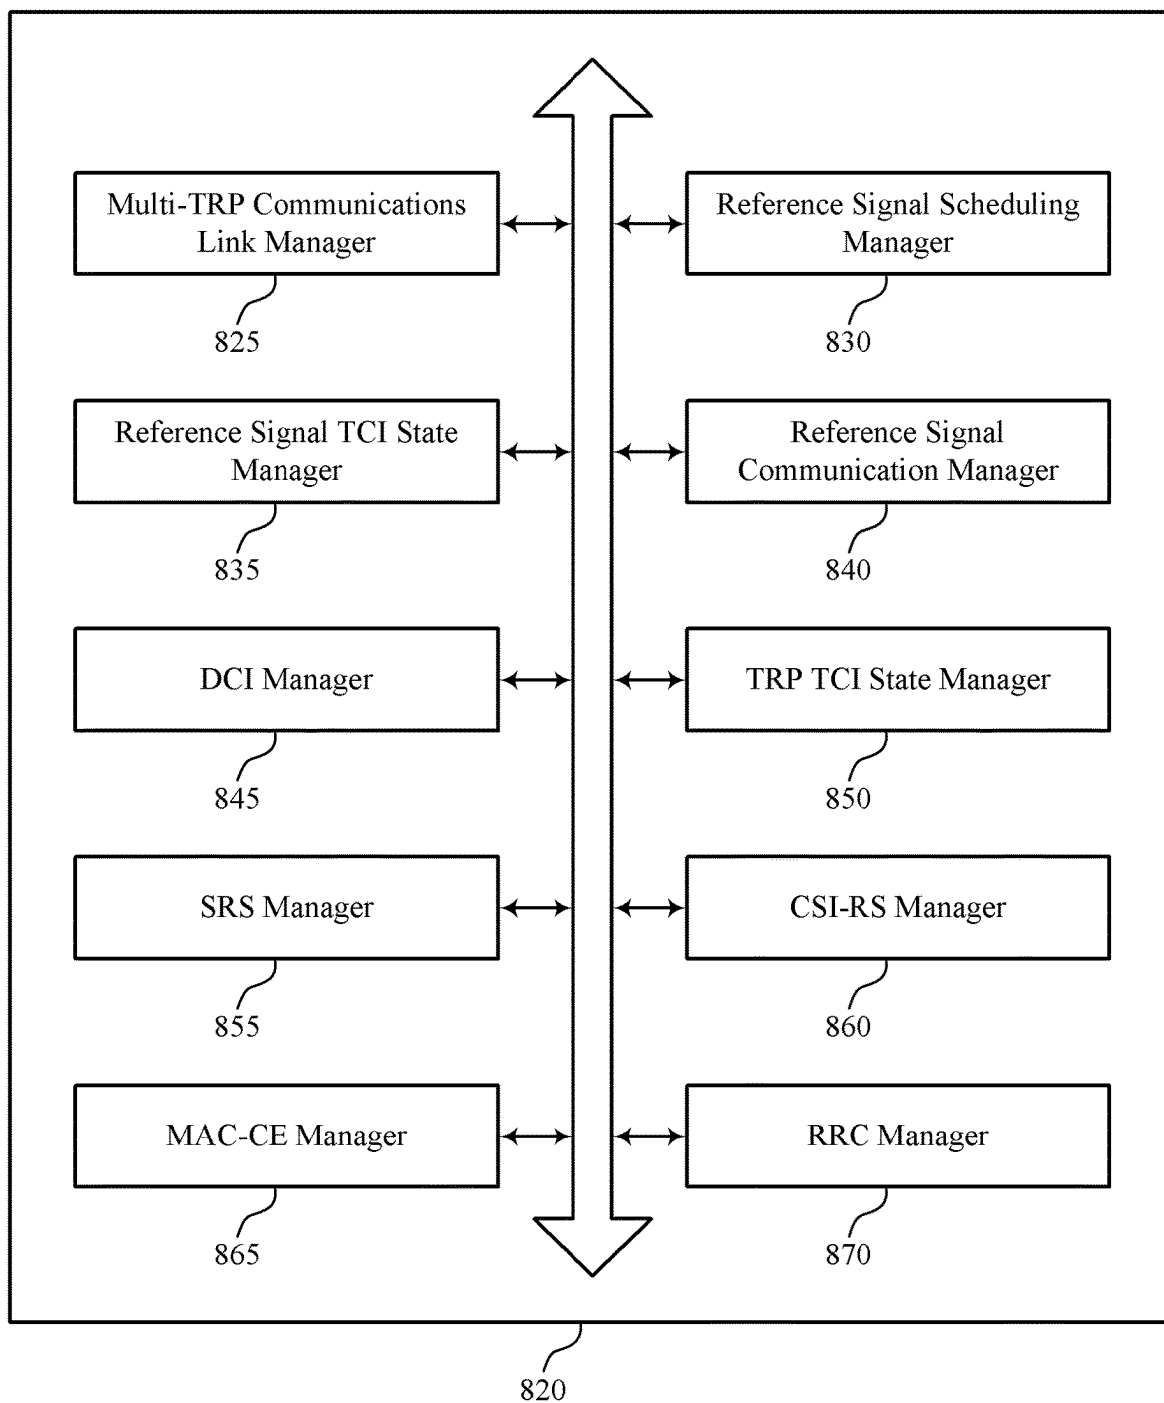


FIG. 8

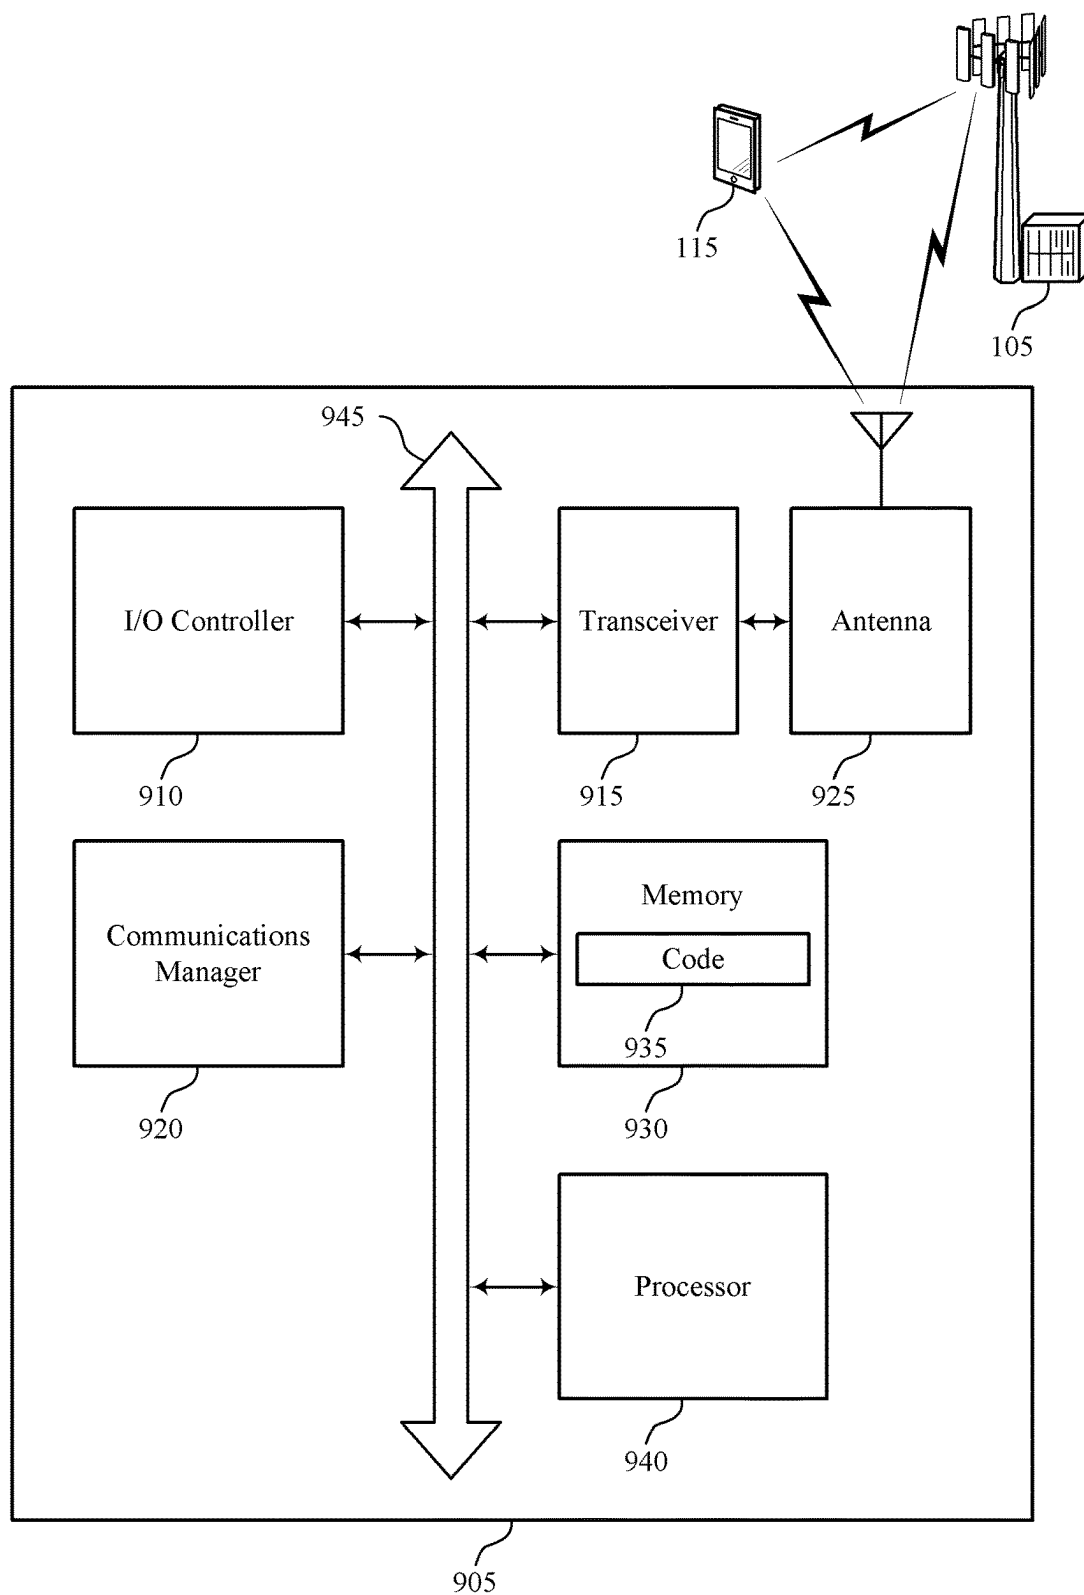


FIG. 9

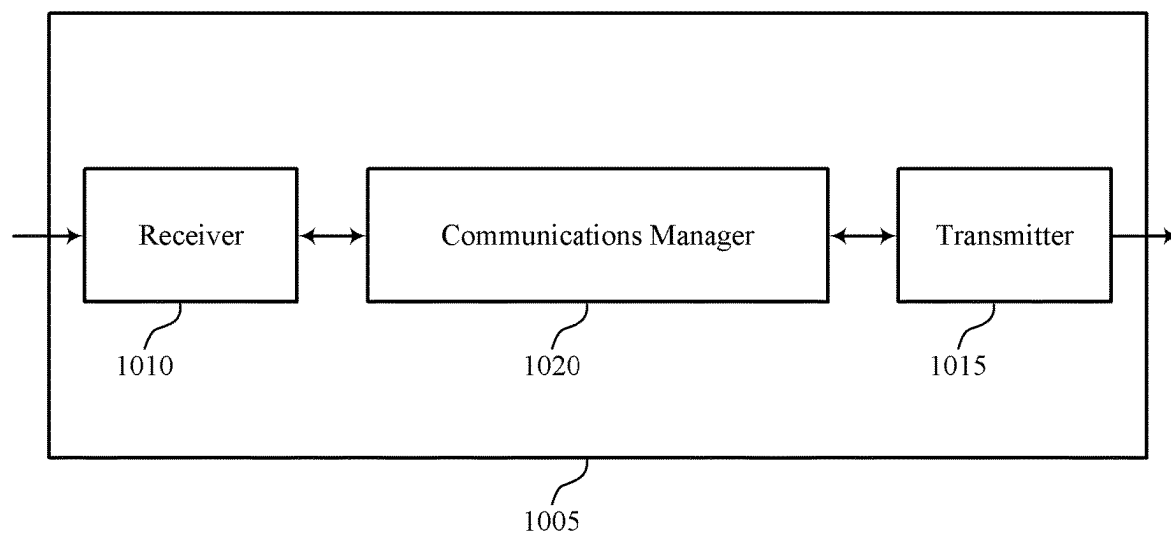


FIG. 10

1000

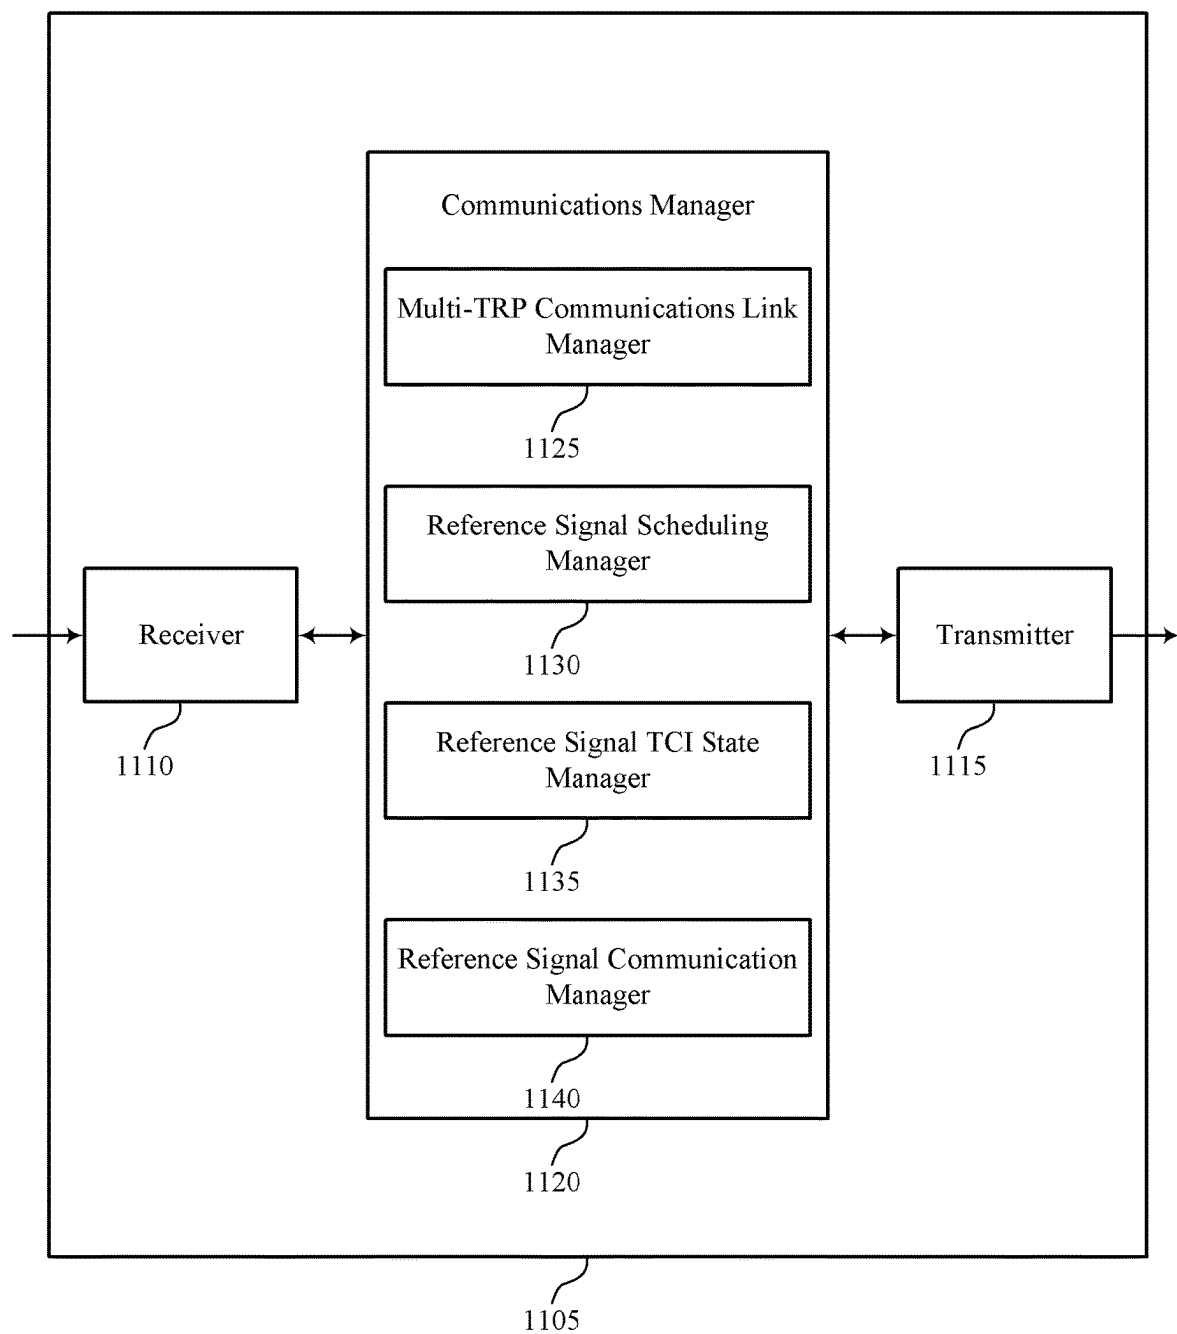


FIG. 11

1100

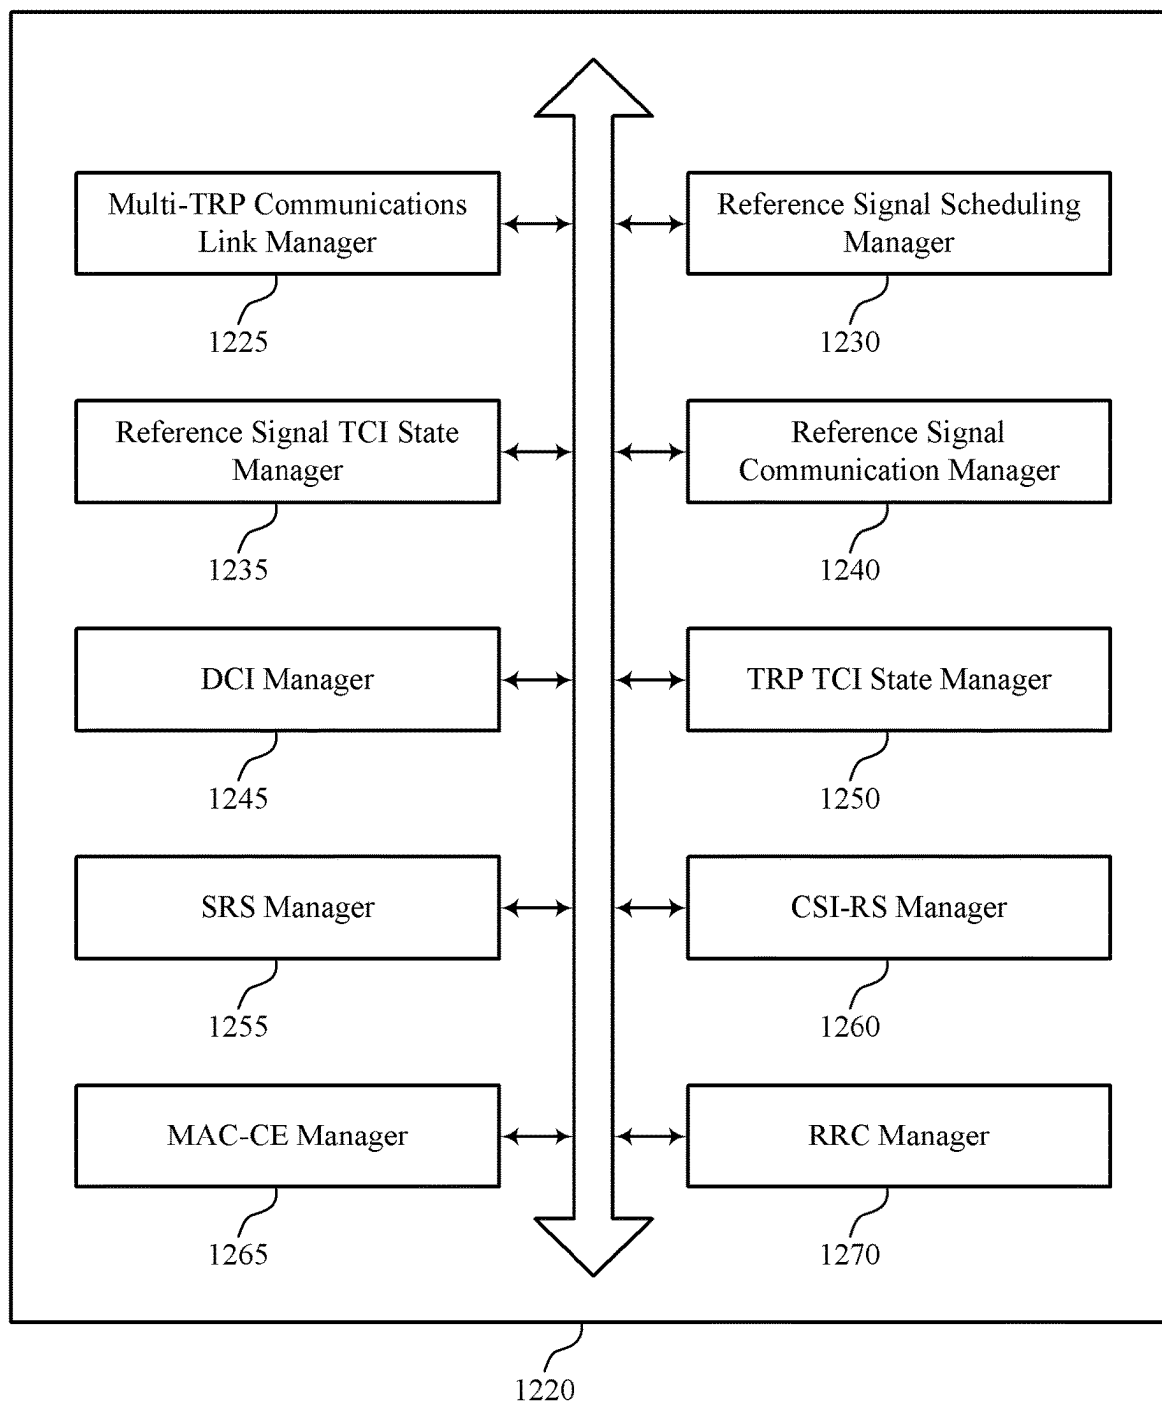


FIG. 12

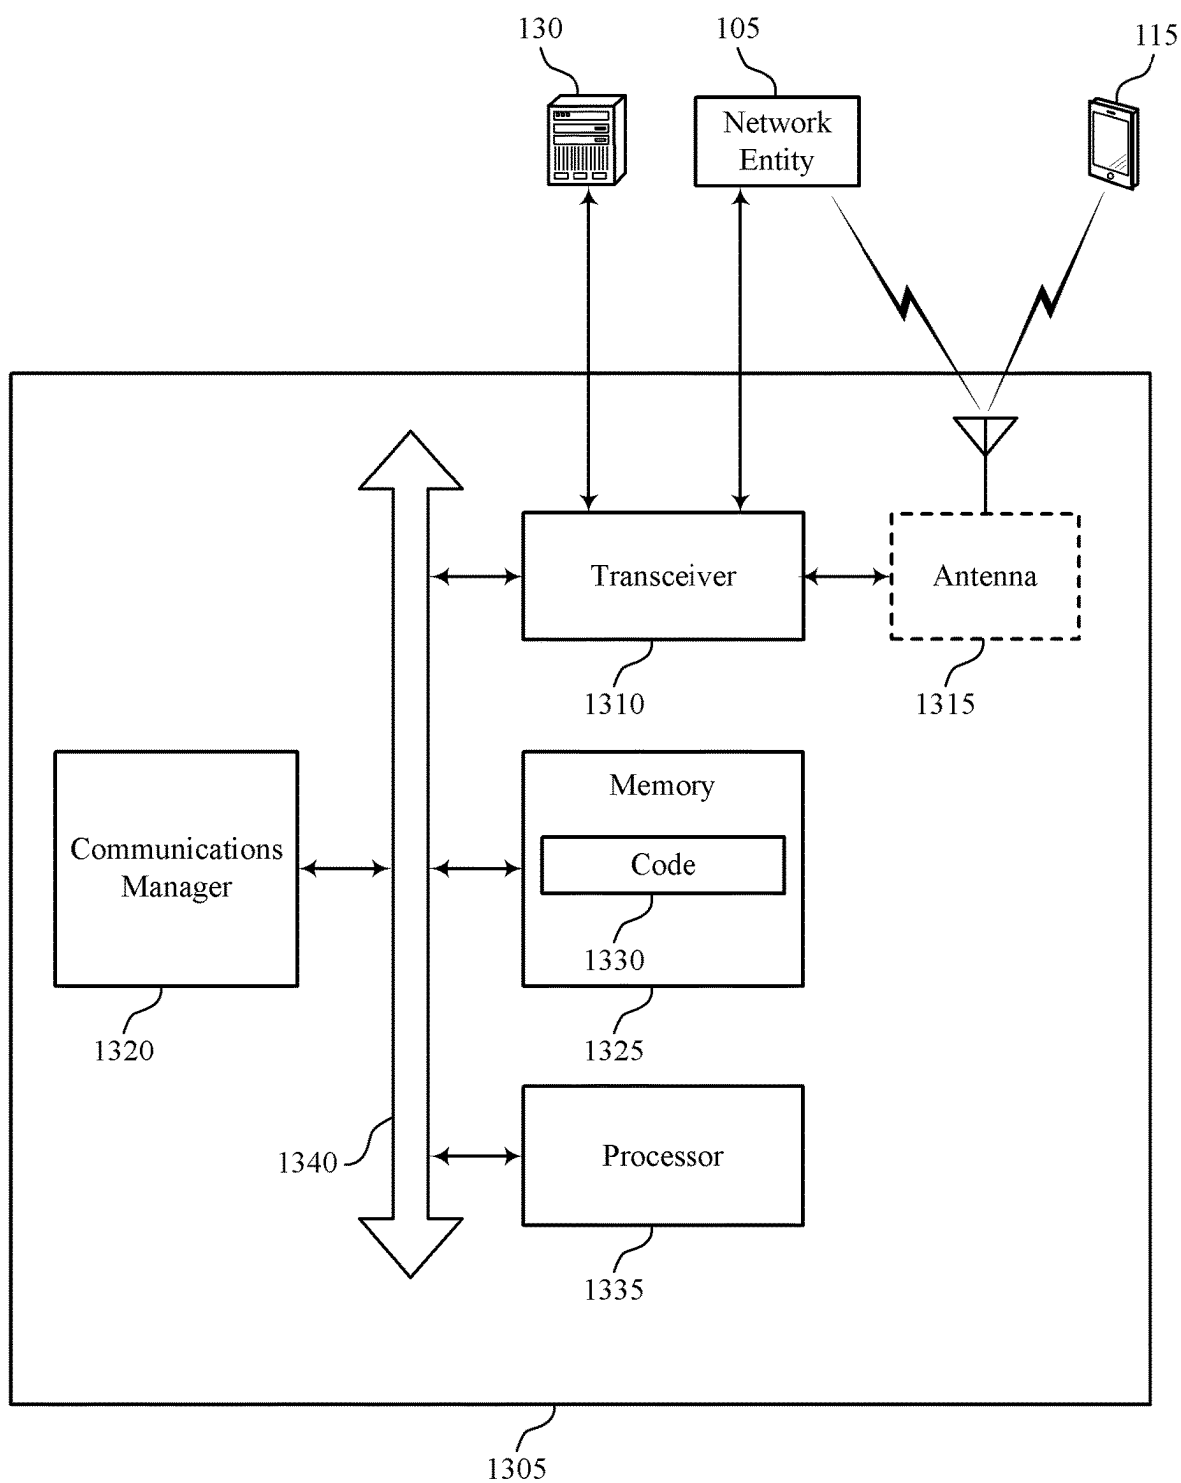


FIG. 13

1300

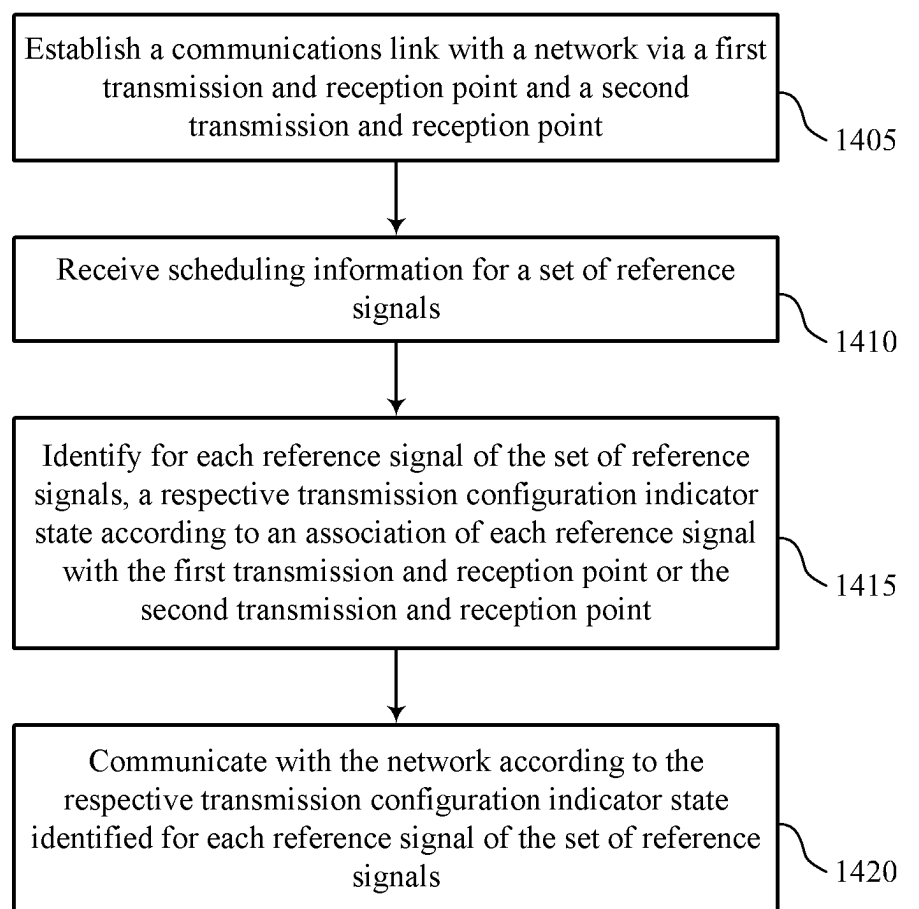


FIG. 14

1400

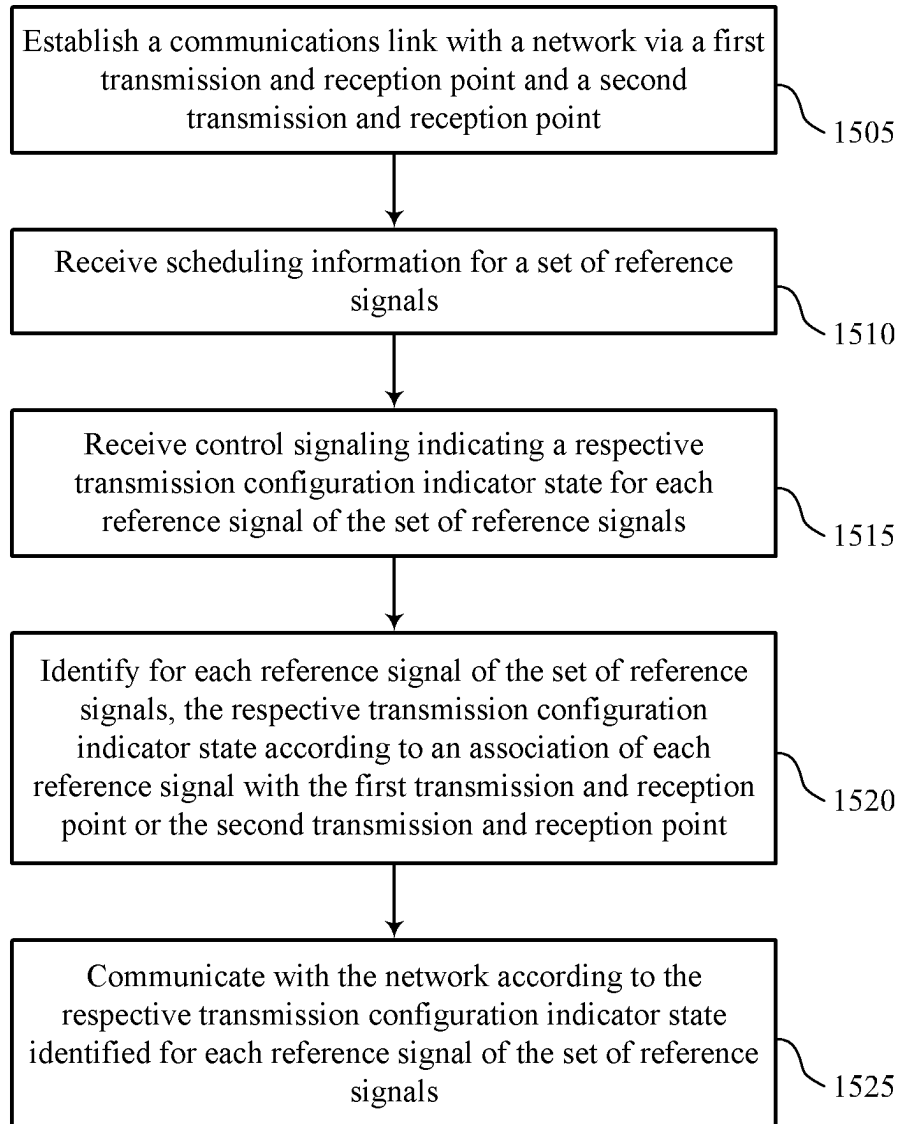


FIG. 15

1500

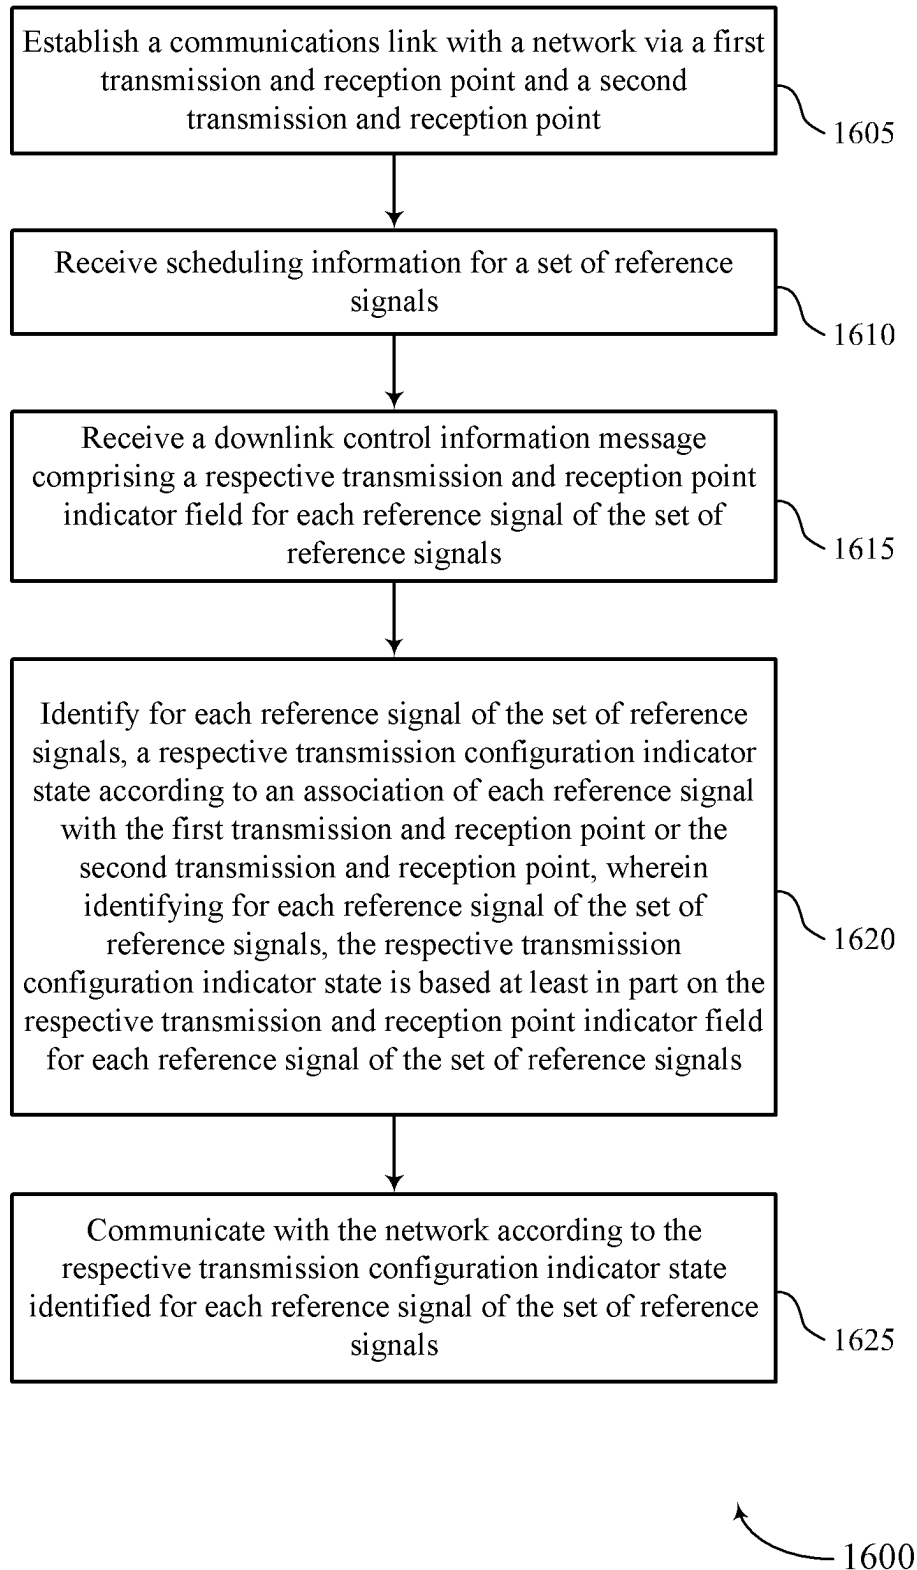


FIG. 16

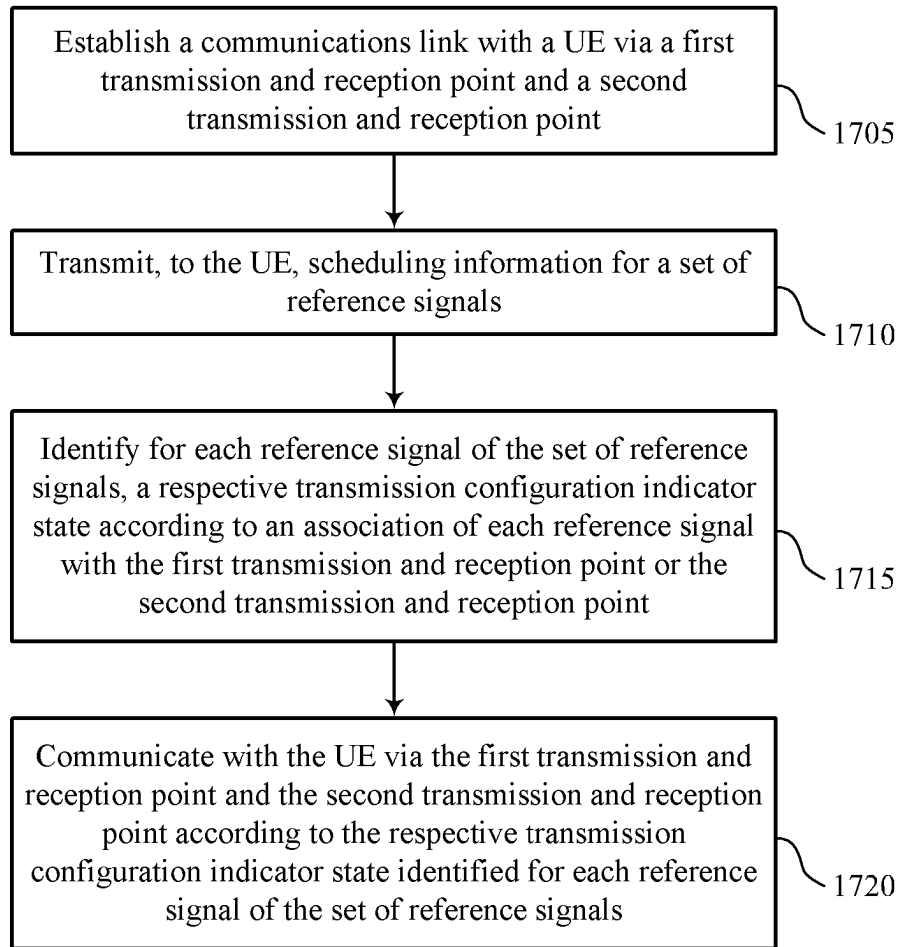


FIG. 17

1700

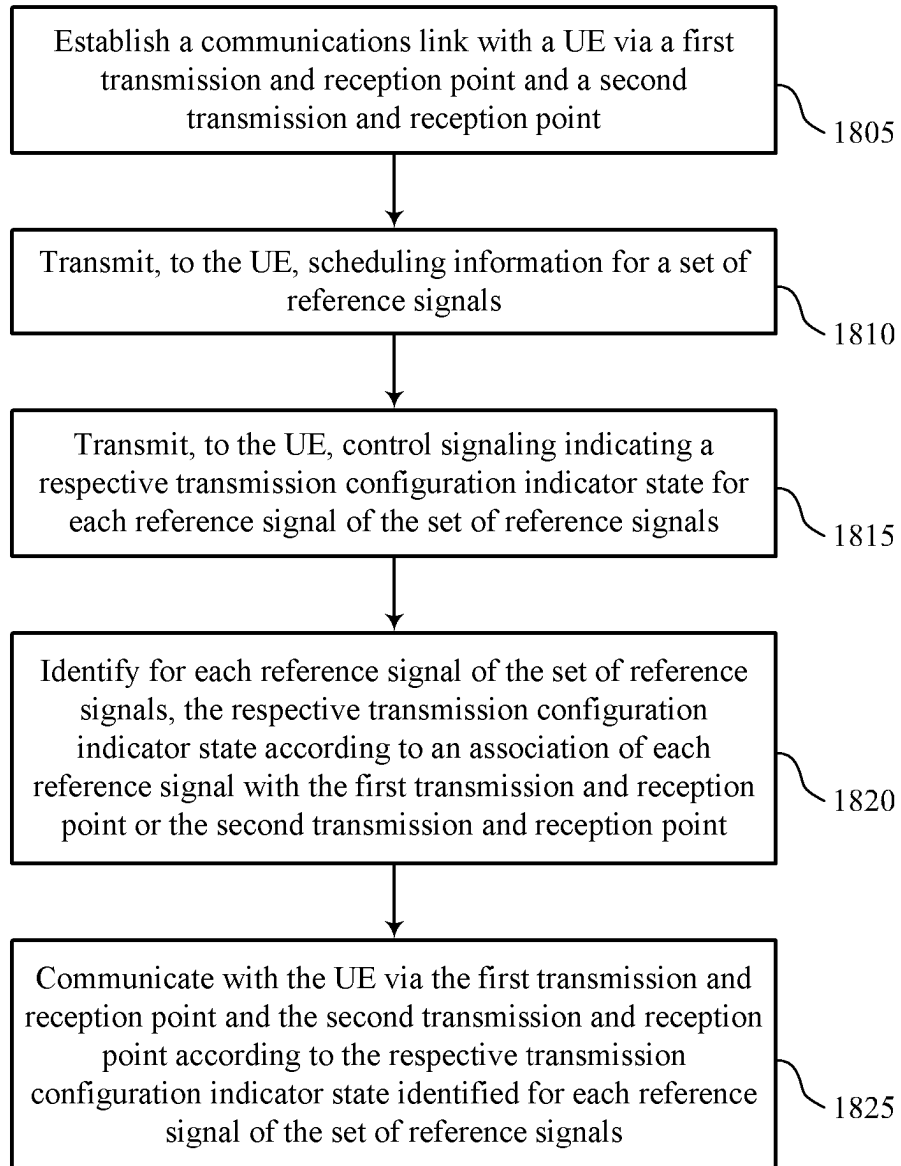


FIG. 18

1800

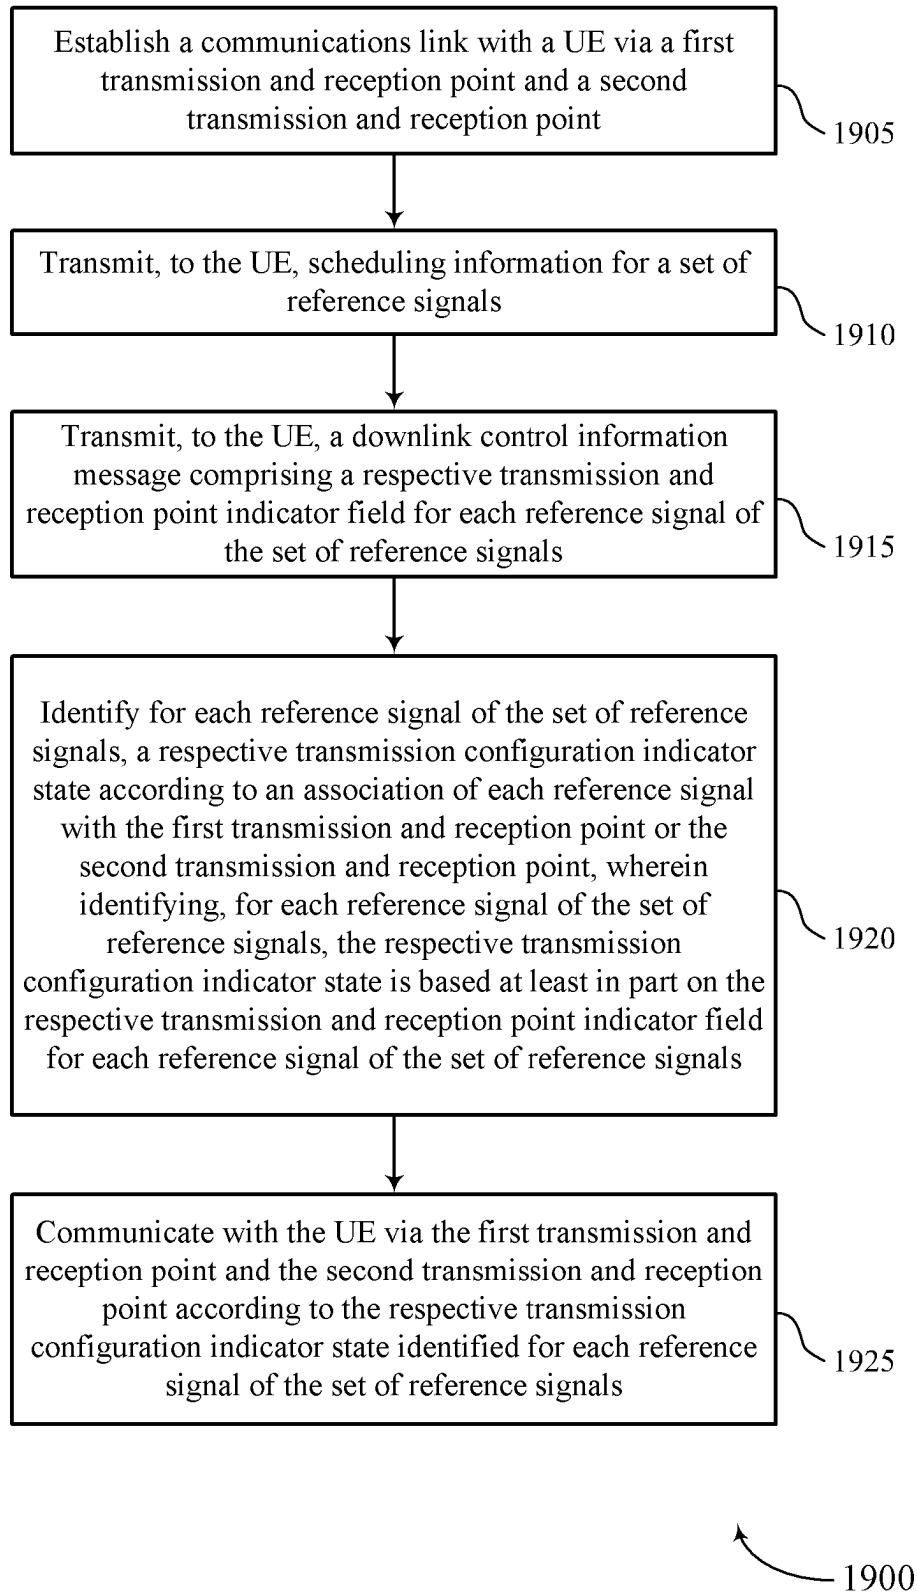


FIG. 19

**TRANSMISSION CONFIGURATION
INDICATOR STATE SELECTION FOR
REFERENCE SIGNALS IN MULTI
TRANSMISSION AND RECEPTION POINT
OPERATION**

CROSS REFERENCE

[0001] The present Application is a 371 national phase filing of International PCT Application No. PCT/CN2022/102179 by YUAN et al., entitled “TRANSMISSION CONFIGURATION INDICATOR STATE SELECTION FOR REFERENCE SIGNALS IN MULTI TRANSMISSION AND RECEPTION POINT OPERATION,” filed Jun. 29, 2022, which is assigned to the assignee hereof, and which is expressly incorporated by reference in its entirety herein.

FIELD OF TECHNOLOGY

[0002] The following relates to wireless communications, including transmission configuration indicator state selection for reference signals in multi transmission and reception point operation.

BACKGROUND

[0003] Wireless communications systems are widely deployed to provide various types of communication content such as voice, video, packet data, messaging, broadcast, and so on. These systems may be capable of supporting communication with multiple users by sharing the available system resources (e.g., time, frequency, and power). Examples of such multiple-access systems include fourth generation (4G) systems such as Long Term Evolution (LTE) systems, LTE-Advanced (LTE-A) systems, or LTE-A Pro systems, and fifth generation (5G) systems which may be referred to as New Radio (NR) systems. These systems may employ technologies such as code division multiple access (CDMA), time division multiple access (TDMA), frequency division multiple access (FDMA), orthogonal FDMA (OFDMA), or discrete Fourier transform spread orthogonal frequency division multiplexing (DFT-S-OFDM). A wireless multiple-access communications system may include one or more base stations, each supporting wireless communication for communication devices, which may be known as user equipment (UE).

SUMMARY

[0004] The described techniques relate to improved methods, systems, devices, and apparatuses that support transmission configuration indicator (TCI) state selection for reference signals in multi transmission and reception point (TRP) operation. In multi TRP operation, a user equipment (UE) may communicate with the network via two or more TRPs. Each TRP may be associated with a transmission configuration indicator (TCI) state, which may be indicated by the network to the UE. A UE that has established a communication link with the network via two or more TRPs may receive scheduling information for a set of reference signals (e.g., sounding reference signals (SRSs) or channel state information reference signals (CSI-RSs)). The UE may identify a TCI state to apply to each reference signal of the set of reference signals, and then communicate with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[0005] A method for wireless communications at a UE is described. The method may include establishing a communications link with a network via a first TRP and a second TRP, receiving scheduling information for a set of reference signals, identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, and communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[0006] An apparatus for wireless communications at a UE is described. The apparatus may include a processor, memory coupled with the processor, and instructions stored in the memory. The instructions may be executable by the processor to cause the apparatus to establish a communications link with a network via a first TRP and a second TRP, receive scheduling information for a set of reference signals, identify for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, and communicate with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[0007] Another apparatus for wireless communications at a UE is described. The apparatus may include means for establishing a communications link with a network via a first TRP and a second TRP, means for receiving scheduling information for a set of reference signals, means for identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, and means for communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[0008] A non-transitory computer-readable medium storing code for wireless communications at a UE is described. The code may include instructions executable by a processor to establish a communications link with a network via a first TRP and a second TRP, receive scheduling information for a set of reference signals, identify for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, and communicate with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[0009] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for receiving control signaling indicating the respective TCI state for each reference signal of the set of reference signals.

[0010] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, where the control signaling indicates for each reference signal one of: the first TCI state, the second TCI state, or a different TCI state.

[0011] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for receiving, with the control signaling, for each reference signal of the set of reference signals, an indication

of whether the respective TCI state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first TRP or the second TRP or a respective different transmission indicator state.

[0012] In some examples of the method, apparatuses, and non-transitory computer-readable medium described herein, receiving the control signaling may include operations, features, means, or instructions for receiving the control signaling via a medium access control (MAC) control element (CE), where the control signaling supersedes a previous indication of respective TCI states for the set of reference signals.

[0013] In some examples of the method, apparatuses, and non-transitory computer-readable medium described herein, receiving the control signaling may include operations, features, means, or instructions for receiving the control signaling via a radio resource control (RRC) message.

[0014] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for receiving a downlink control information (DCI) message including a respective TRP indicator field for each reference signal of the set of reference signals, where identifying for each reference signal of the set of reference signals, the respective TCI state may be based on the respective TRP indicator field for each reference signal of the set of reference signals.

[0015] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, where identifying for each reference signal of the set of reference signals, the respective TCI state includes identifying, for each reference signal of the set of reference signals one of the first TCI state or the second TCI state.

[0016] In some examples of the method, apparatuses, and non-transitory computer-readable medium described herein, identifying the TCI state for each reference signal of the set of reference signals may include operations, features, means, or instructions for identifying, for each reference signal of the set of reference signals based on an order of the set of reference signals, one of the first TCI state or the second TCI state.

[0017] In some examples of the method, apparatuses, and non-transitory computer-readable medium described herein, communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals may include operations, features, means, or instructions for transmitting the set of SRSs according to the respective TCI state identified for each SRS of the set of SRSs.

[0018] In some examples of the method, apparatuses, and non-transitory computer-readable medium described herein, communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals may include operations, features, means, or instructions for receiving the set of CSI-RSs according to the respective TCI state identified for each CSI-RS of the set of CSI-RSs.

[0019] A method for wireless communications at a network entity is described. The method may include establishing a communications link with a UE via a first TRP and a second TRP, transmitting, to the UE, scheduling information

for a set of reference signals, identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, and communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals.

[0020] An apparatus for wireless communications at a network entity is described. The apparatus may include a processor, memory coupled with the processor, and instructions stored in the memory. The instructions may be executable by the processor to cause the apparatus to establish a communications link with a UE via a first TRP and a second TRP, transmit, to the UE, scheduling information for a set of reference signals, identify for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, and communicate with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals.

[0021] Another apparatus for wireless communications at a network entity is described. The apparatus may include means for establishing a communications link with a UE via a first TRP and a second TRP, means for transmitting, to the UE, scheduling information for a set of reference signals, means for identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, and means for communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals.

[0022] A non-transitory computer-readable medium storing code for wireless communications at a network entity is described. The code may include instructions executable by a processor to establish a communications link with a UE via a first TRP and a second TRP, transmit, to the UE, scheduling information for a set of reference signals, identify for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, and communicate with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals.

[0023] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for transmitting, to the UE, control signaling indicating the respective TCI state for each reference signal of the set of reference signals.

[0024] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, where the control signaling indicates for each reference signal one of: the first TCI state, the second TCI state, or a different TCI state.

[0025] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for transmitting, with the control signaling, for each reference signal of the set of reference signals, an indication

of whether the respective TCI state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first TRP or the second TRP or a respective different transmission indicator state.

[0026] In some examples of the method, apparatuses, and non-transitory computer-readable medium described herein, transmitting the control signaling may include operations, features, means, or instructions for transmitting the control signaling via a MAC-CE, where the control signaling supersedes a previous indication of respective TCI states for the set of reference signals.

[0027] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for transmitting the control signaling via a RRC message.

[0028] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for transmitting, to the UE, a DCI message including a respective TRP indicator field for each reference signal of the set of reference signals, where identifying, for each reference signal of the set of reference signals, the respective TCI state may be based on the respective TRP indicator field for each reference signal of the set of reference signals.

[0029] Some examples of the method, apparatuses, and non-transitory computer-readable medium described herein may further include operations, features, means, or instructions for identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, where identifying for each reference signal of the set of reference signals, the respective TCI state includes identifying, for each reference signal of the set of reference signals one of the first TCI state or the second TCI state.

[0030] In some examples of the method, apparatuses, and non-transitory computer-readable medium described herein, identifying the TCI state for each reference signal of the set of reference signals may include operations, features, means, or instructions for identifying, for each reference signal of the set of reference signals based on an order of the set of reference signals, one of the first TCI state or the second TCI state.

[0031] In some examples of the method, apparatuses, and non-transitory computer-readable medium described herein, communicating with the UE according to the respective TCI state identified for each reference signal of the set of reference signals may include operations, features, means, or instructions for receiving the set of SRSs according to the respective TCI state identified for each SRS of the set of SRSs.

[0032] In some examples of the method, apparatuses, and non-transitory computer-readable medium described herein, communicating with the UE according to the respective TCI state identified for each reference signal of the set of reference signals may include operations, features, means, or instructions for transmitting the set of CSI-RSs according to the respective TCI state identified for each CSI-RS of the set of CSI-RSs.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] FIG. 1 illustrates an example of a wireless communications system that supports transmission configuration indicator (TCI) state selection for reference signals in multi

transmission and reception point (TRP) operation in accordance with one or more aspects of the present disclosure.

[0034] FIG. 2 illustrates an example of a network architecture that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0035] FIG. 3 illustrates an example of a wireless communications system that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0036] FIG. 4 illustrates an example of a process flow that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0037] FIG. 5 illustrates an example of a process flow that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0038] FIGS. 6 and 7 show block diagrams of devices that support TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0039] FIG. 8 shows a block diagram of a communications manager that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0040] FIG. 9 shows a diagram of a system including a device that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0041] FIGS. 10 and 11 show block diagrams of devices that support TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0042] FIG. 12 shows a block diagram of a communications manager that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0043] FIG. 13 shows a diagram of a system including a device that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

[0044] FIGS. 14 through 19 show flowcharts illustrating methods that support TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure.

DETAILED DESCRIPTION

[0045] In some wireless communication systems, a user equipment (UE) may communicate with the network via two or more transmission/reception points (TRPs) (e.g., a multi-TRP operation). Each TRP may be associated with a transmission configuration indicator (TCI) state, which may be indicated by the network to the UE. A UE communicating with the network in a multi-TPR operation may transmit or receive reference signals via the multiple TRPs. For example, a UE may transmit sounding reference signals (SRSs) or the UE may receive channel state information reference signals (CSI-RSs) from the TRPs. Currently, there is no defined behavior to determine a unified TCI state to apply to the transmission or reception of reference signals in a multi-TRP operation. If this issue is unaddressed, channel estimates based on these reference signals may be inaccurate, leading to poor network performance.

[0046] A UE that has established a communication link with the network via two or more TRPs may receive scheduling information for a set of reference signals (e.g., SRSs or CSI-RSs). The UE may identify a TCI state to apply to each reference signal of the set of reference signals, and then communicate with the network according to the respective TCI state identified for each reference signal of the set of reference signals. In some cases, the TCI state to apply to each respective reference signal of the set of reference signals may be indicated by control signaling (e.g., radio resource control (RRC) signaling, a medium access control (MAC) control element (CE), or a downlink control information (DCI) message). In some cases, the control signaling scheduling or activating the set of reference signals (e.g., a DCI message) may indicate the TCI states to apply to each reference signal of the set of reference signals. In some cases, the TCI states to apply to each reference signal of the set of reference signals may be based on a TRP associated with each of the respective reference signals (e.g., which may be indicated in the control signaling scheduling or activating the set of reference signals). In some cases, the UE may determine the TCI state to apply to each respective reference signal of the set of reference signals based on a configured rule. For example, a rule may define which TCI state to apply to which reference signal based on an order of the reference signals.

[0047] Aspects of the disclosure are initially described in the context of wireless communications systems. Aspects of the disclosure are further illustrated by and described with reference to process flows, apparatus diagrams, system diagrams, and flowcharts that relate to TCI state selection for reference signals in multi TRP operation.

[0048] FIG. 1 illustrates an example of a wireless communications system 100 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The wireless communications system 100 may include one or more network entities 105, one or more UEs 115, and a core network 130. In some examples, the wireless communications system 100 may be a Long Term Evolution (LTE) network, an LTE-Advanced (LTE-A) network, an LTE-A Pro network, a New Radio (NR) network, or a network operating in accordance with other systems and radio technologies, including future systems and radio technologies not explicitly mentioned herein.

[0049] The network entities 105 may be dispersed throughout a geographic area to form the wireless communications system 100 and may include devices in different forms or having different capabilities. In various examples, a network entity 105 may be referred to as a network element, a mobility element, a radio access network (RAN) node, or network equipment, among other nomenclature. In some examples, network entities 105 and UEs 115 may wirelessly communicate via one or more communication links 125 (e.g., a radio frequency (RF) access link). For example, a network entity 105 may support a coverage area 110 (e.g., a geographic coverage area) over which the UEs 115 and the network entity 105 may establish one or more communication links 125. The coverage area 110 may be an example of a geographic area over which a network entity 105 and a UE 115 may support the communication of signals according to one or more radio access technologies (RATs).

[0050] The UEs 115 may be dispersed throughout a coverage area 110 of the wireless communications system 100,

and each UE 115 may be stationary, or mobile, or both at different times. The UEs 115 may be devices in different forms or having different capabilities. Some example UEs 115 are illustrated in FIG. 1. The UEs 115 described herein may be capable of supporting communications with various types of devices, such as other UEs 115 or network entities 105, as shown in FIG. 1.

[0051] As described herein, a node of the wireless communications system 100, which may be referred to as a network node, or a wireless node, may be a network entity 105 (e.g., any network entity described herein), a UE 115 (e.g., any UE described herein), a network controller, an apparatus, a device, a computing system, one or more components, or another suitable processing entity configured to perform any of the techniques described herein. For example, a node may be a UE 115. As another example, a node may be a network entity 105. As another example, a first node may be configured to communicate with a second node or a third node. In one aspect of this example, the first node may be a UE 115, the second node may be a network entity 105, and the third node may be a UE 115. In another aspect of this example, the first node may be a UE 115, the second node may be a network entity 105, and the third node may be a network entity 105. In yet other aspects of this example, the first, second, and third nodes may be different relative to these examples. Similarly, reference to a UE 115, network entity 105, apparatus, device, computing system, or the like may include disclosure of the UE 115, network entity 105, apparatus, device, computing system, or the like being a node. For example, disclosure that a UE 115 is configured to receive information from a network entity 105 also discloses that a first node is configured to receive information from a second node.

[0052] In some examples, network entities 105 may communicate with the core network 130, or with one another, or both. For example, network entities 105 may communicate with the core network 130 via one or more backhaul communication links 120 (e.g., in accordance with an S1, N2, N3, or other interface protocol). In some examples, network entities 105 may communicate with one another via a backhaul communication link 120 (e.g., in accordance with an X2, Xn, or other interface protocol) either directly (e.g., directly between network entities 105) or indirectly (e.g., via a core network 130). In some examples, network entities 105 may communicate with one another via a midhaul communication link 162 (e.g., in accordance with a midhaul interface protocol) or a fronthaul communication link 168 (e.g., in accordance with a fronthaul interface protocol), or any combination thereof. The backhaul communication links 120, midhaul communication links 162, or fronthaul communication links 168 may be or include one or more wired links (e.g., an electrical link, an optical fiber link), one or more wireless links (e.g., a radio link, a wireless optical link), among other examples or various combinations thereof. A UE 115 may communicate with the core network 130 via a communication link 155.

[0053] One or more of the network entities 105 described herein may include or may be referred to as a base station 140 (e.g., a base transceiver station, a radio base station, an NR base station, an access point, a radio transceiver, a NodeB, an eNodeB (eNB), a next-generation NodeB or a giga-NodeB (either of which may be referred to as a gNB), a 5G NB, a next-generation eNB (ng-eNB), a Home NodeB, a Home eNodeB, or other suitable terminology). In some

examples, a network entity **105** (e.g., a base station **140**) may be implemented in an aggregated (e.g., monolithic, stand-alone) base station architecture, which may be configured to utilize a protocol stack that is physically or logically integrated within a single network entity **105** (e.g., a single RAN node, such as a base station **140**).

[0054] In some examples, a network entity **105** may be implemented in a disaggregated architecture (e.g., a disaggregated base station architecture, a disaggregated RAN architecture), which may be configured to utilize a protocol stack that is physically or logically distributed among two or more network entities **105**, such as an integrated access backhaul (IAB) network, an open RAN (O-RAN) (e.g., a network configuration sponsored by the O-RAN Alliance), or a virtualized RAN (vRAN) (e.g., a cloud RAN (C-RAN)). For example, a network entity **105** may include one or more of a central unit (CU) **160**, a distributed unit (DU) **165**, a radio unit (RU) **170**, a RAN Intelligent Controller (RIC) **175** (e.g., a Near-Real Time RIC (Near-RT RIC), a Non-Real Time RIC (Non-RT RIC)), a Service Management and Orchestration (SMO) **180** system, or any combination thereof. An RU **170** may also be referred to as a radio head, a smart radio head, a remote radio head (RRH), a remote radio unit (RRU), or a TRP. One or more components of the network entities **105** in a disaggregated RAN architecture may be co-located, or one or more components of the network entities **105** may be located in distributed locations (e.g., separate physical locations). In some examples, one or more network entities **105** of a disaggregated RAN architecture may be implemented as virtual units (e.g., a virtual CU (VCU), a virtual DU (VDU), a virtual RU (VRU)).

[0055] The split of functionality between a CU **160**, a DU **165**, and an RU **170** is flexible and may support different functionalities depending upon which functions (e.g., network layer functions, protocol layer functions, baseband functions, RF functions, and any combinations thereof) are performed at a CU **160**, a DU **165**, or an RU **170**. For example, a functional split of a protocol stack may be employed between a CU **160** and a DU **165** such that the CU **160** may support one or more layers of the protocol stack and the DU **165** may support one or more different layers of the protocol stack. In some examples, the CU **160** may host upper protocol layer (e.g., layer 3 (L3), layer 2 (L2)) functionality and signaling (e.g., Radio Resource Control (RRC), service data adaptation protocol (SDAP), Packet Data Convergence Protocol (PDCP)). The CU **160** may be connected to one or more DUs **165** or RUs **170**, and the one or more DUs **165** or RUs **170** may host lower protocol layers, such as layer 1 (L1) (e.g., physical (PHY) layer) or L2 (e.g., radio link control (RLC) layer, medium access control (MAC) layer) functionality and signaling, and may each be at least partially controlled by the CU **160**. Additionally, or alternatively, a functional split of the protocol stack may be employed between a DU **165** and an RU **170** such that the DU **165** may support one or more layers of the protocol stack and the RU **170** may support one or more different layers of the protocol stack. The DU **165** may support one or multiple different cells (e.g., via one or more RUs **170**). In some cases, a functional split between a CU **160** and a DU **165**, or between a DU **165** and an RU **170** may be within a protocol layer (e.g., some functions for a protocol layer may be performed by one of a CU **160**, a DU **165**, or an RU **170**, while other functions of the protocol layer are performed by a different one of the CU **160**, the DU **165**, or the RU **170**).

A CU **160** may be functionally split further into CU control plane (CU-CP) and CU user plane (CU-UP) functions. A CU **160** may be connected to one or more DUs **165** via a midhaul communication link **162** (e.g., F1, F1-c, F1-u), and a DU **165** may be connected to one or more RUs **170** via a fronthaul communication link **168** (e.g., open fronthaul (FH) interface). In some examples, a midhaul communication link **162** or a fronthaul communication link **168** may be implemented in accordance with an interface (e.g., a channel) between layers of a protocol stack supported by respective network entities **105** that are in communication via such communication links.

[0056] In wireless communications systems (e.g., wireless communications system **100**), infrastructure and spectral resources for radio access may support wireless backhaul link capabilities to supplement wired backhaul connections, providing an IAB network architecture (e.g., to a core network **130**). In some cases, in an IAB network, one or more network entities **105** (e.g., IAB nodes **104**) may be partially controlled by each other. One or more IAB nodes **104** may be referred to as a donor entity or an IAB donor. One or more DUs **165** or one or more RUs **170** may be partially controlled by one or more CUs **160** associated with a donor network entity **105** (e.g., a donor base station **140**). The one or more donor network entities **105** (e.g., IAB donors) may be in communication with one or more additional network entities **105** (e.g., IAB nodes **104**) via supported access and backhaul links (e.g., backhaul communication links **120**). IAB nodes **104** may include an IAB mobile termination (IAB-MT) controlled (e.g., scheduled) by DUs **165** of a coupled IAB donor. An IAB-MT may include an independent set of antennas for relay of communications with UEs **115**, or may share the same antennas (e.g., of an RU **170**) of an IAB node **104** used for access via the DU **165** of the IAB node **104** (e.g., referred to as virtual IAB-MT (vIAB-MT)). In some examples, the IAB nodes **104** may include DUs **165** that support communication links with additional entities (e.g., IAB nodes **104**, UEs **115**) within the relay chain or configuration of the access network (e.g., downstream). In such cases, one or more components of the disaggregated RAN architecture (e.g., one or more IAB nodes **104** or components of IAB nodes **104**) may be configured to operate according to the techniques described herein.

[0057] For instance, an access network (AN) or RAN may include communications between access nodes (e.g., an IAB donor), IAB nodes **104**, and one or more UEs **115**. The IAB donor may facilitate connection between the core network **130** and the AN (e.g., via a wired or wireless connection to the core network **130**). That is, an IAB donor may refer to a RAN node with a wired or wireless connection to core network **130**. The IAB donor may include a CU **160** and at least one DU **165** (e.g., and RU **170**), in which case the CU **160** may communicate with the core network **130** via an interface (e.g., a backhaul link). IAB donor and IAB nodes **104** may communicate via an F1 interface according to a protocol that defines signaling messages (e.g., an F1 AP protocol). Additionally, or alternatively, the CU **160** may communicate with the core network via an interface, which may be an example of a portion of backhaul link, and may communicate with other CUs **160** (e.g., a CU **160** associated with an alternative IAB donor) via an Xn-C interface, which may be an example of a portion of a backhaul link.

[0058] An IAB node **104** may refer to a RAN node that provides IAB functionality (e.g., access for UEs **115**, wireless self-backhauling capabilities). A DU **165** may act as a distributed scheduling node towards child nodes associated with the IAB node **104**, and the LAB-MT may act as a scheduled node towards parent nodes associated with the IAB node **104**. That is, an IAB donor may be referred to as a parent node in communication with one or more child nodes (e.g., an IAB donor may relay transmissions for UEs through one or more other IAB nodes **104**). Additionally, or alternatively, an IAB node **104** may also be referred to as a parent node or a child node to other IAB nodes **104**, depending on the relay chain or configuration of the AN. Therefore, the IAB-MT entity of IAB nodes **104** may provide a Uu interface for a child IAB node **104** to receive signaling from a parent IAB node **104**, and the DU interface (e.g., DUs **165**) may provide a Uu interface for a parent IAB node **104** to signal to a child IAB node **104** or UE **115**.

[0059] For example, IAB node **104** may be referred to as a parent node that supports communications for a child IAB node, or referred to as a child IAB node associated with an IAB donor, or both. The IAB donor may include a CU **160** with a wired or wireless connection (e.g., a backhaul communication link **120**) to the core network **130** and may act as parent node to IAB nodes **104**. For example, the DU **165** of IAB donor may relay transmissions to UEs **115** through IAB nodes **104**, or may directly signal transmissions to a UE **115**, or both. The CU **160** of IAB donor may signal communication link establishment via an F1 interface to IAB nodes **104**, and the IAB nodes **104** may schedule transmissions (e.g., transmissions to the UEs **115** relayed from the IAB donor) through the DUs **165**. That is, data may be relayed to and from IAB nodes **104** via signaling via an NR Uu interface to MT of the IAB node **104**. Communications with IAB node **104** may be scheduled by a DU **165** of IAB donor and communications with IAB node **104** may be scheduled by DU **165** of IAB node **104**.

[0060] In the case of the techniques described herein applied in the context of a disaggregated RAN architecture, one or more components of the disaggregated RAN architecture may be configured to support TCI state selection for reference signals in multi TRP operation as described herein. For example, some operations described as being performed by a UE **115** or a network entity **105** (e.g., a base station **140**) may additionally, or alternatively, be performed by one or more components of the disaggregated RAN architecture (e.g., IAB nodes **104**, DUs **165**, CUs **160**, RUs **170**, RIC **175**, SMO **180**).

[0061] A UE **115** may include or may be referred to as a mobile device, a wireless device, a remote device, a handheld device, or a subscriber device, or some other suitable terminology, where the “device” may also be referred to as a unit, a station, a terminal, or a client, among other examples. A UE **115** may also include or may be referred to as a personal electronic device such as a cellular phone, a personal digital assistant (PDA), a tablet computer, a laptop computer, or a personal computer. In some examples, a UE **115** may include or be referred to as a wireless local loop (WLL) station, an Internet of Things (IoT) device, an Internet of Everything (IoE) device, or a machine type communications (MTC) device, among other examples, which may be implemented in various objects such as appliances, or vehicles, meters, among other examples.

[0062] The UEs **115** described herein may be able to communicate with various types of devices, such as other UEs **115** that may sometimes act as relays as well as the network entities **105** and the network equipment including macro eNBs or gNBs, small cell eNBs or gNBs, or relay base stations, among other examples, as shown in FIG. 1.

[0063] The UEs **115** and the network entities **105** may wirelessly communicate with one another via one or more communication links **125** (e.g., an access link) using resources associated with one or more carriers. The term “carrier” may refer to a set of RF spectrum resources having a defined physical layer structure for supporting the communication links **125**. For example, a carrier used for a communication link **125** may include a portion of a RF spectrum band (e.g., a bandwidth part (BWP)) that is operated according to one or more physical layer channels for a given radio access technology (e.g., LTE, LTE-A, LTE-A Pro, NR). Each physical layer channel may carry acquisition signaling (e.g., synchronization signals, system information), control signaling that coordinates operation for the carrier, user data, or other signaling. The wireless communications system **100** may support communication with a UE **115** using carrier aggregation or multi-carrier operation. A UE **115** may be configured with multiple downlink component carriers and one or more uplink component carriers according to a carrier aggregation configuration. Carrier aggregation may be used with both frequency division duplexing (FDD) and time division duplexing (TDD) component carriers. Communication between a network entity **105** and other devices may refer to communication between the devices and any portion (e.g., entity, sub-entity) of a network entity **105**. For example, the terms “transmitting,” “receiving,” or “communicating,” when referring to a network entity **105**, may refer to any portion of a network entity **105** (e.g., a base station **140**, a CU **160**, a DU **165**, a RU **170**) of a RAN communicating with another device (e.g., directly or via one or more other network entities **105**).

[0064] In some examples, such as in a carrier aggregation configuration, a carrier may also have acquisition signaling or control signaling that coordinates operations for other carriers. A carrier may be associated with a frequency channel (e.g., an evolved universal mobile telecommunication system terrestrial radio access (E-UTRA) absolute RF channel number (EARFCN)) and may be identified according to a channel raster for discovery by the UEs **115**. A carrier may be operated in a standalone mode, in which case initial acquisition and connection may be conducted by the UEs **115** via the carrier, or the carrier may be operated in a non-standalone mode, in which case a connection is anchored using a different carrier (e.g., of the same or a different radio access technology).

[0065] The communication links **125** shown in the wireless communications system **100** may include downlink transmissions (e.g., forward link transmissions) from a network entity **105** to a UE **115**, uplink transmissions (e.g., return link transmissions) from a UE **115** to a network entity **105**, or both, among other configurations of transmissions. Carriers may carry downlink or uplink communications (e.g., in an FDD mode) or may be configured to carry downlink and uplink communications (e.g., in a TDD mode).

[0066] A carrier may be associated with a particular bandwidth of the RF spectrum and, in some examples, the carrier bandwidth may be referred to as a “system bandwidth” of

the carrier or the wireless communications system **100**. For example, the carrier bandwidth may be one of a set of bandwidths for carriers of a particular radio access technology (e.g., 1.4, 3, 5, 10, 15, 20, 40, or 80 megahertz (MHz)). Devices of the wireless communications system **100** (e.g., the network entities **105**, the UEs **115**, or both) may have hardware configurations that support communications using a particular carrier bandwidth or may be configurable to support communications using one of a set of carrier bandwidths. In some examples, the wireless communications system **100** may include network entities **105** or UEs **115** that support concurrent communications using carriers associated with multiple carrier bandwidths. In some examples, each served UE **115** may be configured for operating using portions (e.g., a sub-band, a BWP) or all of a carrier bandwidth.

[0067] Signal waveforms transmitted via a carrier may be made up of multiple subcarriers (e.g., using multi-carrier modulation (MCM) techniques such as orthogonal frequency division multiplexing (OFDM) or discrete Fourier transform spread OFDM (DFT-S-OFDM)). In a system employing MCM techniques, a resource element may refer to resources of one symbol period (e.g., a duration of one modulation symbol) and one subcarrier, in which case the symbol period and subcarrier spacing may be inversely related. The quantity of bits carried by each resource element may depend on the modulation scheme (e.g., the order of the modulation scheme, the coding rate of the modulation scheme, or both), such that a relatively higher quantity of resource elements (e.g., in a transmission duration) and a relatively higher order of a modulation scheme may correspond to a relatively higher rate of communication. A wireless communications resource may refer to a combination of an RF spectrum resource, a time resource, and a spatial resource (e.g., a spatial layer, a beam), and the use of multiple spatial resources may increase the data rate or data integrity for communications with a UE **115**.

[0068] One or more numerologies for a carrier may be supported, and a numerology may include a subcarrier spacing (Δf) and a cyclic prefix. A carrier may be divided into one or more BWPs having the same or different numerologies. In some examples, a UE **115** may be configured with multiple BWPs. In some examples, a single BWP for a carrier may be active at a given time and communications for the UE **115** may be restricted to one or more active BWPs.

[0069] The time intervals for the network entities **105** or the UEs **115** may be expressed in multiples of a basic time unit which may, for example, refer to a sampling period of $T_{s=1}/(\Delta f_{max} \cdot N_f)$ seconds, for which Δf_{max} may represent a supported subcarrier spacing, and N_f may represent a supported discrete Fourier transform (DFT) size. Time intervals of a communications resource may be organized according to radio frames each having a specified duration (e.g., 10 milliseconds (ms)). Each radio frame may be identified by a system frame number (e.g., ranging from 0 to 1023).

[0070] Each frame may include multiple consecutively-numbered subframes or slots, and each subframe or slot may have the same duration. In some examples, a frame may be divided (e.g., in the time domain) into subframes, and each subframe may be further divided into a quantity of slots. Alternatively, each frame may include a variable quantity of slots, and the quantity of slots may depend on subcarrier spacing. Each slot may include a quantity of symbol periods

(e.g., depending on the length of the cyclic prefix prepended to each symbol period). In some wireless communications systems **100**, a slot may further be divided into multiple mini-slots associated with one or more symbols. Excluding the cyclic prefix, each symbol period may be associated with one or more (e.g., N_p) sampling periods. The duration of a symbol period may depend on the subcarrier spacing or frequency band of operation.

[0071] A subframe, a slot, a mini-slot, or a symbol may be the smallest scheduling unit (e.g., in the time domain) of the wireless communications system **100** and may be referred to as a transmission time interval (TTI). In some examples, the TTI duration (e.g., a quantity of symbol periods in a TTI) may be variable. Additionally, or alternatively, the smallest scheduling unit of the wireless communications system **100** may be dynamically selected (e.g., in bursts of shortened TTIs (STTIs)).

[0072] Physical channels may be multiplexed for communication using a carrier according to various techniques. A physical control channel and a physical data channel may be multiplexed for signaling via a downlink carrier, for example, using one or more of time division multiplexing (TDM) techniques, frequency division multiplexing (FDM) techniques, or hybrid TDM-FDM techniques. A control region (e.g., a control resource set (CORESET)) for a physical control channel may be defined by a set of symbol periods and may extend across the system bandwidth or a subset of the system bandwidth of the carrier. One or more control regions (e.g., CORESETs) may be configured for a set of the UEs **115**. For example, one or more of the UEs **115** may monitor or search control regions for control information according to one or more search space sets, and each search space set may include one or multiple control channel candidates in one or more aggregation levels arranged in a cascaded manner. An aggregation level for a control channel candidate may refer to an amount of control channel resources (e.g., control channel elements (CCEs)) associated with encoded information for a control information format having a given payload size. Search space sets may include common search space sets configured for sending control information to multiple UEs **115** and UE-specific search space sets for sending control information to a specific UE **115**.

[0073] A network entity **105** may provide communication coverage via one or more cells, for example a macro cell, a small cell, a hot spot, or other types of cells, or any combination thereof. The term “cell” may refer to a logical communication entity used for communication with a network entity **105** (e.g., using a carrier) and may be associated with an identifier for distinguishing neighboring cells (e.g., a physical cell identifier (PCID), a virtual cell identifier (VCID), or others). In some examples, a cell also may refer to a coverage area **110** or a portion of a coverage area **110** (e.g., a sector) over which the logical communication entity operates. Such cells may range from smaller areas (e.g., a structure, a subset of structure) to larger areas depending on various factors such as the capabilities of the network entity **105**. For example, a cell may be or include a building, a subset of a building, or exterior spaces between or overlapping with coverage areas **110**, among other examples.

[0074] A macro cell generally covers a relatively large geographic area (e.g., several kilometers in radius) and may allow unrestricted access by the UEs **115** with service subscriptions with the network provider supporting the

macro cell. A small cell may be associated with a lower-powered network entity **105** (e.g., a lower-powered base station **140**), as compared with a macro cell, and a small cell may operate using the same or different (e.g., licensed, unlicensed) frequency bands as macro cells. Small cells may provide unrestricted access to the UEs **115** with service subscriptions with the network provider or may provide restricted access to the UEs **115** having an association with the small cell (e.g., the UEs **115** in a closed subscriber group (CSG), the UEs **115** associated with users in a home or office). A network entity **105** may support one or multiple cells and may also support communications via the one or more cells using one or multiple component carriers.

[0075] In some examples, a carrier may support multiple cells, and different cells may be configured according to different protocol types (e.g., MTC, narrowband IoT (NB-IoT), enhanced mobile broadband (eMBB)) that may provide access for different types of devices.

[0076] In some examples, a network entity **105** (e.g., a base station **140**, an RU **170**) may be movable and therefore provide communication coverage for a moving coverage area **110**. In some examples, different coverage areas **110** associated with different technologies may overlap, but the different coverage areas **110** may be supported by the same network entity **105**. In some other examples, the overlapping coverage areas **110** associated with different technologies may be supported by different network entities **105**. The wireless communications system **100** may include, for example, a heterogeneous network in which different types of the network entities **105** provide coverage for various coverage areas **110** using the same or different radio access technologies.

[0077] The wireless communications system **100** may support synchronous or asynchronous operation. For synchronous operation, network entities **105** (e.g., base stations **140**) may have similar frame timings, and transmissions from different network entities **105** may be approximately aligned in time. For asynchronous operation, network entities **105** may have different frame timings, and transmissions from different network entities **105** may, in some examples, not be aligned in time. The techniques described herein may be used for either synchronous or asynchronous operations.

[0078] Some UEs **115**, such as MTC or IoT devices, may be low cost or low complexity devices and may provide for automated communication between machines (e.g., via Machine-to-Machine (M2M) communication). M2M communication or MTC may refer to data communication technologies that allow devices to communicate with one another or a network entity **105** (e.g., a base station **140**) without human intervention. In some examples, M2M communication or MTC may include communications from devices that integrate sensors or meters to measure or capture information and relay such information to a central server or application program that uses the information or presents the information to humans interacting with the application program. Some UEs **115** may be designed to collect information or enable automated behavior of machines or other devices. Examples of applications for MTC devices include smart metering, inventory monitoring, water level monitoring, equipment monitoring, healthcare monitoring, wildlife monitoring, weather and geological event monitoring, fleet management and tracking, remote security sensing, physical access control, and transaction-based business charging.

[0079] Some UEs **115** may be configured to employ operating modes that reduce power consumption, such as half-duplex communications (e.g., a mode that supports one-way communication via transmission or reception, but not transmission and reception concurrently). In some examples, half-duplex communications may be performed at a reduced peak rate. Other power conservation techniques for the UEs **115** include entering a power saving deep sleep mode when not engaging in active communications, operating using a limited bandwidth (e.g., according to narrowband communications), or a combination of these techniques. For example, some UEs **115** may be configured for operation using a narrowband protocol type that is associated with a defined portion or range (e.g., set of subcarriers or resource blocks (RBs)) within a carrier, within a guard-band of a carrier, or outside of a carrier.

[0080] The wireless communications system **100** may be configured to support ultra-reliable communications or low-latency communications, or various combinations thereof. For example, the wireless communications system **100** may be configured to support ultra-reliable low-latency communications (URLLC). The UEs **115** may be designed to support ultra-reliable, low-latency, or critical functions. Ultra-reliable communications may include private communication or group communication and may be supported by one or more services such as push-to-talk, video, or data. Support for ultra-reliable, low-latency functions may include prioritization of services, and such services may be used for public safety or general commercial applications. The terms ultra-reliable, low-latency, and ultra-reliable low-latency may be used interchangeably herein.

[0081] In some examples, a UE **115** may be configured to support communicating directly with other UEs **115** via a device-to-device (D2D) communication link **135** (e.g., in accordance with a peer-to-peer (P2P), D2D, or sidelink protocol). In some examples, one or more UEs **115** of a group that are performing D2D communications may be within the coverage area **110** of a network entity **105** (e.g., a base station **140**, an RU **170**), which may support aspects of such D2D communications being configured by (e.g., scheduled by) the network entity **105**. In some examples, one or more UEs **115** of such a group may be outside the coverage area **110** of a network entity **105** or may be otherwise unable to or not configured to receive transmissions from a network entity **105**. In some examples, groups of the UEs **115** communicating via D2D communications may support a one-to-many (1:M) system in which each UE **115** transmits to each of the other UEs **115** in the group. In some examples, a network entity **105** may facilitate the scheduling of resources for D2D communications. In some other examples, D2D communications may be carried out between the UEs **115** without an involvement of a network entity **105**.

[0082] In some systems, a D2D communication link **135** may be an example of a communication channel, such as a sidelink communication channel, between vehicles (e.g., UEs **115**). In some examples, vehicles may communicate using vehicle-to-everything (V2X) communications, vehicle-to-vehicle (V2V) communications, or some combination of these. A vehicle may signal information related to traffic conditions, signal scheduling, weather, safety, emergencies, or any other information relevant to a V2X system. In some examples, vehicles in a V2X system may communicate with roadside infrastructure, such as roadside units, or

with the network via one or more network nodes (e.g., network entities **105**, base stations **140**, RUs **170**) using vehicle-to-network (V2N) communications, or with both.

[0083] The core network **130** may provide user authentication, access authorization, tracking, Internet Protocol (IP) connectivity, and other access, routing, or mobility functions. The core network **130** may be an evolved packet core (EPC) or 5G core (5GC), which may include at least one control plane entity that manages access and mobility (e.g., a mobility management entity (MME), an access and mobility management function (AMF)) and at least one user plane entity that routes packets or interconnects to external networks (e.g., a serving gateway (S-GW), a Packet Data Network (PDN) gateway (P-GW), or a user plane function (UPF)). The control plane entity may manage non-access stratum (NAS) functions such as mobility, authentication, and bearer management for the UEs **115** served by the network entities **105** (e.g., base stations **140**) associated with the core network **130**. User IP packets may be transferred through the user plane entity, which may provide IP address allocation as well as other functions. The user plane entity may be connected to IP services **150** for one or more network operators. The IP services **150** may include access to the Internet, Intranet(s), an IP Multimedia Subsystem (IMS), or a Packet-Switched Streaming Service.

[0084] The wireless communications system **100** may operate using one or more frequency bands, which may be in the range of 300 megahertz (MHz) to 300 gigahertz (GHz). Generally, the region from 300 MHz to 3 GHz is known as the ultra-high frequency (UHF) region or decimeter band because the wavelengths range from approximately one decimeter to one meter in length. UHF waves may be blocked or redirected by buildings and environmental features, which may be referred to as clusters, but the waves may penetrate structures sufficiently for a macro cell to provide service to the UEs **115** located indoors. Communications using UHF waves may be associated with smaller antennas and shorter ranges (e.g., less than 100 kilometers) compared to communications using the smaller frequencies and longer waves of the high frequency (HF) or very high frequency (VHF) portion of the spectrum below 300 MHz.

[0085] The wireless communications system **100** may also operate using a super high frequency (SHF) region, which may be in the range of 3 GHz to 30 GHz, also known as the centimeter band, or using an extremely high frequency (EHF) region of the spectrum (e.g., from 30 GHz to 300 GHz), also known as the millimeter band. In some examples, the wireless communications system **100** may support millimeter wave (mmW) communications between the UEs **115** and the network entities **105** (e.g., base stations **140**, RUs **170**), and EHF antennas of the respective devices may be smaller and more closely spaced than UHF antennas. In some examples, such techniques may facilitate using antenna arrays within a device. The propagation of EHF transmissions, however, may be subject to even greater attenuation and shorter range than SHF or UHF transmissions. The techniques disclosed herein may be employed across transmissions that use one or more different frequency regions, and designated use of bands across these frequency regions may differ by country or regulating body.

[0086] The wireless communications system **100** may utilize both licensed and unlicensed RF spectrum bands. For example, the wireless communications system **100** may employ License Assisted Access (LAA), LTE-Unlicensed

(LTE-U) radio access technology, or NR technology using an unlicensed band such as the 5 GHz industrial, scientific, and medical (ISM) band. While operating using unlicensed RF spectrum bands, devices such as the network entities **105** and the UEs **115** may employ carrier sensing for collision detection and avoidance. In some examples, operations using unlicensed bands may be based on a carrier aggregation configuration in conjunction with component carriers operating using a licensed band (e.g., LAA). Operations using unlicensed spectrum may include downlink transmissions, uplink transmissions, P2P transmissions, or D2D transmissions, among other examples.

[0087] A network entity **105** (e.g., a base station **140**, an RU **170**) or a UE **115** may be equipped with multiple antennas, which may be used to employ techniques such as transmit diversity, receive diversity, multiple-input multiple-output (MIMO) communications, or beamforming. The antennas of a network entity **105** or a UE **115** may be located within one or more antenna arrays or antenna panels, which may support MIMO operations or transmit or receive beamforming. For example, one or more base station antennas or antenna arrays may be co-located at an antenna assembly, such as an antenna tower. In some examples, antennas or antenna arrays associated with a network entity **105** may be located at diverse geographic locations. A network entity **105** may include an antenna array with a set of rows and columns of antenna ports that the network entity **105** may use to support beamforming of communications with a UE **115**. Likewise, a UE **115** may include one or more antenna arrays that may support various MIMO or beamforming operations. Additionally, or alternatively, an antenna panel may support RF beamforming for a signal transmitted via an antenna port.

[0088] The network entities **105** or the UEs **115** may use MIMO communications to exploit multipath signal propagation and increase spectral efficiency by transmitting or receiving multiple signals via different spatial layers. Such techniques may be referred to as spatial multiplexing. The multiple signals may, for example, be transmitted by the transmitting device via different antennas or different combinations of antennas. Likewise, the multiple signals may be received by the receiving device via different antennas or different combinations of antennas. Each of the multiple signals may be referred to as a separate spatial stream and may carry information associated with the same data stream (e.g., the same codeword) or different data streams (e.g., different codewords). Different spatial layers may be associated with different antenna ports used for channel measurement and reporting. MIMO techniques include single-user MIMO (SU-MIMO), for which multiple spatial layers are transmitted to the same receiving device, and multiple-user MIMO (MU-MIMO), for which multiple spatial layers are transmitted to multiple devices.

[0089] Beamforming, which may also be referred to as spatial filtering, directional transmission, or directional reception, is a signal processing technique that may be used at a transmitting device or a receiving device (e.g., a network entity **105**, a UE **115**) to shape or steer an antenna beam (e.g., a transmit beam, a receive beam) along a spatial path between the transmitting device and the receiving device. Beamforming may be achieved by combining the signals communicated via antenna elements of an antenna array such that some signals propagating along particular orientations with respect to an antenna array experience construc-

tive interference while others experience destructive interference. The adjustment of signals communicated via the antenna elements may include a transmitting device or a receiving device applying amplitude offsets, phase offsets, or both to signals carried via the antenna elements associated with the device. The adjustments associated with each of the antenna elements may be defined by a beamforming weight set associated with a particular orientation (e.g., with respect to the antenna array of the transmitting device or receiving device, or with respect to some other orientation).

[0090] A network entity **105** or a UE **115** may use beam sweeping techniques as part of beamforming operations. For example, a network entity **105** (e.g., a base station **140**, an RU **170**) may use multiple antennas or antenna arrays (e.g., antenna panels) to conduct beamforming operations for directional communications with a UE **115**. Some signals (e.g., synchronization signals, reference signals, beam selection signals, or other control signals) may be transmitted by a network entity **105** multiple times along different directions. For example, the network entity **105** may transmit a signal according to different beamforming weight sets associated with different directions of transmission. Transmissions along different beam directions may be used to identify (e.g., by a transmitting device, such as a network entity **105**, or by a receiving device, such as a UE **115**) a beam direction for later transmission or reception by the network entity **105**.

[0091] Some signals, such as data signals associated with a particular receiving device, may be transmitted by transmitting device (e.g., a transmitting network entity **105**, a transmitting UE **115**) along a single beam direction (e.g., a direction associated with the receiving device, such as a receiving network entity **105** or a receiving UE **115**). In some examples, the beam direction associated with transmissions along a single beam direction may be determined based on a signal that was transmitted along one or more beam directions. For example, a UE **115** may receive one or more of the signals transmitted by the network entity **105** along different directions and may report to the network entity **105** an indication of the signal that the UE **115** received with a highest signal quality or an otherwise acceptable signal quality.

[0092] In some examples, transmissions by a device (e.g., by a network entity **105** or a UE **115**) may be performed using multiple beam directions, and the device may use a combination of digital precoding or beamforming to generate a combined beam for transmission (e.g., from a network entity **105** to a UE **115**). The UE **115** may report feedback that indicates precoding weights for one or more beam directions, and the feedback may correspond to a configured set of beams across a system bandwidth or one or more sub-bands. The network entity **105** may transmit a reference signal (e.g., a cell-specific reference signal (CRS), a CSI-RS), which may be precoded or unprecoded. The UE **115** may provide feedback for beam selection, which may be a precoding matrix indicator (PMI) or codebook-based feedback (e.g., a multi-panel type codebook, a linear combination type codebook, a port selection type codebook). Although these techniques are described with reference to signals transmitted along one or more directions by a network entity **105** (e.g., a base station **140**, an RU **170**), a UE **115** may employ similar techniques for transmitting signals multiple times along different directions (e.g., for identifying a beam direction for subsequent transmission or

reception by the UE **115**) or for transmitting a signal along a single direction (e.g., for transmitting data to a receiving device).

[0093] A receiving device (e.g., a UE **115**) may perform reception operations in accordance with multiple receive configurations (e.g., directional listening) when receiving various signals from a receiving device (e.g., a network entity **105**), such as synchronization signals, reference signals, beam selection signals, or other control signals. For example, a receiving device may perform reception in accordance with multiple receive directions by receiving via different antenna subarrays, by processing received signals according to different antenna subarrays, by receiving according to different receive beamforming weight sets (e.g., different directional listening weight sets) applied to signals received at multiple antenna elements of an antenna array, or by processing received signals according to different receive beamforming weight sets applied to signals received at multiple antenna elements of an antenna array, any of which may be referred to as “listening” according to different receive configurations or receive directions. In some examples, a receiving device may use a single receive configuration to receive along a single beam direction (e.g., when receiving a data signal). The single receive configuration may be aligned along a beam direction determined based on listening according to different receive configuration directions (e.g., a beam direction determined to have a highest signal strength, highest signal-to-noise ratio (SNR), or otherwise acceptable signal quality based on listening according to multiple beam directions).

[0094] The wireless communications system **100** may be a packet-based network that operates according to a layered protocol stack. In the user plane, communications at the bearer or PDCP layer may be IP-based. An RLC layer may perform packet segmentation and reassembly to communicate via logical channels. A MAC layer may perform priority handling and multiplexing of logical channels into transport channels. The MAC layer also may implement error detection techniques, error correction techniques, or both to support retransmissions to improve link efficiency. In the control plane, an RRC layer may provide establishment, configuration, and maintenance of an RRC connection between a UE **115** and a network entity **105** or a core network **130** supporting radio bearers for user plane data. A PHY layer may map transport channels to physical channels.

[0095] The UEs **115** and the network entities **105** may support retransmissions of data to increase the likelihood that data is received successfully. Hybrid automatic repeat request (HARQ) feedback is one technique for increasing the likelihood that data is received correctly via a communication link (e.g., a communication link **125**, a D2D communication link **135**). HARQ may include a combination of error detection (e.g., using a cyclic redundancy check (CRC)), forward error correction (FEC), and retransmission (e.g., automatic repeat request (ARQ)). HARQ may improve throughput at the MAC layer in poor radio conditions (e.g., low signal-to-noise conditions). In some examples, a device may support same-slot HARQ feedback, in which case the device may provide HARQ feedback in a specific slot for data received via a previous symbol in the slot. In some other examples, the device may provide HARQ feedback in a subsequent slot, or according to some other time interval.

[0096] In the wireless communication system **100**, a UE **115** may communicate with the network via two or more

TRPs. The wireless communications system **100** may apply a unified TCI state framework. In some cases, three types of unified TCI states may be defined. A first type of TCI state (e.g., type 1) may include a joint TCI state to indicate a common beam for at least one downlink channel or reference signal and at least one uplink channel or reference signal (e.g., including UE-specific physical downlink control channel (PDCCH), UE-specific physical downlink shared channel (PDSCH), UE-specific physical uplink control channel (PUCCH), and UE-specific physical uplink shared channel (PUSCH)). A second type of TCI state (e.g., type 2) may include a downlink TCI state to indicate a common beam for more than one downlink channel or reference signal (e.g., including at least UE-specific PDCCH and UE-specific PDSCH). A third type of TCI state (e.g., type 3) may include an uplink TCI state to indicate a common beam for more than one uplink channel or reference signal (e.g., including at least UE-specific PUCCH and UE-specific PUSCH). For example, the network may indicate to the UE **115** multiple downlink or uplink states for multiple TRPs.

[0097] In some cases, to facilitate simultaneous multi-panel uplink transmission for higher uplink throughput and reliability (e.g., focusing on FR2 and multi-TRP), uplink precoding indication for PUSCH may be specified, where no new codebook is introduced for multi-panel simultaneous transmission. In some cases, a total number of layers may be up to four across all panels and a total number of codewords may be up to two across all panels, considering single DCI and multi-DCI based multi-TRP operation. In some cases, to facilitate simultaneous multi-panel uplink transmission for higher uplink throughput and reliability (e.g., focusing on FR2 and multi-TRP), uplink beam indication for PUCCH or PUSCH may be specified, where a unified TCI framework may be assumed considering single DCI and multi-DCI based multi-TRP operation. For the case of multi-DCI based multi-TRP operation, in some examples only PUSCH+PUSCH or PUCCH+PUCCH may be transmitted across two panels in a same component carrier. In some cases, timing advances for uplink multi-DCI for multi-TRP operation may be specified. In some cases, power control for uplink single DCI for multi-TRP operation may be applied.

[0098] In multi-TRP operation, each TRP may be associated with a TCI state, which may be indicated by the network to the UE **115**. A UE **115** communicating with the network in a multi-TPR operation may transmit or receive reference signals via the multiple TRPs. In some cases, a reference signal such as an SRS or a CSI-RS may be indicated with a beam which is different from the beam for another channel such as PDCCH, PDSCH, PUSCH, or PUCCH. In some cases, a reference signal such as an SRS or a CSI-RS associated with a TRP for a UE **115** in a multi TRP operation may be indicated with a beam associated with another TRP.

[0099] In some cases, a UE that has established a communication link with the network via two or more TRPs may receive scheduling information for a set of reference signals (e.g., SRSs or CSI-RSs). The UE **115** may identify a TCI state to apply to each reference signal of the set of reference signals, and then communicate with the network according to the respective TCI state identified for each reference signal of the set of reference signals. In some cases, the TCI state to apply to each respective reference signal of the set of reference signals may be indicated by control signaling

(e.g., RRC signaling, a MAC-CE, or a DCI message). In some cases, the control signaling scheduling or activating the set of reference signals (e.g., a DCI message) may indicate the TCI states to apply to each reference signal of the set of reference signals. In some cases, the TCI states to apply to each reference signal of the set of reference signals may be based on a TRP associated with each of the respective reference signals (e.g., which may be indicated in the control signaling scheduling or activating the set of reference signals). In some cases, the UE **115** may determine the TCI state to apply to each respective reference signal of the set of reference signals based on a configured rule. For example, a rule may define which TCI state to apply to which reference signal based on an order of the reference signals.

[0100] FIG. 2 illustrates an example of a network architecture **200** (e.g., a disaggregated base station architecture, a disaggregated RAN architecture) that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The network architecture **200** may illustrate an example for implementing one or more aspects of the wireless communications system **100**. The network architecture **200** may include one or more CUs **160-a** that may communicate directly with a core network **130-a** via a backhaul communication link **120-a**, or indirectly with the core network **130-a** through one or more disaggregated network entities **105** (e.g., a Near-RT RIC **175-b** via an E2 link, or a Non-RT RIC **175-a** associated with an SMO **180-a** (e.g., an SMO Framework), or both). A CU **160-a** may communicate with one or more DUs **165-a** via respective midhaul communication links **162-a** (e.g., an F1 interface). The DUs **165-a** may communicate with one or more RUs **170-a** via respective fronthaul communication links **168-a**. The RUs **170-a** may be associated with respective coverage areas **110-a** and may communicate with UEs **115-a** via one or more communication links **125-a**. In some implementations, a UE **115-a** may be simultaneously served by multiple RUs **170-a**.

[0101] Each of the network entities **105** of the network architecture **200** (e.g., CUs **160-a**, DUs **165-a**, RUs **170-a**, Non-RT RICs **175-a**, Near-RT RICs **175-b**, SMOs **180-a**, Open Clouds (O-Clouds) **205**, Open eNBs (O-eNBs) **210**) may include one or more interfaces or may be coupled with one or more interfaces configured to receive or transmit signals (e.g., data, information) via a wired or wireless transmission medium. Each network entity **105**, or an associated processor (e.g., controller) providing instructions to an interface of the network entity **105**, may be configured to communicate with one or more of the other network entities **105** via the transmission medium. For example, the network entities **105** may include a wired interface configured to receive or transmit signals over a wired transmission medium to one or more of the other network entities **105**. Additionally, or alternatively, the network entities **105** may include a wireless interface, which may include a receiver, a transmitter, or transceiver (e.g., an RF transceiver) configured to receive or transmit signals, or both, over a wireless transmission medium to one or more of the other network entities **105**.

[0102] In some examples, a CU **160-a** may host one or more higher layer control functions. Such control functions may include RRC, PDCP, SDAP, or the like. Each control function may be implemented with an interface configured

to communicate signals with other control functions hosted by the CU 160-*a*. A CU 160-*a* may be configured to handle user plane functionality (e.g., CU-UP), control plane functionality (e.g., CU-CP), or a combination thereof. In some examples, a CU 160-*a* may be logically split into one or more CU-UP units and one or more CU-CP units. A CU-UP unit may communicate bidirectionally with the CU-CP unit via an interface, such as an E1 interface when implemented in an O-RAN configuration. A CU 160-*a* may be implemented to communicate with a DU 165-*a*, as necessary, for network control and signaling.

[0103] A DU 165-*a* may correspond to a logical unit that includes one or more functions (e.g., base station functions, RAN functions) to control the operation of one or more RUs 170-*a*. In some examples, a DU 165-*a* may host, at least partially, one or more of an RLC layer, a MAC layer, and one or more aspects of a PHY layer (e.g., a high PHY layer, such as modules for FEC encoding and decoding, scrambling, modulation and demodulation, or the like) depending, at least in part, on a functional split, such as those defined by the 3rd Generation Partnership Project (3GPP). In some examples, a DU 165-*a* may further host one or more low PHY layers. Each layer may be implemented with an interface configured to communicate signals with other layers hosted by the DU 165-*a*, or with control functions hosted by a CU 160-*a*.

[0104] In some examples, lower-layer functionality may be implemented by one or more RUs 170-*a*. For example, an RU 170-*a*, controlled by a DU 165-*a*, may correspond to a logical node that hosts RF processing functions, or low-PHY layer functions (e.g., performing fast Fourier transform (FFT), inverse FFT (iFFT), digital beamforming, physical random access channel (PRACH) extraction and filtering, or the like), or both, based at least in part on the functional split, such as a lower-layer functional split. In such an architecture, an RU 170-*a* may be implemented to handle over the air (OTA) communication with one or more UEs 115-*a*. In some implementations, real-time and non-real-time aspects of control and user plane communication with the RU(s) 170-*a* may be controlled by the corresponding DU 165-*a*. In some examples, such a configuration may enable a DU 165-*a* and a CU 160-*a* to be implemented in a cloud-based RAN architecture, such as a vRAN architecture.

[0105] The SMO 180-*a* may be configured to support RAN deployment and provisioning of non-virtualized and virtualized network entities 105. For non-virtualized network entities 105, the SMO 180-*a* may be configured to support the deployment of dedicated physical resources for RAN coverage requirements which may be managed via an operations and maintenance interface (e.g., an O1 interface). For virtualized network entities 105, the SMO 180-*a* may be configured to interact with a cloud computing platform (e.g., an O-Cloud 205) to perform network entity life cycle management (e.g., to instantiate virtualized network entities 105) via a cloud computing platform interface (e.g., an O2 interface). Such virtualized network entities 105 can include, but are not limited to, CUs 160-*a*, DUs 165-*a*, RUs 170-*a*, and Near-RT RICs 175-*b*. In some implementations, the SMO 180-*a* may communicate with components configured in accordance with a 4G RAN (e.g., via an O1 interface). Additionally, or alternatively, in some implementations, the SMO 180-*a* may communicate directly with one or more

RUs 170-*a* via an O1 interface. The SMO 180-*a* also may include a Non-RT RIC 175-*a* configured to support functionality of the SMO 180-*a*.

[0106] The Non-RT RIC 175-*a* may be configured to include a logical function that enables non-real-time control and optimization of RAN elements and resources, Artificial Intelligence (AI) or Machine Learning (ML) workflows including model training and updates, or policy-based guidance of applications/features in the Near-RT RIC 175-*b*. The Non-RT RIC 175-*a* may be coupled to or communicate with (e.g., via an A1 interface) the Near-RT RIC 175-*b*. The Near-RT RIC 175-*b* may be configured to include a logical function that enables near-real-time control and optimization of RAN elements and resources via data collection and actions over an interface (e.g., via an E2 interface) connecting one or more CUs 160-*a*, one or more DUs 165-*a*, or both, as well as an O-eNB 210, with the Near-RT RIC 175-*b*.

[0107] In some examples, to generate AI/ML models to be deployed in the Near-RT RIC 175-*b*, the Non-RT RIC 175-*a* may receive parameters or external enrichment information from external servers. Such information may be utilized by the Near-RT RIC 175-*b* and may be received at the SMO 180-*a* or the Non-RT RIC 175-*a* from non-network data sources or from network functions. In some examples, the Non-RT RIC 175-*a* or the Near-RT RIC 175-*b* may be configured to tune RAN behavior or performance. For example, the Non-RT RIC 175-*a* may monitor long-term trends and patterns for performance and employ AI or ML models to perform corrective actions through the SMO 180-*a* (e.g., reconfiguration via O1) or via generation of RAN management policies (e.g., A1 policies).

[0108] In some examples, a UE 115-*a* may communicate with the network via multiple TRPs (e.g., the UE 115-*a* may operate in a multiple TRP mode). As described herein, a TRP may include an RU 170-*a*, a DU 165-*a*, or a combination thereof.

[0109] FIG. 3 illustrates an example of a wireless communications system 300 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. In some examples, the wireless communications system 300 may implement aspects of wireless communications system 100. The wireless communications system 300 may include a UE 115-*b*, which may be an example of a UE 115 as described herein. The wireless communications system 300 may include a network entity 105-*a*, which may be an example of a network entity 105 as described herein.

[0110] The UE 115-*b* may operate in a multiple TRP mode with a first TRP 305-*a* and a second TRP 305-*b*. In some cases, the first TRP 305-*a* and the second TRP 305-*b* may be located at a same network entity 105-*a*. In some cases, the first TRP 305-*a* and the second TRP 305-*b* may be located at different network entities.

[0111] The UE 115-*b* may be capable of performing simultaneous communication with the first TRP 305-*a* and the second TRP 305-*b* (e.g., using a same set of time resources, or a same set of frequency resource, or both, but different spatial resources). The UE 115-*b* may communicate with the first TRP 305-*a* using a communication link 125-*b*. The UE 115-*b* may communicate with the second TRP 305-*b* using a communication link 125-*c*. The communication link 125-*b* and the communication link 125-*c* may include bi-directional links that enable both uplink and downlink communication. For example, the UE 115-*b* may transmit uplink

signals **330-a**, such as uplink control signals or uplink data signals, to the first TRP **305-a** using the communication link **125-b** and the first TRP **305-a** may transmit downlink signals **335-a**, such as downlink control signals or downlink data signals, to the UE **115-b** using the communication link **125-b**. The UE **115-b** may transmit uplink signals **330-b**, such as uplink control signals or uplink data signals, to the second TRP **305-b** using the communication link **125-c** and the second TRP **305-b** may transmit downlink signals **335-b**, such as downlink control signals or downlink data signals, to the UE **115-b** using the communication link **125-c**. In some examples, different TRPs (e.g., the first TRP **305-a** and the second TRP **305-b**) may have different TRP identifiers (IDs). In some examples, different TRPs may be identified through an association with other IDs, such as a CORESET pool index, closed loop index, TCI ID, TCI group ID, or a SRS resource set ID.

[0112] In a single DCI multi-TRP operation or a multi-DCI multi-TRP operation, the UE **115-b** may communicate with the first TRP **305-a** and the second TRP **305-b** using space division multiplexing, frequency division multiplexing, or time division multiplexing, or a combination thereof. The wireless communication system may support DCI repetition (e.g., across CORESETs associated with the first TRP **305-a** and the second TRP **305-b**), PUSCH and PUCCH repetition, a downlink single frequency network (SFN) configuration, or an uplink SFN configuration. For example, in downlink, the UE **115-b** may receive PDSCH or PDCCH messages according to an SFN configuration. For example, the UE **115-b** may receive a same downlink signal (e.g., a PDSCH or PDCCH message) from the first TRP **305-a** and the second TRP **305-b** on different beams using different antenna panels at the UE **115-b**. In uplink, the UE **115-b** may transmit PUSCH or PUCCH messages according to an SFN configuration. For example, the UE **115-b** may transmit a same uplink signal to the first TRP **305-a** and the second TRP **305-b** on different beams using different antenna panels at the UE **115-b**.

[0113] The UE **115-b** may be indicated or configured with a pair of uplink applicable TCI states (e.g., joint or uplink TCI states) for multi TRP operation uplink transmissions (e.g., PUCCH or PUSCH) to the first TRP **305-a** and the second TRP **305-b**. The UE **115-b** may receive scheduling information **310** for a set of reference signals **315**.

[0114] For example, the UE **115-b** may be activated with a set of semi-persistent CSI-RS or SRS by a MAC-CE. In some cases, the UE **115-b** (and the network entity **105-a**) may determine the TCI state to apply for each reference signal in the set of reference signals **315** based on control signaling **320**. For example, the TCI state for a reference signal may be configured by RRC signaling. In some cases, the RRC signaling may include a field “followingUnifiedTCIforTRPA,” which may indicate to use an indicated TCI state associated with the first TRP **305-a** or the RRC signaling may include a field “followingUnifiedTCIforTRPB,” which may indicate to use an indicated TCI state associated with the second TRP **305-b**. In some cases, the RRC signaling may indicate to use a configured TCI state that is not the indicated TCI state for a PUSCH or PUCCH for the first TRP **305-a** or the second TRP **305-b**. In some cases, the RRC signaling may indicate to use a default TCI state, which in some examples may follow the TCI state of a control resource set (CORESET) associated with the MAC-CE activating the set of reference signals (e.g., the

CORESET with DCI scheduling a PDSCH with the MAC-CE). In some cases, control signaling **320** may be a MAC-CE that activates the TCI state for a reference signal or activates a channel state information (CSI) report associated with a reference signal. For example, the MAC-CE may include a field “followingUnifiedTCIforTRPA,” which may indicate to use an indicated TCI state associated with the first TRP **305-a** or the MAC-CE may include a field “followingUnifiedTCIforTRPB,” which may indicate to use an indicated TCI state associated with the second TRP **305-b**. In some cases, the MAC-CE may indicate to use a configured TCI state that is not the indicated TCI state for a PUSCH or PUCCH for the first TRP **305-a** or the second TRP **305-b**. In some cases, the MAC-CE may supersede or overwrite a previous indication of respective TCI states for the set of reference signals **315** (e.g., which may have been indicated via RRC signaling).

[0115] In some cases, for a semi-persistent set of reference signals **315**, the TCI state to apply for each reference signal of the set of reference signals **315** may be based on a configured rule. For example, the TCI state to apply for each reference signal of the set of reference signals **315** may be based on the order of the reference signals. For example, if there are two sets of SRSs configured for non-codebook or codebook based MIMO, a first set of SRSs for non-codebook or codebook based MIMO may follow the indicated TCI state for the first TRP **305-a** and a second set of SRSs for non-codebook or codebook based MIMO may follow the indicated TCI state for the second TRP **305-b**. As another example, if there are multiple sets of CSI-RSs associated with one CSI report, a first set of CSI-RSs and a second set of CSI-RSs may follow the indicated TCI states for the first TRP **305-a** and the second TRP **305-b**, respectively.

[0116] In some cases, the UE **115-b** may be activated or triggered with a set of semi-persistent or aperiodic reference signals **315** (e.g., SRSs or CSI-RSs) by a DCI message **325**. In some cases, the UE **115-b** (and the network entity **105-a**) may determine the TCI state applied for each reference signal in the set of reference signals **315** based on control signaling **320**. For example, the TCI state for a reference signal may be configured by RRC signaling or MAC-CE signaling. In some cases, the RRC signaling or MAC-CE signaling may include a field “followingUnifiedTCIforTRPA,” which may indicate to use an indicated TCI state associated with the first TRP **305-a** or the RRC signaling or MAC-CE signaling may include a field “followingUnifiedTCIforTRPB,” which may indicate to use an indicated TCI state associated with the second TRP **305-b**. In some cases, the RRC signaling or MAC-CE signaling may indicate to use a configured TCI state that is not the indicated TCI state for a PUSCH or PUCCH for the first TRP **305-a** or the second TRP **305-b**. In some cases, the scheduling/activating DCI message **325** may indicate the TCI state to apply for each reference signal of the set of reference signals **315**. In some cases, the DCI message **325** may include a field “followingUnifiedTCIforTRPA,” which may indicate to use an indicated TCI state associated with the first TRP **305-a** or the DCI message **325** may include a field “followingUnifiedTCIforTRPB,” which may indicate to use an indicated TCI state associated with the second TRP **305-b**. In some cases, the DCI message **325** may indicate to apply the TCI state of the DCI message **325**, where the TCI state of the CORESET used to receive the DCI message **325** is applied for the activated or scheduled reference signal. In some

cases, the UE 115-*b* may apply the TCI state of the CORE-SET used to receive the DCI message 325 is applied for the activated or scheduled reference signal when no other indication of which TCI state to apply is provided.

[0117] In some cases, for semi-persistent or aperiodic reference signals 315 activated or triggered by DCI message 325, the TCI state to apply for each reference signal of the set of reference signals 315 may be based on a configured rule. For example, the TCI state to apply for each reference signal of the set of reference signals 315 may be based on the order of the reference signals. For example, if there are two sets of SRSs configured for non-codebook or codebook based MIMO, a first set of SRSs for non-codebook or codebook based MIMO may follow the indicated TCI state for the first TRP 305-*a* and a second set of SRSs for non-codebook or codebook based MIMO may follow the indicated TCI state for the second TRP 305-*b*. As another example, if there are two sets of CSI-RSs associated with one CSI report, a first set of CSI-RSs and a second set of CSI-RSs for a same CSI report may follow the indicated TCI states for the first TRP 305-*a* and the second TRP 305-*b*, respectively.

[0118] In some cases, for semi-persistent or aperiodic reference signals 315 activated or triggered by DCI message 325, the UE 115-*b* may identify the TCI state to apply to each reference signal in the set of reference signals 315 based on a TRP selection indicator field in the DCI message 325. For example, the TRP selection indicator field may be configured in the DCI message 325 and indicate to apply {TCI1}, {TCI2}, {TCI1 and TCI2}, or {TCI2 and TCI1} to any of PDSCH, PUSCH, PDCCH, and PUCCH (e.g., where TCI1 refers to the TCI state associated with the first TRP 305-*a* and TCI2 refers to the TCI state associated with the second TRP 305-*b*). The TRP selection indicator field for other channels (e.g., PDSCH, PUSCH, PDCCH, or PUCCH) may be reused for a triggered or activated reference signal. In some examples, the TRP selection indicator field may be reused when no uplink or downlink data is scheduled. For example, the DCI message 325 may activate or trigger a SRS or CSI-RS without scheduling a PDSCH or PUSCH, and the TRP selection indicator field may indicate a TCI state for the activated or triggered SRS or CSI-RS. In some cases, the TRP selection indicator field may be reused even when downlink or uplink data is scheduled by the DCI message 325. The UE 115-*b* may apply the selected TCI states to both the data transmissions and the reference signals in the set of reference signals 315.

[0119] FIG. 4 illustrates an example of a process flow 400 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The process flow 400 may include a UE 115-*c*, which may be an example of a UE 115 as described herein. The process flow 400 may include a network entity 105-*b*, which may be an example of a network entity 105 as described herein. In the following description of the process flow 400, the operations between the network entity 105-*b* and the UE 115-*c* may be transmitted in a different order than the example order shown, or the operations performed by the network entity 105-*b* and the UE 115-*c* may be performed in different orders or at different times. Some operations may also be omitted from the process flow 400, and other operations may be added to the process flow 400.

[0120] At 405, the UE 115-*c* may establish a communications link with the network entity 105-*b* via a first TRP and a second TRP.

[0121] At 410, the UE 115-*c* may receive, from the network entity 105-*b*, scheduling information for a set of reference signals.

[0122] At 415, the UE 115-*c* and the network entity 105-*b* may identify, for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. In some examples, the UE 115-*c* may receive control signaling indicating the respective TCI state for each reference signal of the set of reference signals. In some examples, the UE 115-*c* and the network entity 105-*b* may identify a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, and identifying, for each reference signal of the set of reference signals, the respective TCI state includes identifying, for each reference signal of the set of reference signals one of the first TCI state or the second TCI state. In some cases, identifying the TCI state for each reference signal of the set of reference signals includes identifying, for each reference signal of the set of reference signals based on an order of the set of reference signals, one of the first TCI state or the second TCI state.

[0123] At 420, the UE 115-*c* may communicate with the network entity 105-*b* according to the respective TCI state identified for each reference signal of the set of reference signals. In some cases, the set of reference signals are a set of SRSs, and the communicating includes transmitting, from the UE 115-*c* to the network entity 105-*b*, the SRSs according to the respective TCI state identified for each SRS of the set of SRSs. In some cases, the set of reference signals are a set of CSI-RSs, and the communicating includes transmitting, from the network entity 105-*b* to the UE 115-*c*, the CSI-RSs according to the respective TCI state identified for each CSI-RS of the set of CSI-RSs.

[0124] FIG. 5 illustrates an example of a process flow 500 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The process flow 500 may include a UE 115-*d*, which may be an example of a UE 115 as described herein. The process flow 500 may include a network entity 105-*c*, which may be an example of a network entity 105 as described herein. In the following description of the process flow 500, the operations between the network entity 105-*c* and the UE 115-*d* may be transmitted in a different order than the example order shown, or the operations performed by the network entity 105-*c* and the UE 115-*d* may be performed in different orders or at different times. Some operations may also be omitted from the process flow 500, and other operations may be added to the process flow 500.

[0125] At 505, the UE 115-*d* may establish a communications link with the network entity 105-*c* via a first TRP and a second TRP.

[0126] At 510, the UE 115-*d* may receive, from the network entity 105-*c*, scheduling information for a set of reference signals.

[0127] At 515, the UE 115-*d* may receive, from the network entity 105-*c*, control signaling indicating the respective TCI state for each reference signal of the set of reference signals.

[0128] In some cases, the UE 115-*d* and the network entity 105-*c* may identify a first TCI state associated with the first

TRP and a second TCI state associated with the second TRP, and the control signaling indicates for each reference signal one of: the first TCI state, the second TCI state, or a different TCI state.

[0129] In some cases, the UE 115-d may receive, with the control signaling, for each reference signal of the set of reference signals, an indication of whether the respective TCI state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first TRP or the second TRP or a respective different transmission indicator state.

[0130] In some cases, the UE 115-d may receive the control signaling via a MAC-CE, and the control signaling may supersede a previous indication of respective TCI states for the set of reference signals (e.g., which may have been configured in RRC signaling). In some cases, the UE 115-d may receive the control signaling via RRC signaling.

[0131] In some cases, the control signaling may be a DCI message including a respective TRP indicator field for each reference signal of the set of reference signals, and identifying, for each reference signal of the set of reference signals, the respective TCI state, is based on the respective TRP indicator field for each reference signal of the set of reference signals.

[0132] At 520, based on the control signaling at 515, the UE 115-d and the network entity 105-c may identify, for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP.

[0133] At 525, the UE 115-d may communicate with the network entity 105-c according to the respective TCI state identified for each reference signal of the set of reference signals. In some cases, the set of reference signals are a set of SRSs, and the communicating includes transmitting, from the UE 115-d to the network entity 105-c, the SRSs according to the respective TCI state identified for each SRS of the set of SRSs. In some cases, the set of reference signals are a set of CSI-RSs, and the communicating includes transmitting, from the network entity 105-c to the UE 115-d, the CSI-RSs according to the respective TCI state identified for each CSI-RS of the set of CSI-RSs.

[0134] FIG. 6 shows a block diagram 600 of a device 605 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The device 605 may be an example of aspects of a UE 115 as described herein. The device 605 may include a receiver 610, a transmitter 615, and a communications manager 620. The device 605 may also include a processor. Each of these components may be in communication with one another (e.g., via one or more buses).

[0135] The receiver 610 may provide a means for receiving information such as packets, user data, control information, or any combination thereof associated with various information channels (e.g., control channels, data channels, information channels related to TCI state selection for reference signals in multi TRP operation). Information may be passed on to other components of the device 605. The receiver 610 may utilize a single antenna or a set of multiple antennas.

[0136] The transmitter 615 may provide a means for transmitting signals generated by other components of the device 605. For example, the transmitter 615 may transmit information such as packets, user data, control information, or any combination thereof associated with various infor-

mation channels (e.g., control channels, data channels, information channels related to TCI state selection for reference signals in multi TRP operation). In some examples, the transmitter 615 may be co-located with a receiver 610 in a transceiver module. The transmitter 615 may utilize a single antenna or a set of multiple antennas.

[0137] The communications manager 620, the receiver 610, the transmitter 615, or various combinations thereof or various components thereof may be examples of means for performing various aspects of TCI state selection for reference signals in multi TRP operation as described herein. For example, the communications manager 620, the receiver 610, the transmitter 615, or various combinations or components thereof may support a method for performing one or more of the functions described herein.

[0138] In some examples, the communications manager 620, the receiver 610, the transmitter 615, or various combinations or components thereof may be implemented in hardware (e.g., in communications management circuitry). The hardware may include a processor, a digital signal processor (DSP), a central processing unit (CPU), an application-specific integrated circuit (ASIC), a field-programmable gate array (FPGA) or other programmable logic device, a microcontroller, discrete gate or transistor logic, discrete hardware components, or any combination thereof configured as or otherwise supporting a means for performing the functions described in the present disclosure. In some examples, a processor and memory coupled with the processor may be configured to perform one or more of the functions described herein (e.g., by executing, by the processor, instructions stored in the memory).

[0139] Additionally, or alternatively, in some examples, the communications manager 620, the receiver 610, the transmitter 615, or various combinations or components thereof may be implemented in code (e.g., as communications management software or firmware) executed by a processor. If implemented in code executed by a processor, the functions of the communications manager 620, the receiver 610, the transmitter 615, or various combinations or components thereof may be performed by a general-purpose processor, a DSP, a CPU, an ASIC, an FPGA, a microcontroller, or any combination of these or other programmable logic devices (e.g., configured as or otherwise supporting a means for performing the functions described in the present disclosure).

[0140] In some examples, the communications manager 620 may be configured to perform various operations (e.g., receiving, obtaining, monitoring, outputting, transmitting) using or otherwise in cooperation with the receiver 610, the transmitter 615, or both. For example, the communications manager 620 may receive information from the receiver 610, send information to the transmitter 615, or be integrated in combination with the receiver 610, the transmitter 615, or both to obtain information, output information, or perform various other operations as described herein.

[0141] The communications manager 620 may support wireless communications at a UE in accordance with examples as disclosed herein. For example, the communications manager 620 may be configured as or otherwise support a means for establishing a communications link with a network via a first TRP and a second TRP. The communications manager 620 may be configured as or otherwise support a means for receiving scheduling information for a set of reference signals. The communications manager 620

may be configured as or otherwise support a means for identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The communications manager 620 may be configured as or otherwise support a means for communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[0142] By including or configuring the communications manager 620 in accordance with examples as described herein, the device 605 (e.g., a processor controlling or otherwise coupled with the receiver 610, the transmitter 615, the communications manager 620, or a combination thereof) may support techniques for more efficient utilization of communication resources by determining TCI states to apply to the communication of reference signals in multi TRP operation.

[0143] FIG. 7 shows a block diagram 700 of a device 705 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The device 705 may be an example of aspects of a device 605 or a UE 115 as described herein. The device 705 may include a receiver 710, a transmitter 715, and a communications manager 720. The device 705 may also include a processor. Each of these components may be in communication with one another (e.g., via one or more buses).

[0144] The receiver 710 may provide a means for receiving information such as packets, user data, control information, or any combination thereof associated with various information channels (e.g., control channels, data channels, information channels related to TCI state selection for reference signals in multi TRP operation). Information may be passed on to other components of the device 705. The receiver 710 may utilize a single antenna or a set of multiple antennas.

[0145] The transmitter 715 may provide a means for transmitting signals generated by other components of the device 705. For example, the transmitter 715 may transmit information such as packets, user data, control information, or any combination thereof associated with various information channels (e.g., control channels, data channels, information channels related to TCI state selection for reference signals in multi TRP operation). In some examples, the transmitter 715 may be co-located with a receiver 710 in a transceiver module. The transmitter 715 may utilize a single antenna or a set of multiple antennas.

[0146] The device 705, or various components thereof, may be an example of means for performing various aspects of TCI state selection for reference signals in multi TRP operation as described herein. For example, the communications manager 720 may include a multi-TRP communications link manager 725, a reference signal scheduling manager 730, a reference signal TCI state manager 735, a reference signal communication manager 740, or any combination thereof. The communications manager 720 may be an example of aspects of a communications manager 620 as described herein. In some examples, the communications manager 720, or various components thereof, may be configured to perform various operations (e.g., receiving, obtaining, monitoring, outputting, transmitting) using or otherwise in cooperation with the receiver 710, the transmitter 715, or both. For example, the communications manager 720 may receive information from the receiver 710,

send information to the transmitter 715, or be integrated in combination with the receiver 710, the transmitter 715, or both to obtain information, output information, or perform various other operations as described herein.

[0147] The communications manager 720 may support wireless communications at a UE in accordance with examples as disclosed herein. The multi-TRP communications link manager 725 may be configured as or otherwise support a means for establishing a communications link with a network via a first TRP and a second TRP. The reference signal scheduling manager 730 may be configured as or otherwise support a means for receiving scheduling information for a set of reference signals. The reference signal TCI state manager 735 may be configured as or otherwise support a means for identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The reference signal communication manager 740 may be configured as or otherwise support a means for communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[0148] FIG. 8 shows a block diagram 800 of a communications manager 820 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The communications manager 820 may be an example of aspects of a communications manager 620, a communications manager 720, or both, as described herein. The communications manager 820, or various components thereof, may be an example of means for performing various aspects of TCI state selection for reference signals in multi TRP operation as described herein. For example, the communications manager 820 may include a multi-TRP communications link manager 825, a reference signal scheduling manager 830, a reference signal TCI state manager 835, a reference signal communication manager 840, a DCI manager 845, an TRP TCI state manager 850, an SRS manager 855, a CSI-RS manager 860, a MAC-CE manager 865, an RRC manager 870, or any combination thereof. Each of these components may communicate, directly or indirectly, with one another (e.g., via one or more buses).

[0149] The communications manager 820 may support wireless communications at a UE in accordance with examples as disclosed herein. The multi-TRP communications link manager 825 may be configured as or otherwise support a means for establishing a communications link with a network via a first TRP and a second TRP. The reference signal scheduling manager 830 may be configured as or otherwise support a means for receiving scheduling information for a set of reference signals. The reference signal TCI state manager 835 may be configured as or otherwise support a means for identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The reference signal communication manager 840 may be configured as or otherwise support a means for communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[0150] In some examples, the reference signal TCI state manager 835 may be configured as or otherwise support a

means for receiving control signaling indicating the respective TCI state for each reference signal of the set of reference signals.

[0151] In some examples, the TRP TCI state manager 850 may be configured as or otherwise support a means for identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, where the control signaling indicates for each reference signal one of: the first TCI state, the second TCI state, or a different TCI state.

[0152] In some examples, the reference signal TCI state manager 835 may be configured as or otherwise support a means for receiving, with the control signaling, for each reference signal of the set of reference signals, an indication of whether the respective TCI state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first TRP or the second TRP or a respective different transmission indicator state.

[0153] In some examples, to support receiving the control signaling, the MAC-CE manager 865 may be configured as or otherwise support a means for receiving the control signaling via a MAC-CE, where the control signaling supercedes a previous indication of respective TCI states for the set of reference signals.

[0154] In some examples, to support receiving the control signaling, the RRC manager 870 may be configured as or otherwise support a means for receiving the control signaling via an radio resource control message.

[0155] In some examples, the DCI manager 845 may be configured as or otherwise support a means for receiving a DCI message including a respective TRP indicator field for each reference signal of the set of reference signals, where identifying for each reference signal of the set of reference signals, the respective TCI state is based on the respective TRP indicator field for each reference signal of the set of reference signals.

[0156] In some examples, the TRP TCI state manager 850 may be configured as or otherwise support a means for identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, where identifying for each reference signal of the set of reference signals, the respective TCI state includes identifying, for each reference signal of the set of reference signals one of the first TCI state or the second TCI state.

[0157] In some examples, to support identifying the TCI state for each reference signal of the set of reference signals, the reference signal TCI state manager 835 may be configured as or otherwise support a means for identifying, for each reference signal of the set of reference signals based on an order of the set of reference signals, one of the first TCI state or the second TCI state.

[0158] In some examples, to support communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals, where the set of reference signals are a set of SRSs, the SRS manager 855 may be configured as or otherwise support a means for transmitting the set of SRSs according to the respective TCI state identified for each SRS of the set of SRSs.

[0159] In some examples, to support communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals, where the set of reference signals are a set of CSI-RSs, the CSI-RS manager 860 may be configured as or otherwise

support a means for receiving the set of CSI-RSs according to the respective TCI state identified for each CSI-RS of the set of CSI-RSs.

[0160] FIG. 9 shows a diagram of a system 900 including a device 905 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The device 905 may be an example of or include the components of a device 605, a device 705, or a UE 115 as described herein. The device 905 may communicate (e.g., wirelessly) with one or more network entities 105, one or more UEs 115, or any combination thereof. The device 905 may include components for bi-directional voice and data communications including components for transmitting and receiving communications, such as a communications manager 920, an input/output (I/O) controller 910, a transceiver 915, an antenna 925, a memory 930, code 935, and a processor 940. These components may be in electronic communication or otherwise coupled (e.g., operatively, communicatively, functionally, electronically, electrically) via one or more buses (e.g., a bus 945).

[0161] The I/O controller 910 may manage input and output signals for the device 905. The I/O controller 910 may also manage peripherals not integrated into the device 905. In some cases, the I/O controller 910 may represent a physical connection or port to an external peripheral. In some cases, the I/O controller 910 may utilize an operating system such as iOS®, ANDROID®, MS-DOS®, MS-WINDOWS®, OS/2®, UNIX®, LINUX®, or another known operating system. Additionally, or alternatively, the I/O controller 910 may represent or interact with a modem, a keyboard, a mouse, a touchscreen, or a similar device. In some cases, the I/O controller 910 may be implemented as part of a processor, such as the processor 940. In some cases, a user may interact with the device 905 via the I/O controller 910 or via hardware components controlled by the I/O controller 910.

[0162] In some cases, the device 905 may include a single antenna 925. However, in some other cases, the device 905 may have more than one antenna 925, which may be capable of concurrently transmitting or receiving multiple wireless transmissions. The transceiver 915 may communicate bi-directionally, via the one or more antennas 925, wired, or wireless links as described herein. For example, the transceiver 915 may represent a wireless transceiver and may communicate bi-directionally with another wireless transceiver. The transceiver 915 may also include a modem to modulate the packets, to provide the modulated packets to one or more antennas 925 for transmission, and to demodulate packets received from the one or more antennas 925. The transceiver 915, or the transceiver 915 and one or more antennas 925, may be an example of a transmitter 615, a transmitter 715, a receiver 610, a receiver 710, or any combination thereof or component thereof, as described herein.

[0163] The memory 930 may include random access memory (RAM) and read-only memory (ROM). The memory 930 may store computer-readable, computer-executable code 935 including instructions that, when executed by the processor 940, cause the device 905 to perform various functions described herein. The code 935 may be stored in a non-transitory computer-readable medium such as system memory or another type of memory. In some cases, the code 935 may not be directly executable

by the processor 940 but may cause a computer (e.g., when compiled and executed) to perform functions described herein. In some cases, the memory 930 may contain, among other things, a basic I/O system (BIOS) which may control basic hardware or software operation such as the interaction with peripheral components or devices.

[0164] The processor 940 may include an intelligent hardware device (e.g., a general-purpose processor, a DSP, a CPU, a microcontroller, an ASIC, an FPGA, a programmable logic device, a discrete gate or transistor logic component, a discrete hardware component, or any combination thereof). In some cases, the processor 940 may be configured to operate a memory array using a memory controller. In some other cases, a memory controller may be integrated into the processor 940. The processor 940 may be configured to execute computer-readable instructions stored in a memory (e.g., the memory 930) to cause the device 905 to perform various functions (e.g., functions or tasks supporting TCI state selection for reference signals in multi TRP operation). For example, the device 905 or a component of the device 905 may include a processor 940 and memory 930 coupled with or to the processor 940, the processor 940 and memory 930 configured to perform various functions described herein.

[0165] The communications manager 920 may support wireless communications at a UE in accordance with examples as disclosed herein. For example, the communications manager 920 may be configured as or otherwise support a means for establishing a communications link with a network via a first TRP and a second TRP. The communications manager 920 may be configured as or otherwise support a means for receiving scheduling information for a set of reference signals. The communications manager 920 may be configured as or otherwise support a means for identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The communications manager 920 may be configured as or otherwise support a means for communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[0166] By including or configuring the communications manager 920 in accordance with examples as described herein, the device 905 may support techniques for improved communication reliability, more efficient utilization of communication resources, and improved coordination between devices by determining TCI states to apply to the communication of reference signals in multi TRP operation.

[0167] In some examples, the communications manager 920 may be configured to perform various operations (e.g., receiving, monitoring, transmitting) using or otherwise in cooperation with the transceiver 915, the one or more antennas 925, or any combination thereof. Although the communications manager 920 is illustrated as a separate component, in some examples, one or more functions described with reference to the communications manager 920 may be supported by or performed by the processor 940, the memory 930, the code 935, or any combination thereof. For example, the code 935 may include instructions executable by the processor 940 to cause the device 905 to perform various aspects of TCI state selection for reference signals in multi TRP operation as described herein, or the processor 940 and the memory 930 may be otherwise configured to perform or support such operations.

[0168] FIG. 10 shows a block diagram 1000 of a device 1005 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The device 1005 may be an example of aspects of a network entity 105 as described herein. The device 1005 may include a receiver 1010, a transmitter 1015, and a communications manager 1020. The device 1005 may also include a processor. Each of these components may be in communication with one another (e.g., via one or more buses).

[0169] The receiver 1010 may provide a means for obtaining (e.g., receiving, determining, identifying) information such as user data, control information, or any combination thereof (e.g., I/Q samples, symbols, packets, protocol data units, service data units) associated with various channels (e.g., control channels, data channels, information channels, channels associated with a protocol stack). Information may be passed on to other components of the device 1005. In some examples, the receiver 1010 may support obtaining information by receiving signals via one or more antennas. Additionally, or alternatively, the receiver 1010 may support obtaining information by receiving signals via one or more wired (e.g., electrical, fiber optic) interfaces, wireless interfaces, or any combination thereof.

[0170] The transmitter 1015 may provide a means for outputting (e.g., transmitting, providing, conveying, sending) information generated by other components of the device 1005. For example, the transmitter 1015 may output information such as user data, control information, or any combination thereof (e.g., I/Q samples, symbols, packets, protocol data units, service data units) associated with various channels (e.g., control channels, data channels, information channels, channels associated with a protocol stack). In some examples, the transmitter 1015 may support outputting information by transmitting signals via one or more antennas. Additionally, or alternatively, the transmitter 1015 may support outputting information by transmitting signals via one or more wired (e.g., electrical, fiber optic) interfaces, wireless interfaces, or any combination thereof. In some examples, the transmitter 1015 and the receiver 1010 may be co-located in a transceiver, which may include or be coupled with a modem.

[0171] The communications manager 1020, the receiver 1010, the transmitter 1015, or various combinations thereof or various components thereof may be examples of means for performing various aspects of TCI state selection for reference signals in multi TRP operation as described herein. For example, the communications manager 1020, the receiver 1010, the transmitter 1015, or various combinations or components thereof may support a method for performing one or more of the functions described herein.

[0172] In some examples, the communications manager 1020, the receiver 1010, the transmitter 1015, or various combinations or components thereof may be implemented in hardware (e.g., in communications management circuitry). The hardware may include a processor, a DSP, a CPU, an ASIC, an FPGA or other programmable logic device, a microcontroller, discrete gate or transistor logic, discrete hardware components, or any combination thereof configured as or otherwise supporting a means for performing the functions described in the present disclosure. In some examples, a processor and memory coupled with the processor may be configured to perform one or more of the

functions described herein (e.g., by executing, by the processor, instructions stored in the memory).

[0173] Additionally, or alternatively, in some examples, the communications manager 1020, the receiver 1010, the transmitter 1015, or various combinations or components thereof may be implemented in code (e.g., as communications management software or firmware) executed by a processor. If implemented in code executed by a processor, the functions of the communications manager 1020, the receiver 1010, the transmitter 1015, or various combinations or components thereof may be performed by a general-purpose processor, a DSP, a CPU, an ASIC, an FPGA, a microcontroller, or any combination of these or other programmable logic devices (e.g., configured as or otherwise supporting a means for performing the functions described in the present disclosure).

[0174] In some examples, the communications manager 1020 may be configured to perform various operations (e.g., receiving, obtaining, monitoring, outputting, transmitting) using or otherwise in cooperation with the receiver 1010, the transmitter 1015, or both. For example, the communications manager 1020 may receive information from the receiver 1010, send information to the transmitter 1015, or be integrated in combination with the receiver 1010, the transmitter 1015, or both to obtain information, output information, or perform various other operations as described herein.

[0175] The communications manager 1020 may support wireless communications at a network entity in accordance with examples as disclosed herein. For example, the communications manager 1020 may be configured as or otherwise support a means for establishing a communications link with a UE via a first TRP and a second TRP. The communications manager 1020 may be configured as or otherwise support a means for transmitting, to the UE, scheduling information for a set of reference signals. The communications manager 1020 may be configured as or otherwise support a means for identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The communications manager 1020 may be configured as or otherwise support a means for communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals.

[0176] By including or configuring the communications manager 1020 in accordance with examples as described herein, the device 1005 (e.g., a processor controlling or otherwise coupled with the receiver 1010, the transmitter 1015, the communications manager 1020, or a combination thereof) may support techniques for more efficient utilization of communication resources by determining TCI states to apply to the communication of reference signals in multi TRP operation.

[0177] FIG. 11 shows a block diagram 1100 of a device 1105 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The device 1105 may be an example of aspects of a device 1005 or a network entity 105 as described herein. The device 1105 may include a receiver 1110, a transmitter 1115, and a communications manager 1120. The device 1105 may also include a processor. Each of these components may be in communication with one another (e.g., via one or more buses).

[0178] The receiver 1110 may provide a means for obtaining (e.g., receiving, determining, identifying) information such as user data, control information, or any combination thereof (e.g., I/Q samples, symbols, packets, protocol data units, service data units) associated with various channels (e.g., control channels, data channels, information channels, channels associated with a protocol stack). Information may be passed on to other components of the device 1105. In some examples, the receiver 1110 may support obtaining information by receiving signals via one or more antennas. Additionally, or alternatively, the receiver 1110 may support obtaining information by receiving signals via one or more wired (e.g., electrical, fiber optic) interfaces, wireless interfaces, or any combination thereof.

[0179] The transmitter 1115 may provide a means for outputting (e.g., transmitting, providing, conveying, sending) information generated by other components of the device 1105. For example, the transmitter 1115 may output information such as user data, control information, or any combination thereof (e.g., I/Q samples, symbols, packets, protocol data units, service data units) associated with various channels (e.g., control channels, data channels, information channels, channels associated with a protocol stack). In some examples, the transmitter 1115 may support outputting information by transmitting signals via one or more antennas. Additionally, or alternatively, the transmitter 1115 may support outputting information by transmitting signals via one or more wired (e.g., electrical, fiber optic) interfaces, wireless interfaces, or any combination thereof. In some examples, the transmitter 1115 and the receiver 1110 may be co-located in a transceiver, which may include or be coupled with a modem.

[0180] The device 1105, or various components thereof, may be an example of means for performing various aspects of TCI state selection for reference signals in multi TRP operation as described herein. For example, the communications manager 1120 may include a multi-TRP communications link manager 1125, a reference signal scheduling manager 1130, a reference signal TCI state manager 1135, a reference signal communication manager 1140, or any combination thereof. The communications manager 1120 may be an example of aspects of a communications manager 1020 as described herein. In some examples, the communications manager 1120, or various components thereof, may be configured to perform various operations (e.g., receiving, obtaining, monitoring, outputting, transmitting) using or otherwise in cooperation with the receiver 1110, the transmitter 1115, or both. For example, the communications manager 1120 may receive information from the receiver 1110, send information to the transmitter 1115, or be integrated in combination with the receiver 1110, the transmitter 1115, or both to obtain information, output information, or perform various other operations as described herein.

[0181] The communications manager 1120 may support wireless communications at a network entity in accordance with examples as disclosed herein. The multi-TRP communications link manager 1125 may be configured as or otherwise support a means for establishing a communications link with a UE via a first TRP and a second TRP. The reference signal scheduling manager 1130 may be configured as or otherwise support a means for transmitting, to the UE, scheduling information for a set of reference signals. The reference signal TCI state manager 1135 may be configured as or otherwise support a means for identifying for

each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The reference signal communication manager 1140 may be configured as or otherwise support a means for communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals.

[0182] FIG. 12 shows a block diagram 1200 of a communications manager 1220 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The communications manager 1220 may be an example of aspects of a communications manager 1020, a communications manager 1120, or both, as described herein. The communications manager 1220, or various components thereof, may be an example of means for performing various aspects of TCI state selection for reference signals in multi TRP operation as described herein. For example, the communications manager 1220 may include a multi-TRP communications link manager 1225, a reference signal scheduling manager 1230, a reference signal TCI state manager 1235, a reference signal communication manager 1240, a DCI manager 1245, an TRP TCI state manager 1250, an SRS manager 1255, a CSI-RS manager 1260, a MAC-CE manager 1265, an RRC manager 1270, or any combination thereof. Each of these components may communicate, directly or indirectly, with one another (e.g., via one or more buses) which may include communications within a protocol layer of a protocol stack, communications associated with a logical channel of a protocol stack (e.g., between protocol layers of a protocol stack, within a device, component, or virtualized component associated with a network entity 105, between devices, components, or virtualized components associated with a network entity 105), or any combination thereof.

[0183] The communications manager 1220 may support wireless communications at a network entity in accordance with examples as disclosed herein. The multi-TRP communications link manager 1225 may be configured as or otherwise support a means for establishing a communications link with a UE via a first TRP and a second TRP. The reference signal scheduling manager 1230 may be configured as or otherwise support a means for transmitting, to the UE, scheduling information for a set of reference signals. The reference signal TCI state manager 1235 may be configured as or otherwise support a means for identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The reference signal communication manager 1240 may be configured as or otherwise support a means for communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals.

[0184] In some examples, the reference signal TCI state manager 1235 may be configured as or otherwise support a means for transmitting, to the UE, control signaling indicating the respective TCI state for each reference signal of the set of reference signals.

[0185] In some examples, the TRP TCI state manager 1250 may be configured as or otherwise support a means for identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, where

the control signaling indicates for each reference signal one of: the first TCI state, the second TCI state, or a different TCI state.

[0186] In some examples, the reference signal TCI state manager 1235 may be configured as or otherwise support a means for transmitting, with the control signaling, for each reference signal of the set of reference signals, an indication of whether the respective TCI state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first TRP or the second TRP or a respective different transmission indicator state.

[0187] In some examples, to support transmitting the control signaling, the MAC-CE manager 1265 may be configured as or otherwise support a means for transmitting the control signaling via a MAC-CE, where the control signaling supersedes a previous indication of respective TCI states for the set of reference signals.

[0188] In some examples, the RRC manager 1270 may be configured as or otherwise support a means for transmitting the control signaling via an RRC message.

[0189] In some examples, the DCI manager 1245 may be configured as or otherwise support a means for transmitting, to the UE, a DCI message including a respective TRP indicator field for each reference signal of the set of reference signals, where identifying, for each reference signal of the set of reference signals, the respective TCI state is based on the respective TRP indicator field for each reference signal of the set of reference signals.

[0190] In some examples, the TRP TCI state manager 1250 may be configured as or otherwise support a means for identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, where identifying for each reference signal of the set of reference signals, the respective TCI state includes identifying, for each reference signal of the set of reference signals one of the first TCI state or the second TCI state.

[0191] In some examples, to support identifying the TCI state for each reference signal of the set of reference signals, the reference signal TCI state manager 1235 may be configured as or otherwise support a means for identifying, for each reference signal of the set of reference signals based on an order of the set of reference signals, one of the first TCI state or the second TCI state.

[0192] In some examples, to support communicating with the UE according to the respective TCI state identified for each reference signal of the set of reference signals, where the set of reference signals are a set of SRSs, the SRS manager 1255 may be configured as or otherwise support a means for receiving the set of SRSs according to the respective TCI state identified for each SRS of the set of SRSs.

[0193] In some examples, to support communicating with the UE according to the respective TCI state identified for each reference signal of the set of reference signals, where the set of reference signals are a set of CSI-RSs, the CSI-RS manager 1260 may be configured as or otherwise support a means for transmitting the set of CSI-RSs according to the respective TCI state identified for each CSI-RS of the set of CSI-RSs.

[0194] FIG. 13 shows a diagram of a system 1300 including a device 1305 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The device 1305 may be an example of or include the components of a

device **1005**, a device **1105**, or a network entity **105** as described herein. The device **1305** may communicate with one or more network entities **105**, one or more UEs **115**, or any combination thereof, which may include communications over one or more wired interfaces, over one or more wireless interfaces, or any combination thereof. The device **1305** may include components that support outputting and obtaining communications, such as a communications manager **1320**, a transceiver **1310**, an antenna **1315**, a memory **1325**, code **1330**, and a processor **1335**. These components may be in electronic communication or otherwise coupled (e.g., operatively, communicatively, functionally, electronically, electrically) via one or more buses (e.g., a bus **1340**).

[0195] The transceiver **1310** may support bi-directional communications via wired links, wireless links, or both as described herein. In some examples, the transceiver **1310** may include a wired transceiver and may communicate bi-directionally with another wired transceiver. Additionally, or alternatively, in some examples, the transceiver **1310** may include a wireless transceiver and may communicate bi-directionally with another wireless transceiver. In some examples, the device **1305** may include one or more antennas **1315**, which may be capable of transmitting or receiving wireless transmissions (e.g., concurrently). The transceiver **1310** may also include a modem to modulate signals, to provide the modulated signals for transmission (e.g., by one or more antennas **1315**, by a wired transmitter), to receive modulated signals (e.g., from one or more antennas **1315**, from a wired receiver), and to demodulate signals. The transceiver **1310**, or the transceiver **1310** and one or more antennas **1315** or wired interfaces, where applicable, may be an example of a transmitter **1015**, a transmitter **1115**, a receiver **1010**, a receiver **1110**, or any combination thereof or component thereof, as described herein. In some examples, the transceiver may be operable to support communications via one or more communications links (e.g., a communication link **125**, a backhaul communication link **120**, a midhaul communication link **162**, a fronthaul communication link **168**).

[0196] The memory **1325** may include RAM and ROM. The memory **1325** may store computer-readable, computer-executable code **1330** including instructions that, when executed by the processor **1335**, cause the device **1305** to perform various functions described herein. The code **1330** may be stored in a non-transitory computer-readable medium such as system memory or another type of memory. In some cases, the code **1330** may not be directly executable by the processor **1335** but may cause a computer (e.g., when compiled and executed) to perform functions described herein. In some cases, the memory **1325** may contain, among other things, a BIOS which may control basic hardware or software operation such as the interaction with peripheral components or devices.

[0197] The processor **1335** may include an intelligent hardware device (e.g., a general-purpose processor, a DSP, an ASIC, a CPU, an FPGA, a microcontroller, a programmable logic device, discrete gate or transistor logic, a discrete hardware component, or any combination thereof). In some cases, the processor **1335** may be configured to operate a memory array using a memory controller. In some other cases, a memory controller may be integrated into the processor **1335**. The processor **1335** may be configured to execute computer-readable instructions stored in a memory (e.g., the memory **1325**) to cause the device **1305** to perform

various functions (e.g., functions or tasks supporting TCI state selection for reference signals in multi TRP operation). For example, the device **1305** or a component of the device **1305** may include a processor **1335** and memory **1325** coupled with the processor **1335**, the processor **1335** and memory **1325** configured to perform various functions described herein. The processor **1335** may be an example of a cloud-computing platform (e.g., one or more physical nodes and supporting software such as operating systems, virtual machines, or container instances) that may host the functions (e.g., by executing code **1330**) to perform the functions of the device **1305**.

[0198] In some examples, a bus **1340** may support communications of (e.g., within) a protocol layer of a protocol stack. In some examples, a bus **1340** may support communications associated with a logical channel of a protocol stack (e.g., between protocol layers of a protocol stack), which may include communications performed within a component of the device **1305**, or between different components of the device **1305** that may be co-located or located in different locations (e.g., where the device **1305** may refer to a system in which one or more of the communications manager **1320**, the transceiver **1310**, the memory **1325**, the code **1330**, and the processor **1335** may be located in one of the different components or divided between different components).

[0199] In some examples, the communications manager **1320** may manage aspects of communications with a core network **130** (e.g., via one or more wired or wireless backhaul links). For example, the communications manager **1320** may manage the transfer of data communications for client devices, such as one or more UEs **115**. In some examples, the communications manager **1320** may manage communications with other network entities **105**, and may include a controller or scheduler for controlling communications with UEs **115** in cooperation with other network entities **105**. In some examples, the communications manager **1320** may support an X2 interface within an LTE/LTE-A wireless communications network technology to provide communication between network entities **105**.

[0200] The communications manager **1320** may support wireless communications at a network entity in accordance with examples as disclosed herein. For example, the communications manager **1320** may be configured as or otherwise support a means for establishing a communications link with a UE via a first TRP and a second TRP. The communications manager **1320** may be configured as or otherwise support a means for transmitting, to the UE, scheduling information for a set of reference signals. The communications manager **1320** may be configured as or otherwise support a means for identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The communications manager **1320** may be configured as or otherwise support a means for communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals.

[0201] By including or configuring the communications manager **1320** in accordance with examples as described herein, the device **1305** may support techniques for improved communication reliability, more efficient utilization of communication resources, and improved coordina-

tion between devices by determining TCI states to apply to the communication of reference signals in multi TRP operation.

[0202] In some examples, the communications manager 1320 may be configured to perform various operations (e.g., receiving, obtaining, monitoring, outputting, transmitting) using or otherwise in cooperation with the transceiver 1310, the one or more antennas 1315 (e.g., where applicable), or any combination thereof. Although the communications manager 1320 is illustrated as a separate component, in some examples, one or more functions described with reference to the communications manager 1320 may be supported by or performed by the processor 1335, the memory 1325, the code 1330, the transceiver 1310, or any combination thereof. For example, the code 1330 may include instructions executable by the processor 1335 to cause the device 1305 to perform various aspects of TCI state selection for reference signals in multi TRP operation as described herein, or the processor 1335 and the memory 1325 may be otherwise configured to perform or support such operations.

[0203] FIG. 14 shows a flowchart illustrating a method 1400 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The operations of the method 1400 may be implemented by a UE or its components as described herein. For example, the operations of the method 1400 may be performed by a UE 115 as described with reference to FIGS. 1 through 9. In some examples, a UE may execute a set of instructions to control the functional elements of the UE to perform the described functions. Additionally, or alternatively, the UE may perform aspects of the described functions using special-purpose hardware.

[0204] At 1405, the method may include establishing a communications link with a network via a first TRP and a second TRP. The operations of 1405 may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of 1405 may be performed by a multi-TRP communications link manager 825 as described with reference to FIG. 8.

[0205] At 1410, the method may include receiving scheduling information for a set of reference signals. The operations of 1410 may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of 1410 may be performed by a reference signal scheduling manager 830 as described with reference to FIG. 8.

[0206] At 1415, the method may include identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The operations of 1415 may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of 1415 may be performed by a reference signal TCI state manager 835 as described with reference to FIG. 8.

[0207] At 1420, the method may include communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals. The operations of 1420 may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of 1420 may be performed by a reference signal communication manager 840 as described with reference to FIG. 8.

[0208] FIG. 15 shows a flowchart illustrating a method 1500 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The operations of the method 1500 may be implemented by a UE or its components as described herein. For example, the operations of the method 1500 may be performed by a UE 115 as described with reference to FIGS. 1 through 9. In some examples, a UE may execute a set of instructions to control the functional elements of the UE to perform the described functions. Additionally, or alternatively, the UE may perform aspects of the described functions using special-purpose hardware.

[0209] At 1505, the method may include establishing a communications link with a network via a first TRP and a second TRP. The operations of 1505 may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of 1505 may be performed by a multi-TRP communications link manager 825 as described with reference to FIG. 8.

[0210] At 1510, the method may include receiving scheduling information for a set of reference signals. The operations of 1510 may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of 1510 may be performed by a reference signal scheduling manager 830 as described with reference to FIG. 8.

[0211] At 1515, the method may include receiving control signaling indicating a respective TCI state for each reference signal of the set of reference signals. The operations of 1515 may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of 1515 may be performed by a reference signal TCI state manager 835 as described with reference to FIG. 8.

[0212] At 1520, the method may include identifying for each reference signal of the set of reference signals, the respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The operations of 1520 may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of 1520 may be performed by a reference signal TCI state manager 835 as described with reference to FIG. 8.

[0213] At 1525, the method may include communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals. The operations of 1525 may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of 1525 may be performed by a reference signal communication manager 840 as described with reference to FIG. 8.

[0214] FIG. 16 shows a flowchart illustrating a method 1600 that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The operations of the method 1600 may be implemented by a UE or its components as described herein. For example, the operations of the method 1600 may be performed by a UE 115 as described with reference to FIGS. 1 through 9. In some examples, a UE may execute a set of instructions to control the functional elements of the UE to perform the described functions. Additionally, or alternatively, the UE may perform aspects of the described functions using special-purpose hardware.

[0215] At 1605, the method may include establishing a communications link with a network via a first TRP and a

second TRP. The operations of **1605** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1605** may be performed by a multi-TRP communications link manager **825** as described with reference to FIG. 8.

[0216] At **1610**, the method may include receiving scheduling information for a set of reference signals. The operations of **1610** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1610** may be performed by a reference signal scheduling manager **830** as described with reference to FIG. 8.

[0217] At **1615**, the method may include receiving a DCI message including a respective TRP indicator field for each reference signal of the set of reference signals. The operations of **1615** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1615** may be performed by a DCI manager **845** as described with reference to FIG. 8.

[0218] At **1620**, the method may include identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, where identifying for each reference signal of the set of reference signals, the respective TCI state is based on the respective TRP indicator field for each reference signal of the set of reference signals. The operations of **1620** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1620** may be performed by a reference signal TCI state manager **835** as described with reference to FIG. 8.

[0219] At **1625**, the method may include communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals. The operations of **1625** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1625** may be performed by a reference signal communication manager **840** as described with reference to FIG. 8.

[0220] FIG. 17 shows a flowchart illustrating a method **1700** that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The operations of the method **1700** may be implemented by a network entity or its components as described herein. For example, the operations of the method **1700** may be performed by a network entity as described with reference to FIGS. 1 through 5 and 10 through 13. In some examples, a network entity may execute a set of instructions to control the functional elements of the network entity to perform the described functions. Additionally, or alternatively, the network entity may perform aspects of the described functions using special-purpose hardware.

[0221] At **1705**, the method may include establishing a communications link with a UE via a first TRP and a second TRP. The operations of **1705** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1705** may be performed by a multi-TRP communications link manager **1225** as described with reference to FIG. 12.

[0222] At **1710**, the method may include transmitting, to the UE, scheduling information for a set of reference signals. The operations of **1710** may be performed in accordance with examples as disclosed herein. In some examples,

aspects of the operations of **1710** may be performed by a reference signal scheduling manager **1230** as described with reference to FIG. 12.

[0223] At **1715**, the method may include identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The operations of **1715** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1715** may be performed by a reference signal TCI state manager **1235** as described with reference to FIG. 12.

[0224] At **1720**, the method may include communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals. The operations of **1720** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1720** may be performed by a reference signal communication manager **1240** as described with reference to FIG. 12.

[0225] FIG. 18 shows a flowchart illustrating a method **1800** that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The operations of the method **1800** may be implemented by a network entity or its components as described herein. For example, the operations of the method **1800** may be performed by a network entity as described with reference to FIGS. 1 through 5 and 10 through 13. In some examples, a network entity may execute a set of instructions to control the functional elements of the network entity to perform the described functions. Additionally, or alternatively, the network entity may perform aspects of the described functions using special-purpose hardware.

[0226] At **1805**, the method may include establishing a communications link with a UE via a first TRP and a second TRP. The operations of **1805** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1805** may be performed by a multi-TRP communications link manager **1225** as described with reference to FIG. 12.

[0227] At **1810**, the method may include transmitting, to the UE, scheduling information for a set of reference signals. The operations of **1810** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1810** may be performed by a reference signal scheduling manager **1230** as described with reference to FIG. 12.

[0228] At **1815**, the method may include transmitting, to the UE, control signaling indicating a respective TCI state for each reference signal of the set of reference signals. The operations of **1815** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1815** may be performed by a reference signal TCI state manager **1235** as described with reference to FIG. 12.

[0229] At **1820**, the method may include identifying for each reference signal of the set of reference signals, the respective TCI state according to an association of each reference signal with the first TRP or the second TRP. The operations of **1820** may be performed in accordance with examples as disclosed herein. In some examples, aspects of

the operations of **1820** may be performed by a reference signal TCI state manager **1235** as described with reference to FIG. **12**.

[**0230**] At **1825**, the method may include communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals. The operations of **1825** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1825** may be performed by a reference signal communication manager **1240** as described with reference to FIG. **12**.

[**0231**] FIG. **19** shows a flowchart illustrating a method **1900** that supports TCI state selection for reference signals in multi TRP operation in accordance with one or more aspects of the present disclosure. The operations of the method **1900** may be implemented by a network entity or its components as described herein. For example, the operations of the method **1900** may be performed by a network entity as described with reference to FIGS. **1** through **5** and **10** through **13**. In some examples, a network entity may execute a set of instructions to control the functional elements of the network entity to perform the described functions. Additionally, or alternatively, the network entity may perform aspects of the described functions using special-purpose hardware.

[**0232**] At **1905**, the method may include establishing a communications link with a UE via a first TRP and a second TRP. The operations of **1905** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1905** may be performed by a multi-TRP communications link manager **1225** as described with reference to FIG. **12**.

[**0233**] At **1910**, the method may include transmitting, to the UE, scheduling information for a set of reference signals. The operations of **1910** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1910** may be performed by a reference signal scheduling manager **1230** as described with reference to FIG. **12**.

[**0234**] At **1915**, the method may include transmitting, to the UE, a DCI message including a respective TRP indicator field for each reference signal of the set of reference signals. The operations of **1915** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1915** may be performed by a DCI manager **1245** as described with reference to FIG. **12**.

[**0235**] At **1920**, the method may include identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP, wherein identifying, for each reference signal of the set of reference signals, the respective TCI state is based on the respective TRP indicator field for each reference signal of the set of reference signals. The operations of **1920** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1920** may be performed by a reference signal TCI state manager **1235** as described with reference to FIG. **12**.

[**0236**] At **1925**, the method may include communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals. The operations of **1925** may be performed in accordance with examples as disclosed herein. In some examples, aspects of the operations of **1925**

may be performed by a reference signal communication manager **1240** as described with reference to FIG. **12**.

[**0237**] The following provides an overview of aspects of the present disclosure:

[**0238**] Aspect 1: A method for wireless communications at a UE, comprising: establishing a communications link with a network via a first TRP and a second TRP; receiving scheduling information for a set of reference signals; identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP; and communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals.

[**0239**] Aspect 2: The method of aspect 1, further comprising: receiving control signaling indicating the respective TCI state for each reference signal of the set of reference signals.

[**0240**] Aspect 3: The method of aspect 2, further comprising: identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, wherein the control signaling indicates for each reference signal one of: the first TCI state, the second TCI state, or a different TCI state.

[**0241**] Aspect 4: The method of any of aspects 2 through 3, further comprising: receiving, with the control signaling, for each reference signal of the set of reference signals, an indication of whether the respective TCI state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first TRP or the second TRP or a respective different transmission indicator state.

[**0242**] Aspect 5: The method of any of aspects 2 through 4, wherein receiving the control signaling comprises: receiving the control signaling via a MAC-CE, wherein the control signaling supersedes a previous indication of respective TCI states for the set of reference signals.

[**0243**] Aspect 6: The method of any of aspects 2 through 5, wherein receiving the control signaling comprises: receiving the control signaling via a RRC message.

[**0244**] Aspect 7: The method of any of aspects 1 through 6, further comprising: receiving a DCI message comprising a respective TRP indicator field for each reference signal of the set of reference signals, wherein identifying for each reference signal of the set of reference signals, the respective TCI state is based at least in part on the respective TRP indicator field for each reference signal of the set of reference signals.

[**0245**] Aspect 8: The method of any of aspects 1 through 7, further comprising: identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, wherein identifying for each reference signal of the set of reference signals, the respective TCI state comprises identifying, for each reference signal of the set of reference signals one of the first TCI state or the second TCI state.

[**0246**] Aspect 9: The method of aspect 8, wherein identifying the TCI state for each reference signal of the set of reference signals comprises: identifying, for each reference signal of the set of reference signals based at least in part on an order of the set of reference signals, one of the first TCI state or the second TCI state.

[**0247**] Aspect 10: The method of any of aspects 1 through 9, wherein the set of reference signals comprises a set of

SRSs, wherein communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals comprises: transmitting the set of SRSs according to the respective TCI state identified for each SRS of the set of SRSs.

[0248] Aspect 11: The method of any of aspects 1 through 10, wherein the set of reference signals comprises a set of CSI-RSs, wherein communicating with the network according to the respective TCI state identified for each reference signal of the set of reference signals comprises: receiving the set of CSI-RSs according to the respective TCI state identified for each CSI-RS of the set of CSI-RSs.

[0249] Aspect 12: A method for wireless communications at a network entity, comprising: establishing a communications link with a UE via a first TRP and a second TRP; transmitting, to the UE, scheduling information for a set of reference signals; identifying for each reference signal of the set of reference signals, a respective TCI state according to an association of each reference signal with the first TRP or the second TRP; and communicating with the UE via the first TRP and the second TRP according to the respective TCI state identified for each reference signal of the set of reference signals.

[0250] Aspect 13: The method of aspect 12, further comprising: transmitting, to the UE, control signaling indicating the respective TCI state for each reference signal of the set of reference signals.

[0251] Aspect 14: The method of aspect 13, further comprising: identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, wherein the control signaling indicates for each reference signal one of: the first TCI state, the second TCI state, or a different TCI state.

[0252] Aspect 15: The method of any of aspects 13 through 14, further comprising: transmitting, with the control signaling, for each reference signal of the set of reference signals, an indication of whether the respective TCI state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first TRP or the second TRP or a respective different transmission indicator state.

[0253] Aspect 16: The method of any of aspects 13 through 15, wherein transmitting the control signaling comprises: transmitting the control signaling via a MAC-CE, wherein the control signaling supersedes a previous indication of respective TCI states for the set of reference signals.

[0254] Aspect 17: The method of any of aspects 13 through 16, further comprising: transmitting the control signaling via a RRC message.

[0255] Aspect 18: The method of any of aspects 12 through 17, further comprising: transmitting, to the UE, a DCI message comprising a respective TRP indicator field for each reference signal of the set of reference signals, wherein identifying, for each reference signal of the set of reference signals, the respective TCI state is based at least in part on the respective TRP indicator field for each reference signal of the set of reference signals.

[0256] Aspect 19: The method of any of aspects 12 through 18, further comprising: identifying a first TCI state associated with the first TRP and a second TCI state associated with the second TRP, wherein identifying for each reference signal of the set of reference signals, the respective

TCI state comprises identifying, for each reference signal of the set of reference signals one of the first TCI state or the second TCI state.

[0257] Aspect 20: The method of aspect 19, wherein identifying the TCI state for each reference signal of the set of reference signals comprises: identifying, for each reference signal of the set of reference signals based at least in part on an order of the set of reference signals, one of the first TCI state or the second TCI state.

[0258] Aspect 21: The method of any of aspects 12 through 20, wherein the set of reference signals comprises a set of SRSs, wherein communicating with the UE according to the respective TCI state identified for each reference signal of the set of reference signals comprises: receiving the set of SRSs according to the respective TCI state identified for each SRS of the set of SRSs.

[0259] Aspect 22: The method of any of aspects 12 through 21, wherein the set of reference signals comprises a set of CSI-RSs, wherein communicating with the UE according to the respective TCI state identified for each reference signal of the set of reference signals comprises: transmitting the set of CSI-RSs according to the respective TCI state identified for each CSI-RS of the set of CSI-RSs.

[0260] Aspect 23: An apparatus for wireless communications at a UE, comprising a processor; memory coupled with the processor; and instructions stored in the memory and executable by the processor to cause the apparatus to perform a method of any of aspects 1 through 11.

[0261] Aspect 24: An apparatus for wireless communications at a UE, comprising at least one means for performing a method of any of aspects 1 through 11.

[0262] Aspect 25: A non-transitory computer-readable medium storing code for wireless communications at a UE, the code comprising instructions executable by a processor to perform a method of any of aspects 1 through 11.

[0263] Aspect 26: An apparatus for wireless communications at a network entity, comprising a processor; memory coupled with the processor; and instructions stored in the memory and executable by the processor to cause the apparatus to perform a method of any of aspects 12 through 22.

[0264] Aspect 27: An apparatus for wireless communications at a network entity, comprising at least one means for performing a method of any of aspects 12 through 22.

[0265] Aspect 28: A non-transitory computer-readable medium storing code for wireless communications at a network entity, the code comprising instructions executable by a processor to perform a method of any of aspects 12 through 22.

[0266] It should be noted that the methods described herein describe possible implementations, and that the operations and the steps may be rearranged or otherwise modified and that other implementations are possible. Further, aspects from two or more of the methods may be combined.

[0267] Although aspects of an LTE, LTE-A, LTE-A Pro, or NR system may be described for purposes of example, and LTE, LTE-A, LTE-A Pro, or NR terminology may be used in much of the description, the techniques described herein are applicable beyond LTE, LTE-A, LTE-A Pro, or NR networks. For example, the described techniques may be applicable to various other wireless communications systems such as Ultra Mobile Broadband (UMB), Institute of Electrical and Electronics Engineers (IEEE) 802.11 (Wi-Fi),

IEEE 802.16 (WiMAX), IEEE 802.20, Flash-OFDM, as well as other systems and radio technologies not explicitly mentioned herein.

[0268] Information and signals described herein may be represented using any of a variety of different technologies and techniques. For example, data, instructions, commands, information, signals, bits, symbols, and chips that may be referenced throughout the description may be represented by voltages, currents, electromagnetic waves, magnetic fields or particles, optical fields or particles, or any combination thereof.

[0269] The various illustrative blocks and components described in connection with the disclosure herein may be implemented or performed using a general-purpose processor, a DSP, an ASIC, a CPU, an FPGA or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general-purpose processor may be a microprocessor but, in the alternative, the processor may be any processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices (e.g., a combination of a DSP and a microprocessor, multiple microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration).

[0270] The functions described herein may be implemented using hardware, software executed by a processor, firmware, or any combination thereof. If implemented using software executed by a processor, the functions may be stored as or transmitted using one or more instructions or code of a computer-readable medium. Other examples and implementations are within the scope of the disclosure and appended claims. For example, due to the nature of software, functions described herein may be implemented using software executed by a processor, hardware, firmware, hardwiring, or combinations of any of these. Features implementing functions may also be physically located at various positions, including being distributed such that portions of functions are implemented at different physical locations.

[0271] Computer-readable media includes both non-transitory computer storage media and communication media including any medium that facilitates transfer of a computer program from one location to another. A non-transitory storage medium may be any available medium that may be accessed by a general-purpose or special-purpose computer. By way of example, and not limitation, non-transitory computer-readable media may include RAM, ROM, electrically erasable programmable ROM (EEPROM), flash memory, compact disk (CD) ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any other non-transitory medium that may be used to carry or store desired program code means in the form of instructions or data structures and that may be accessed by a general-purpose or special-purpose computer, or a general-purpose or special-purpose processor. Also, any connection is properly termed a computer-readable medium. For example, if the software is transmitted from a website, server, or other remote source using a coaxial cable, fiber optic cable, twisted pair, digital subscriber line (DSL), or wireless technologies such as infrared, radio, and microwave, then the coaxial cable, fiber optic cable, twisted pair, DSL, or wireless technologies such as infrared, radio, and microwave are included in the definition of computer-readable medium. Disk and disc, as used herein, include CD,

laser disc, optical disc, digital versatile disc (DVD), floppy disk and Blu-ray disc. Disks may reproduce data magnetically, and discs may reproduce data optically using lasers. Combinations of the above are also included within the scope of computer-readable media.

[0272] As used herein, including in the claims, “or” as used in a list of items (e.g., a list of items prefaced by a phrase such as “at least one of” or “one or more of”) indicates an inclusive list such that, for example, a list of at least one of A, B, or C means A or B or C or AB or AC or BC or ABC (i.e., A and B and C). Also, as used herein, the phrase “based on” shall not be construed as a reference to a closed set of conditions. For example, an example step that is described as “based on condition A” may be based on both a condition A and a condition B without departing from the scope of the present disclosure. In other words, as used herein, the phrase “based on” shall be construed in the same manner as the phrase “based at least in part on.”

[0273] The term “determine” or “determining” encompasses a variety of actions and, therefore, “determining” can include calculating, computing, processing, deriving, investigating, looking up (such as via looking up in a table, a database or another data structure), ascertaining and the like. Also, “determining” can include receiving (e.g., receiving information), accessing (e.g., accessing data stored in memory) and the like. Also, “determining” can include resolving, obtaining, selecting, choosing, establishing, and other such similar actions.

[0274] In the appended figures, similar components or features may have the same reference label. Further, various components of the same type may be distinguished by following the reference label by a dash and a second label that distinguishes among the similar components. If just the first reference label is used in the specification, the description is applicable to any one of the similar components having the same first reference label irrespective of the second reference label, or other subsequent reference label.

[0275] The description set forth herein, in connection with the appended drawings, describes example configurations and does not represent all the examples that may be implemented or that are within the scope of the claims. The term “example” used herein means “serving as an example, instance, or illustration,” and not “preferred” or “advantageous over other examples.” The detailed description includes specific details for the purpose of providing an understanding of the described techniques. These techniques, however, may be practiced without these specific details. In some instances, known structures and devices are shown in block diagram form in order to avoid obscuring the concepts of the described examples.

[0276] The description herein is provided to enable a person having ordinary skill in the art to make or use the disclosure. Various modifications to the disclosure will be apparent to a person having ordinary skill in the art, and the generic principles defined herein may be applied to other variations without departing from the scope of the disclosure. Thus, the disclosure is not limited to the examples and designs described herein but is to be accorded the broadest scope consistent with the principles and novel features disclosed herein.

What is claimed is:

1. An apparatus for wireless communications at a user equipment (UE), comprising:

- a processor;
 memory coupled with the processor; and
 instructions stored in the memory and executable by the processor to cause the apparatus to:
 establish a communications link with a network via a first transmission and reception point and a second transmission and reception point;
 receive scheduling information for a set of reference signals;
 identify for each reference signal of the set of reference signals, a respective transmission configuration indicator state according to an association of each reference signal with the first transmission and reception point or the second transmission and reception point; and
 communicate with the network according to the respective transmission configuration indicator state identified for each reference signal of the set of reference signals.
2. The apparatus of claim 1, wherein the instructions are further executable by the processor to cause the apparatus to: receive control signaling indicating the respective transmission configuration indicator state for each reference signal of the set of reference signals.
3. The apparatus of claim 2, wherein the instructions are further executable by the processor to cause the apparatus to: identify a first transmission configuration indicator state associated with the first transmission and reception point and a second transmission configuration indicator state associated with the second transmission and reception point, wherein the control signaling indicates for each reference signal one of: the first transmission configuration indicator state, the second transmission configuration indicator state, or a different transmission configuration indicator state.
4. The apparatus of claim 2, wherein the instructions are further executable by the processor to cause the apparatus to: receive, with the control signaling, for each reference signal of the set of reference signals, an indication of whether the respective transmission configuration indicator state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first transmission and reception point or the second transmission and reception point or a respective different transmission indicator state.
5. The apparatus of claim 2, wherein the instructions to receive the control signaling are executable by the processor to cause the apparatus to:
 receive the control signaling via a medium access control (MAC) control element, wherein the control signaling supersedes a previous indication of respective transmission configuration indicator states for the set of reference signals.
6. The apparatus of claim 2, wherein the instructions to receive the control signaling are executable by the processor to cause the apparatus to:
 receive the control signaling via a radio resource control message.
7. The apparatus of claim 1, wherein the instructions are further executable by the processor to cause the apparatus to: receive a downlink control information message comprising a respective transmission and reception point indicator field for each reference signal of the set of reference signals, wherein identifying for each refer-

ence signal of the set of reference signals, the respective transmission configuration indicator state is based at least in part on the respective transmission and reception point indicator field for each reference signal of the set of reference signals.

8. The apparatus of claim 1, wherein the instructions are further executable by the processor to cause the apparatus to: identify a first transmission configuration indicator state associated with the first transmission and reception point and a second transmission configuration indicator state associated with the second transmission and reception point, wherein identifying for each reference signal of the set of reference signals, the respective transmission configuration indicator state comprises identifying, for each reference signal of the set of reference signals one of the first transmission configuration indicator state or the second transmission configuration indicator state.
9. The apparatus of claim 8, wherein the instructions to identify the transmission configuration indicator state for each reference signal of the set of reference signals are executable by the processor to cause the apparatus to:
 identify, for each reference signal of the set of reference signals based at least in part on an order of the set of reference signals, one of the first transmission configuration indicator state or the second transmission configuration indicator state.
10. The apparatus of claim 1, wherein the set of reference signals comprises a set of sounding reference signals, wherein the instructions to communicate with the network according to the respective transmission configuration indicator state identified for each reference signal of the set of reference signals are executable by the processor to cause the apparatus to:
 transmit the set of sounding reference signals according to the respective transmission configuration indicator state identified for each sounding reference signal of the set of sounding reference signals.
11. The apparatus of claim 1, wherein the set of reference signals comprises a set of channel state information reference signals, wherein the instructions to communicate with the network according to the respective transmission configuration indicator state identified for each reference signal of the set of reference signals are executable by the processor to cause the apparatus to:
 receive the set of channel state information reference signals according to the respective transmission configuration indicator state identified for each channel state information reference signal of the set of channel state information reference signals.
12. An apparatus for wireless communications at a network entity, comprising:
 a processor;
 memory coupled with the processor; and
 instructions stored in the memory and executable by the processor to cause the apparatus to:
 establish a communications link with a user equipment (UE) via a first transmission and reception point and a second transmission and reception point;
 transmit, to the UE, scheduling information for a set of reference signals;
 identify for each reference signal of the set of reference signals, a respective transmission configuration indicator state according to an association of each ref-

reference signal with the first transmission and reception point or the second transmission and reception point; and

communicate with the UE via the first transmission and reception point and the second transmission and reception point according to the respective transmission configuration indicator state identified for each reference signal of the set of reference signals.

13. The apparatus of claim **12**, wherein the instructions are further executable by the processor to cause the apparatus to:

transmit, to the UE, control signaling indicating the respective transmission configuration indicator state for each reference signal of the set of reference signals.

14. The apparatus of claim **13**, wherein the instructions are further executable by the processor to cause the apparatus to:

identify a first transmission configuration indicator state associated with the first transmission and reception point and a second transmission configuration indicator state associated with the second transmission and reception point, wherein the control signaling indicates for each reference signal one of: the first transmission configuration indicator state, the second transmission configuration indicator state, or a different transmission configuration indicator state.

15. The apparatus of claim **13**, wherein the instructions are further executable by the processor to cause the apparatus to:

transmit, with the control signaling, for each reference signal of the set of reference signals, an indication of whether the respective transmission configuration indicator state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first transmission and reception point or the second transmission and reception point or a respective different transmission indicator state.

16. The apparatus of claim **13**, wherein the instructions to transmit the control signaling are executable by the processor to cause the apparatus to:

transmit the control signaling via a medium access control (MAC) control element, wherein the control signaling supersedes a previous indication of respective transmission configuration indicator states for the set of reference signals.

17. The apparatus of claim **13**, wherein the instructions are further executable by the processor to cause the apparatus to:

transmit the control signaling via a radio resource control message.

18. The apparatus of claim **12**, wherein the instructions are further executable by the processor to cause the apparatus to:

transmit, to the UE, a downlink control information message comprising a respective transmission and reception point indicator field for each reference signal of the set of reference signals, wherein identifying, for each reference signal of the set of reference signals, the respective transmission configuration indicator state is based at least in part on the respective transmission and reception point indicator field for each reference signal of the set of reference signals.

19. The apparatus of claim **12**, wherein the instructions are further executable by the processor to cause the apparatus to:

identify a first transmission configuration indicator state associated with the first transmission and reception point and a second transmission configuration indicator state associated with the second transmission and reception point, wherein identifying for each reference signal of the set of reference signals, the respective transmission configuration indicator state comprises identifying, for each reference signal of the set of reference signals one of the first transmission configuration indicator state or the second transmission configuration indicator state.

20. The apparatus of claim **19**, wherein the instructions to identify the transmission configuration indicator state for each reference signal of the set of reference signals are executable by the processor to cause the apparatus to:

identify, for each reference signal of the set of reference signals based at least in part on an order of the set of reference signals, one of the first transmission configuration indicator state or the second transmission configuration indicator state.

21. The apparatus of claim **12**, wherein the set of reference signals comprises a set of sounding reference signals, wherein the instructions to communicate with the UE according to the respective transmission configuration indicator state identified for each reference signal of the set of reference signals are executable by the processor to cause the apparatus to:

receive the set of sounding reference signals according to the respective transmission configuration indicator state identified for each sounding reference signal of the set of sounding reference signals.

22. The apparatus of claim **12**, wherein the set of reference signals comprises a set of channel state information reference signals, wherein the instructions to communicate with the UE according to the respective transmission configuration indicator state identified for each reference signal of the set of reference signals are executable by the processor to cause the apparatus to:

transmit the set of channel state information reference signals according to the respective transmission configuration indicator state identified for each channel state information reference signal of the set of channel state information reference signals.

23. A method for wireless communications at a user equipment (UE), comprising:

establishing a communications link with a network via a first transmission and reception point and a second transmission and reception point;

receiving scheduling information for a set of reference signals;

identifying for each reference signal of the set of reference signals, a respective transmission configuration indicator state according to an association of each reference signal with the first transmission and reception point or the second transmission and reception point; and

communicating with the network according to the respective transmission configuration indicator state identified for each reference signal of the set of reference signals.

24. The method of claim 23, further comprising:
receiving control signaling indicating the respective transmission configuration indicator state for each reference signal of the set of reference signals.
25. The method of claim 24, further comprising:
identifying a first transmission configuration indicator state associated with the first transmission and reception point and a second transmission configuration indicator state associated with the second transmission and reception point, wherein the control signaling indicates for each reference signal one of: the first transmission configuration indicator state, the second transmission configuration indicator state, or a different transmission configuration indicator state.
26. The method of claim 24, further comprising:
receiving, with the control signaling, for each reference signal of the set of reference signals, an indication of whether the respective transmission configuration indicator state corresponds to a first respective transmission indicator state based on the association of each reference signal with the first transmission and reception point or the second transmission and reception point or a respective different transmission indicator state.
27. The method of claim 24, wherein receiving the control signaling comprises:
receiving the control signaling via a medium access control (MAC) control element, wherein the control signaling supersedes a previous indication of respective transmission configuration indicator states for the set of reference signals.
28. The method of claim 24, wherein receiving the control signaling comprises:
receiving the control signaling via a radio resource control message.
29. The method of claim 23, further comprising:
receiving a downlink control information message comprising a respective transmission and reception point indicator field for each reference signal of the set of reference signals, wherein identifying for each reference signal of the set of reference signals, the respective transmission configuration indicator state is based at least in part on the respective transmission and reception point indicator field for each reference signal of the set of reference signals.
30. A method for wireless communications at a network entity, comprising:
establishing a communications link with a user equipment (UE) via a first transmission and reception point and a second transmission and reception point;
transmitting, to the UE, scheduling information for a set of reference signals;
identifying for each reference signal of the set of reference signals, a respective transmission configuration indicator state according to an association of each reference signal with the first transmission and reception point or the second transmission and reception point; and
communicating with the UE via the first transmission and reception point and the second transmission and reception point according to the respective transmission configuration indicator state identified for each reference signal of the set of reference signals.
- * * * * *