

15 Sep 2025

Dec	Hex	Binary
0	0x0	00000
1	0x1	00001
2	0x2	00010
3	0x3	00011
4	0x4	00100
5	0x5	00101
6	0x6	00110
7	0x7	00111
8	0x8	01000
9	0x9	01001
10	0xA	01010
11	0xB	01011
12	0xC	01100
13	0xD	01101
14	0xE	01110
15	0xF	01111
16	0x10	10000

TIVA-C Launchpad


↳ Debugger Chip

↳ Microcontroller

→ Headers must be short

→ top one debug switched on

→ left one device switched on

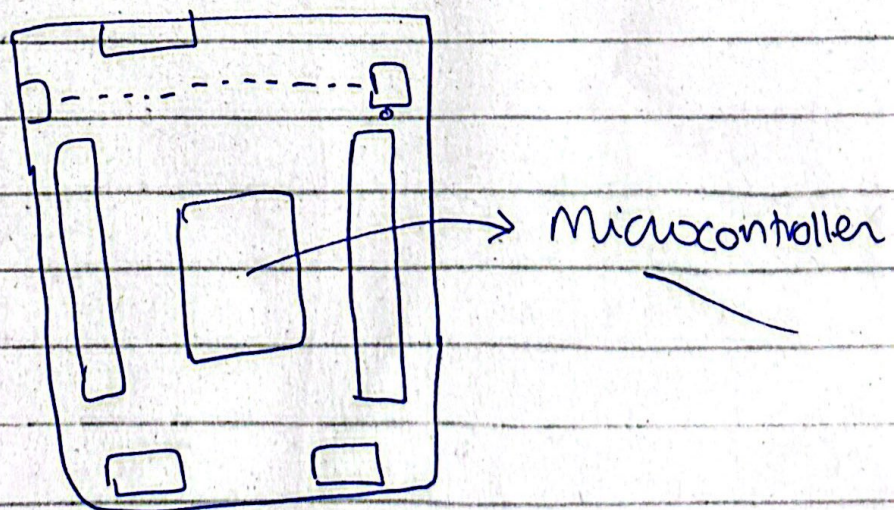


Launchpad (easy access to microcontroller)

almost same ↗ TIVAC1236H6PM (Texas
same ↘ TIVAC1233H6PM instruments)

Microcontroller

↳ Microprocessor (ARM CORTEX M4F)

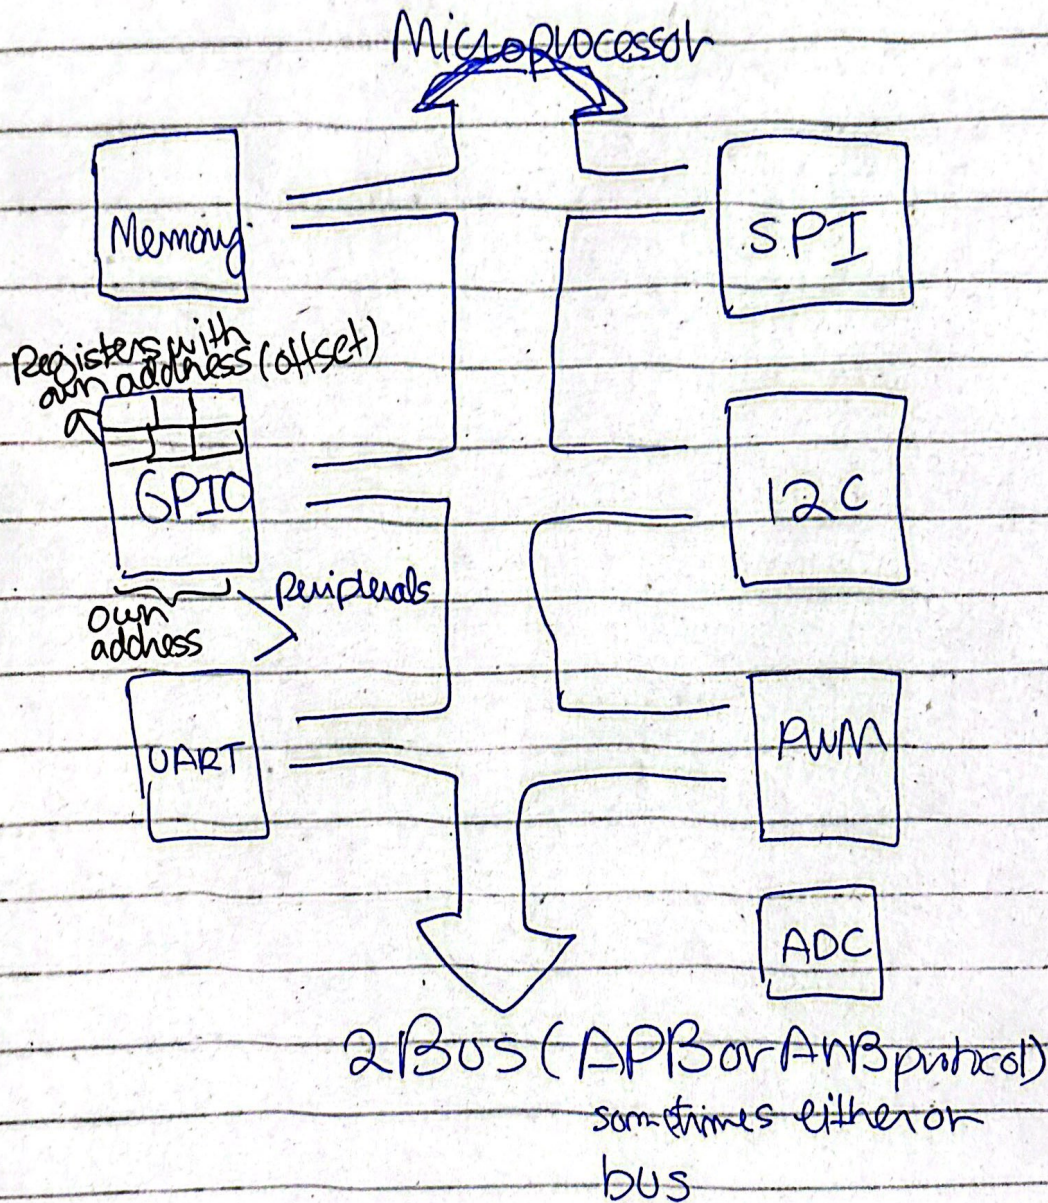

→ Base Address + Offset → Entire Address

32-bit
(also
processor)

AND

A.B

0 0 1	input/previous value
0 1 0	1
0 0 0	input/previous value
	retain

Anything & 0 $\Rightarrow$ zero

OR

0 0 1	input/previous value
0 1 0	1
0 1 1	1

Anything | 0 $\Rightarrow$ Retain (input / previous value)

1 $\Rightarrow$ ON (or with 1) set
0 $\Rightarrow$ OFF (and with 0) unset

XOR Toggle

$$\begin{array}{r} 01011 \\ 11111 \\ \hline 10100 \\ 11111 \\ \hline 01011 \end{array}$$

Toggle each
time when
XOR'ED

turn these off retain others so

$$\begin{array}{r} 01011 \\ \text{AND } 11010 \\ \hline 01010 \end{array}$$