



US012407027B2

(12) **United States Patent**
Lim et al.

(10) **Patent No.:** **US 12,407,027 B2**

(45) **Date of Patent:** **Sep. 2, 2025**

(54) **BATTERY AND CURRENT COLLECTOR
APPLIED THERETO, AND BATTERY PACK
AND VEHICLE INCLUDING THE BATTERY**

(71) Applicant: **LG ENERGY SOLUTION, LTD.**,
Seoul (KR)

(72) Inventors: **Jae-Won Lim**, Daejeon (KR);
Hak-Kyun Kim, Daejeon (KR); **Je-Jun
Lee**, Daejeon (KR); **Ji-Min Jung**,
Daejeon (KR); **Su-Ji Choi**, Daejeon
(KR); **Kwang-Su Hwangbo**, Daejeon
(KR); **Do-Gyun Kim**, Daejeon (KR);
Geon-Woo Min, Daejeon (KR);
Hae-Jin Lim, Daejeon (KR); **Min-Ki
Jo**, Daejeon (KR); **Jae-Woong Kim**,
Daejeon (KR); **Jong-Sik Park**, Daejeon
(KR); **Yu-Sung Choe**, Daejeon (KR);
Byoung-Gu Lee, Daejeon (KR);
Duk-Hyun Ryu, Daejeon (KR);
Kwan-Hee Lee, Daejeon (KR);
Jae-Eun Lee, Daejeon (KR); **Bo-Hyun
Kang**, Daejeon (KR); **Jin-Hak Kong**,
Daejeon (KR); **Soon-O Lee**, Daejeon
(KR); **Kyu-Hyun Choi**, Daejeon (KR);
Pil-Kyu Park, Daejeon (KR)

(73) Assignee: **LG ENERGY SOLUTION, LTD.**,
Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/592,594**

(22) Filed: **Feb. 4, 2022**

(65) **Prior Publication Data**

US 2022/0271402 A1 Aug. 25, 2022

(30) **Foreign Application Priority Data**

Feb. 19, 2021 (KR) 10-2021-0022881

Feb. 19, 2021 (KR) 10-2021-0022891

(Continued)

(51) **Int. Cl.**
H01M 10/0587 (2010.01)
H01M 4/64 (2006.01)

(Continued)

(52) **U.S. Cl.**
CPC **H01M 10/0587** (2013.01); **H01M 4/64**
(2013.01); **H01M 4/70** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H01M 10/0587; H01M 4/64; H01M 4/70;
H01M 50/107; H01M 50/152;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,503,806 A 3/1970 Sugalski
3,761,314 A 9/1973 Cailley
(Continued)

FOREIGN PATENT DOCUMENTS

CN 1170782 A 1/1998
CN 1407642 A 4/2003
(Continued)

OTHER PUBLICATIONS

European Search Report mailed in EP 22 15 2207 on Jul. 22, 2022
(9 pages).

(Continued)

Primary Examiner — Matthew T Martin


Assistant Examiner — Grace Ann Kenlaw

(74) *Attorney, Agent, or Firm* — Birch, Stewart, Kolasch
& Birch, LLP

(57) **ABSTRACT**

A battery having an electrode assembly including a first
electrode, a second electrode, and a separator between the
first and the second electrode, the first electrode having a
first portion including an active material extending between
a pair of first sides, and a second portion extending between

(Continued)

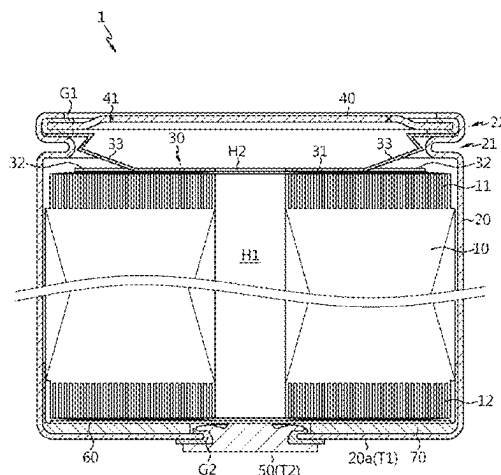

the pair of first sides and exposed beyond the separator, and at least part of the second portion includes an electrode tab; a battery housing having a first opening at a first end and a second end opposite the first end, the battery housing accommodating the electrode assembly; and a first current collector including a support portion on the electrode assembly, a first tab coupling portion extending from the support portion and coupled with the second portion of the first electrode and a first housing coupling portion extending from the support portion and electrically coupled onto an inner surface of the battery housing.

96 Claims, 23 Drawing Sheets

(30) Foreign Application Priority Data

Feb. 19, 2021	(KR)	10-2021-0022894
Feb. 19, 2021	(KR)	10-2021-0022897
Feb. 23, 2021	(KR)	10-2021-0024424
Mar. 8, 2021	(KR)	10-2021-0030291
Mar. 8, 2021	(KR)	10-2021-0030300
Apr. 9, 2021	(KR)	10-2021-0046798
May 4, 2021	(KR)	10-2021-0058183
Jun. 14, 2021	(KR)	10-2021-0077046
Jun. 28, 2021	(KR)	10-2021-0084326
Oct. 1, 2021	(KR)	10-2021-0131205
Oct. 1, 2021	(KR)	10-2021-0131207
Oct. 1, 2021	(KR)	10-2021-0131208
Oct. 1, 2021	(KR)	10-2021-0131215
Oct. 1, 2021	(KR)	10-2021-0131225
Oct. 14, 2021	(KR)	10-2021-0137001
Oct. 15, 2021	(KR)	10-2021-0137856
Oct. 22, 2021	(KR)	10-2021-0142196
Nov. 9, 2021	(KR)	10-2021-0153472
Nov. 19, 2021	(KR)	10-2021-0160823
Nov. 24, 2021	(KR)	10-2021-0163809
Nov. 26, 2021	(KR)	10-2021-0165866
Dec. 3, 2021	(KR)	10-2021-0172446
Dec. 10, 2021	(KR)	10-2021-0177091
Dec. 31, 2021	(KR)	10-2021-0194572
Dec. 31, 2021	(KR)	10-2021-0194593
Dec. 31, 2021	(KR)	10-2021-0194610
Dec. 31, 2021	(KR)	10-2021-0194611
Dec. 31, 2021	(KR)	10-2021-0194612
Jan. 5, 2022	(KR)	10-2022-0001802

(51) Int. Cl.

H01M 4/70	(2006.01)
H01M 50/107	(2021.01)
H01M 50/152	(2021.01)
H01M 50/179	(2021.01)
H01M 50/183	(2021.01)
H01M 50/188	(2021.01)
H01M 50/213	(2021.01)
H01M 50/242	(2021.01)
H01M 50/507	(2021.01)
H01M 50/509	(2021.01)
H01M 50/531	(2021.01)
H01M 50/533	(2021.01)
H01M 50/536	(2021.01)
H01M 50/55	(2021.01)
H01M 50/559	(2021.01)
H01M 50/567	(2021.01)

(52) U.S. Cl.

CPC **H01M 50/107** (2021.01); **H01M 50/152** (2021.01); **H01M 50/179** (2021.01); **H01M 50/183** (2021.01); **H01M 50/188** (2021.01); **H01M 50/213** (2021.01); **H01M 50/242** (2021.01); **H01M 50/507** (2021.01); **H01M 50/509** (2021.01); **H01M 50/531** (2021.01); **H01M 50/533** (2021.01); **H01M 50/536** (2021.01); **H01M 50/55** (2021.01); **H01M 50/559** (2021.01); **H01M 50/567** (2021.01); **H01M 2220/20** (2013.01)

(58) Field of Classification Search

CPC H01M 50/179; H01M 50/183; H01M 50/188; H01M 50/213; H01M 50/242; H01M 50/507; H01M 50/509; H01M 50/531; H01M 50/533; H01M 50/536; H01M 50/55; H01M 50/559; H01M 50/567; H01M 2220/20; H01M 2200/103; H01M 50/538; H01M 50/545; H01M 50/583; H01M 50/586; H01M 50/593; Y02E 60/10; Y02P 70/50

See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

4,049,883	A	9/1977	Schenk et al.	
4,053,687	A	10/1977	Coibion et al.	
4,322,484	A	3/1982	Sugalski	
4,563,551	A	1/1986	Black, III et al.	
5,576,113	A	11/1996	Hirofumi et al.	
5,665,483	A	9/1997	Saito et al.	
5,770,332	A	6/1998	Narukawa et al.	
5,849,431	A	12/1998	Kita et al.	
6,132,900	A	10/2000	Yoshizawa et al.	
6,399,237	B1	6/2002	Souliac et al.	
6,451,473	B1	9/2002	Saito et al.	
6,653,017	B2	11/2003	Satoh et al.	
6,677,082	B2	1/2004	Thackeray et al.	
6,680,143	B2	1/2004	Thackeray et al.	
7,273,678	B2	9/2007	Akita et al.	
7,351,496	B2	4/2008	Nakanishi et al.	
8,007,549	B2	8/2011	Ligeois et al.	
8,580,425	B2	11/2013	Kim	
9,496,539	B2	11/2016	Tyler et al.	
9,496,557	B2	11/2016	Fuhr et al.	
10,840,555	B2	11/2020	Iwama et al.	
2001/0004505	A1	6/2001	Kim et al.	
2001/0051297	A1*	12/2001	Nemoto	H01M 50/586 429/129
2001/0053477	A1	12/2001	Kitoh et al.	
2002/0061435	A1	5/2002	Hisai	
2002/0110729	A1	8/2002	Hozumi et al.	
2003/0035993	A1	2/2003	Enomoto et al.	
2003/0049536	A1	3/2003	Wiepen	
2003/0064285	A1	4/2003	Kawamura et al.	
2003/0104276	A1	6/2003	Mizuno et al.	
2004/0023108	A1	2/2004	Nakanishi et al.	
2004/0131930	A1	7/2004	Nakanishi et al.	
2005/0048365	A1	3/2005	Miyahisa et al.	
2005/0058184	A1	3/2005	Paul et al.	
2005/0118499	A1*	6/2005	Kim	H01M 10/0431 429/185
2005/0142436	A1	6/2005	Arai et al.	
2005/0158620	A1*	7/2005	Kim	H01M 50/533 429/185
2005/0181272	A1	8/2005	Kim	
2005/0214640	A1	9/2005	Kim	
2005/0238951	A1*	10/2005	Yoo	H01M 10/0431 429/163
2005/0260487	A1	11/2005	Kim et al.	
2005/0260489	A1	11/2005	Kim	
2005/0287428	A1	12/2005	Cheon et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

2005/0287432	A1	12/2005	Cheon et al.		2017/0047575	A1	2/2017	Tsuji et al.
2006/0024574	A1	2/2006	Yim et al.		2017/0062789	A1	3/2017	Sim et al.
2006/0063063	A1 *	3/2006	Mori	H01M 10/0585	2017/0149042	A1	5/2017	Koo et al.
				429/61	2017/0187068	A1	6/2017	Morisawa et al.
2006/0204841	A1 *	9/2006	Satoh	H01M 50/533	2017/0200935	A1	7/2017	Hong et al.
				29/623.2	2017/0256769	A1 *	9/2017	Wynn H01M 50/559
2008/0026293	A1	1/2008	Marple et al.		2017/0338462	A1	11/2017	Imre
2008/0038629	A1	2/2008	Okabe et al.		2017/0372848	A1	12/2017	Yoon et al.
2008/0057394	A1	3/2008	Rigobert et al.		2018/0062123	A1	3/2018	Ikeda et al.
2008/0145756	A1	6/2008	Taniguchi		2018/0123143	A1	5/2018	Sato et al.
2008/0182159	A1	7/2008	Mitani et al.		2018/0130995	A1	5/2018	Nemoto et al.
2008/0254354	A1	10/2008	Adams		2018/0182560	A1	6/2018	Khakhalev
2009/0011329	A1	1/2009	Yoon		2018/0205044	A1	7/2018	Urushihara
2009/0104520	A1	4/2009	Marple		2018/0219208	A1	8/2018	Dewulf et al.
2009/0136835	A1	5/2009	Nakai et al.		2018/0247773	A1	8/2018	Lee
2009/0208830	A1	8/2009	Okabe et al.		2018/0375162	A1	12/2018	Wakimoto et al.
2009/0208836	A1	8/2009	Fuhr et al.		2019/0006639	A1	1/2019	Ito
2009/0239133	A1	9/2009	Kosugi		2019/0081294	A1	3/2019	Capati et al.
2009/0280406	A1	11/2009	Kozuki		2019/0148683	A1	5/2019	Kwon et al.
2009/0311583	A1	12/2009	Wu		2019/0221791	A1	7/2019	Wakimoto
2010/0035140	A1	2/2010	Miyahisa et al.		2019/0252667	A1	8/2019	Moriyama et al.
2010/0055548	A1	3/2010	Matsumoto et al.		2019/0280256	A1	9/2019	Baik et al.
2010/0081052	A1	4/2010	Morishima et al.		2019/0296283	A1	9/2019	Chen et al.
2010/0112434	A1	5/2010	Akou et al.		2019/0341201	A1	11/2019	Chami et al.
2010/0129716	A1	5/2010	Kato et al.		2019/0379019	A1	12/2019	Fukuda et al.
2010/0151317	A1	6/2010	Kim et al.		2019/0379028	A1	12/2019	Lim et al.
2010/0159308	A1	6/2010	Kim et al.		2019/0386272	A1	12/2019	Shin et al.
2010/0216001	A1	8/2010	Byun et al.		2020/0044289	A1	2/2020	Pasma et al.
2010/0255358	A1	10/2010	Yoneyama		2020/0083492	A1	3/2020	Koshiol et al.
2010/0266893	A1	10/2010	Martin et al.		2020/0119328	A1	4/2020	Zheng et al.
2010/0316897	A1	12/2010	Kozuki et al.		2020/0127249	A1	4/2020	Yoon et al.
2010/0330414	A1	12/2010	Mori		2020/0144581	A1	5/2020	Thunot
2011/0027644	A1	2/2011	Kiyama		2020/0144676	A1	5/2020	Tsuruta et al.
2011/0067227	A1	3/2011	Sohn		2020/0203773	A1	6/2020	Fujita et al.
2011/0086252	A1 *	4/2011	Phillips	H01M 50/325	2020/0212374	A1	7/2020	Gaugler
				29/623.2	2020/0235369	A1	7/2020	Jeong et al.
2011/0086610	A1	4/2011	Baldwin et al.		2020/0295341	A1 *	9/2020	Kim H01M 50/538
2011/0171508	A1	7/2011	Kim		2020/0365838	A1	11/2020	Chen
2011/0256433	A1	10/2011	Fuhr et al.		2020/0373546	A1	11/2020	Li et al.
2011/0274953	A1	11/2011	Hato et al.		2020/0388856	A1	12/2020	Hayashi
2011/0281155	A1	11/2011	Ito et al.		2021/0021007	A1	1/2021	Park et al.
2011/0300444	A1	12/2011	Nakamura		2021/0039195	A1 *	2/2021	Jost B2K 26/082
2012/0058375	A1	3/2012	Tanaka et al.		2021/0075051	A1	3/2021	Zhou
2012/0094169	A1	4/2012	Kim et al.		2021/0167467	A1	6/2021	Yang et al.
2012/0100419	A1	4/2012	Byun et al.		2021/0210792	A1	7/2021	Mukai et al.
2012/0231641	A1	9/2012	Sugai et al.		2021/0257652	A1	8/2021	Ko et al.
2012/0297611	A1	11/2012	Ma		2021/0273298	A1	9/2021	Babinot et al.
2012/0328932	A1	12/2012	Guen et al.		2021/0278479	A1	9/2021	Park et al.
2013/0136977	A1	5/2013	Masuda		2021/0280835	A1	9/2021	Peng et al.
2013/0183556	A1	7/2013	Kim		2021/0344033	A1	11/2021	Park et al.
2013/0209849	A1	8/2013	Hattori et al.		2021/0376333	A1	12/2021	Shiozaki et al.
2013/0273401	A1 *	10/2013	Lee	H01M 50/198	2022/0037712	A1	2/2022	Kritzer et al.
				429/185	2022/0037747	A1	2/2022	Lee
2013/0323574	A1	12/2013	Tsunaki et al.		2022/0069335	A1	3/2022	Kim
2014/0079971	A1	3/2014	Huang		2022/0094021	A1	3/2022	Ishikawa
2014/0113185	A1	4/2014	Mori et al.		2022/0123444	A1	4/2022	Liu et al.
2014/0162097	A1	6/2014	Fuhr et al.		2022/0271344	A1	8/2022	Chol et al.
2014/0186692	A1	7/2014	Kim et al.		2022/0271402	A1	8/2022	Lim et al.
2014/0205868	A1	7/2014	Phillips		2023/0091100	A1	3/2023	Tsushima et al.
2014/0212695	A1	7/2014	Lane et al.		2023/0123195	A1	4/2023	Fang et al.
2014/0234676	A1	8/2014	Tyler et al.		2024/0356123	A1	10/2024	Ko et al.
2014/0255748	A1	9/2014	Jan et al.					
2015/0004446	A1	1/2015	Kim et al.					
2015/0104694	A1	4/2015	Okuda et al.					
2015/0140379	A1	5/2015	Yau					
2015/0155532	A1	6/2015	Harayama et al.					
2016/0043373	A1	2/2016	Arishima et al.					
2016/0099451	A1	4/2016	Murai et al.					
2016/0141589	A1	5/2016	Kang et al.					
2016/0155998	A1	6/2016	Wakimoto et al.					
2016/0156037	A1	6/2016	Mizuno					
2016/0181577	A1	6/2016	Kajiwarra et al.					
2016/0226056	A1	8/2016	Masson et al.					
2016/0329542	A1	11/2016	Tyler et al.					
2017/0018750	A1	1/2017	Wintner					

FOREIGN PATENT DOCUMENTS

CN	1426609	A	6/2003
CN	1444303	A	9/2003
CN	1495943	A	5/2004
CN	2681364	Y	2/2005
CN	1709495	A	11/2005
CN	1832228	A	9/2006
CN	1309105	C	4/2007
CN	101010818	A	7/2007
CN	101026248	A	8/2007
CN	100349321	C	11/2007
CN	101083317	A	12/2007
CN	200990393	Y	12/2007
CN	201066701	Y	5/2008
CN	201117731	Y	9/2008
CN	101288572	A	10/2008

(56)

References Cited

FOREIGN PATENT DOCUMENTS

CN	100468827	C	3/2009	EP	2677592	A1	12/2013
CN	101404338	A	4/2009	EP	2 728 647	A1	5/2014
CN	101501884	A	8/2009	EP	2 876 338	A1	5/2015
CN	201466087	U	5/2010	EP	2 924 762	A2	9/2015
CN	101188311	B	9/2010	EP	2 160 777	B1	3/2019
CN	201638890	U	11/2010	EP	3 739 669	A1	11/2020
CN	201725845	U	1/2011	EP	3 748 728	A1	12/2020
CN	201781028	U	3/2011	EP	4087034	A1	11/2022
CN	202423400	U	9/2012	EP	4 290 630	A1	12/2023
CN	103155222	A	6/2013	EP	4 293 802	A1	12/2023
CN	103280543	A	9/2013	EP	3 739 652	B1	3/2024
CN	103427063	A	12/2013	EP	4336649	A1	3/2024
CN	203553261	U	4/2014	EP	4 418 379	A1	8/2024
CN	103797611	A	5/2014	EP	4 421 970	A1	8/2024
CN	203967145	U	11/2014	GB	1191105	A	5/1970
CN	104396044	A	3/2015	GB	1 332 944	A	10/1973
CN	204230370	U	3/2015	GB	2564670	A	1/2019
CN	204596910	U	8/2015	JP	48-34834	Y2	10/1973
CN	204885267	U	12/2015	JP	62-7157	U	1/1987
CN	105449291	A	3/2016	JP	6-124696	A	5/1994
CN	105655623	A	6/2016	JP	7-201309	A	8/1995
CN	106030855	A	10/2016	JP	8-22818	A	1/1996
CN	106159350	A	11/2016	JP	8-102313	A	4/1996
CN	205863251	U	1/2017	JP	8-180849	A	7/1996
CN	106463654	A	2/2017	JP	10-83833	A	3/1998
CN	206250283	U	6/2017	JP	10-92469	A	4/1998
CN	106935746	A	7/2017	JP	10-106532	A	4/1998
CN	107112597	A	8/2017	JP	10-214609	A	8/1998
CN	206461019	U	9/2017	JP	10-228908	A	8/1998
CN	206471426	U	9/2017	JP	11-67279	A	3/1999
CN	208481044	U	9/2017	JP	11-144690	A	5/1999
CN	104488113	B	10/2017	JP	11-176447	A	7/1999
CN	107275524	A	10/2017	JP	11-219720	A	8/1999
CN	208819838	U	11/2017	JP	11-297301	A	10/1999
CN	107431215	A	12/2017	JP	2955135	B2	10/1999
CN	107482156	A	12/2017	JP	11-329398	A	11/1999
CN	107851769	A	3/2018	JP	2000-58024	A	2/2000
CN	207217854	U	4/2018	JP	2000-243433	A	9/2000
CN	108063192	A	5/2018	JP	2000-260417	A	9/2000
CN	207381468	U	5/2018	JP	2001-15098	A	1/2001
CN	108496269	A	9/2018	JP	2001-28274	A	1/2001
CN	108695451	A	10/2018	JP	2001-43844	A	2/2001
CN	208400966	U	1/2019	JP	2001-52756	A	2/2001
CN	110048065	A	7/2019	JP	2001-148238	A	5/2001
CN	209133626	U	7/2019	JP	2001-256954	A	9/2001
CN	209328958	U	8/2019	JP	3252846	B2	2/2002
CN	110247058	A	9/2019	JP	2002-141099	A	5/2002
CN	110459705	A	11/2019	JP	2002-157991	A	5/2002
CN	110476273	A	11/2019	JP	2002-289170	A	10/2002
CN	110581235	A	12/2019	JP	2003-100279	A	4/2003
CN	209822778	U	12/2019	JP	2003-115285	A	4/2003
CN	209912959	U	1/2020	JP	2003-203621	A	7/2003
CN	110870099	A	3/2020	JP	2004-14173	A	1/2004
CN	111033807	A	4/2020	JP	2004-95487	A	3/2004
CN	111446386	A	7/2020	JP	2004-111362	A	4/2004
CN	211208547	U	8/2020	JP	2004-247192	A	9/2004
CN	111668534	A	9/2020	JP	2004-253253	A	9/2004
CN	111952525	A	11/2020	JP	3588264	B2	11/2004
CN	211879534	U	11/2020	JP	2004-362956	A	12/2004
CN	212182379	U	12/2020	JP	3632586	B2	3/2005
CN	212303743	U	1/2021	JP	2005-100927	A	4/2005
CN	112310574	A	2/2021	JP	2005-129433	A	5/2005
CN	112335075	A	2/2021	JP	2005-186664	A	6/2005
CN	212907981	U	4/2021	JP	2005-276840	A	10/2005
CN	112909445	A	6/2021	JP	3718872	B2	11/2005
CN	113193165	A	7/2021	JP	3751782	B2	3/2006
CN	113346201	A	9/2021	JP	2006-120606	A	5/2006
CN	214378637	U	10/2021	JP	2006-278016	A	10/2006
CN	215342666	U	12/2021	JP	2007-18962	A	1/2007
CN	114865242	A	8/2022	JP	3906519	B2	1/2007
CN	217239523	U	8/2022	JP	2007-234486	A	9/2007
CN	217239536	U	8/2022	JP	2007-335156	A	12/2007
CN	109119674	B	7/2024	JP	2008-66302	A	3/2008
DE	10 2018 130 173	A1	5/2020	JP	2008-123848	A	5/2008
EP	1 596 450	A2	11/2005	JP	2008-192552	A	8/2008
				JP	2008-243811	A	10/2008
				JP	2009-104925	A	5/2009
				JP	2009-110885	A	5/2009
				JP	2009-123438	A	6/2009

(56)

References Cited

FOREIGN PATENT DOCUMENTS

JP	2009-176449	A	8/2009	KR	10-1265199	B1	5/2013
JP	4346637	B2	10/2009	KR	10-2013-0084086	A	7/2013
JP	2009-259452	A	11/2009	KR	10-1320581	B1	10/2013
JP	2009-289672	A	12/2009	KR	10-1446151	B1	10/2014
JP	2010-10117	A	1/2010	KR	10-1514827	B1	4/2015
JP	4401634	B2	1/2010	KR	10-2015-0117135	A	10/2015
JP	2010-33940	A	2/2010	KR	10-2015-0134566	A	12/2015
JP	2010-61892	A	3/2010	KR	20160009406	A *	1/2016
JP	4430587	B2	3/2010	KR	10-2016-0024685	A	3/2016
JP	2010-80392	A	4/2010	KR	10-2016-0043725	A	4/2016
JP	2010-135304	A	6/2010	KR	10-2016-0092748	A	8/2016
JP	4501361	B2	7/2010	KR	10-1679413	B1	11/2016
JP	2010-529624	A	8/2010	KR	10-2017-0025074	A	3/2017
JP	2011-113845	A	6/2011	KR	10-2017-0033543	A	3/2017
JP	2011-159582	A	8/2011	KR	10-1743136	B1	6/2017
JP	2011-216297	A	10/2011	KR	10-2017-0101653	A	9/2017
JP	2012-74359	A	4/2012	KR	10-1807353	B1	12/2017
JP	2012-510143	A	4/2012	KR	10-2018-0026910	A	3/2018
JP	2012-134108	A	7/2012	KR	10-1839158	B1	3/2018
JP	2012-160658	A	8/2012	KR	10-2018-0087606	A	8/2018
JP	5019557	B2	9/2012	KR	10-2018-0106367	A	10/2018
JP	5030379	B2	9/2012	KR	10-2018-0116004	A	10/2018
JP	2012-190739	A	10/2012	KR	10-2018-0116156	A	10/2018
JP	5051410	B2	10/2012	KR	20180116156	A *	10/2018
JP	2013-246966	A	12/2013	KR	10-2018-0129115	A	12/2018
JP	2014-41791	A	3/2014	KR	10-2019-0030016	A	3/2019
JP	2014-132552	A	7/2014	KR	10-2019-0040699	A	4/2019
JP	5651536	B2	1/2015	KR	10-2019-0078094	A	7/2019
JP	2015-106613	A	6/2015	KR	10-2042999	B1	11/2019
JP	2015-185517	A	10/2015	KR	10-2020-0007561	A	1/2020
JP	5796623	B2	10/2015	KR	10-2020-0020173	A	2/2020
JP	2015-222685	A	12/2015	KR	10-2020-0035739	A	4/2020
JP	5877724	B2	3/2016	KR	10-2020-0037599	A	4/2020
JP	2016-100323	A	5/2016	KR	10-2020-0039214	A	4/2020
JP	2016-115422	A	6/2016	KR	10-2020-0041625	A	4/2020
JP	5935878	B2	6/2016	KR	10-2020-0086957	A	7/2020
JP	2016-195014	A	11/2016	KR	10-2020-0094453	A	8/2020
JP	2016-195025	A	11/2016	KR	10-2020-0102777	A	9/2020
JP	2016-195036	A	11/2016	KR	10-2149886	B1	9/2020
JP	2016-225014	A	12/2016	KR	10-2021-0006203	A	1/2021
JP	2017-143004	A	8/2017	KR	10-2021-0012636	A	2/2021
JP	6250567	B2	12/2017	TW	1679311	B	12/2019
JP	2018-507544	A	3/2018	WO	WO 01/59856	A1	8/2001
JP	2018-092776	A	6/2018	WO	WO 2006/035980	A1	4/2006
JP	2018-525781	A	9/2018	WO	WO-2006085437	A1 *	8/2006
JP	2018-163765	A	10/2018	WO	WO 2010/0146154	A2	12/2010
JP	6406836	B2	10/2018	WO	WO 2012/090599	A1	7/2012
JP	2019-46639	A	3/2019	WO	WO 2013/024774	A1	2/2013
JP	WO2019/194182	A1	10/2019	WO	WO 2015/025388	A1	2/2015
JP	2020-71898	A	5/2020	WO	WO 2016/088287	A1	6/2016
JP	6735445	B2	8/2020	WO	WO 2016/203708	A1	12/2016
JP	2020-527841	A	9/2020	WO	WO 2017/223429	A1	12/2017
JP	2020-202038	A	12/2020	WO	WO 2018/117457	A1	6/2018
KR	2000-0051436	A	8/2000	WO	WO 2018/134704	A1	7/2018
KR	2001-0017098	A	3/2001	WO	WO 2019/151662	A1	8/2019
KR	10-2001-0038811	A	5/2001	WO	WO 2020/060069	A1	3/2020
KR	2001-0056363	A	7/2001	WO	WO 2020/083278	A1	4/2020
KR	10-0490526	B1	8/2005	WO	WO 2020/110888	A1	6/2020
KR	10-2005-0110460	A	11/2005	WO	WO 2020/149350	A1	7/2020
KR	10-2005-0121904	A	12/2005	WO	WO 2020/159071	A1	8/2020
KR	10-2005-0121914	A	12/2005	WO	WO 2020/171426	A1	8/2020
KR	10-0551885	B1	2/2006	WO	WO 2020/174954	A1	9/2020
KR	10-2006-0022128	A	3/2006	WO	WO 2021/020119	A1	2/2021
KR	10-0612236	B1	8/2006	WO	WO 2021/020237	A1	2/2021
KR	10-2006-0111837	A	10/2006	WO	WO 2022/061187	A1	3/2022
KR	10-2007-0033762	A	3/2007				
KR	10-0709870	B1	4/2007				
KR	10-2008-0047165	A	5/2008				
KR	10-2009-0003702	A	1/2009				
KR	10-2010-0068080	A	6/2010				
KR	10-2010-0075177	A	7/2010				
KR	10-2010-0089092	A	8/2010				
KR	10-2010-0096100	A	9/2010				
KR	10-1023865	B1	3/2011				
KR	10-1147175	B1	5/2012				

OTHER PUBLICATIONS

European Communication pursuant to Rule 114(2) EPC for European Application No. 22742840.6, dated Feb. 5, 2024.

Partial Supplementary European Search Report dated Jul. 15, 2024, for European Application No. 22742840.6.

Third Party Observation dated Jul. 22, 2024 for European Application No. 22881172.5.

U.S. Office Action for U.S. Appl. No. 18/086,402 dated Jun. 12, 2024.

European Search Report mailed in EP 22152237 on Aug. 2, 2022 (11 pages).

(56)

References Cited**OTHER PUBLICATIONS**

European Search Report mailed in EP 22152250 on Aug. 5, 2022 (12 pages).

U.S. Office Action dated Nov. 28, 2023 for U.S. Appl. No. 18/132,140.

Automotive & Accessories Magazine, “The core topic of Tesla’s “Battery Day”: reducing battery manufacturing costs,” Sep. 23, 2020, 6 pages.

Third Party Observation dated Feb. 26, 2024 for European Application No. 22152256.8.

Third Party Observation dated Feb. 26, 2024 for European Application No. 22152262.6.

European Communication pursuant to Rule 114(2) EPC for European Application No. 22756569.4, dated Jun. 6, 2024.

European Communication pursuant to Rule 114(2) EPC for European Application No. 22756569.4, dated May 27, 2024.

European Communication pursuant to Rule 114(2) EPC for European Application No. 22756574.4, dated May 3, 2024.

European Communication pursuant to Rule 114(2) EPC for European Application No. 22756576.9, dated Apr. 16, 2024.

European Communication pursuant to Rule 114(2) EPC for European Application No. 22856151.0, dated Apr. 30, 2024.

European Communication pursuant to Rule 114(2) EPC for European Application No. 22881171.7, dated May 3, 2024.

European Communication pursuant to Rule 114(2) EPC for European Application No. 22883724.1, dated May 8, 2024.

European Communication pursuant to Rule 114(2) EPC for European Application No. 22895785.8, dated Apr. 16, 2024.

Nigel, “Tesla 4680 Cell,” Battery Design, Nov. 18, 2022, URL: <<https://www.batterydesign.net/tesla-4680-cell/>>.

U.S. Notice of Allowance for U.S. Appl. No. 18/131,751, dated Jan. 16, 2024.

U.S. Office Action for U.S. Appl. No. 17/592,597, dated Jun. 21, 2023.

Full English Translation of Japanese Publication No. 2002-289170-A dated Oct. 4, 2002.

Third Party Observation dated Apr. 9, 2024 for European Application No. 22742833.1.

U.S. Advisory Action for U.S. Appl. No. 18/086,485, dated Nov. 3, 2023.

U.S. Office Action for U.S. Appl. No. 18/132,166, dated Oct. 2, 2023.

“Laser Welding vs. Arc (Tig) Welding of Medical Instruments,” Accumet, Oct. 22, 2014, 2 pages total.

Ma et al., “Electro-Thermal Modeling of a Lithium-ion Battery System,” Sae International, vol. 3, Issue 2, Oct. 25, 2010, p. 306.

U.S. Office Action for U.S. Appl. No. 17/579,380, dated Jul. 20, 2023.

ASM Aerospace Specification Metals Inc., “Aluminum 5052-H19 Foil”, 2001, <https://asm.matweb.com/search/SpecificMaterial.asp?bassnum=ma5052h19>, 2 pages.

Iowa State University, Center for Nondestructive Evaluation, NDE-Ed.org, Physics of Nondestructive Evaluation>Electricity, 2021, <https://www.nde-ed.org/Physics/Electricity/voltage.xhtml>, 14 pages.

Third Party Observation dated Feb. 13, 2024 for European Application No. 22742834.9.

U.S. Notice of Allowance for U.S. Appl. No. 17/579,380, dated Feb. 14, 2024.

U.S. Office Action for U.S. Appl. No. 17/665,896, dated Feb. 12, 2024.

Youtube, “Tesla Battery Day”, Sep. 22, 2020, <https://www.youtube.com/watch?v=l6T9xieZTds>, 2 pages.

European Search Report mailed in EP 22152223 on Jul. 29, 2022 (10 pages).

European Search Report mailed in EP 22152245 on Jul. 28, 2022 (11 pages).

Third Party Observation dated Apr. 17, 2024 for European Application No. 22742840.6.

Third Party Observation dated Apr. 18, 2024 for European Application No. 23214922.9.

Third Party Observation dated Apr. 19, 2024 for European Application No. 22742838.0.

Third Party Observation dated Apr. 25, 2024 for European Application No. 22742834.9.

Third Party Observation dated Apr. 4, 2024 for U.S. Appl. No. 17/592,576.

Third Party Observation dated Mar. 22, 2024 for U.S. Appl. No. 17/592,672.

U.S. Office Action for U.S. Appl. No. 18/086,410, dated Jul. 24, 2023.

U.S. Office Action for U.S. Appl. No. 18/086,485, dated Aug. 15, 2023.

“What is the “Tabless Battery” Tesla Unveiled?,” Donga-A Science, URL: <<https://www.dongascience.com/print.php?idx=40048>>, Sep. 23, 2020, 6 pages total, with English translation.

Third Party Observation for European Application No. 23218081.0, dated Jan. 9, 2025.

Third Party Observation for European Application No. 23215163.9, dated Jan. 17, 2025.

Third Party Observation for U.S. Appl. No. 18/273,010, dated Oct. 22, 2024.

Third Party Observation for U.S. Appl. No. 18/277,848, dated Oct. 25, 2024.

U.S. Office Action for U.S. Appl. No. 18/086,402, dated Oct. 28, 2024.

Notice of Opposition for European Application No. 22152223.8, dated Oct. 16, 2024.

U.S. Office Action for U.S. Appl. No. 17/592,576, dated Oct. 17, 2024.

U.S. Office Action for U.S. Appl. No. 17/592,608, dated Oct. 17, 2024.

Youtube, “Tesla battery production,” Jan. 18, 2021, https://www.youtube.com/watch?v=zB8_HbrxUI8, 14 pages total.

European Communication of a Notice of Opposition for European Application No. 22152245.1, dated Dec. 10, 2024.

European Communication pursuant to Article 94(3) EPC for European Application No. 23 215 214.0, dated Nov. 21, 2024.

U.S. Office Action for U.S. Appl. No. 17/592,672, dated Dec. 23, 2024.

U.S. Office Action for U.S. Appl. No. 18/132,085, dated Jun. 14, 2023.

Extended European Search Report for European Application No. 22742833.1, dated Feb. 28, 2025.

Notice of Opposition for European Application No. 22152207.1, dated Mar. 11, 2025.

U.S. Appl. No. 63/081,244, filed Sep. 21, 2020.

U.S. Appl. No. 63/167,565, filed Mar. 29, 2021.

Extended European Search Report for European Application No. 22756575.1, dated Mar. 27, 2025.

U.S. Office Action for U.S. Appl. No. 17/592,576, dated Mar. 31, 2025.

U.S. Office Action for U.S. Appl. No. 18/132,140, dated May 9, 2025.

Extended European Search Report for European Application No. 22742838.0, dated Jun. 18, 2025.

Extended European Search Report for European Application No. 22756569.4, dated Jun. 5, 2025.

* cited by examiner

FIG. 1

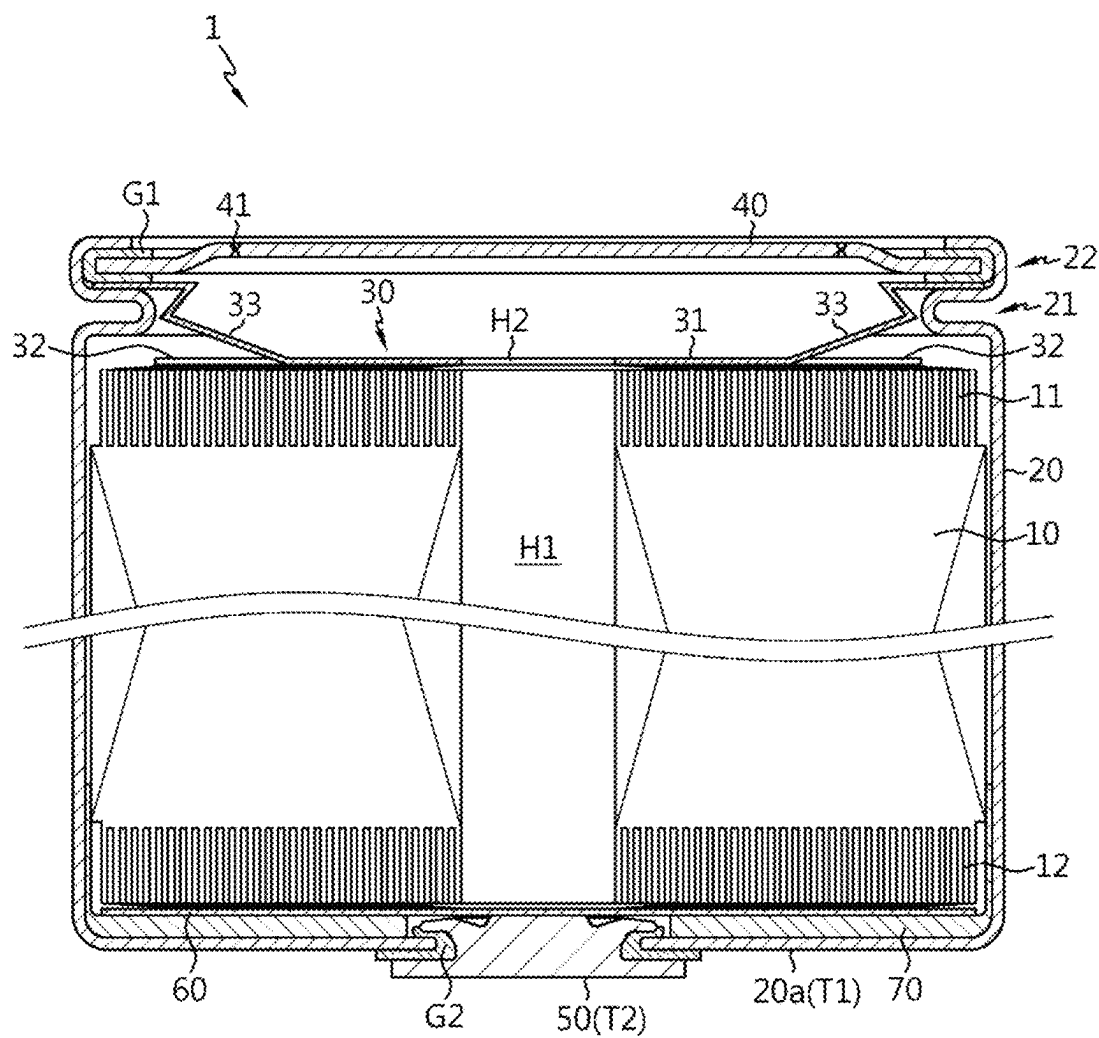


FIG. 2

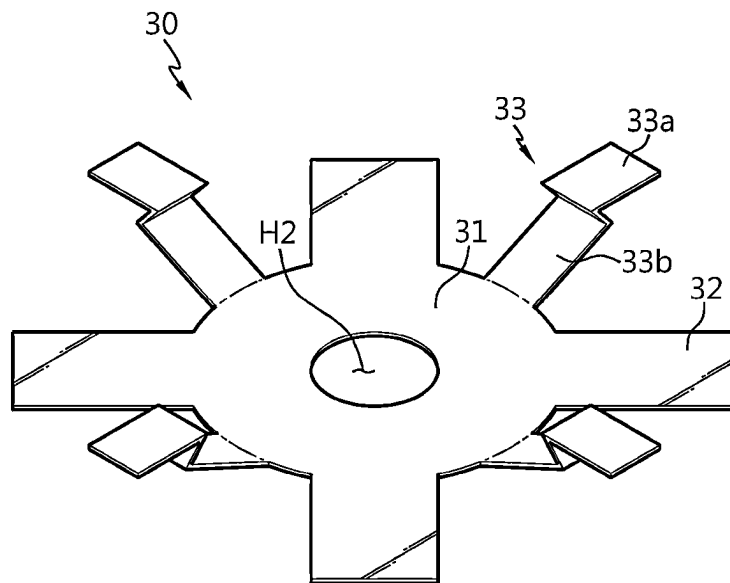


FIG. 3

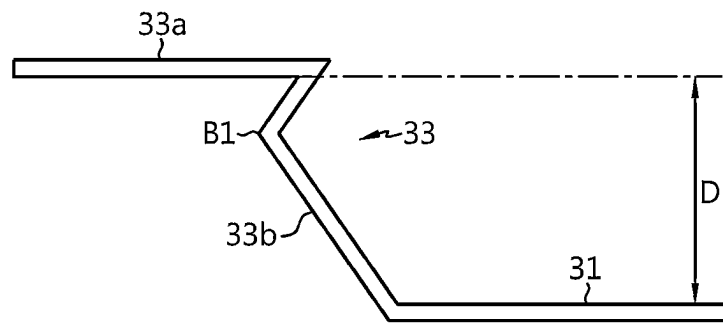


FIG. 4

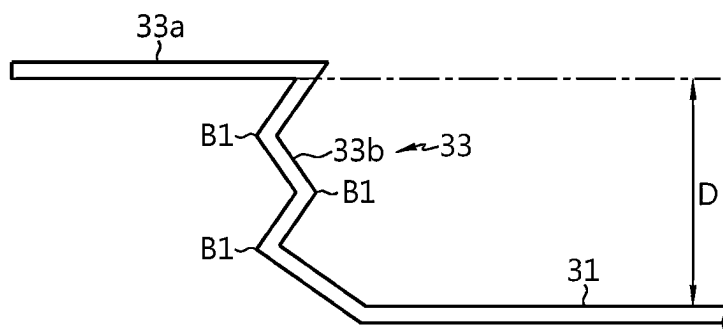


FIG. 5

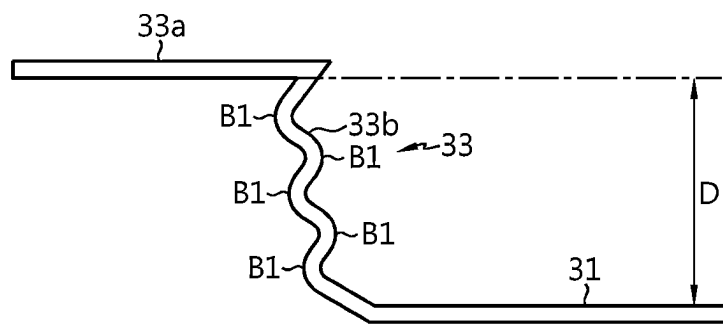


FIG. 6

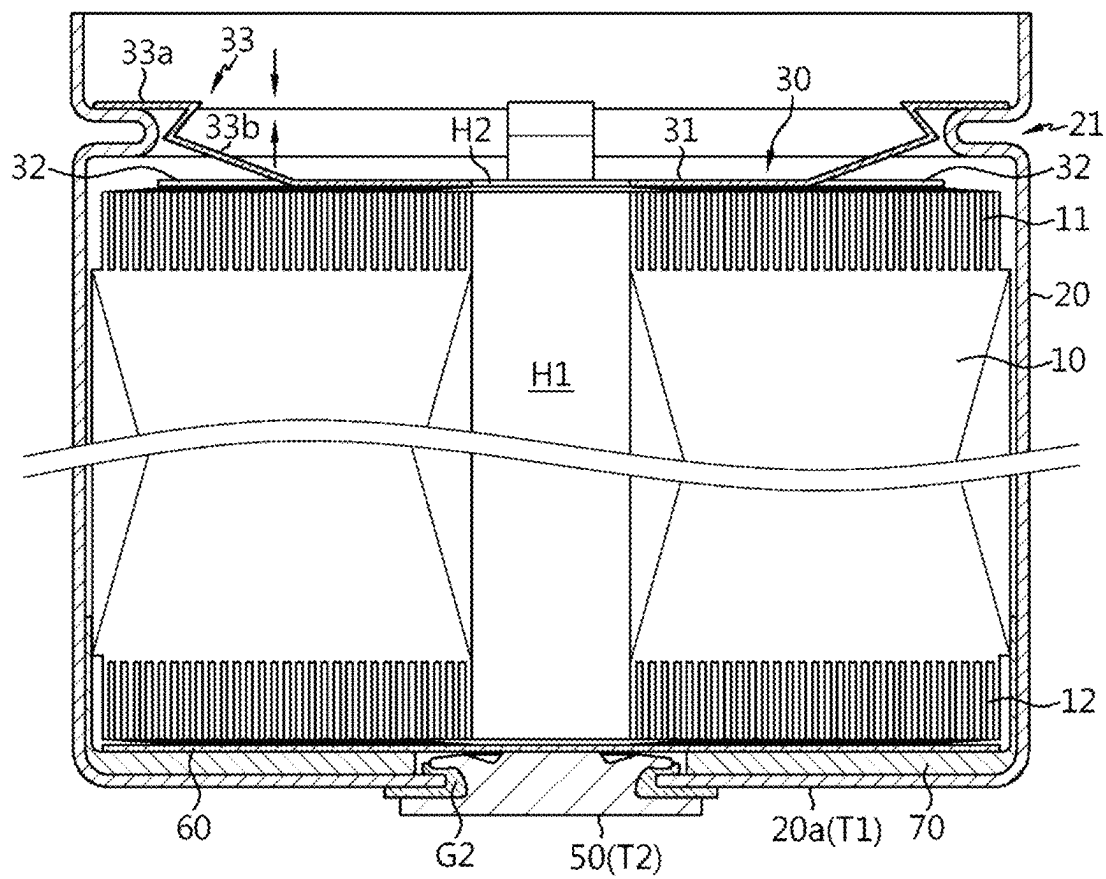


FIG. 7

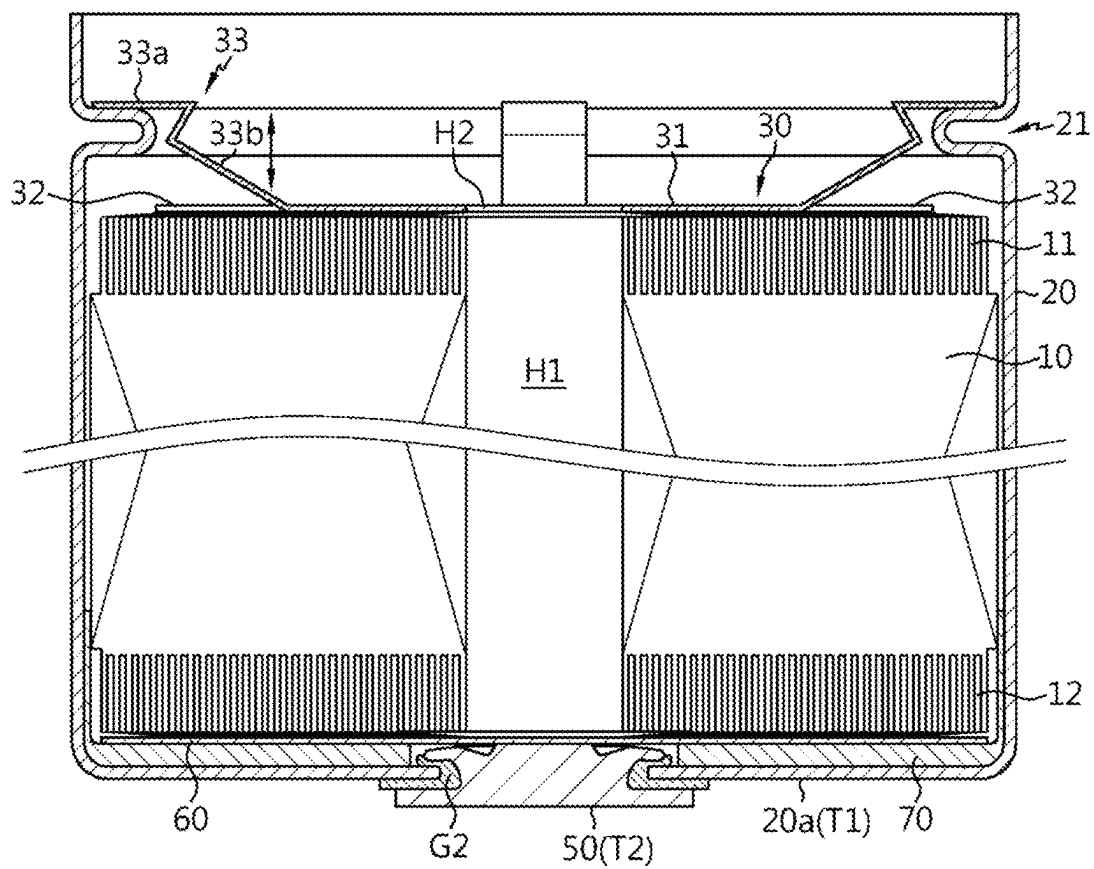


FIG. 8

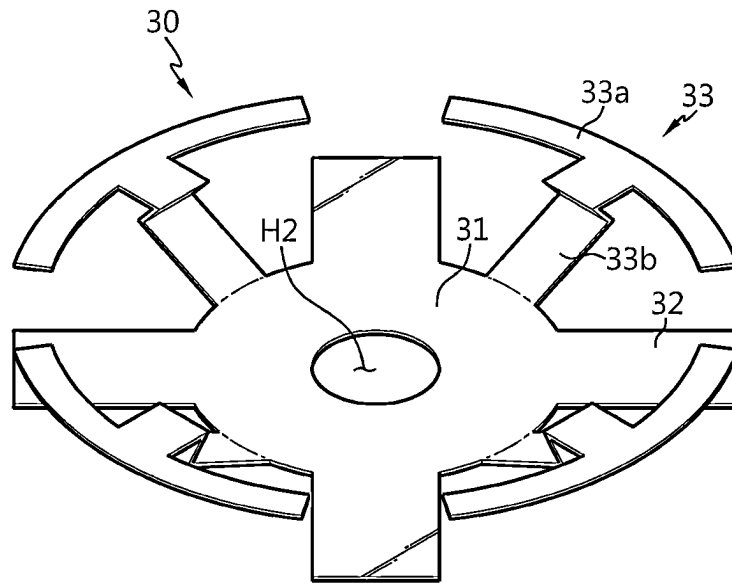


FIG. 9

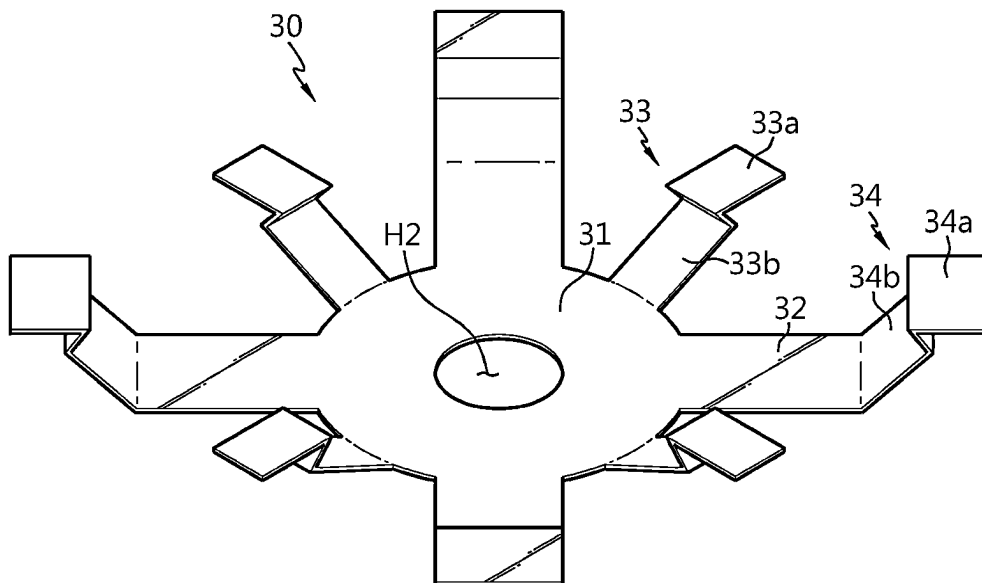


FIG. 10

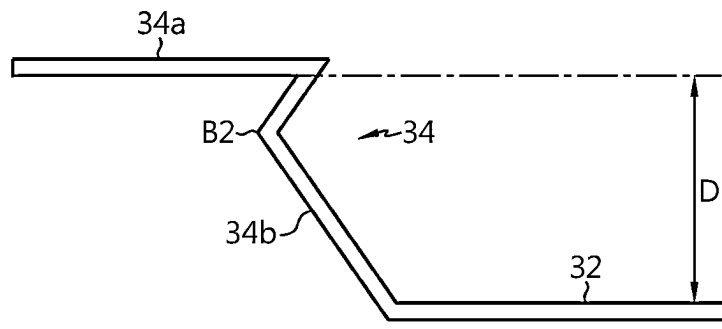


FIG. 11

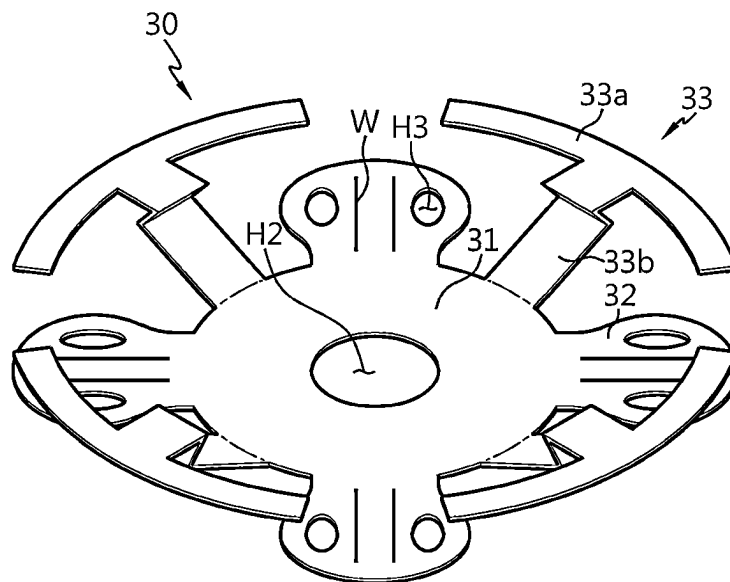


FIG. 12

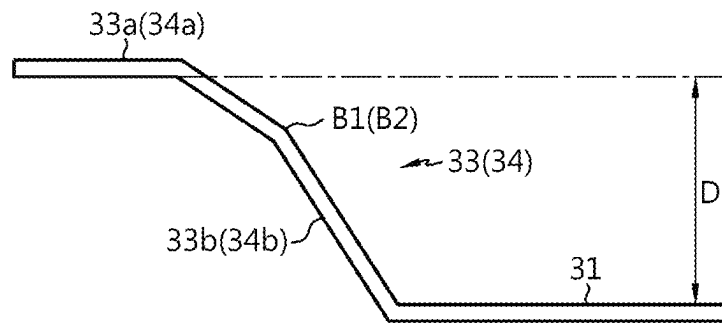


FIG. 13

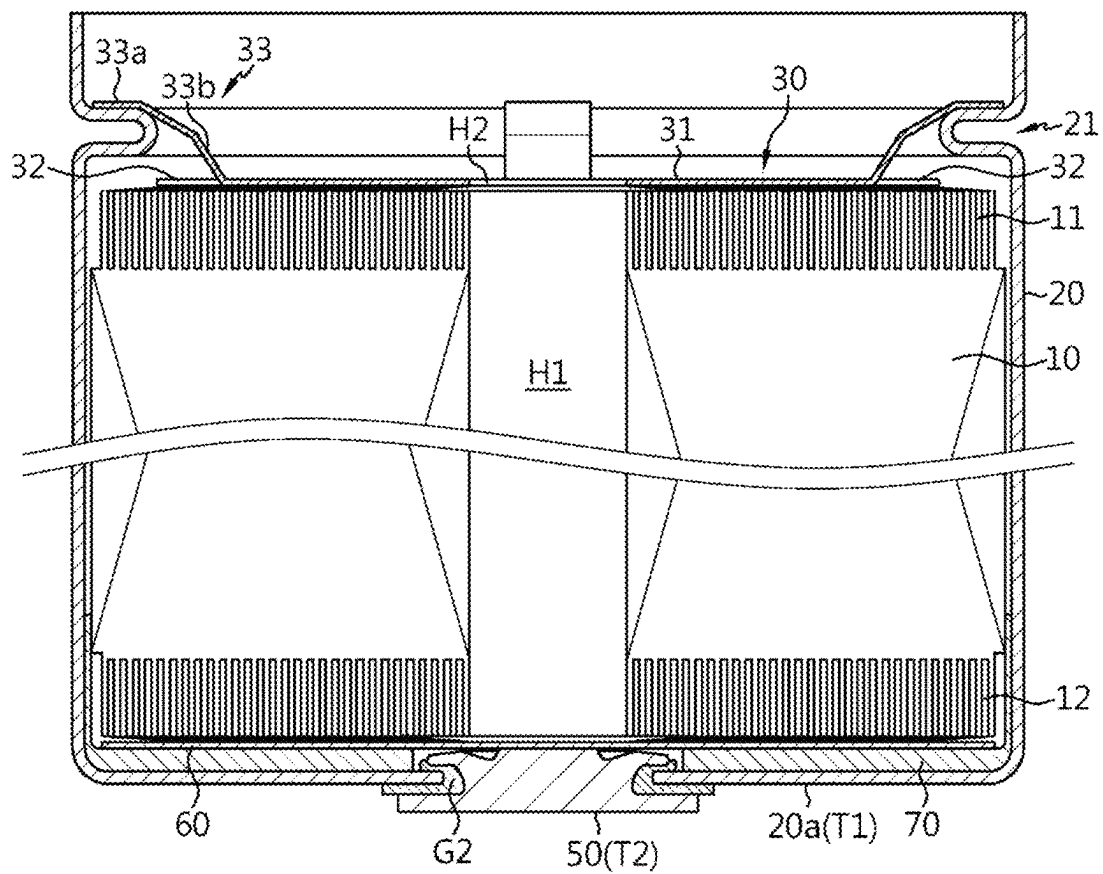


FIG. 14

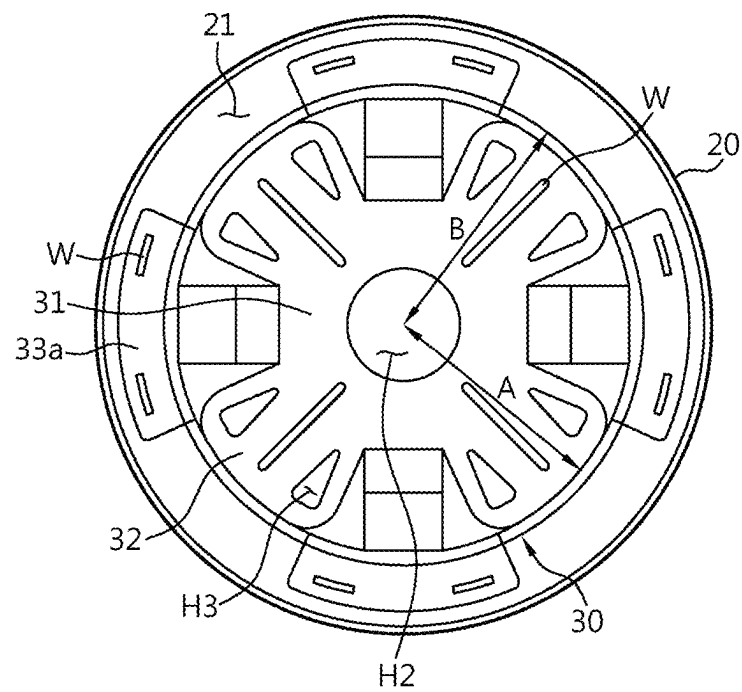


FIG. 15

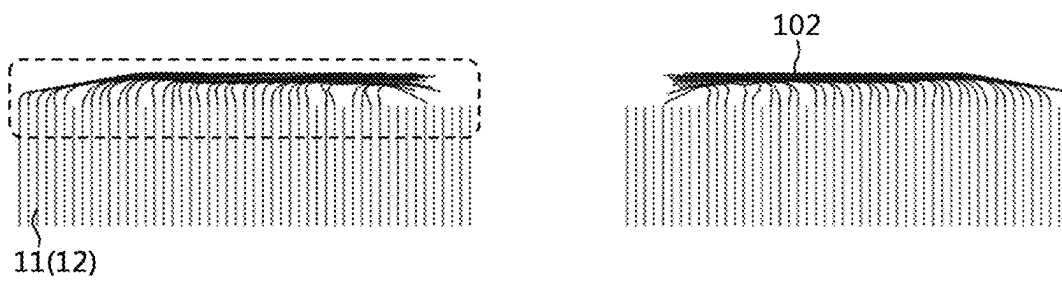


FIG. 16

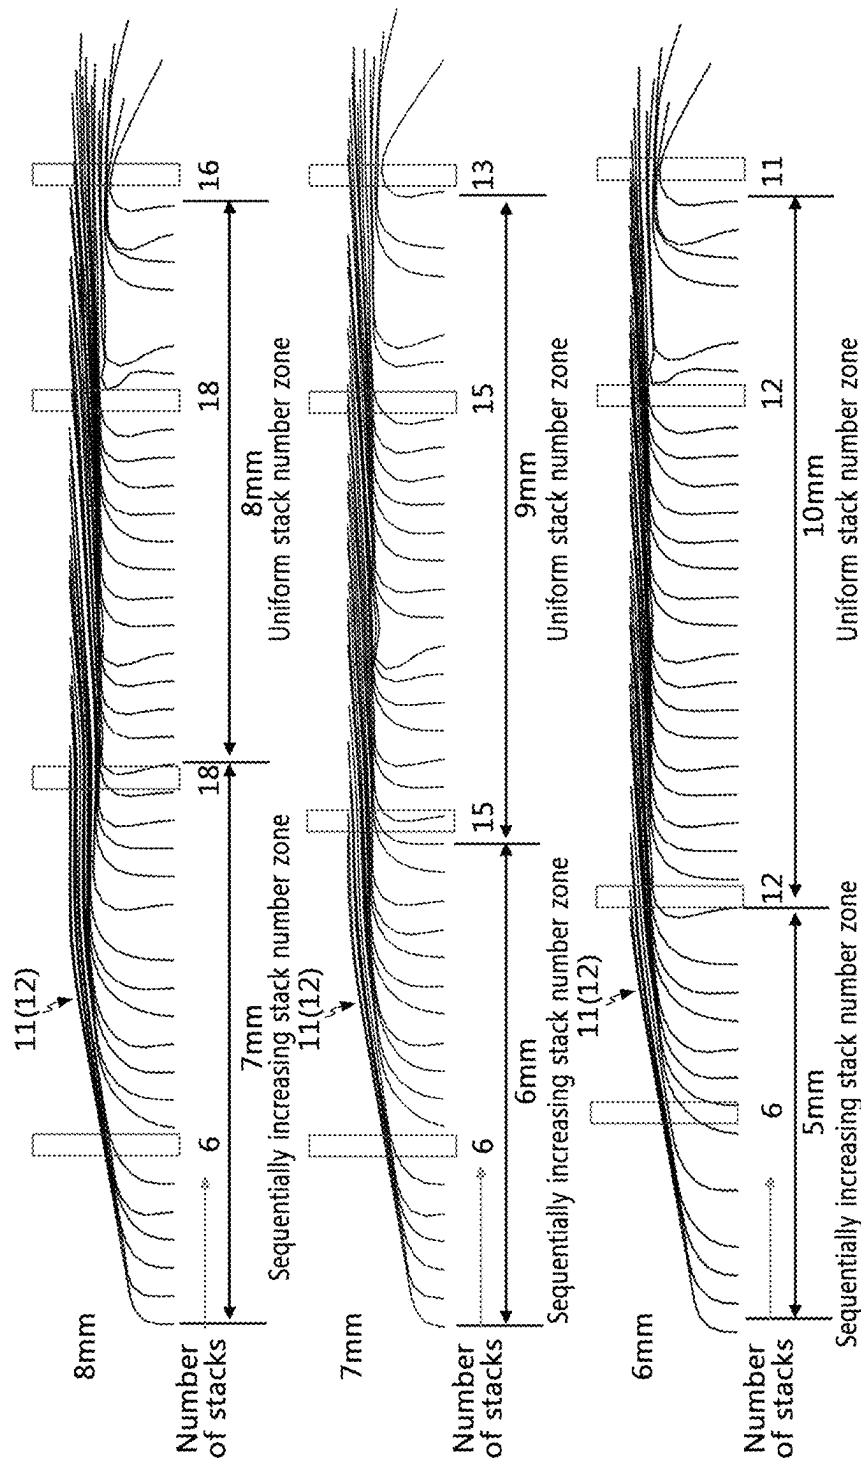


FIG. 17

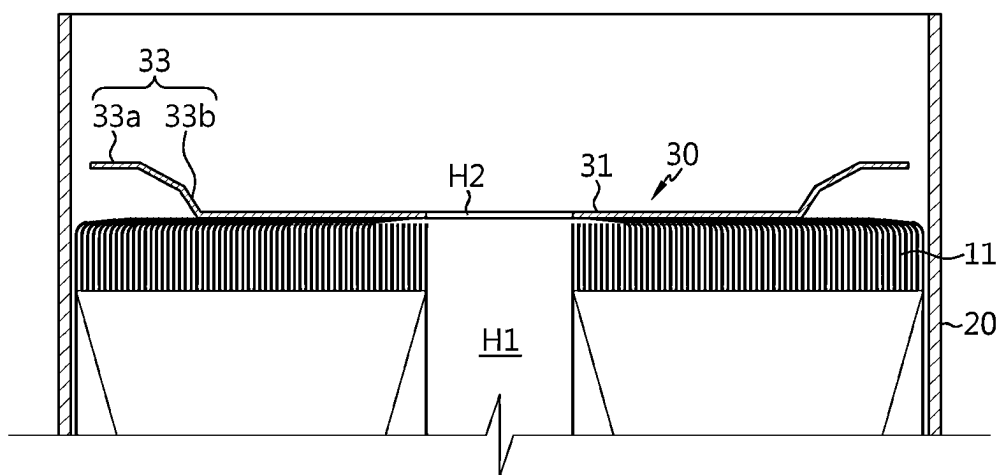
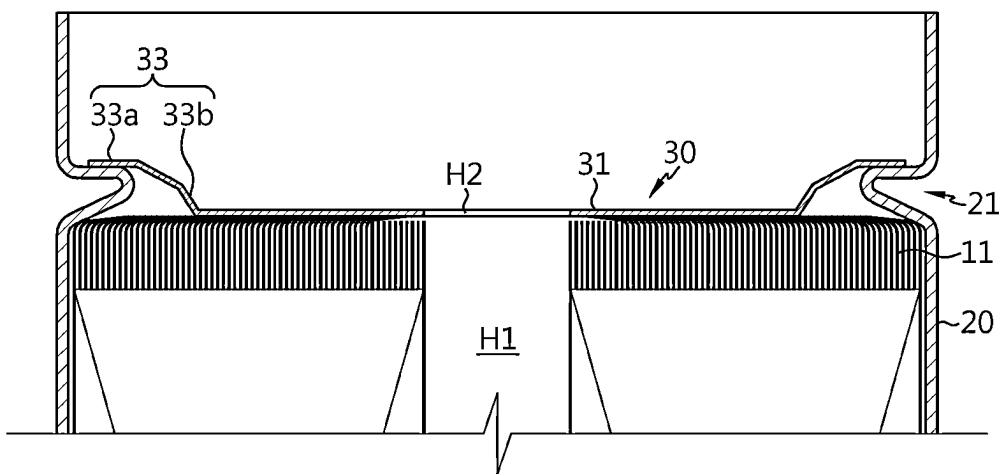


FIG. 18



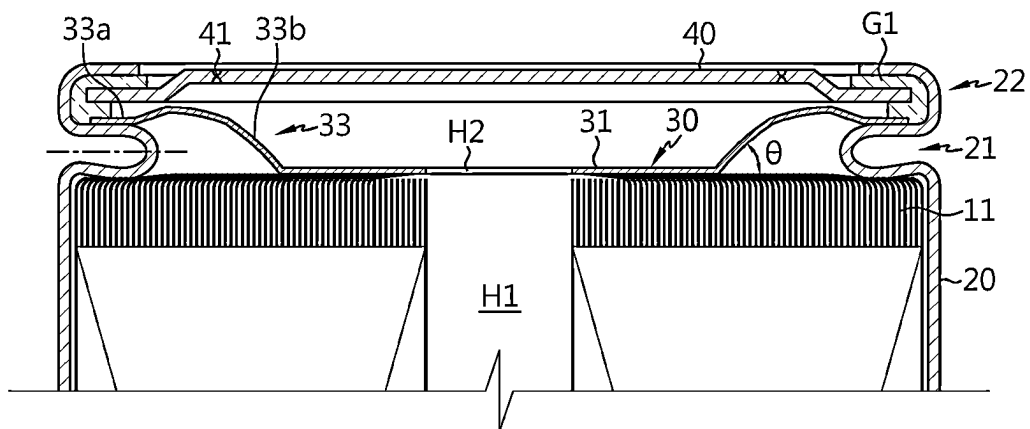


FIG. 21






	Shape of current collector plate before sizing	Deformed shape of current collector plate after 1 mm sizing	Stress applied to J/R by current collector plate
1		 Raised welded portion: 0.72mm	 4.5MPa
2		 Raised welded portion: 0.99mm	 3.7MPa
3		 Raised height: 0.26mm Raised welded portion: 0.02mm	 2.0MPa

FIG. 22

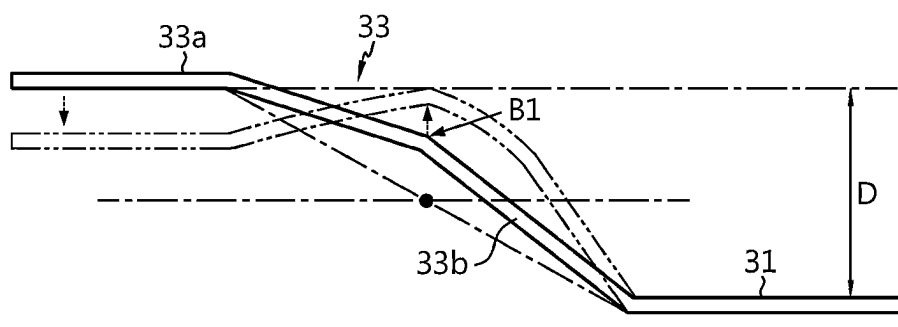


FIG. 23

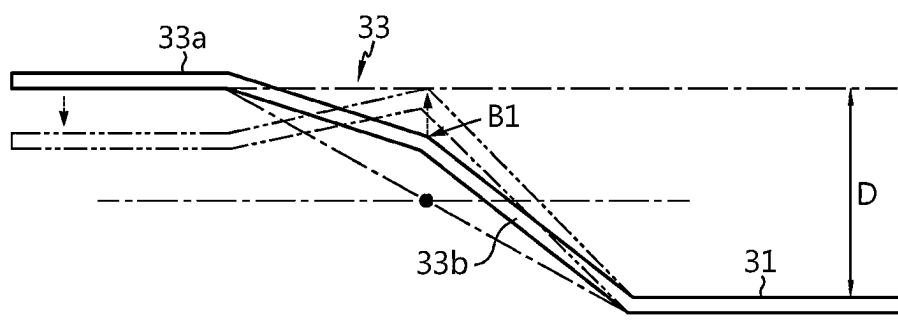


FIG. 24

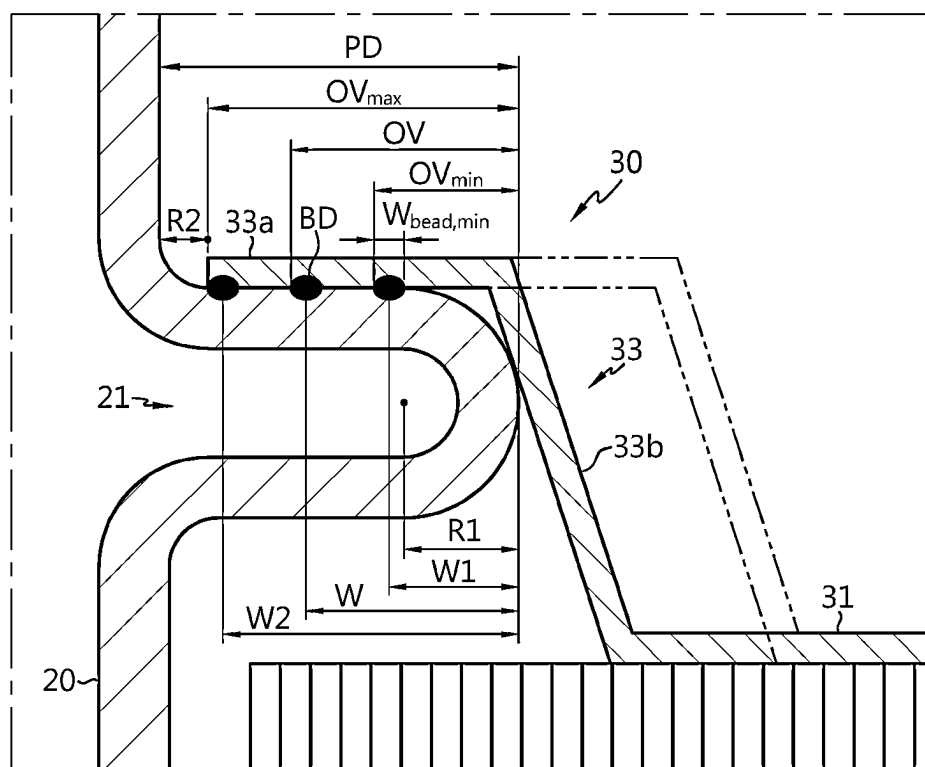


FIG. 25

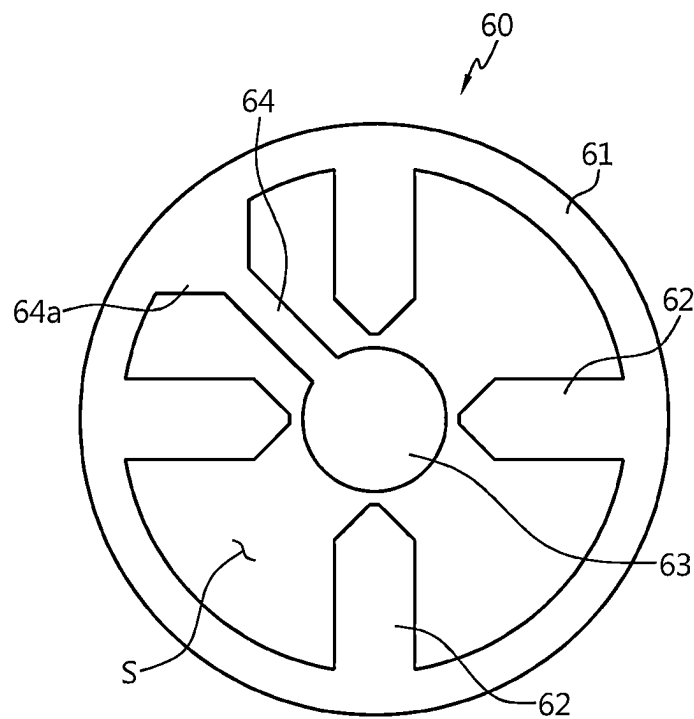


FIG. 26

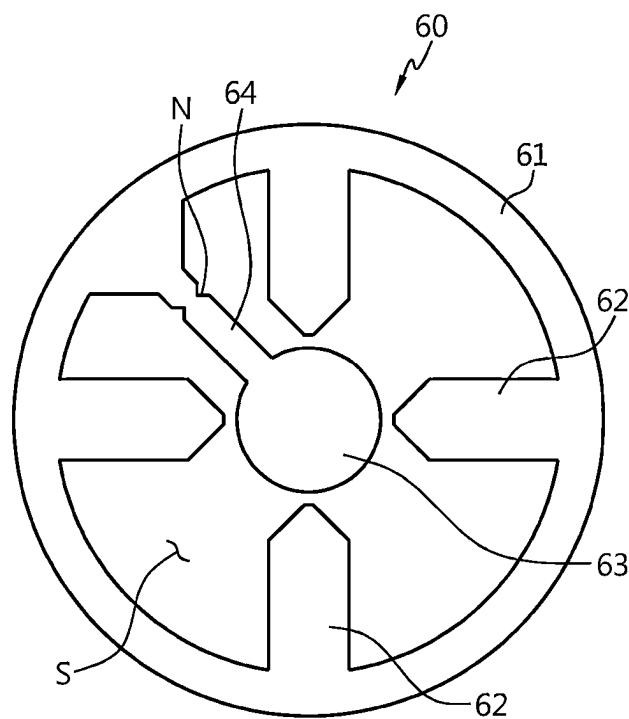


FIG. 27

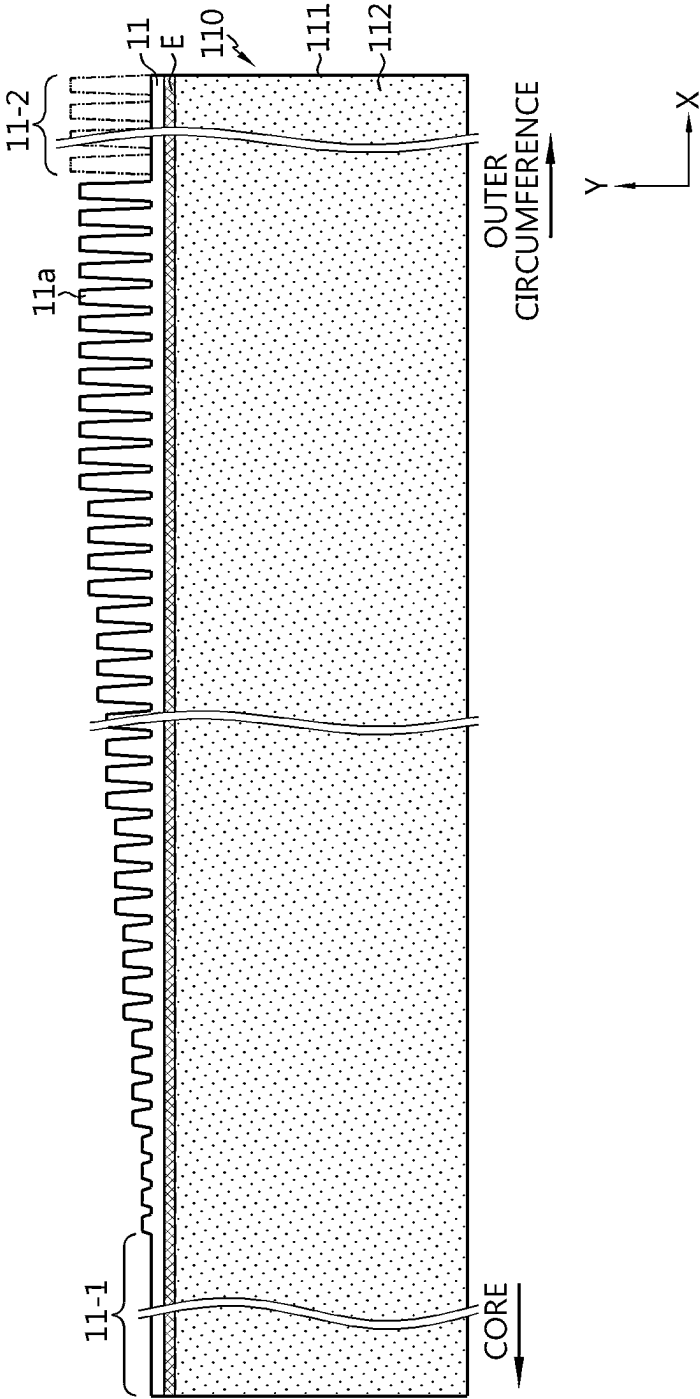


FIG. 28

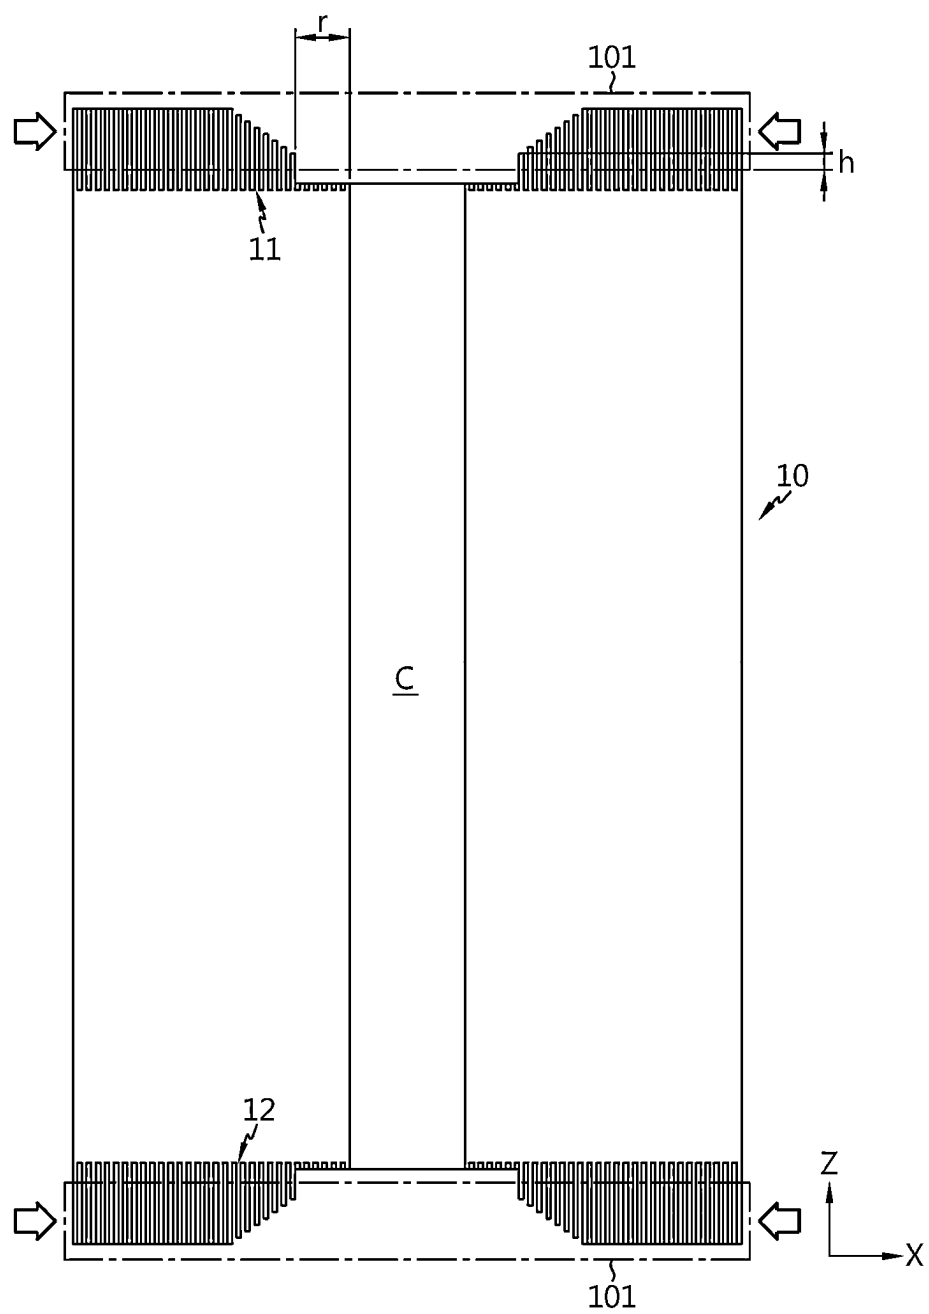


FIG. 29

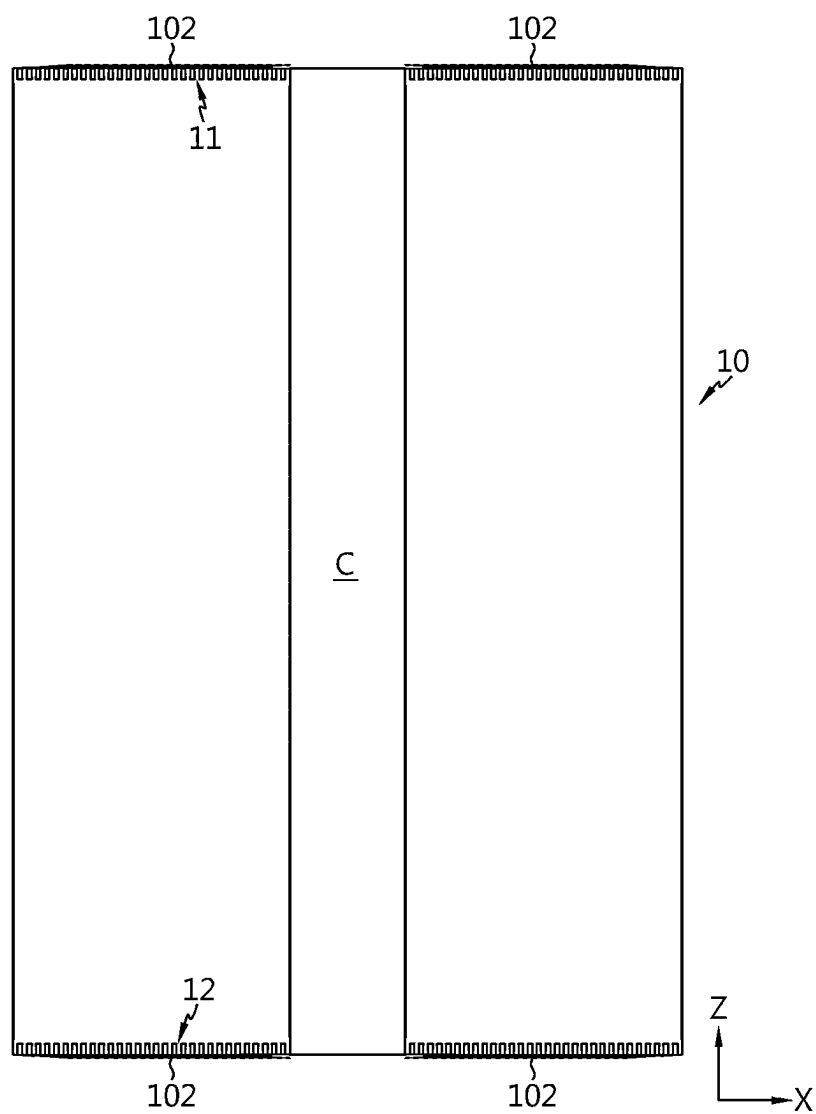


FIG. 30

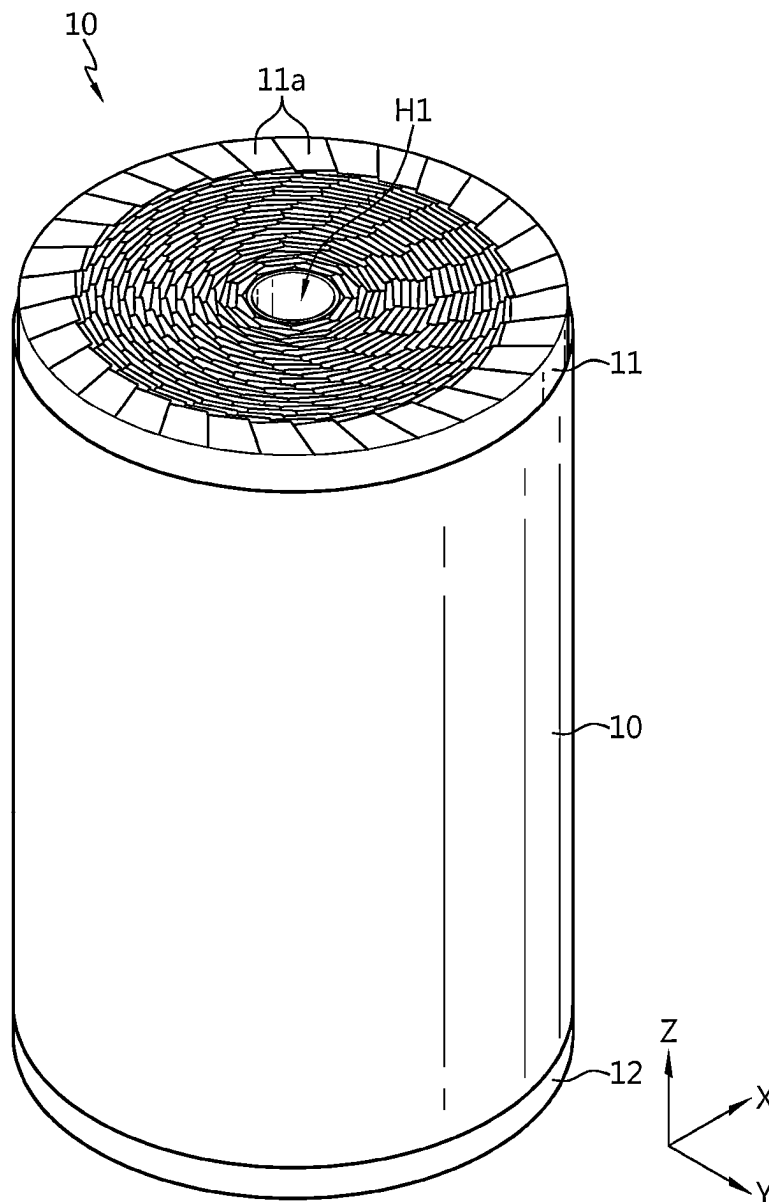


FIG. 31

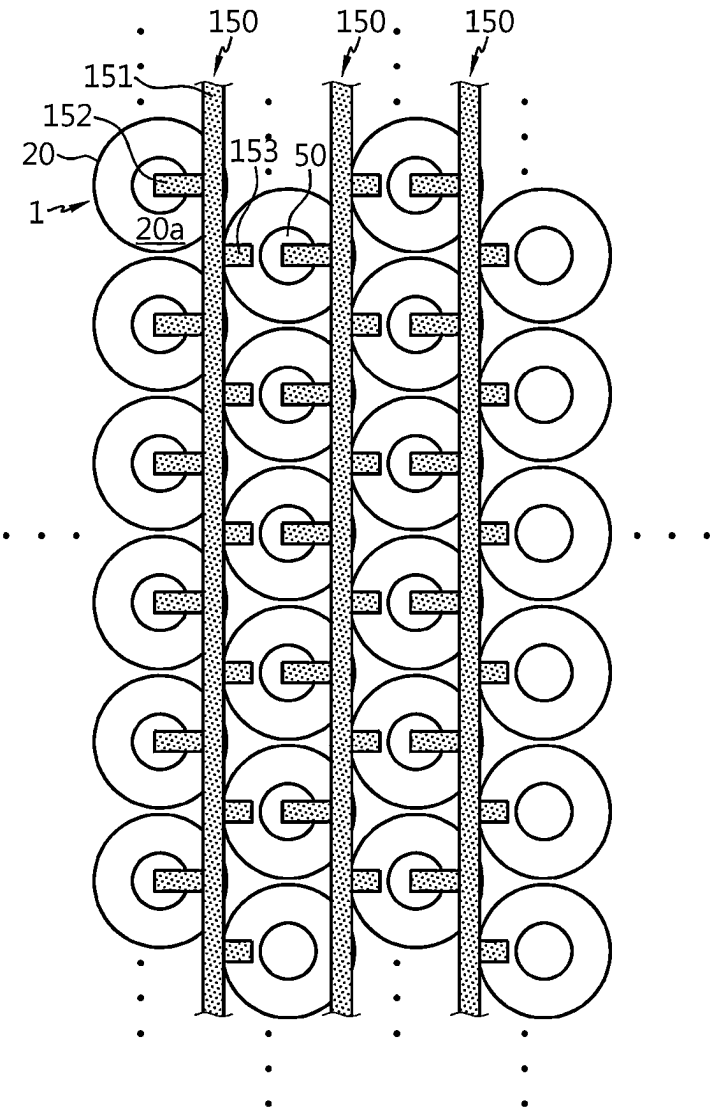


FIG. 32


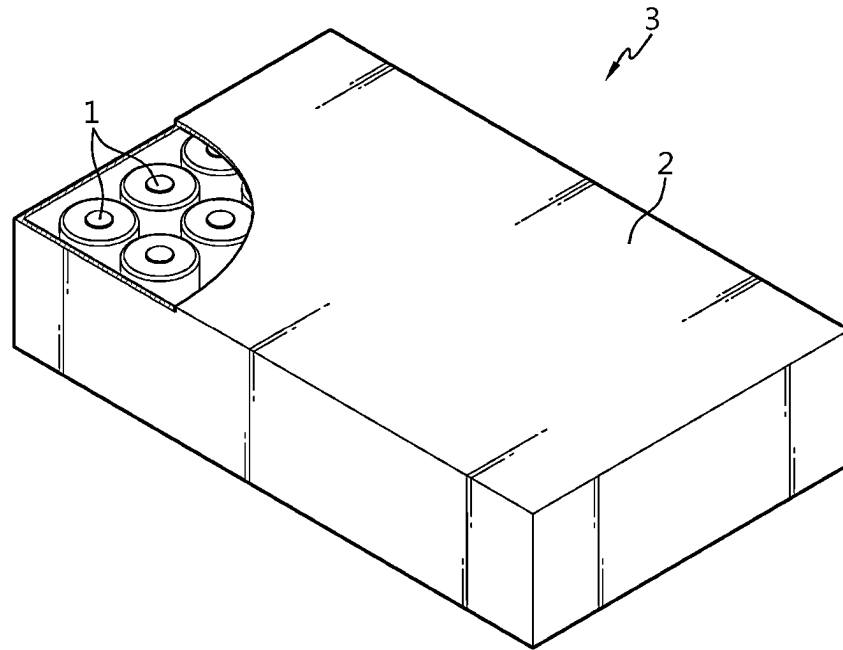


FIG. 33

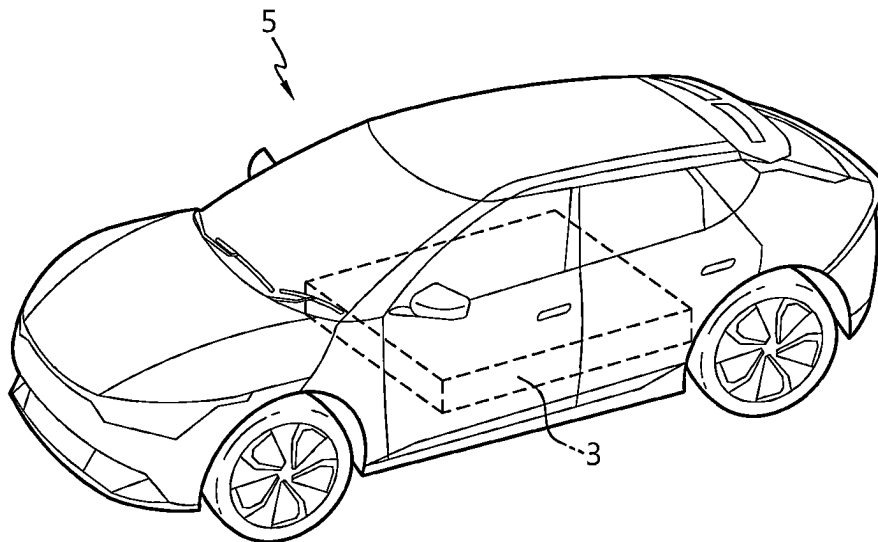

1

BATTERY AND CURRENT COLLECTOR APPLIED THERETO, AND BATTERY PACK AND VEHICLE INCLUDING THE BATTERY

CROSS-REFERENCE TO RELATED APPLICATIONS

This non-provisional application claims the benefit under 35 U.S.C. § 119(a) to Patent Application No. 10-2021-0022881, filed in the Republic of Korea on Feb. 19, 2021, Patent Application No. 10-2021-0022891, filed in the Republic of Korea on Feb. 19, 2021, Patent Application No. 10-2021-0022894, filed in the Republic of Korea on Feb. 19, 2021, Patent Application No. 10-2021-0022897, filed in the Republic of Korea on Feb. 19, 2021, Patent Application No. 10-2021-0024424, filed in the Republic of Korea on Feb. 23, 2021, Patent Application No. 10-2021-0030291, filed in the Republic of Korea on Mar. 8, 2021, Patent Application No. 10-2021-0030300, filed in the Republic of Korea on Mar. 8, 2021, Patent Application No. 10-2021-0046798, filed in the Republic of Korea on Apr. 9, 2021, Patent Application No. 10-2021-0058183, filed in the Republic of Korea on May 4, 2021, Patent Application No. 10-2021-0077046, filed in the Republic of Korea on Jun. 14, 2021, Patent Application No. 10-2021-0084326, filed in the Republic of Korea on Jun. 28, 2021, Patent Application No. 10-2021-0131205, filed in the Republic of Korea on Oct. 1, 2021, Patent Application No. 10-2021-0131207, filed in the Republic of Korea on Oct. 1, 2021, Patent Application No. 10-2021-0131208, filed in the Republic of Korea on Oct. 1, 2021, Patent Application No. 10-2021-0131215, filed in the Republic of Korea on Oct. 1, 2021, Patent Application No. 10-2021-0131225, filed in the Republic of Korea on Oct. 1, 2021, Patent Application No. 10-2021-0137001, filed in the Republic of Korea on Oct. 14, 2021, Patent Application No. 10-2021-0137856, filed in the Republic of Korea on Oct. 15, 2021, Patent Application No. 10-2021-0142196, filed in the Republic of Korea on Oct. 22, 2021, Patent Application No. 10-2021-0153472, filed in the Republic of Korea on Nov. 9, 2021, Patent Application No. 10-2021-0160823, filed in the Republic of Korea on Nov. 19, 2021, Patent Application No. 10-2021-0163809, filed in the Republic of Korea on Nov. 24, 2021, Patent Application No. 10-2021-0165866, filed in the Republic of Korea on Nov. 26, 2021, Patent Application No. 10-2021-0172446, filed in the Republic of Korea on Dec. 3, 2021, Patent Application No. 10-2021-0177091, filed in the Republic of Korea on Dec. 10, 2021, Patent Application No. 10-2021-0194572, filed in the Republic of Korea on Dec. 31, 2021, Patent Application No. 10-2021-0194593, filed in the Republic of Korea on Dec. 31, 2021, Patent Application No. 10-2021-0194610, filed in the Republic of Korea on Dec. 31, 2021, Patent Application No. 10-2021-0194611, filed in the Republic of Korea on Dec. 31, 2021, Patent Application No. 10-2021-0194612, filed in the Republic of Korea on Dec. 31, 2021, and Patent Application No. 10-2022-0001802, filed in the Republic of Korea on Jan. 5, 2022, all of which are hereby expressly incorporated by reference in their entireties into the present application.

Also, Patent Application No. 10-2021-0007278, filed in the Republic of Korea on Jan. 19, 2021, is hereby expressly incorporated by reference in its entirety into the present application.

TECHNICAL FIELD

The present disclosure relates to a battery, a current collector applied thereto, and a battery pack and a vehicle

2

including the battery. More particularly, the present disclosure relates to a current collector having a structure for preventing damage in a welded portion with an electrode assembly when external impacts are applied, a battery including the same, and a battery pack and a vehicle including the battery.

BACKGROUND ART

In general, conventional cylindrical batteries have a structure in which a tab connecting a jelly-roll to an external terminal is connected to a foil of the jelly-roll by welding. The cylindrical batteries of this structure have a limited path of current and very high resistance of the jelly-roll itself.

Accordingly, attempts have been made to reduce the resistance by increasing the number of tabs connecting the jelly-roll to the external terminal, but increasing the number of tabs is insufficient to reduce the resistance to a desired level and ensure sufficient path of current.

Accordingly, to reduce the resistance of the jelly-roll itself, it is necessary to develop a new jelly-roll structure and a current collector structure suitable for the jelly-roll structure. In particular, for example, devices requiring high output/high capacity battery packs, such as electric vehicles, have greater need for the use of the new structure of jelly-roll and current collector.

In addition, it is necessary to develop cylindrical batteries having a structure with improved coupling strength between a current collector and a battery housing and a current collector structure applied to the cylindrical batteries.

Moreover, it is necessary to develop cylindrical batteries with improved energy density by minimizing the dead space in the battery housing when the current collector and the battery housing are coupled.

Recently, as the cylindrical batteries are applied to electric vehicles, the form factor of the cylindrical batteries increases. That is, the cylindrical batteries are increasing in diameter and height compared to the conventional cylindrical batteries with 1865, 2170 form factor. The increase in form factor leads to the increased energy density, increased safety from thermal runaway and improved cooling efficiency.

The energy density of the cylindrical battery may further increase when the unnecessary space in the battery housing is minimal together with the increasing form factor. Accordingly, it is necessary to design the current collector with a low resistance structure over the entire structure of the battery to increase the capacity of the battery and minimize the amount of heat generated during rapid charging.

In addition, the battery packs applied to electric vehicles are often exposed to vibrations and impacts due to the environment in which the battery packs are used. Accordingly, there is a need for development of cylindrical batteries having a structure for reducing the likelihood that damage may occur in a welded portion when vibrations and external impacts are applied and a current collector structure applied to the cylindrical batteries.

DISCLOSURE

Technical Problem

The present disclosure is designed to solve the above-described problem, and therefore the present disclosure is directed to providing a current collector having a suitable structure for an electrode assembly having a low resistance structure and a battery including the same.

3

In another aspect, the present disclosure is directed to providing a current collector having a structure for improving the coupling strength of a coupled portion between the current collector and the battery housing and a battery including the same.

In another aspect, the present disclosure is directed to providing a current collector having a structure for improving the energy density of a battery and a battery including the same.

In another aspect, the present disclosure is directed to providing a current collector having a structure for increasing the convenience of the welding process for electrical connection between the battery housing and the current collector in the manufacture of the battery, thereby improving the productivity, and a battery including the same.

In another aspect, the present disclosure is directed to providing a current collector having a structure for significantly reducing the likelihood that damage may occur in the welded portion with the electrode assembly and/or the welded portion with the battery housing when vibrations and impacts are applied and a battery including the same.

In another aspect, the present disclosure is directed to providing a current collector having a structure for increasing the convenience in the welding process for electrical connection between the battery housing and the current collector in the manufacture of the battery, thereby improving the productivity, and a battery including the same.

However, the technical problem of the present disclosure is not limited to the above-described problem, and other problems not mentioned herein will be clearly understood by those skilled in the art from the following description.

Technical Solution

To solve the above-described problem, a battery according to an embodiment of the present disclosure includes an electrode assembly including a first electrode, a second electrode, and a separator between the first electrode and the second electrode, wherein the first electrode, the second electrode, and the separator are wound about an axis defining a core and an outer circumferential surface, wherein the first electrode has a pair of first sides and a pair of second sides extending between the pair of first sides, a first portion including an active material extending between the pair of first sides, and a second portion extending between the pair of first sides and exposed beyond the separator along a winding direction, and at least part of the second portion includes an electrode tab; a battery housing having a first opening at a first end and a second end with a second opening opposite the first end, the battery housing accommodating the electrode assembly through the first opening at the first end; a first current collector including a support portion positioned on the electrode assembly, a first tab coupling portion extending from the support portion and coupled with the second portion of the first electrode and a first housing coupling portion extending from the support portion and electrically coupled onto an inner surface of the battery housing; and a housing cover which seals the first opening.

The first tab coupling portion and the first housing coupling portion may not be directly connected to each other, and may be indirectly connected by the support portion.

The battery housing may include a beading portion which is formed at an end portion adjacent to the first opening and is press-fit inward.

The first tab coupling portion has at least one injection hole.

4

The first housing coupling portion may include a first contact portion coupled onto the beading portion of the battery housing; and a first connecting portion connecting the support portion to the first contact portion.

The first connecting portion may have an upwardly convex structure with respect to an imaginary straight line connecting two ends of the first connecting portion in a longitudinal direction.

The first connecting portion may be more upwardly raised than the beading portion.

The beading portion may include an upper beading portion at an upper part with respect to an innermost point; and a lower beading portion at a lower part with respect to the innermost point.

The upper beading portion and the lower beading portion may be asymmetrical with respect to an imaginary reference plane passing through the innermost point of the beading portion in parallel to a bottom surface of the battery housing.

The first tab coupling portion of the first current collector may be disposed at a lower position than the lower beading portion.

At least one of the upper beading portion or the lower beading portion may be inclined at a predetermined angle to a lower surface of the battery housing.

The first contact portion may be seated on an inclined upper surface of the beading portion.

At least one of the upper beading portion or the lower beading portion, at least in part, may be parallel to a lower surface of the battery housing.

The first contact portion may be seated on a flat upper surface of the beading portion.

The first contact portion may be coupled to an upper surface of the beading portion by welding.

The first contact portion may be coupled within a flat area formed on the upper beading portion by welding.

At least a part of the first contact portion may have a shape of an arc which extends in a circumferential direction along the beading portion of the battery housing.

The first contact portion may have a shape of an arc which extends from an intersection between the first connecting portion and the first contact portion in opposite directions along a circumferential direction on the beading portion.

A press-fit depth of the beading portion PD may satisfy the following formula:

$$PD \geq R1_{min} + R2_{min} + W_{bead,min}$$

wherein $R1_{min}$ is a minimum value of a radius of curvature of the beading portion, $W_{bead,min}$ is a minimum value of a welding bead width, and $R2_{min}$ is a minimum value of a radius of curvature at a boundary area between the beading portion and the inner surface of the battery housing.

A press-fit depth of the beading portion may be 0.2 mm to 10 mm.

A press-fit depth of the beading portion PD and a maximum press-fit depth PD_{max} may satisfy the following formula:

$$\frac{(R1_{min} + W_{bead,min})}{PD_{max}} \leq OV/PD \leq (PD_{max} - R2_{min})/PD_{max}$$

wherein OV is an overlap length, the overlap length being a shortest distance from an end of the first contact portion to a vertical line passing through an innermost point of the beading portion, $R1_{min}$ is a minimum radius of curvature of the beading portion, $W_{bead,min}$ is a minimum welding bead width, and $R2_{min}$ is a minimum radius of curvature at a boundary area between the beading portion and the inner surface of the battery housing.

5

A weld area between the first contact portion and the beading portion may be narrower than a flat upper surface of the beading portion.

A press-fit depth of the beading portion PD and a maximum value of the press-fit depth PD_{max} satisfy the following formula:

$$\frac{(OV_{min}-0.5*W_{bead,min})/PD_{max} \leq W/PD \leq (OV_{max}-0.5*W_{bead,min})/PD_{max}}$$

wherein W is a distance from an innermost point of the beading portion to the center point of the welding bead disposed on an outermost side in a radial direction, OV is an overlap length, the overlap length being a shortest distance from an end of the first contact portion to a vertical line passing through the innermost point of the beading portion, OV_{min} is a minimum overlap length, OV_{max} is a maximum overlap length, and $W_{bead,min}$ is a minimum welding bead width.

A minimum value of the distance from the innermost point of the beading portion to the center point of the welding bead disposed on the outermost side in the radial direction W1 and the distance from the innermost point of the beading portion to the center point of the welding bead disposed on the outermost side in the radial direction W may satisfy the following formula:

$$W1=R1+0.5*W_{bead,min}$$

$$W=OV-0.5*W_{bead,min} \text{ are satisfied,}$$

wherein R1 is a radius of curvature of the beading portion is R1.

The beading portion, at least in part, may have a flat region parallel to a lower surface of the battery housing, and a length of the flat region of the beading portion in contact with the first current collector may be $OV-R1$ where R1 is a radius of curvature of the beading portion.

A width in a radial direction of a welding pattern formed between the beading portion and the first contact portion may be $W_{bead,min}$ or more and $OV-R1$ or less.

A ratio of the width in a radial direction of the welding pattern to the length of the flat region may be in a range of 10 to 40%.

The first connecting portion may include at least one first bending portion which changes in extension direction at least once.

The first bending portion may pass through a center of an imaginary straight line connecting one end of the first contact portion to one end of the first tab coupling portion and may be disposed at a higher position than an imaginary plane parallel to a bottom surface of the battery housing.

The at least one first bending portion may be bent at an obtuse angle not to overlap with itself, when viewed along a longitudinal direction of the battery housing.

A boundary between the first contact portion and the first connecting portion may be bent at an obtuse angle.

The first connecting portion may decrease in slope step-wise or gradually toward the beading portion.

An angle between the first tab coupling portion and the first connecting portion may be between 0° and 90° .

The first connecting portion may support the housing cover.

The first tab coupling portion and the first contact portion may be disposed at a substantially equal height.

The first contact portion may have a flat surface which is coupled with an upper surface of the beading portion toward the first opening.

6

The first current collector may have a hole formed at a center.

The hole may be provided at a location corresponding to a winding hole formed at a center of the electrode assembly.

A diameter of the hole may be equal to or larger than a diameter of the winding hole provided in the core of the electrode assembly.

The the first current collector may further include a plurality of the first tab coupling portions; and a second housing coupling portion extending from an end of one of the plurality of the first tab coupling portions and coupled onto the inner surface of the battery housing.

The second housing coupling portion may include a second contact portion coupled onto the inner surface of the battery housing; and a second connecting portion connecting the end of one of the plurality of the first tab coupling portions to the second contact portion.

At least part of the second contact portion may extend along an inner circumferential surface of the battery housing.

The second connecting portion may include at least one second bending portion which changes in extension direction at least once.

A distance from a center of the first current collector to an end of the first tab coupling portion may be substantially equal to or shorter than a distance from a center of a winding hole of the electrode assembly to an innermost side of the beading portion.

An upper surface of the beading portion may a flat region.

At least one welding bead may formed between the beading portion and the first contact portion, and the at least one welding bead may form a straight line welding pattern extending approximately along a circumferential direction.

At least one welding bead may be formed between the beading portion and the first contact portion, and the at least one welding bead may form an arc welding pattern extending along a circumferential direction.

A welding bead may be formed between the beading portion and the first contact portion, the welding bead may form a welding pattern, and the welding pattern may have a shape of a line formed by connecting spot weldings.

A plurality of welding beads formed between the beading portion and the first contact portion may be formed within a same first contact portion.

The second electrode may have a pair of third sides and a pair of fourth sides extending between the pair of third sides, a third portion including an active material extending between the pair of third sides, and a fourth portion extending between the pair of third sides, and the fourth portion is exposed beyond the separator along a winding direction, and at least part of the fourth portion includes an electrode tab, and wherein the battery may further comprise a terminal electrically connected to the fourth portion through the second opening at the second end of the battery housing.

The battery may further include a second current collector disposed between the electrode assembly and the terminal, and the second current collector may include a second tab coupling portion coupled with the fourth portion; and a terminal coupling portion coupled with the terminal.

The terminal coupling portion may cover a winding hole of the electrode assembly.

An outer diameter of the second current collector may be larger than an outer diameter of the first current collector.

The fourth portion may be bent providing a coupling surface, and the second tab coupling portion may be coupled onto the coupling surface.

The battery housing may include a crimping portion which is formed above the beading portion, and is extended and bent around a circumferential edge of the housing cover.

The first housing coupling portion may be compressed and fixed by the crimping portion.

The battery may further include a sealing gasket positioned in the crimping portion and interposed between the battery housing and the housing cover.

The first contact portion may be positioned between the beading portion and the sealing gasket.

The first contact portion may be fixed by bending the crimping portion.

The sealing gasket may have a larger thickness at an area that does not contact the first contact portion than at a contact area with the first contact portion.

The sealing gasket may have a larger compression ratio at a contact area with the first contact portion than at an area that does not contact the first contact portion.

The sealing gasket may have a compression ratio at a contact area with the first contact portion which is substantially equal to a compression ratio at an area that does not contact the first contact portion.

The sealing gasket may change in thickness area by area along a circumferential direction on the beading portion.

The sealing gasket may repeatedly increase and decrease in thickness in an alternating manner along a circumferential direction on the beading portion.

The sealing gasket may change in compression ratio area by area along a circumferential direction on the beading portion.

The first housing coupling portion may be elastically biased on the beading portion.

A connected portion between the first contact portion and the first connecting portion may have a complementary shape corresponding to an inner surface of the beading portion.

At least part of the second portion may a plurality of segments split along the winding direction of the electrode assembly, and the plurality of segments may be bent along a radial direction of the electrode assembly forming a bent surface.

The plurality of segments may overlap in multiple layers forming the bent surface, and the bent surface may include an increasing stack number zone in which the number of overlapping layers of the segments sequentially increases to a maximum value from an outer circumference of the electrode assembly to the core and a uniform stack number zone from a radial position at which the number of overlapping layers is at a maximum to a radial position at which an innermost segment exists.

The first tab coupling portion may be coupled to the bent surface such that it overlaps with the uniform stack number zone.

The number of overlapping layers of the uniform stack number zone may be 10 or more.

The first tab coupling portion may be welded to the bent surface, and a weld area of the tab coupling portion may overlap at least 50% with the uniform stack number zone along the radial direction of the electrode assembly.

The second portion and the first tab coupling portion may be coupled by welding along a radial direction of the electrode assembly.

The first tab coupling portion may be coupled to the second portion by welding while being in parallel to a lower surface of the battery housing.

A welding bead formed between the second portion and the first tab coupling portion may form a straight line welding pattern which extends along the radial direction of the electrode assembly.

A welding bead formed between the first uncoated region and the first tab coupling portion may form a welding pattern, and the welding pattern may have a shape of a line formed by connecting spot weldings.

A width of a welding bead formed between the second portion and the first tab coupling portion may be 0.1 mm or more.

A plurality of the first tab coupling portions and a plurality of the first housing coupling portions may be provided, and the plurality of first tab coupling portions and the plurality of first housing coupling portions may be arranged in a radial pattern, a crisscross pattern or a combined pattern with respect to a center of the first current collector.

Each of the plurality of the first housing coupling portions may be positioned between adjacent first tab coupling portions.

A plurality of the first housing coupling portions may be provided, and the first contact portions of the plurality of the first housing coupling portions may be connected to each other and integrally formed.

An outermost point of the first connecting portion may be spaced a predetermined distance apart from an innermost point of the beading portion.

An angle between the first contact portion and the first connecting portion may be an acute angle due to the first bending portion.

A plurality of the injection holes may be provided.

The plurality of the injection holes may be symmetrically arranged on left and right sides with respect to a center of the first tab coupling portion in a width direction.

A welding bead coupling the first tab coupling portion and the second portion may be formed between the injection holes symmetrically arranged on the left and right sides.

The first tab coupling portion may have a larger width at a location a predetermined distance away from a connected portion between the first tab coupling portion and the support portion toward an end of the first tab coupling portion in a longitudinal direction than a width at the connected portion between the first tab coupling portion and the support portion.

The injection hole may be formed at the location a predetermined distance away from a connected portion toward the end of the first tab coupling portion in the longitudinal direction.

At least part of an area in which the injection hole is formed may be included in an extended area by a larger width at the location the predetermined distance away from the connected portion to the end of the first tab coupling portion than the width at the connected portion between the first tab coupling portion and the support portion.

An end of the first tab coupling portion in the longitudinal direction may have a shape of an arc corresponding to an inner circumferential surface of the battery housing.

An extension direction of the welding pattern formed between the second portion and the first tab coupling portion and an extension direction of a welding pattern formed between the beading portion and the first contact portion may be perpendicular to each other.

An innermost point of the beading portion may be positioned farther inward in a radial direction than an end point of the crimping portion.

The sealing gasket may surround the housing cover, and a radial length at a region of the sealing gasket which covers

a lower surface of the housing cover may be smaller than the radial length at a region of the sealing gasket which covers an upper surface of the housing cover.

A total radial length of the first tab coupling portion T satisfies the following formula:

$$JR-2*F \leq T < JR$$

wherein JR is an outer diameter of the electrode assembly, and F is a height of the segment positioned on an outermost side of the electrode assembly.

A ratio of an area where the first current collector and an upper surface of the electrode assembly do not contact to an area of a circle having an outer diameter of the electrode assembly as its diameter may be 30% or more and less than 100%.

A ratio of an area where the first current collector and the electrode assembly do not contact to an area of a circle having an outer diameter of the electrode assembly as its diameter may be 60% or more and less than 100%.

A diameter of the first current collector hole may be smaller than a diameter of a winding hole in the core of the electrode assembly.

The diameter of the first current collector hole may be $0.5*R3$ or more and less than $R3$, where $R3$ is the diameter of the winding hole.

The diameter of the first current collector hole may be $0.7*R3$ or more and less than $R3$.

A form factor ratio obtained by dividing a diameter of the battery by a height may be larger than 0.4.

A measured resistance between a positive electrode and a negative electrode may be 4 mohm or less.

A battery according to another embodiment of the present disclosure may include an electrode assembly including a first electrode, a second electrode and a separator between the first electrode and the second electrode, wherein the first electrode, the second electrode, and the separator are wound about an axis defining a core and an outer circumferential surface, wherein the first electrode has a pair of first sides and a pair of second sides extending between the pair of first sides, a first portion extending between the pair of first sides, and a second portion extending between the pair of first sides, the first portion is coated with an active material and the second portion is exposed beyond the separator along a winding direction, and at least part of the second portion includes an electrode tab; a battery housing having a first opening at a first end and a second end with a second opening opposite the first end, the battery housing accommodating the electrode assembly through the first opening; and a first current collector electrically coupled with the second portion and an inner surface of the battery housing, wherein the first current collector includes a first part which contacts the inner surface of the battery housing and a second part coupled with the second portion of the first electrode, and when a central region of the first part is projected onto a plane in which the second part exists, the central region of the first part and the second part are spaced apart from each other along a circumferential direction of the electrode assembly.

The battery may further include a sealing gasket between the first opening at the first end of the battery housing and the first current collector, and the first part may be interposed between the inner surface of the battery housing and the sealing gasket.

The first part and the second part may be disposed on different planes in a direction of the axis of the electrode assembly.

In addition, to solve the above-described problem, a current collector of a battery according to another embodiment of the present disclosure includes a support portion to be positioned on an electrode assembly of the battery; a plurality of tab coupling portions extending from the support portion and to be coupled with a portion of an electrode of the electrode assembly; and a first housing coupling portion extending from the support portion, disposed between the adjacent tab coupling portions and to be electrically coupled onto a beading portion of the battery housing.

The tab coupling portions and the first housing coupling portion may not be directly connected to each other, and may be indirectly connected by the support portion.

Each of the tab coupling portions may have at least one injection hole.

The first housing coupling portion may include a first contact portion to be coupled onto the beading portion of the battery housing; and a first connecting portion connecting the support portion to the first contact portion.

The first connecting portion may include at least one first bending portion which changes in extension direction at least once.

The current collector may include a hole formed at a center.

The current collector may further include a second housing coupling portion extending from an end of one of the plurality of tab coupling portions to be coupled onto the beading portion of the battery housing.

The second housing coupling portion may include a second contact portion to be coupled onto the beading portion of the battery housing; and a second connecting portion connecting the end of one of the plurality of tab coupling portions to the second contact portion.

A plurality of the first housing coupling portions may be provided, and the first contact portions of the plurality of the first housing coupling portions may be connected to each other and integrally formed.

An angle between the first contact portion and the first connecting portion may be an acute angle due to the first bending portion.

A plurality of injection holes may be provided.

The plurality of injection holes may be symmetrically arranged on left and right sides with respect to a center of the tab coupling portion in a width direction.

The tab coupling portion may have a larger width at a location a predetermined distance away from a connected portion toward an end of the tab coupling portion in a longitudinal direction than a width at a connected portion between the tab coupling portion and the support portion.

The injection hole may be formed at the location the predetermined distance away from the connected portion toward the end of the tab coupling portion in the longitudinal direction.

At least part of an area in which the injection hole is formed may be included in an extended area by the larger width at the location the predetermined distance away from the connected portion toward the end of the tab coupling portion than the width at the connected portion between the tab coupling portion and the support portion.

An end of the tab coupling portion in a longitudinal direction may have a shape of an arc corresponding to an inner circumferential surface of the battery housing.

In addition, a battery pack according to an embodiment of the present disclosure includes a plurality of batteries according an embodiment of the present disclosure described above.

11

The plurality of batteries may be arranged in a predetermined number of columns, and a terminal of each of the plurality of batteries and an outer surface of the second end of the battery housing may be positioned vertically upward.

The battery pack may include a plurality of busbars to connect the plurality of batteries in series and in parallel, each busbar may be positioned on adjacent batteries among the plurality of batteries, and each busbar may include a body portion extending between the adjacent batteries; a plurality of first busbar terminals extending to a first side direction of the body portion and electrically coupled to terminals of the adjacent batteries disposed in the first side direction; and a plurality of second busbar terminals extending in a second side direction of the body portion opposite the first side direction and electrically coupled to an outer surface of the second end of the battery housing of each of the adjacent batteries disposed in the second side direction.

Finally, a vehicle according to an embodiment of the present disclosure may include the battery pack according to an embodiment of the present disclosure as described above.

Advantageous Effects

According to the present disclosure, it is possible to significantly reduce the resistance in electrically connecting the current collector to the battery housing.

In another aspect, according to the present disclosure, it is possible to improve the coupling strength of the coupled portion between the current collector and the battery housing.

In another aspect, according to the present disclosure, it is possible to improve the energy density of the battery.

In another aspect, according to the present disclosure, it is possible to increase the convenience of the welding process for electrical connection between the battery housing and the current collector in the manufacture of the battery, thereby improving the productivity.

In another aspect, according to the present disclosure, it is possible to significantly reduce the likelihood that damage may occur in the welded portion between the current collector and the electrode assembly and/or the welded portion between the current collector and the battery housing when vibrations and impacts are applied while the battery is in use.

In another aspect, according to the present disclosure, it is possible to increase the convenience in the welding process for electrical connection between the battery housing and the current collector in the manufacture of the battery, thereby improving the productivity.

However, the effects that can be obtained through the present disclosure are not limited to the above-described effects, and these and other effects will be clearly understood by those skilled in the art from the following description.

DESCRIPTION OF DRAWINGS

The accompanying drawings illustrate embodiments of the present disclosure, and together with the detailed description of the present disclosure described below, serve to provide a further understanding of the technical aspects of the present disclosure, and thus the present disclosure should not be construed as being limited to the drawing.

FIG. 1 is a cross-sectional view showing the internal structure of a cylindrical battery according to an embodiment of the present disclosure.

FIG. 2 is a diagram showing a current collector (a first current collector) according to an embodiment of the present disclosure.

12

FIGS. 3 to 5 are diagrams showing exemplary shapes of a first connecting portion of a current collector (a first current collector) according to an embodiment of the present disclosure.

FIGS. 6 and 7 each are diagrams showing the shape of a first connecting portion depending on the height of an electrode assembly.

FIG. 8 is a diagram showing a current collector (a first current collector) according to another embodiment of the present disclosure.

FIG. 9 is a diagram showing a current collector (a first current collector) according to still another embodiment of the present disclosure.

FIG. 10 is a diagram showing the exemplary shape of a second connecting portion of the current collector (a first current collector) shown in FIG. 9.

FIGS. 11 and 12 are diagrams showing a current collector (a first current collector) of the present disclosure having a different shape from those described and shown in the previous embodiments.

FIG. 13 is a diagram showing the internal structure of a cylindrical battery with the current collector (a first current collector) shown in FIG. 12.

FIG. 14 is a top view showing a current collector (a first current collector) according to the present disclosure, coupled with a battery housing.

FIG. 15 is an enlarged diagram of the upper part of an electrode assembly of the present disclosure.

FIG. 16 is an enlarged diagram of the upper part of an uncoated region of FIG. 15.

FIG. 17 is a diagram illustrating a welding process of a current collector (a first current collector).

FIG. 18 is a diagram illustrating a beading process of a battery housing.

FIG. 19 is a diagram illustrating a crimping process of a battery housing.

FIG. 20 is a diagram illustrating a sizing process of a battery housing.

FIG. 21 is a diagram illustrating a change in shape of a current collector (a first current collector) after a sizing process depending on the shape of the current collector before the sizing process.

FIGS. 22 and 23 are diagrams illustrating the shape of a current collector (a first current collector) configured to maintain a weld area after a sizing process.

FIG. 24 is a diagram illustrating the position, length and width of a welding bead formed at a weld area between a contact portion and a beading portion of a current collector (a first current collector) of the present disclosure.

FIG. 25 is a diagram showing an embodiment of a current collector (a second current collector) applied to the present disclosure.

FIG. 26 is a diagram showing a current collector (a second current collector) of a different embodiment from the current collector (the second current collector) shown in FIG. 25.

FIG. 27 is a plan view exemplarily showing an electrode structure according to an embodiment of the present disclosure.

FIG. 28 is a cross-sectional view showing an electrode assembly in which an uncoated region segment structure of a first electrode is also applied to a second electrode according to an embodiment of the present disclosure, taken along a lengthwise direction Z.

FIG. 29 is a cross-sectional view of an electrode assembly with a bent uncoated region according to an embodiment of the present disclosure, taken along a lengthwise direction Z.

13

FIG. 30 is a perspective view of an electrode assembly with a bent uncoated region according to an embodiment of the present disclosure.

FIG. 31 is a top plan view showing a plurality of cylindrical batteries according to an embodiment of the present disclosure, connected in series and in parallel using busbars.

FIG. 32 is a diagram showing a schematic configuration of a battery pack including cylindrical batteries according to an embodiment of the present disclosure.

FIG. 33 is a diagram showing a schematic configuration of a vehicle including a battery pack according to an embodiment of the present disclosure.

BEST MODE

Hereinafter, the embodiments of the present disclosure will be described in detail with reference to the accompanying drawings. Prior to the description, it should be understood that the terms or words used in the specification and the appended claims should not be construed as being limited to general and dictionary meanings, but rather interpreted based on the meanings and concepts corresponding to the technical aspects of the present disclosure on the basis of the principle that the inventor is allowed to define the terms appropriately for the best explanation. Therefore, the embodiments described herein and illustrations shown in the drawings are just some of the embodiments of the present disclosure, but not intended to fully describe the technical aspects of the present disclosure, so it should be understood that a variety of other equivalents and modifications could have been made thereto at the time that the application was filed.

In addition, to help the understanding of the present disclosure, the accompanying drawings may illustrate some elements in exaggerated dimensions, not in actual scale. Furthermore, the same element in different embodiments may be given the same reference number.

When two components are referred to as being equal, it represents that they are 'substantially equal'. Accordingly, substantially equal may encompass all cases having the deviation regarded as a low level in the corresponding technical field, for example, the deviation of 5% or less. In addition, a uniform parameter in an area may refer to uniform from the average point of view.

First, referring to FIG. 1, a cylindrical battery 1 according to an embodiment of the present disclosure includes an electrode assembly 10, a battery housing 20, a current collector (a first current collector) 30, a housing cover 40 and a terminal 50. The cylindrical battery 1 may further include a sealing gasket G1 and/or an insulation gasket G2 and/or a current collector (a second current collector) 60 and/or an insulator 70.

The present invention is not limited to the shape of the battery and thus may be applicable to any battery of a different shape, for example, a prismatic battery.

The electrode assembly 10 includes a first uncoated region 11 and a second uncoated region 12. More specifically, the electrode assembly 10 has a structure in which a first electrode, a second electrode and a separator interposed between the first electrode and the second electrode are wound around a winding axis, defining a core and an outer circumferential surface. That is, the electrode assembly 10 applied to the present disclosure may be a jelly-roll type electrode assembly. In this case, an additional separator may be provided on the outer circumferential surface of the electrode assembly 10 for insulation from the battery hous-

14

ing 20. The electrode assembly 10 may have any well-known winding structure without limitation.

The first electrode includes a first electrode current collector and a first electrode active material coated on one or two surfaces of the first electrode current collector. An uncoated region in which the first electrode active material is not coated exists at one end of the first electrode in the widthwise direction (parallel to the heightwise direction of the cylindrical battery 1 shown in FIG. 1). That is, the first electrode includes the uncoated region which is not coated with the active material and is exposed to the outside of the separator at the end of the long side along the winding direction. The uncoated region serving as a first electrode tab is hereinafter referred to as the first uncoated region 11. The first uncoated region 11 is provided on the electrode assembly 10 received in the battery housing 20 in the heightwise direction (parallel to the heightwise direction of the cylindrical battery 1 shown in FIG. 1). That is, the first electrode includes the first uncoated region not coated with the active material layer and exposed to the outside of the separator at the end of the long side, and at least part of the first uncoated region itself is used as the electrode tab. The first uncoated region 11 may be, for example, a negative electrode tab.

Meanwhile, at least part of the first uncoated region 11 may include a plurality of segments split along the winding direction of the electrode assembly 10. In this case, the plurality of segments (11a in FIG. 30) may be bent along the radial direction of the electrode assembly 10.

Referring to FIGS. 15 and 16 together with FIG. 1, the plurality of bent segments of the first uncoated region 11 may overlap in multiple layers to form a bent surface (a coupling surface) 102. In this case, a tab coupling portion (a first tab coupling portion) 32 of the current collector (the first current collector) 30 as described below may be coupled onto the bent surface 102. The tab coupling portion 32 may be coupled to an area in which the plurality of segments overlaps in multiple layers. The bent surface 102 may include an increasing stack number zone in which the number of overlapping layers of the segments sequentially increases to the maximum as it goes from the outer circumference of the electrode assembly 10 to the core and a uniform stack number zone from a radial position at which the number of overlapping layers is at the maximum to a radial position at which the innermost segment exits.

In this case, when the tab coupling portion (the first tab coupling portion) 32 is seated on the bent surface 102 of the first uncoated region 11, welding may be performed on a predetermined area. That is, the tab coupling portion 32 may be coupled to the area in which the plurality of segments of the first uncoated region 11 overlaps in multiple layers. For example, the tab coupling portion 32 may be coupled to the bent surface 102 such that it overlaps with the uniform stack number zone. Referring to FIG. 16, the welding between the tab coupling portion 32 and the first uncoated region 11 may be performed in the area in which the number of overlapping layers of the first uncoated region 11 is approximately 10 or more in the bent surface 102 of the first uncoated region 11. The ratio in the radial direction for the zone in which the number of overlapping layers is ten or more may be designed as approximately 25% or more with respect to the radius of the electrode assembly 10 except the core by adjusting the length of the first uncoated region 11.

The tab coupling portion (the first tab coupling portion) 32 of the current collector (the first current collector) 30 may be coupled to the bent surface 102 such that it overlaps with the uniform stack number zone. Preferably, the tab coupling portion 32 may be welded to the bent surface 102, and the

15

weld area of the tab coupling portion **32** may overlap at least 50% with the uniform stack number zone along the radial direction of the electrode assembly **10**. The number of overlapping layers of the uniform stack number zone may be approximately 10 or more.

When welding the current collector **30** to the bent surface **102** of the first uncoated region **11**, to sufficiently ensure the weld strength, it is desirable to increase the output of a laser. When the output of the laser increases, the laser penetrates into the electrode assembly **10** through the overlap area of the first uncoated region **11**, causing damage to the separator and the active material layer. Accordingly, to prevent the laser from passing through, it is desirable to increase the number of overlapping layers of the first uncoated region **11** above a predetermined level. To increase the number of overlapping layers of the first uncoated region **11**, it is necessary to increase the height of the segment. However, when the height of the segment increases, a swell may occur in the first uncoated region **11** in the process of manufacturing the first electrode current collector. Accordingly, it is possible to adjust the height of the segment to an appropriate level.

As described above, when the length ratio in the radial direction where the number of overlapping layers of the segments of the uncoated region is 10 or more is designed as 25% or more with respect to the radius of the electrode assembly, and the area in which the segments of the uncoated region overlap in 10 or more layers and the current collector **30** are welded using a laser, even though the output of the laser increases, the overlap region of the uncoated region sufficiently masks the laser, thereby preventing the separator and the active material layer from being damaged by the laser.

The output of the laser may be appropriately adjusted in the range of approximately 250 W to 320 W or in the range of approximately 40%–90% of the laser maximum output specification, but the present disclosure is not limited thereto. When the output of the laser satisfies the above-described numerical range, it is possible to sufficiently increase the weld strength. In an example, the weld strength may increase to 2 kgf/cm² or more, and more particularly 4 kgf/cm² or more. The weld strength may be set to 8 kgf/cm² or less, and more particularly 6 kgf/cm² or less. The weld strength is defined as the tensile force per unit area (kgf/cm²) of the current collector **30** at the time when the current collector starts to be separated from the bent surface area. Specifically, after the welding of the current collector is completed, the tensile force of gradually increasing size is applied to the current collector. When the tensile force increases, the uncoated region starts to be separated from the weld interface. In this instance, a value obtained by dividing the tensile force applied to the current collector by the area of the current collector is the weld strength.

FIG. **16** is a partial cross-sectional view showing the bent surface area in which the first uncoated region **11** of the first electrode current collector split into the plurality of segments is bent from the outer circumference toward the core and overlaps in ten or more layers, in the electrode assembly included in a cylindrical battery with 4680 form factor having the radius of 22 mm and the radius of the core of 4 mm. In the drawing, the electrode assembly area and the core area having no segment is not illustrated. The height of the segment increases by 1 mm each time the radius of the electrode assembly increases by 1 mm, starting from 3 mm. In addition, after the length reaches 6 mm, 7 mm or 8 mm as shown in the drawing, the height of the segment is substantially equally maintained.

16

Referring to FIG. **16**, it can be seen that the number of overlapping layers of the first uncoated region **11** gradually increases as it goes from the outer circumference to the core, and as the length of the first uncoated region **11** increases, the maximum value of the number of overlapping layers increases.

In an example, when the length of the first uncoated region **11** is 8 mm, the number of overlapping layers of the first uncoated region **11** split into the plurality of segments increases to 18 layers in the range of from the outer circumferential surface of the electrode assembly to 7 mm, and the number of overlapping layers of the first uncoated region **11** is maintained at a level of a maximum of 18 layers in the range of 8 mm toward the core, and reduces by 1-2 layers in the radial range adjacent to the core. The height of the segment gradually increases from 3 mm to 8 mm in the range of 7 mm to 12 mm in radius. In the present disclosure, the uniform stack number zone is defined as a radial range of from the radial position at which the number of overlapping layers reaches the maximum to the location at which the innermost segment is disposed as shown in FIG. **16**. Accordingly, a ratio of the uniform stack number zone in which the segments of the first uncoated region **11** overlap in 10 or more layers to the radius of the electrode assembly except the core (4 mm) is 44.4% ($\frac{1}{18}$).

In another example, when the length of the first uncoated region **11** is 7 mm, the number of overlapping layers of the first uncoated region **11** split into the plurality of segments increases to 15 layers in the range of from the outer circumferential surface of the electrode assembly to 6 mm, and the number of overlapping layers of the first uncoated region **11** is uniformly maintained at a level of a maximum of 15 layers in the range of 9 mm toward the core, and reduces by 1-2 layers in the radial range adjacent to the core. The height of the segment increases stepwise from 3 mm to 7 mm in the range of 7 mm to 11 mm in radius. Accordingly, a ratio of the uniform stack number zone in which the segments of the first uncoated region **11** overlap in 10 or more layers to the radius of the electrode assembly except the core (4 mm) is 50% ($\frac{1}{18}$).

In still another example, when the length of the first uncoated region **11** is 6 mm, the number of overlapping layers of the first uncoated region **11** split into the plurality of segments increases to 12 layers in the range of 5 mm from the outer circumferential surface of the electrode assembly, and the number of overlapping layers of the first uncoated region **11** is uniformly maintained at a level of a maximum of 12 layers in the range of 10 mm toward the core, and reduces by 1-2 layers in the radial range adjacent to the core. The height of the segment increases from 3 mm to 6 mm in the range of 7 mm to 10 mm in radius. Accordingly, a ratio of the uniform stack number zone in which the segments of the first uncoated region **11** overlap in 10 or more layers to the radius of the electrode assembly except the core (4 mm) is 55.6% ($\frac{1}{18}$).

According to an embodiment, the length of the zone having the sequentially increasing number of overlapping layers increases from 5 mm to 7 mm with the increasing length of the first uncoated region **11**, and in particular, it can be seen that the requirement is satisfied that the ratio of the uniform stack number zone in which the number of stacked layers is 10 or more to the radius of the electrode assembly except the core is 25% or more.

In the present disclosure, the uniform stack number zone may be increased and decreased by the radius of the core, the minimum value and the maximum value of the segment height in variable segment height zone, and the increase in

17

height of the segment in the radial direction of the electrode assembly. Accordingly, it is extremely obvious that those skilled in the art design the corresponding ratio as 25% or more by adjusting the factors that affect the ratio of the uniform stack number zone. In an example, it is possible to increase the number of stacked layers and reduce the ratio of the uniform stack number zone down to the level of 25% by increasing both the minimum value and the maximum value of the segment height in the variable segment height zone.

The uniform stack number zone is an area in which the current collector may be welded. Accordingly, when the ratio of the uniform stack number zone is adjusted to 25% or more, it is possible to ensure the weld strength of the current collector in the preferred range, and it is advantageous in terms of the resistance of the weld interface.

The second electrode includes a second electrode current collector and a second electrode active material coated on one or two surfaces of the second electrode current collector. An uncoated region in which the second electrode active material is not coated exists at the other end of the second electrode in the widthwise direction (parallel to the heightwise direction of the cylindrical battery 1 shown in FIG. 1). That is, the second electrode includes the uncoated region which is not coated with an active material and is exposed to the outside of the separator at the end of the long side along the winding direction. The uncoated region serving as a second electrode tab is hereinafter referred to as the second uncoated region 12. The second uncoated region 12 is provided below the electrode assembly 10 received in the battery housing 20 in the heightwise direction. That is, the second electrode includes the second uncoated region which is not coated with the active material layer and is exposed to the outside of the separator at the end of the long side, and at least part of the second uncoated region itself is used as an electrode tab. The second uncoated region 12 may be, for example, a positive electrode tab.

Meanwhile, at least part of the second uncoated region 12 may include a plurality of segments split along the winding direction of the electrode assembly 10. In this case, the plurality of segments may be bent along the radial direction of the electrode assembly 10.

Referring to FIGS. 15 and 16 together with FIG. 1, the plurality of bent segments of the second uncoated region 12 may overlap in multiple layer to form the bent surface (the coupling surface) 102. In this case, a tab coupling portion (a second tab coupling portion) 62 of the current collector (the second current collector) 60 as described below may be coupled onto the bent surface 102. The tab coupling portion 62 may be coupled to the area in which the plurality of segments overlaps in multiple layers. The bent surface 102 may include an increasing stack number zone in which the number of overlapping layers of the segments sequentially increases to the maximum as it goes from the outer circumference of the electrode assembly 10 to the core and a uniform stack number zone in which a radial position at which the number of overlapping layers is at the maximum to a radial position at which the innermost segment exists.

The tab coupling portion (the second tab coupling portion) 62 of the current collector (the second current collector) 60 may be coupled to the bent surface such that it overlaps with the uniform stack number zone. Preferably, the tab coupling portion 62 may be welded onto the bent surface 102, and the welding area of the tab coupling portion 62 may overlap at least 50% with the uniform stack number zone along the radial direction of the electrode assembly 10. The number of overlapping layers of the uniform stack number zone may be approximately 10 or more.

18

When welding the first current collector 30 and/or the second current collector 60 onto the approximately flat coupling surface 102 formed by bending the first uncoated region 11 and/or the second uncoated region 12, it is desirable to increase the output of a laser to ensure sufficient weld strength. When the output of the laser increases, the laser penetrates into the electrode assembly 10 through the overlap area of the first uncoated region 11 and/or the second uncoated region 12, causing damage to the separator and the active material layer. Accordingly, to prevent the laser from passing through, it is desirable to increase the number of overlapping layers of the first uncoated region 11 and/or the second uncoated region 12 above a predetermined level. To increase the number of overlapping layers of the first uncoated region 11 and/or the second uncoated region 12, it is necessary to increase the height of the segment. However, when the height of the segment increases, a swell may occur in the first uncoated region 11 and/or the second uncoated region 12 in the process of manufacturing the electrode plate. Accordingly, it is desirable to adjust the height of the segment to an appropriate level.

As described above, when it is designed such that the radial direction length of the zone in which the number of overlapping layers of the segments of the first uncoated region 11 and/or the second uncoated region 12 is 10 or more is approximately 25% or more compared to the radius of the electrode assembly 10, and welding is performed in the target weld area, even though the output of the laser increases, the overlap portion of the first uncoated region 11 and/or the second uncoated region 12 sufficiently masks the laser, thereby preventing the separator and the active material layer from being damaged by the laser.

In the present disclosure, the positive electrode active material coated on the positive electrode plate and the negative electrode active material coated on the negative electrode plate may include any well-known active material without limitation.

In an example, the positive electrode active material may include an alkali metal compound represented by a general formula $A[A_xM_y]O_{2+z}$ (A includes at least one of Li, Na or K; M includes at least one selected from Ni, Co, Mn, Ca, Mg, Al, Ti, Si, Fe, Mo, V, Zr, Zn, Cu, Al, Mo, Sc, Zr, Ru and Cr; $x \geq 0$, $1 \leq x+y \leq 2$, $-0.1 \leq z \leq 2$; and the stoichiometric coefficients x, y and z are selected to keep the compound electrically neutral).

In another example, the positive electrode active material may include an alkali metal compound $xLiM^1O_2-(1-x)Li_2M^2O_3$ disclosed in U.S. Pat. Nos. 6,677,082, 6,680,143, et al. (M^1 includes at least one element having an average oxidation state of 3; M^2 includes at least one element having an average oxidation state of 4; $0 \leq x \leq 1$).

In still another example, the positive electrode active material may include lithium metal phosphate represented by a general formula $Li_xM^1_xFe_{1-x}M^2_yP_{1-y}M^3_zO_{4-z}$ (M^1 includes at least one selected from the Ti, Si, Mn, Co, Fe, V, Cr, Mo, Ni, Nd, Al, Mg and Al; M^2 includes at least one selected from Ti, Si, Mn, Co, Fe, V, Cr, Mo, Ni, Nd, Al, Mg, Al, As, Sb, Si, Ge, V and S; M^3 includes a halogen group element optionally including F; $0 < a \leq 2$, $0 \leq x \leq 1$, $0 \leq y < 1$, $0 \leq z < 1$; the stoichiometric coefficients a, x, y and z are selected to keep the compound electrically neutral), or $Li_3M_2(PO_4)_3$ (M includes at least one selected from Ti, Si, Mn, Fe, Co, V, Cr, Mo, Ni, Al, Mg and Al).

Preferably, the positive electrode active material may include primary particles and/or secondary particles formed by agglomeration of the primary particles.

In an example, the negative electrode active material may include carbon materials, lithium metal or lithium metal compounds, silicon or silicon compounds and tin or tin compounds. In addition, the negative electrode active material may include metal oxides such as TiO_2 and SnO_2 with a potential of less than 2V. The carbon material may include a low-crystalline carbon and a high-crystalline carbon.

The separator may include a porous polymer film, for example, a porous polymer film made of a polyolefin-based polymer such as ethylene homopolymer, propylene homopolymer, ethylene/butene copolymer, ethylene/hexene copolymer and ethylene/methacrylate copolymer, used singly or in stack. As another example, the separator may include a commonly used porous nonwoven fabric, for example, a nonwoven fabric made of high melting point glass fibers and polyethylene terephthalate fibers.

The separator may include a coating layer of inorganic particles on at least one surface thereof. The separator itself may be a coating layer of inorganic particles. The particles in the coating layer may be bonded with a binder such that there is interstitial volume between adjacent particles.

The inorganic particles may include an inorganic material having a dielectric constant of 5 or more. A non-limiting example of the inorganic particles may include at least one selected from the group consisting of $\text{Pb}(\text{Zr,Ti})\text{O}_3$ (PZT), $\text{Pb}_{1-x}\text{La}_x\text{Zr}_{1-y}\text{Ti}_y\text{O}_3$ (PLZT), $\text{PB}(\text{Mg}_3\text{Nb}_{2/3})\text{O}_3$ — PbTiO_3 (PMN-PT), BaTiO_3 , hafnia (HfO_2), SrTiO_3 , TiO_2 , Al_2O_3 , ZrO_2 , SnO_2 , CeO_2 , MgO , CaO , ZnO and Y_2O_3 .

An electrolyte may be a salt having a structure of A^+B^- . Here, A^+ includes an alkali metal cation such as Li^+ , Na^+ and K^+ , or a combination thereof. B^- includes at least one anion selected from the group consisting of F^- , Cl^- , Br^- , I^- , NO_3^- , $\text{N}(\text{CN})_2^-$, BF_4^- , ClO_4^- , AlO_4^- , AlCl_4^- , PF_6^- , SbF_6^- , AsF_6^- , $\text{BF}_2\text{C}_2\text{O}_4^-$, BC_4O_8^- , $(\text{CF}_3)_2\text{PF}_4^-$, $(\text{CF}_3)_3\text{PF}_3^-$, $(\text{CF}_3)_4\text{PF}_2^-$, $(\text{CF}_3)_5\text{PF}^-$, $(\text{CF}_3)_6\text{P}^-$, CF_3SO_3^- , $\text{C}_4\text{F}_9\text{SO}_3^-$, $\text{CF}_3\text{CF}_2\text{SO}_3^-$, $(\text{CF}_3\text{SO}_2)_2\text{N}^-$, $(\text{FSO}_2)_2\text{N}^-$, $\text{CF}_3\text{CF}_2(\text{CF}_3)_2\text{CO}^-$, $(\text{CF}_3\text{SO}_2)_2\text{CH}^-$, $(\text{SF}_5)_3\text{C}^-$, $(\text{CF}_3\text{SO}_2)_3\text{C}^-$, $\text{CF}_3(\text{CF}_2)_7\text{SO}_3^-$, CF_3CO_2^- , CH_3CO_2^- , SCN^- and $(\text{CF}_3\text{CF}_2\text{SO}_2)_2\text{N}^-$.

The electrolyte may be dissolved in an organic solvent. The organic solvent may include at least one of propylene carbonate (PC), ethylene carbonate (EC), diethyl carbonate (DEC), dimethyl carbonate (DMC), dipropyl carbonate (DPC), dimethyl sulfoxide, acetonitrile, dimethoxyethane, diethoxyethane, tetrahydrofuran, N-methyl-2-pyrrolidone (NMP), ethyl methyl carbonate (EMC) or γ -butyrolactone.

Referring to FIG. 1, the battery housing 20 is a substantially cylindrical container having an opening on one side, and is made of a metal having conductive properties. In general, the side of the battery housing 20 and the lower surface (the lower surface in FIG. 1) disposed on the opposite side to the open portion are integrally formed. That is, in general, the battery housing 20 has an open top and a closed bottom in the heightwise direction. The lower surface of the battery housing 20 may have an approximately flat shape. The battery housing 20 receives the electrode assembly 10 through the open portion formed on one side in the heightwise direction (parallel to the Z axis). The battery housing 20 may also receive the electrolyte together through the open portion.

The battery housing 20 may include a beading portion 21 at the end adjacent to the open portion provided on top of the battery housing 20. The battery housing 20 may further include a crimping portion 22 on the beading portion 21. The beading portion 21 is configured such that the edge of the outer circumferential surface of the battery housing 20 is press-fit to a predetermined depth.

The press-fit depth of the beading portion 21 may be, for example approximately 0.2 to 10 mm. The minimum value of the press-fit depth PD of the beading portion 21 requires the consideration of the radius of curvature R1 of the beading portion 21, the width W_{bead} of the welding bead and the radius of curvature R2 at the boundary area between the beading portion 21 and the inner surface of the battery housing 20. For example, referring to FIG. 24, in addition to the radius of curvature R1 of the beading portion 21 and the radius of curvature R2 at the boundary area between the beading portion 21 and the inner surface of the battery housing 20, welding requires an extra space. It is because when the press-fit depth PD is $\text{R1}+\text{R2}$, there is no flat region F on the beading portion 21. Moreover, welding requires the extra space which is greater than the minimum width $W_{bead,min}$ of the welding bead BD. Accordingly, the minimum value of the press-fit depth PD satisfies the following relation equation.

$$PD \geq R1_{min} + R2_{min} + W_{bead,min}$$

For example, the minimum value of each of R1_{min} and R2_{min} may be approximately 0.05 mm, and $W_{bead,min}$ may be approximately 0.1 mm. In this case, the minimum value of the press-fit depth PD may be approximately 0.2 mm or more.

In another aspect, the maximum value of the press-fit depth PD of the beading portion 21 may change depending on the material and thickness of the battery housing 20. In an example, when the material of the battery housing 20 is steel and the maximum thickness of the battery housing 20 is approximately 1 mm, the maximum value of the press-fit depth PD of the beading portion 21 may be approximately 10 mm. Accordingly, in an example, the press-fit depth PD of the beading portion 21 may have a value between approximately 0.2 and 10 mm.

The beading portion 21 is formed on the electrode assembly 10. The inner diameter of the battery housing 20 at the area in which the beading portion 21 is formed is smaller than the diameter of the electrode assembly 10. The beading portion 21 may include an upper beading portion disposed at the upper part with respect to the innermost inside when the battery housing 20 is press-fit, and a lower beading portion disposed at the lower part with respect to the innermost inside when press-fit. At least one tab coupling portion 32 of the current collector 30 as described below may be disposed at the lower position than the lower beading portion.

At least one of the upper beading portion or the lower beading portion may be inclined at a predetermined angle to the lower surface of the battery housing 20. In this case, a first contact portion 33a of the current collector (the first current collector) 30 as described below may be seated on the inclined upper surface of the upper beading portion of the beading portion 21.

Alternatively, at least one of the upper beading portion or the lower beading portion may be approximately parallel to the lower surface of the battery housing 20 in at least some regions. In this case, the first contact portion 33a of the current collector 30 as described below may be seated on the approximately flat upper surface of the upper beading portion. The first contact portion 33a may have the flat surface coupled with the upper surface of the beading portion 21 facing the open portion of the battery housing 20.

The beading portion 21 provides a support surface on which the housing cover 40 may be seated. In addition, the beading portion 21 may provide the support surface where at least part of the circumferential edge of the current collector 30 as described below may be seated and coupled.

21

That is, at least part of the circumferential edge of the current collector **30** of the present disclosure and/or the circumferential edge of the housing cover **40** may be seated on the upper surface of the upper beading portion. To stably support at least part of the circumferential edge of the current collector **30** and/or the circumferential edge of the housing cover **40**, the upper surface of the upper beading portion may extend along a direction approximately parallel to the lower surface of the battery housing **20**, i.e., a direction approximately perpendicular to the sidewall of the battery housing **20**. The beading portion **21** may be omitted, and at least part of the circumferential edge of the current collector **30** may be directly attached to the flat sidewall of the battery housing **20**.

Referring to FIG. **20** together with FIG. **1**, the beading portion **21** may include the upper beading portion and the lower beading portion disposed at upper and lower positions, respectively, with respect to the innermost side along the press-fit direction. The upper beading portion and the lower beading portion may have an asymmetrical shape. Specifically, the upper beading portion and the lower beading portion may have an asymmetrical shape with respect to an imaginary reference plane passing through the innermost point of the beading portion in parallel to the bottom surface of the battery housing **20**. The asymmetrical shape may be formed in the process of compressing the battery housing **20** along the heightwise direction (parallel to the Z axis) of the battery housing **20** through a sizing process. The sizing process is a process of conforming the height of the cylindrical battery **1** to the design form factor by pressing the battery housing **20** along the winding axis direction of the electrode assembly **10**.

The upper beading portion may include a flat portion approximately parallel to the closed portion of the battery housing **20**. In contrast, due to the asymmetrical shape, the lower beading portion may be inclined downward, at least in part, along a direction toward the innermost side. Accordingly, the lower beading portion may fix the electrode assembly **10** by pressing down the electrode assembly **10**. The beading portion **21** prevents the electrode assembly **10** having the size approximately corresponding to the inner diameter of the battery housing **20** from slipping through the open portion formed on top of the battery housing **20**, and act as a support portion on which the housing cover **40** is seated. The upper beading portion may act as the support portion for fixing not only the housing cover **40** but also the first contact portion **33a** of the current collector (the first current collector) **30** and the sealing gasket **G1**.

The crimping portion **22** is formed on the beading portion **21**. The crimping portion **22** may be extended and bent along the circumferential edge of the housing cover **40** positioned on the beading portion **21**. By this shape of the crimping portion **22**, the housing cover **40** is fixed on the beading portion **21**. The crimping portion **22** may be omitted and the housing cover **40** may be fixed to cover the open portion of the battery housing **20** through other fixing structure. The innermost point of the beading portion **21** may be disposed at the inner position along the radial direction of the electrode assembly **10** than the end of the crimping portion **22**. For example, referring to FIG. **1**, the end of the crimping portion **22** may be disposed at the outer position in the radial direction than the innermost point of the beading portion **21**. By this structure, it is possible to maintain the relatively flat beading portion **21** after the sizing process. For example, when the innermost point of the beading portion **21** is disposed at the outer position in the radial direction than the end of the crimping portion **22**, the radial direction length of

22

the upper surface of the crimping portion **22** is longer than the radial direction length of the beading portion **21**. As a consequence, the upper surface of the crimping portion **22** subjected to pressure in the sizing process becomes wider, and the beading portion **21** may not be flattened after the sizing process.

Subsequently, the current collector (the first current collector) **30** according to an embodiment of the present disclosure will be described in detail with reference to FIGS. **1** to **5**.

First, referring to FIGS. **1** and **2**, the current collector **30** according to an embodiment of the present disclosure is received in the battery housing **20**, and is electrically connected to the electrode assembly **10** and also electrically connected to the battery housing **20**. That is, the current collector **30** electrically connects the electrode assembly **10** to the battery housing **20**.

The current collector **30** includes a support portion **31** disposed on one surface of the electrode assembly **10**, a plurality of tab coupling portions (the plurality of first tab coupling portions) **32** coupled with the first uncoated region **11** and a plurality of first housing coupling portions **33** extending from the support portion **31** and coupled onto the inner surface of the battery housing **20**. The tab coupling portion **32** and the first housing coupling portion **33** are indirectly connected through the support portion **31**, and they are not directly connected to each other. Accordingly, when external impacts are applied to the cylindrical battery **1** of the present disclosure, it is possible to minimize the likelihood that damage occurs in the coupled portion between the current collector **30** and the electrode assembly **10** and the coupled portion between the current collector **30** and the battery housing **20**. At least one tab coupling portion **32** and/or at least one first housing coupling portion **33** may be provided. The at least one tab coupling portion **32** and the at least one first housing coupling portion **33** may be arranged, for example, in an approximately radial pattern, an approximately crisscross pattern or a combined pattern with respect to the center of the current collector **30**. In another aspect, each of the plurality of first housing coupling portions **33** may be interposed between the adjacent tab coupling portions **32**.

The support portion **31** and the plurality of tab coupling portions **32** are positioned on the electrode assembly **10**. The tab coupling portion **32** is coupled with the first uncoated region **11** of the electrode assembly **10**. For example, the tab coupling portion **32** may be coupled with the first uncoated region **11** by welding along the radial direction of the electrode assembly **10**. For example, the tab coupling portion **32** may be coupled to the first uncoated region **11** by welding in approximately parallel to the lower surface of the battery housing **20**. For example, the welding bead formed between the first uncoated region **11** and the tab coupling portion **32** may form the welding pattern in the shape of an approximately straight line which extends along the radial direction of the electrode assembly **10**. For example, the welding pattern may have a shape of a line formed by connection of spot welding. The welding pattern may include one or two or more patterns extending along the radial direction of the electrode assembly **10**.

Meanwhile, not only the tab coupling portion **32** but also the support portion **31** may be coupled with the first uncoated region **11**. The tab coupling portion **32** and the first uncoated region **11** may be coupled by welding. When the battery housing **20** includes the beading portion **21**, the support portion **31** and the tab coupling portion **32** are disposed at the lower position than the beading portion **21**.

23

The support portion 31 may have a current collector hole H2 formed at a location corresponding to a winding hole H1 formed at the approximately center of the electrode assembly 10. The winding hole H1 and the current collector hole H2 in communication with each other may serve as a passage for inserting a welding rod for welding between the terminal 50 and the current collector (the second current collector) 60 or welding between the terminal 50 and a lead tab or laser beam irradiation as described below. The current collector hole H2 may have the diameter that is substantially equal to or larger than the winding hole H1 of the electrode assembly 10 not to cover the winding hole H1 formed at the core of the electrode assembly 10. In case that the diameter of the current collector hole H2 is too much smaller than the diameter of the winding hole H1, the hole formed at the winding hole H1 is covered, resulting in poor liquid injection, and in addition, it may be difficult to have a sufficient space for inserting the device for welding or laser irradiation.

As opposed to the above-described embodiment, according to another embodiment of the present disclosure, the diameter of the current collector hole H2 may be smaller than the winding hole H1. In this case, for example, when the diameter of the winding hole H1 is $R3$, the diameter of the current collector hole H2 may be approximately $0.5 \times R3$ or more and less than $R3$, and more particularly approximately $0.7 \times R3$ or more and less than $R3$. In general, when vented, the separator or the uncoated region at the winding center may slip from the upper surface of the electrode assembly 10 by strong pressure of gas coming out at the winding center of the electrode assembly 10. In this instance, when the diameter of the current collector hole H2 is smaller than the diameter of the hole provided at the core of the electrode assembly 10, it is possible to prevent the separator or the uncoated region at the winding center from slipping from the electrode assembly 10. However, when the diameter of the current collector hole H2 is too small, it may be difficult to inject the electrolyte solution, and since a space for welding between the second current collector 60 and the terminal 50 is necessary, the diameter of the current collector hole H2 may be $0.5 \times R3$ or more, and more particularly $0.7 \times R3$ or more.

The plurality of tab coupling portions 32 may extend to the sidewall of the battery housing 20 approximately radially from the support portion 31 of the current collector 30. Each of the plurality of tab coupling portions 32 may be spaced apart from each other along the circumference of the support portion 31. Meanwhile, to ensure the coupling strength and reduce the electrical resistance through the increased coupling area between the current collector 30 and the electrode assembly 10, not only the tab coupling portion 32 but also the support portion 31 may be coupled with the first uncoated region 11. At least part of the first uncoated region 11 may be formed such that the end is bent approximately parallel to the tab coupling portion 32. In this case, the bending may be done, for example, toward the winding center C of the electrode assembly 10. When the first uncoated region 11 is coupled with the tab coupling portion 32 in parallel to the tab coupling portion 32 by the end forming, it is possible to increase the coupling area, thereby improving the coupling strength and reduce the electrical resistance, and it is possible to minimize a height of the electrode assembly 10, thereby improving the energy density. Meanwhile, the bent end of the first uncoated region 11 may overlap in multiple layers. When the first uncoated region 11 overlaps in multiple layers, the tab coupling portion 32 of the current collector 30 may be coupled onto

24

the coupling surface 102 (see FIGS. 15 and 16) formed by bending the first uncoated region 11 such that it overlaps in multiple layers as described above.

The plurality of first housing coupling portions 33 may extend to the sidewall of the battery housing 20 approximately radially from the support portion 31 of the current collector 30. Each of the plurality of first housing coupling portions 33 may be spaced apart from each other along the circumference of the support portion 31. At least one first housing coupling portion 33 may be disposed between the adjacent tab coupling portions 32. The plurality of first housing coupling portions 33 may be, for example, coupled to the beading portion 21 in the inner surface of the battery housing 20. The first housing coupling portions 33 may be coupled, especially to the upper surface of the beading portion 21. In the cylindrical battery 1 of the present disclosure, in case that this structure is applied, the first housing coupling portion 33 may be spontaneously seated on the beading portion 21 through the process of receiving the electrode assembly 10 having the current collector 30 in the battery housing 20. Accordingly, the welding process of the battery housing 20 and the current collector 30 can be easily performed. The welding for coupling between the battery housing 20 and the current collector 30 may use, for example, laser welding, ultrasonic welding or spot welding. When a multi-current path is formed by coupling the first housing coupling portion 33 onto the beading portion 21 by welding, the resistance level may be limited to approximately 4 mOhm or less suitable for rapid charging. In addition, when the upper surface of the beading portion 21 extends along the direction approximately parallel to the lower surface of the battery housing 20, i.e., the direction approximately perpendicular to the sidewall of the battery housing 20, and the first housing coupling portion 33 also extends along the same direction, i.e., the radial direction and the circumferential direction, the first housing coupling portion 33 may stably contact the beading portion 21. In addition, as the first housing coupling portion 33 stably contacts the beading portion 21, it is possible to smoothly weld the two components, thereby improving the coupling strength between the two components and minimizing the resistance rise at the coupled portion.

Subsequently, referring to FIGS. 3 to 7, the first housing coupling portion 33 includes a first contact portion 33a coupled onto the inner surface of the battery housing 20 and a first connecting portion 33b connecting the support portion 31 to the first contact portion 33a.

The first contact portion 33a is coupled onto the inner surface of the battery housing 20. When the battery housing 20 includes the beading portion 21, the first contact portion 33a may be coupled onto the beading portion 21 as described above. In this case, as described above, for stable contact and coupling, both the beading portion 21 and the first contact portion 33a may extend along the direction approximately parallel to the lower surface of the battery housing 20, i.e., the direction approximately perpendicular to the sidewall of the battery housing 20. In addition, the connected portion between the first contact portion 33a and the first connecting portion 33b may match the inner surface of the beading portion 21. That is, the shape of the connected portion between the first contact portion 33a and the first connecting portion 33b and the shape of the beading portion 21 at the corresponding location may match each other. In this case, when coupling the first housing coupling portion 33 to the beading portion 21, it is possible to increase the coupling strength between the first housing coupling portion 33 and the beading portion 21, and increase the resistance

25

reduction effect with the increasing contact area. Meanwhile, the outermost point of the first connecting portion 33b may be spaced a predetermined distance apart from the innermost point of the beading portion 21.

The first connecting portion 33b may include at least one first bending portion B1 which changes in extension direction at least once between the support portion 31 and the first contact portion 33a. The first connecting portion 33b may have, for example, a spring-like structure or a bellows-like structure capable of contracting and stretching within a predetermined range. The structure of the first connecting portion 33b allows the first contact portion 33a to come into close contact on the beading portion 21 in the process of receiving the electrode assembly 10 having the current collector 30 coupled thereto in the battery housing 20 even though there is a predetermined range of height dispersion of the electrode assembly 10.

For example, the vertical distance D between the first contact portion 33a and the support portion 31 in undeformed condition in the absence of an external force applied to the current collector 30 may be substantially equal to the vertical distance between the upper surface of the beading portion 21 and the support portion 31 when the electrode assembly 10 having the current collector 30 coupled thereto is seated in the battery housing 20, or smaller within the stretchable range of the first connecting portion 33b. That is, the first housing coupling portion 33 may be elastically biased on the beading portion 21. More specifically, the first housing coupling portion 33 may be coupled onto the beading portion 21 with the stored elastic energy causing deformation to reduce the straight line distance from one end of the first connecting portion 33b in the lengthwise direction to the other end. In case that the first connecting portion 33b is configured to meet this requirement, when the electrode assembly 10 having the current collector 30 coupled thereto is seated in the battery housing 20, the first contact portion 33a may spontaneously come into close contact with the beading portion 21.

In addition, the contractable and stretchable structure of the first connecting portion 33b mitigates impacts caused by the movement of the electrode assembly 10 in a predetermined range when the electrode assembly 10 moves up and down due to vibrations and/or impacts while the cylindrical battery 1 (see FIG. 1) is in use. That is, the contractable and stretchable structure of the first connecting portion 33b may serve as a buffer to prevent the transfer of impacts to the coupled portion between the first contact portion 33a and the battery housing 20 and the coupled portion between the tab coupling portion 32 and the first uncoated region 11 (see FIGS. 1 to 5).

Meanwhile, the first contact portion 33a may be coupled to the upper surface of the beading portion 21 (the upper surface of the upper beading portion) by welding. In addition, the first contact portion 33a may be coupled to the flat area on the upper surface of the beading portion 21 by welding. The weld area between the first contact portion 33a and the beading portion 21 may be narrower than the flat upper surface of the beading portion 21. When the first bending portion B1 is provided, an angle between the first contact portion 33a and the first connecting portion 33b may be an acute angle due to the first bending portion B1.

Subsequently, referring to FIG. 8, the current collector 30 according to another embodiment of the present disclosure is shown. The current collector 30 according to another embodiment of the present disclosure is only different in the shape of the first contact portion 33a from the current collector 30 (the current collector described with reference

26

to FIG. 2 for illustrative purposes) described above, and the structure of the current collector 30 described above may be applied substantially equally to the others.

Referring to FIGS. 1 and 8, at least part of the first contact portion 33a may have a shape of an arc that extends in the circumferential direction along the beading portion 21 of the battery housing 20. In this case, to maximize the contact area, the current collector 30 may be configured such that the sum of the circumferential extended lengths of the first contact portions 33a of the plurality of first housing coupling portions 33 may be substantially equal to or shorter than the inner circumference of the battery housing 20. In another aspect, the first contact portion 33a may have a shape of an arc which extends in the opposite directions along the circumferential direction on the beading portion 21 from the intersection between the connecting portion 33b and the contact portion 33a.

Subsequently, referring to FIGS. 9 and 10 together with FIG. 1, the current collector 30 according to still another embodiment of the present disclosure is shown. Compared with the current collectors 30 (the current collectors described with reference to FIGS. 2 and 8 for illustrative purposes) according to the previous embodiments, the current collector 30 according to still another embodiment of the present disclosure is only different in that it further includes a second housing coupling portion 34, and the structure of the current collectors 30 (see FIG. 9) described above may be substantially equally applied to the others.

The second housing coupling portion 34 extends from the end of the tab coupling portion 32 and is coupled onto the inner surface of the battery housing 20. The second housing coupling portion 34 is provided at the end of at least one of the plurality of tab coupling portions 32. The second housing coupling portion 34 includes a second contact portion 34a coupled onto the inner surface of the battery housing 20, and a second connecting portion 34b connecting the end of the tab coupling portion 32 of the support portion 31 to the second contact portion 34a.

The second contact portion 34a is coupled onto the inner surface of the battery housing 20. When the battery housing 20 includes the beading portion 21, in the same way as the first contact portion 33a described above, the second contact portion 34a may be coupled onto the beading portion 21. In this case, as described above, for stable contact and coupling, the beading portion 21 and the second contact portion 34a may extend along the direction approximately parallel to the lower surface of the battery housing 20, i.e., the direction approximately perpendicular to the sidewall of the battery housing 20.

In the same way as the shape of the first contact portion 33a shown in FIG. 8, at least part of the second contact portion 34a may extend in the circumferential direction along the beading portion 21 of the battery housing 20. In this case, to maximize the contact area between the current collector 30 and the battery housing 20, the current collector 30 may be configured such that the length obtained by adding the sum of the circumferential extended lengths of the first contact portions 33a of the plurality of first housing coupling portions 33 to the sum of the circumferential extended lengths of the second contact portions 34a of the plurality of second housing coupling portions 34 is substantially equal to or slightly shorter than the inner circumference of the battery housing 20.

In the same way as the first connecting portion 33b described previously, the second connecting portion 34b may include at least one second bending portion B2 which changes in extension direction at least once between the tab

27

coupling portion 32 and the second contact portion 34a. By the formation of the second bending portion B2, the second connecting portion 34b has a contractable and stretchable structure, and accordingly has the assembly procedural advantage of the cylindrical battery 1 and the buffering effect as described above.

Although the drawings of the present disclosure show only one second bending portion B2, the present disclosure is not limited thereto, and in the same way as the first connecting portion 33b described with reference to FIGS. 4 and 5 for illustrative purposes, a plurality of second bending portions B2 may be provided.

Referring to FIG. 11, the current collector 30 having a different shape from those described above is shown. Referring to FIG. 11 together with FIG. 1, the current collector (the first current collector) 30 of the present disclosure may have at least one injection hole H3. The injection hole H3 may be provided, for example, in the tab coupling portion 32. When the plurality of tab coupling portions 32 is provided, the injection hole H3 may be provided in the at least one tab coupling portion 32. The injection hole H3 may be provided, for example, on one side or each of two sides of the at least one welding bead W formed on the tab coupling portion 32. Referring to FIGS. 1 and 11, in the manufacture of the cylindrical battery 1 according to an embodiment of the present disclosure, after receiving the assembly including the electrode assembly 10 and the current collector (the first current collector) 30 in the battery housing 20, the electrolyte solution may be injected. In this instance, the injection performance may be improved by the injection hole H3.

One tab coupling portion 32 may have a plurality of injection holes H3. The plurality of injection holes H3 may be arranged approximately symmetrically on the left and right sides with respect to the center of the tab coupling portion 32 in the widthwise direction. The welding bead W for coupling between the tab coupling portion 32 and the first uncoated region 11 may be formed between the injection holes H3 arranged approximately symmetrically on the left and right sides.

The tab coupling portion 32 may be formed such that the width at a location a predetermined distance away from the connected portion toward the end of the tab coupling portion in the lengthwise direction is larger than the width at the connected portion between the tab coupling portion 32 and the support portion 31. At least part of the area in which the injection hole H3 is formed may be included in an extended area by a larger width at the location the predetermined distance away from the connected portion toward the end of the tab coupling portion 32 than the width at the connected portion between the tab coupling portion 32 and the support portion 31. Meanwhile, the end of the tab coupling portion 32 in the lengthwise direction may have a shape of an approximately arc corresponding to the inner circumferential surface of the battery housing 20.

Referring to FIGS. 12 and 13, the first connecting portion 33b of the first housing coupling portion 33 and/or the second connecting portion 34b of the second housing coupling portion 34 of the present disclosure may be bent once, and may be bent in a different direction from those shown in FIGS. 3 and 10. That is, the first bending portion B1 formed on the first connecting portion 33b and/or the second bending portion B2 formed on the second connecting portion 34b may protrude in the direction toward the center of the cylindrical battery 1 (see FIG. 1). The bending direction of the first connecting portion 33b and/or the second connecting portion 34b is to prevent damage from occurring at the

28

coupled portion between the current collector (the first current collector) 30 and the electrode assembly 10 and/or the coupled portion between the current collector (the first current collector) 30 and the battery housing 20 during the sizing process. The sizing process is a compression process for reducing the height occupied by the beading portion 21 area of the battery housing 20 to reduce a height of the cylindrical battery 1 in the manufacture of the cylindrical battery 1. As a result of experiment on how much the welded portion is damaged after the sizing process depending on the presence or absence of the bending portions B1, B2 and the protruding direction of the bending portions B1, B2, it is found that damage does not occur in the cylindrical battery 1 having a structure in which the bending portions B1, B2 protrude in the direction toward the center of the cylindrical battery 1.

Referring to FIGS. 17 to 20, some steps of the process of manufacturing the cylindrical battery 1 of the present disclosure are shown. First, referring to FIG. 17, the current collector 30 is placed on the electrode assembly 10 received in the battery housing 20, and the first uncoated region 11 protruding above the electrode assembly 10 and the current collector 30 are welded. In this case, the tab coupling portion 32 of the current collector 30 is welded to the bent surface 102 (see FIG. 15) where the plurality of segments 11a (see FIG. 20) provided in the first uncoated region 11 is bent. In a variation, the current collector 30 may be welded to the bent surface 102 in advance before the electrode assembly 10 is received in the battery housing 20.

Subsequently, referring to FIG. 18, when the current collector 30 is welded onto the electrode assembly 10, a beading knife may move forward into the battery housing 20. Accordingly, the beading portion 21 press-fit inward of the battery housing 20 is formed on the sidewall of the battery housing 20, and the beading portion 21 is disposed below the contact portion 33a of the current collector 30. Accordingly, afterwards, the contact portion 33a and the beading portion 21 are placed at a weldable location.

Subsequently, referring to FIG. 19 together with FIG. 18, the contact portion 33a of the current collector 30 may be placed on the upper surface of the beading portion 21. In a state that the current collector 30 is placed on the upper surface of the beading portion 21, the current collector 30 and the beading portion 21 may be welded. The housing cover 40 having the end surrounded by the sealing gasket G1 may be placed on the upper surface of the contact portion 33a. Subsequently, the battery housing 20 is bent around the edge of the housing cover 40 to fix the housing cover 40 and the current collector 30. The area disposed on top of the beading portion 21 of the battery housing 20 is bent to form the crimping portion 22, and by the extended and bent shape of the crimping portion 22, the housing cover 40 and the contact portion 33a of the current collector 30 are fixed on the beading portion 21. The housing coupling portion 33 may be compressed and fixed by the crimping portion 22.

Meanwhile, in the present disclosure, the extension direction of the welding pattern formed between the first uncoated region 11 and the tab coupling portion 32 and the extension direction of the welding pattern formed between the beading portion 21 and the first contact portion 33a may approximately be perpendicular to each other. For example, the extension direction of the welding pattern formed between the first uncoated region 11 and the tab coupling portion 32 may be the radial direction of the electrode assembly 10, and the extension direction of the welding pattern formed between the beading portion 21 and the first contact portion 33a may be the circumferential direction of

29

the electrode assembly 10 (or the battery housing 20). In this case, a tangent line formed at a point in the circumferential direction is perpendicular to the radial direction. This structure may increase the coupling strength between the current collector 30 and the electrode assembly 10 and the coupling strength between the current collector 30 and the battery housing 20. That is, according to this structure, even though vibrations and/or impacts are applied to the cylindrical battery 1 in any direction, the current collector 30 may be kept in firmly fixed state with each of the electrode assembly 10 and the battery housing 20.

Subsequently, referring to FIG. 20 together with FIG. 19, the cylindrical battery with a height adjusted by the sizing process is shown. The sizing process is a compression process for reducing the height occupied by the beading portion 21 area of the battery housing 20 to reduce the height in the manufacture of the cylindrical battery. Since the battery housing 20 is compressed in the heightwise direction (parallel to the Z axis) by the sizing process, the beading portion 21 of the electrode assembly 10 is pressed so its part may be compressed. In another aspect, since the battery housing 20 is compressed in the lengthwise direction (vertical direction) by the sizing process, the current collector 30 may be bent when subjected to the vertical pressure. That is, as the sizing process is performed, the tab coupling portion 32 is bent upward, causing damage to the weld between the tab coupling portion 32 and the first uncoated region 11. Accordingly, the current collector 30 needs to have a structure for preventing damage of the welded portion between the tab coupling portion 32 and the first uncoated region 11 after the sizing process.

For example, when the connecting portion (the first connecting portion) 33b has an upwardly convex shape as shown in FIG. 22, it is possible to maximize the suppression effect of a phenomenon in which the tab coupling portion 32 is raised up as shown in FIG. 20. That is, when the battery housing 20 of FIG. 19 is compressed vertically, the connecting portion 33b bends and upward stress acts on the tab coupling portion 32 of the present disclosure. However, when the connecting portion 33b has the approximately upwardly convex shape like the current collector 30 of the present disclosure, it is possible to minimize the stress applied to the tab coupling portion 32. Accordingly, the tab coupling portion 32 is not bent upward, and the welded portion with the first uncoated region 11 may be kept in good welded state.

More specifically, referring to FIGS. 22 and 23, the connecting portion 33b before the sizing process may have the upwardly convex structure with respect to an imaginary straight line connecting the connection point between the contact portion 33a and the connecting portion 33b to the connection point between the connecting portion 33b and the tab coupling portion 32, i.e., an imaginary straight line connecting two ends of the connecting portion 33b in the lengthwise direction. For example, at least one bending portion B1 that forms an obtuse angle may be provided on the connecting portion 33b. Meanwhile, the bending portion B1 may pass through the approximately center of the imaginary straight line connecting the two ends of the connecting portion 33b, and may be disposed at an upper position than an imaginary plane parallel to the bottom surface of the battery housing 20. The length of the connecting portion 33b from the bending portion B1 to the tab coupling portion 32 may be longer than the length of the connecting portion 33b from the bending portion B1 to the contact portion 33a.

30

According to this structure, in the sizing process during which the vertical pressure is applied, the contact portion 33a moves down in the direction of arrow, and the connecting portion 33b is raised up in the direction of arrow (see the dashed line). More specifically, the connecting portion 33b is raised higher than the beading portion 21. That is, the profile of the housing coupling portion 33 changes before and after the sizing process as shown in FIGS. 22 and 23. The extent of protrusion of the connecting portion 33b may change depending on the height change of the battery housing 20 made by the sizing process. Meanwhile, as opposed to those shown in the drawing, the position of the bending portion B1 may only move up to the height level of the contact portion 33a. By the phenomenon in which the connecting portion 33b is raised up, the connecting portion 33b may absorb most of the stress, so the stress applied to the weld area of the tab coupling portion 32 and the first uncoated region 11 reduces. Accordingly, according to the present disclosure, the phenomenon in which the tab coupling portion 32 is raised up does not occur. In addition, by the above-described structure, the length of the connecting portion 33b from the bending portion B1 to the tab coupling portion 32 is longer than length of the connecting portion 33b from the bending portion B1 to the contact portion 33a, and thus it is easy to insert the current collector 30 into the battery housing 20, and it is possible to effectively dissipate the stress.

Meanwhile, the shape change by the protrusion of the connecting portion 33b may be made in the shape of an approximately curved line which is upwardly convex as shown in FIG. 22, or may be made in the shape of a bent straight line with respect to the bending portion B1 as shown in FIG. 23. When bending occurs in the shape of a straight line as shown in FIG. 23, each of the area from the bending portion B1 to the contact portion 33a and the area from the bending portion B1 to the tab coupling portion 32 in the connecting portion 33b may have a shape of a straight line.

As a result of studying the structure of the current collector 30 for preventing phenomena in which the current collector 30 is twisted and/or raised, the inventors found that when the connecting portion 33b has an upwardly convex structure, it is possible to significantly reduce damage that occurs in the welded portion between the tab coupling portion 32 and the first uncoated region 11 in the sizing process.

FIG. 21 is a diagram illustrating a difference in the extent of damage depending on the shape of the current collector 30 before the sizing process. Referring to FIG. 21, experimental example 1 is an experimental example in which the connecting portion 33b before sizing is in the shape of a straight line, experimental example 2 is an experimental example in which the connecting portion 33b before sizing is downwardly convex, and experimental example 3 is an experimental example in which the connecting portion 33b before sizing is upwardly convex. As a result of 1 mm sizing in experimental examples 1 to 3, in experimental example 1 in which the connecting portion 33b is in the shape of a straight line, the weld area with the tab coupling portion 32 is raised up by approximately 0.72 mm. In experimental example 2 in which the connecting portion 33b is in a downwardly convex shape, the weld area with the tab coupling portion is raised up by approximately 0.99 mm. That is, it is found that when the connecting portion 33b is downwardly convex, the raised phenomenon is severer than the straight line shaped connecting portion 33b. Meanwhile, in experimental example 3 in which the connecting portion 33b has the upwardly convex shape, the weld area with the tab coupling

31

portion 32 is raised up by approximately 0.02 mm. This represents that the raised phenomenon is significantly reduced compared to experimental examples 1 and 2. That is, in experimental example 3 in which the connecting portion 33b has the upwardly convex shape, it can be seen that it is possible to minimize damage of the weld area between the tab coupling portion and the first uncoated region. It is because the extent of protrusion of the current collector 30 may change depending on stress applied to the electrode assembly 10 by the current collector 30. That is, in experimental example 1 in which the connecting portion 33b has the straight line shape and experimental example 2 in which the connecting portion 33b has the downwardly convex shape, very large stress of approximately 4.5 MPa and 3.7 MPa is applied to the welded portion of the current collector 30 and the electrode assembly 10 in the sizing process, respectively, and thus it can be seen that the protrusion phenomenon of the current collector 30 is severer. In contrast, in experimental example 3 in which the connecting portion 33b has the upwardly convex shape, stress applied to the welded portion of the current collector 30 and the electrode assembly 10 in the sizing process is at the level of approximately 2.0 MPa, which is lower than experimental examples 1 and 2, and thus it can be seen that the raised phenomenon of the current collector 30 is reduced.

Accordingly, as shown in FIG. 22, the slope of the connecting portion 33b is not uniform, and the slope at the upper area may be smaller than the slope at the lower area with respect to a predetermined location (for example, the bending portion B1). The predetermined location may be disposed at the upper position than the middle of the connecting portion 33b. Alternatively, the connecting portion 33b may have an upwardly convex shape with respect to an imaginary straight line connecting the tab coupling portion 32 to the contact portion 33a. The convex shape may be a shape of connected straight lines, a curved shape, or a combined shape. In an example, as shown in FIG. 22 or 23, the connecting portion 33b may include at least one bending portion B1 with respect to the predetermined location. Preferably, the at least one bending portion B1 may be bent at an obtuse angle not to overlap when viewed along the lengthwise axis of the battery housing 20. Meanwhile, the boundary between the contact portion 33a and the connecting portion 33b may be bent at an obtuse angle. Accordingly, the connecting portion 33b may reduce in slope stepwise or gradually as the connecting portion 33b goes toward the beading portion 21.

In another aspect of the present disclosure, referring to FIG. 20, an angle θ between the tab coupling portion 32 and the connecting portion 33b may be, for example, 0 to 90°. For example, when the upper end of the electrode assembly 10 is raised to the height corresponding to the beading portion 21 in the sizing process, the tab coupling portion 32 and the contact portion 33a may be disposed at the same height. In this case, the angle θ between the tab coupling portion 32 and the connecting portion 33b is approximately 0°. Even though the sizing process is performed, it is undesirable that the contact portion 33a is disposed at the lower position than the tab coupling portion 32. In this case, the first uncoated region 11 may be too much pressed by the beading portion 21, causing damage. Accordingly, the angle θ between the tab coupling portion 32 and the connecting portion 33b may be equal to or higher than 0°. In another aspect, the angle θ between the tab coupling portion 32 and the connecting portion 33b may increase to approximately 90° with the stepwise or gradual changes in length, thickness

32

or slope of the connecting portion 33b. However, to avoid contact with the housing cover 40, preferably, the angle θ does not exceed 90°.

In another aspect of the present disclosure, the connecting portion 33b may support the housing cover 40. For example, the connecting portion 33b may be bent upward by the sizing process. In this instance, the connecting portion 33b bent upward may contact the housing cover 40. In this case, the connecting portion 33b may support the housing cover 40 upward. Accordingly, the current collector 30 may be firmly fixed in the vertical direction by the sizing process. Accordingly, it is possible to prevent the electrode assembly 10 from unnecessarily moving up and down in the battery housing 20 when vibrations and/or impacts occur during the use of the cylindrical battery 1.

In another aspect of the present disclosure, the upper surface of the beading portion 21 and the lower surface of the beading portion 21 may be asymmetrical with respect to an imaginary reference plane passing through the innermost point of the beading portion 21 in parallel to the bottom surface of the battery housing. For example, referring to FIG. 20, when the battery housing 20 is vertically compressed by the sizing process, the beading portion 21 is also vertically compressed. In this instance, the upper surface of the beading portion 21 and the lower surface of the beading portion 21 may be asymmetrical with respect to an imaginary reference plane (see the dashed line) passing through the innermost point of the beading portion 21.

In another aspect of the present disclosure, the press-fit depth of the beading portion 21 may be defined as PD. For example, referring to FIG. 24, the vertical distance from the inner surface of the battery housing 20 to the innermost point of the beading portion 21 may be defined as the press-fit depth PD. Meanwhile, the shortest distance from the end of the contact portion 33a to a vertical line passing through the innermost point of the beading portion 21 may be defined as an overlap length OV. That is, referring to FIG. 24, the overlap length OV refers to the radial length of the overlap area of the beading portion 21 and the current collector 30 when the beading portion 21 is viewed from the top. In this instance, the cylindrical battery 1 of the present disclosure may satisfy the following relation equation.

$$\frac{(R1_{min} + W_{bead,min})}{PD_{max}} \leq OV/PD \leq (PD_{max} - R2_{min})/PD_{max}$$

To weldably place the contact portion 33a of the current collector 30 on the beading portion 21, the ratio may be equal to or larger than $(R1_{min} + W_{bead,min})/PD_{max}$. Referring to FIG. 24, to weldably place the contact portion 33a of the current collector 30 on the beading portion 21, a more overlap area than the radius of curvature R1 of the beading portion 21 is necessary. For example, when the contact portion 33a overlaps as much as the radius of curvature R1 of the beading portion 21, there is no flat region, so the contact portion 33a may contact the beading portion 21 at only one contact point. That is, the contact portion 33a cannot be stably placed on the beading portion 21. Accordingly, in addition to the radius of curvature R1 of the beading portion 21, the contact portion 33a needs an additional overlap area, and in this instance, preferably, the length of the additional overlap area is at least equal to or larger than the welding bead width W_{bead} . That is, the contact portion 33a overlaps, in substance, with the beading portion 21 at the additional overlap area, and welding may be performed at this area. Accordingly, the length of the additional overlap area is at least equal to or larger than the welding bead width W_{bead} for stable welding without departing from the overlap

33

area. That is, the minimum overlap length for weldably placing the contact portion 33a on the beading portion 21 is $R1_{min} + W_{bead,min}$.

In another aspect, to weldably place the contact portion 33a of the current collector 30 on the beading portion 21, the ratio may be equal to or less than $(PD_{max} - R2_{min}) / PD_{max}$. Referring to FIG. 24, the radius of curvature R2 exists at the boundary area between the beading portion 21 and the inner surface of the battery housing 20. Accordingly, when the contact portion 33a of the current collector 30 moves into the boundary area between the beading portion 21 having the radius of curvature R2 and the inner surface of the battery housing 20, the contact portion 33a does not come into close contact with the beading portion 21 and is raised by the radius of curvature R2. Accordingly, the maximum overlap length for placing the contact portion 33a in close contact on the beading portion 21 is $PD_{max} - R2_{min}$.

In an example, the maximum value PD_{max} of the press-fit depth PD of the beading portion 21 may be approximately 10 mm, the minimum value of each of $R1_{min}$ and $R2_{min}$ may be approximately 0.05 mm, and $W_{bead,min}$ may be approximately 0.1 mm. In this instance, a ratio of the overlap length OV to the press-fit depth PD of the beading portion 21 may satisfy the range of approximately 1.5~99.5%. To weldably place the contact portion 33a of the current collector 30 on the beading portion 21, the ratio may be equal to or larger than approximately 1.5%. The lower limit of OV/PD may be determined from the maximum value PD_{max} of the press-fit depth of the beading portion 21, the minimum value $R1_{min}$ of the radius of curvature R1 and the minimum width of the contact portion 33a requiring contact with the upper surface of the beading portion 21 for welding of the contact portion 33a, i.e., the length of the minimum width $W_{bead,min}$ of the welding bead BD. Specifically, in an example, the maximum value PD_{max} of the press-fit depth may be 10 mm, the minimum contact width of the contact portion 33a required for welding of the contact portion 33a, i.e., the length of the minimum width $W_{bead,min}$ of the welding bead BD may be 0.1 mm, and the minimum value $R1_{min}$ of the radius of curvature R1 may be 0.05 mm. In this condition, the minimum value of the overlap length OV is 0.15 mm (=0.1 mm+0.05 mm) and PD_{max} is 10 mm, and thus the lower limit of OV/PD is 1.5%. Meanwhile, a location at which the contact portion 33a of the current collector 30 may contact the flat portion of the upper surface of the beading portion 21 to the maximum width is a location the radius of curvature R2 away from the inner surface of the battery housing. Accordingly, when the end of the contact portion 33a is disposed at the corresponding location, the overlap length OV is at the maximum. The upper limit of OV/PD may be determined from the maximum value of the press-fit depth and the minimum value $R2_{min}$ of the radius of curvature R2. Specifically, the maximum value of the press-fit depth may be 10 mm, and the minimum value of the radius of curvature R2 may be 0.05 mm. In this condition, the maximum value of the overlap length OV is 9.95 mm (=10 mm-0.05 mm) and PD_{max} is 10 mm, and thus the upper limit of OV/PD is 99.5%.

In another aspect of the present disclosure, the welding position at which the beading portion 21 and the contact portion 33a are welded may be defined as W. More specifically, the welding position W may refer to the distance from the innermost point of the beading portion 21 to the center point of the welding bead BD disposed on the outermost side in the radial direction. In this instance, the welding position W and the press-fit depth PD may satisfy the following relation equation.

34

$$\frac{(OV_{min} - 0.5 * W_{bead,min}) / PD_{max} \leq W / PD \leq (OV_{max} - 0.5 * W_{bead,min}) / PD_{max}}$$

The welding position W of the beading portion 21 and the contact portion 33a may be determined from the overlap length of the contact portion 33a and the beading portion 21 and the minimum width $W_{bead,min}$ of the welding bead BD. The welding position W is the center point of the welding bead BD.

Describing with reference to FIG. 24, the welding position when the contact portion 33a is placed on the beading portion 21 to the minimum extent may be defined as W1. The overlap length at that time is OV_{min} as described above. Meanwhile, when the welding bead BD is formed in the overlap area, stable welding is performed, and thus the welding bead BD needs to be completely included in the overlap area. Accordingly, the welding position W1 is at least $0.5 * W_{bead,min}$ away from OV_{min} toward the inner side of the beading portion 21. Accordingly, W1 may satisfy the following relation equation.

$$W1 = OV_{min} - 0.5 * W_{bead,min} =$$

$$R1_{min} + W_{bead,min} - 0.5 * W_{bead,min} = R1_{min} + 0.5 * W_{bead,min}$$

Meanwhile, for the minimum W1/PD, PD should be at the maximum, and thus the minimum value of W/PD is $(OV_{min} - 0.5 * W_{bead,min}) / PD_{max}$.

In another aspect, describing with reference to FIG. 24, the welding position when the contact portion 33a moves into the beading portion 21 to the maximum extent may be defined as W2. The overlap length at that time is OV_{max} as described above. Meanwhile, when the welding bead BD is formed in the overlap area, stable welding is performed, and thus the welding bead BD needs to be completely included in the overlap area. Accordingly, the welding position W2 is at least $0.5 * W_{bead,min}$ away from OV_{max} toward the inner side of the beading portion 21. Accordingly, W2 may satisfy the following relation equation.

$$W2 = OV_{max} - 0.5 * W_{bead,min} = PD_{max} - R2_{min} - 0.5 * W_{bead,min}$$

Meanwhile, for the maximum W2/PD, the product of dividing $(PD_{max} - R2_{min} - 0.5 * W_{bead,min})$ by PD, i.e., $\{1 - (R2_{min} + 0.5 * W_{bead,min}) / PD\}$ should be at the maximum. That is, when the PD value is at the maximum, the W2/PD value is at the maximum. Accordingly, the maximum value of W/PD is $(OV_{min} - 0.5 * W_{bead,min}) / PD_{max}$.

In an example, the minimum width necessary for welding the contact portion 33a to the beading portion 21 may be 0.1 mm. That is, the width of 0.1 mm corresponds to the minimum width of the welding bead BD that may be formed by laser welding. Accordingly, the welding position W1 when the contact portion 33a contacts the upper surface of the beading portion 21 to the minimum width corresponds to a location $(R1_{min} + 0.5 * 0.1 \text{ mm})$ away from the innermost point of the beading portion 21. Here, $R1_{min}$ is the minimum value of the radius of curvature R1, and for example, is 0.05 mm. When laser is irradiated onto the corresponding location, the welding bead BD having the width of 0.1 mm is formed on the contact surface between the contact portion 33a and the beading portion 21. The width of the welding bead BD corresponds to the minimum contact width of the contact portion 33a. The welding position W1 with respect

35

to the press-fit depth PD of the beading portion **21** is a location 0.1 mm away with respect to the innermost point of the beading portion **21**.

Meanwhile, when the contact portion **33a** contacts the upper surface of the beading portion **21** to the maximum width, the end of the contact portion **33a** is disposed at a location the radius of curvature ($R2_{min}$) away from the inner surface of the battery housing. Here, $R2_{min}$ is the minimum value of the radius of curvature $R2$, and for example, is 0.05 mm. In this case, the welding position $W2$ closest to the end of the contact portion **33a** is a location 0.05 mm away from the end of the contact portion **33a**. When laser is irradiated onto the corresponding location, the welding bead having the minimum width of 0.1 mm may be formed in contact with the end of the contact portion **33a**. The welding position $W2$ when the contact portion **33a** contacts the upper surface of the beading portion **21** to the maximum width is a location ($PD-R2_{min}-0.05$ mm) away with respect to the innermost point of the beading portion **21**. In an example, when $R2_{min}$ is 0.05 mm, the maximum value of the welding position $W2$ is a location $PD-0.1$ mm away with respect to the innermost point of the beading portion **21**.

According to the foregoing description, when $R1_{min}$ and $R2_{min}$ are 0.05 mm, the welding position W of the contact portion **33a** with respect to the press-fit depth PD may be set to the range of (0.1 mm) to ($PD-0.1$ mm) with respect to the innermost point of the beading portion **21**. Since the ratio of the welding position $W1$ with respect to the press-fit depth PD is when the press-fit depth PD is at the maximum, the minimum value (%) of $W1/PD$ is 1% ($=100*0.1$ mm/10 mm). In addition, since the maximum value of the ratio $W1/PD$ of the welding position $W2$ with respect to the press-fit depth PD is when PD is at the maximum value, the maximum value (%) of $W2/PD$ is 99% ($=100*(10$ mm-0.1 mm)/10 mm). In summary, the welding position area with respect to the press-fit depth PD may be an area of 1% or more and 99% or less with respect to the press-fit depth PD.

Meanwhile, describing with reference to FIG. **24**, the distance of the center point of the welding bead BD disposed on the outermost side in the radial direction from the innermost point of the beading portion **21** when the overlap length is OV may be defined as W . In this instance, the cylindrical battery **1** of the present disclosure may satisfy the following relation equation.

$$W=OV-0.5*W_{bead,min}$$

In another aspect, the beading portion **21** may have the flat region F parallel to the lower surface of the battery housing **20** at least in part, and the length of the flat region F of the beading portion **21** which contacts the current collector **30** may be $OV-R1$. That is, describing with reference to FIG. **23**, the flat region F corresponds to the length obtained by subtracting the radius of curvature $R1$ of the beading portion **21** from the overlap length OV.

In still another aspect of the present disclosure, when the overlap length is OV, the radial width length of the welding pattern or a set of welding beads BD formed between the beading portion **21** and the contact portion **33a** may be $W_{bead,min}$ or more and $OV-R1$ or less.

Describing with reference to FIG. **24**, the minimum width of the welding bead BD is $W_{bead,min}$, and thus the minimum value of the radial width length of the welding pattern formed between the beading portion **21** and the contact portion **33a** is at least $W_{bead,min}$. Meanwhile, a plurality of welding beads BD may be formed over the entire flat region F of the beading portion **21**. In this instance, the plurality of welding beads BD may form a uniform welding pattern.

36

Referring to FIG. **23**, the maximum value of the radial width length of the welding pattern formed between the beading portion **21** and the contact portion **33a** may satisfy the following relation equation.

Maximum value of the radial widthwise length of the welding pattern formed between the beading portion **21** and the contact portion **33a**

$$\begin{aligned} &= W - W1 + \text{minimum width of the welding bead } BD \\ &= [(OV - 0.5 * W_{bead,min}) - (R1 + 0.5 * W_{bead,min})] + W_{bead,min} \\ &= OV - R1 \end{aligned}$$

In another aspect of the present disclosure, the ratio of the radial widthwise length of the welding pattern to the length of the flat region F may satisfy the range of approximately 10 to 40%. The ratio may satisfy approximately 20 to 30%. When the ratio satisfies the above-described range, the weld strength may increase with the increasing weld area. Accordingly, the cylindrical battery **1** according to the present disclosure may have the outstanding shock resistant characteristics.

In another aspect of the present disclosure, a ratio of a non-contact area between the current collector **30** and the upper surface of the electrode assembly **10** to the area of a circle having the outer diameter of the electrode assembly **10** as the diameter may be defined as the open ratio of the current collector **30**. The open ratio may be calculated by the following equation.

Open ratio (%)

$$= 1 - \frac{\text{(contact area between the current collector and the upper surface of the electrode assembly)}}{\text{(area of circle having the outer diameter of the electrode assembly as the diameter)}}$$

$$= \frac{\text{(non-contact area between the current collector and the upper surface of the electrode assembly)}}{\text{(area of circle having the outer diameter of the electrode assembly as the diameter)}}$$

The open ratio of the current collector **30** may be, for example approximately 30% or more and less than 100%, and more particularly approximately 60% or more and less than 100%. Describing that the current collector **30** shown in FIG. **8a** is placed on and coupled to the electrode assembly **10** for illustrative purposes, the contact area between the current collector **30** and the electrode assembly **10** may be the support portion **31** and the tab coupling portion **32**. That is, in other words, the ratio of the contact area between the current collector **30** and the electrode assembly **10** to the area of the circle having the outer diameter of the electrode assembly **10** as the diameter may be approximately 70% or less, and more particularly approximately 40% or less. When the open ratio of the current collector **30** is in the above-described range, the electrolyte solution may smoothly permeate the electrode assembly **10** through the open area of the current collector **30** including the current collector hole H2 when the electrolyte solution is injected. That is, when the open ratio of the current collector **30** is in the above-described range, the electrolyte solution permeates the electrode assembly **10** through the winding center hole H1 provided in the electrode assembly **10** and the open area of the current collector **30**, and in particular, there is a small gap between the overlap surfaces of the segments **11a** and between the adjacent

37

segments 11a, and thus the electrolyte solution may smoothly permeate the electrode assembly 10 through the corresponding gap by capillarity.

Referring to FIGS. 13 and 14, the distance A from the center of the current collector 30 to the end of the tab coupling portion 32 may be substantially equal to or shorter than the distance B from the center of the winding hole H1 of the electrode assembly 10 to the innermost side of the beading portion 21 formed in the battery housing 20. In this case, it is possible to prevent interference between the beading portion 21 and the current collector 30 in the sizing process described above, thereby preventing damage from occurring in the current collector and/or the electrode assembly 10 by the pressing of the beading portion 21 on the current collector 30.

At least one welding bead W may be provided for each tab coupling portion 32. In addition to the tab coupling portion 32, the welding bead W may be formed in the support portion 31 of the current collector 30.

The flat portion may be provided on the beading portion 21 as described above. At least one welding bead W is formed between the beading portion 21 and the first contact portion 33a. The at least one welding bead W may form a straight line shaped welding pattern extending along the approximately circumferential direction on the beading portion 21. Alternatively, at least one welding bead W formed between the beading portion 21 and the first contact portion 33a may form an arc shaped welding pattern extending along the approximately circumferential direction on the beading portion 21. The welding bead W formed on the first contact portion 33a may extend along the circumferential direction. In another aspect, the welding pattern may have a shape of a line formed by connection of spot welding. In another aspect, a plurality of welding beads formed between the beading portion 21 and the first contact portion 33a may be formed within the same contact portion 33a.

Meanwhile, when the plurality of first housing coupling portions 33 is provided, the first contact portions 33a provided in the plurality of first housing coupling portions 33 may be connected to each other and integrally formed.

Referring to FIG. 1, the housing cover 40 covers the open portion formed on one side of the battery housing 20. The housing cover 40 may be fixed by the crimping portion 22 formed on top of the battery housing 20. In this case, for the improved fixing strength and improved sealability of the battery housing 20, the sealing gasket G1 may be interposed between the battery housing 20 and the housing cover 40 and between the current collector 30 and the housing cover 40. In this case, the first contact portion 33a and/or the second contact portion 34a may be interposed between the beading portion 21 of the battery housing 20 and the sealing gasket G1. The first contact portion 33a and/or the second contact portion 34a interposed between the beading portion 21 and the sealing gasket G1 may be fixed by the bend of the crimping portion 22 extending upward from the beading portion 21.

Meanwhile, in the present disclosure, the housing cover 40 is not a component serving as the passage of current. Accordingly, so long as the battery housing 20 and the housing cover 40 are firmly fixed through fixing by welding or the application of other component and the open portion of the battery housing 20 is air-tightly closed, the use of the sealing gasket G1 is not essential.

When the sealing gasket G1 is applied, the extended length of a region interposed between the current collector 30 and the housing cover 40 in the sealing gasket G1 may be shorter than the extended length of a region interposed

38

between the battery housing 20 and the housing cover 40. That is, the sealing gasket G1 surrounds the housing cover 40, and the radial length of the region that covers the lower surface of the housing cover 40 may be shorter than the radial length of the region that covers the upper surface of the housing cover 40. When the sealing gasket G1 is extended too long in the direction toward the center of the cylindrical battery 1 within the battery housing 20, the current collector 30 may be deformed due to the interference between the sealing gasket G1 and the current collector 30, and as a consequence, a force is applied to the welded portion between the current collector 30 and the battery housing 20 and/or the welded portion between the current collector 30 and the first uncoated region 11, causing structural defects such as cracks. Accordingly, it is possible to prevent the defects by controlling the extended length in the sealing gasket G1 as described above.

Referring to FIGS. 19 and 20, the sealing gasket G1 may have a larger thickness at the non-contact area with the first contact portion 33a than the contact area with the first contact portion 33a. The sealing gasket G1 may have a larger compression ratio at the contact area with the first contact portion 33a than the non-contact area with the first contact portion 33a. Since the sealing gasket G1 includes both the region having the first contact portion 33a and the region without the first contact portion 33a, the thickness may change for each region along the circumferential direction on the beading portion 21. Since the sealing gasket G1 has both the region having the first contact portion 33a and the region without the first contact portion 33a, the thickness may repeatedly increase and decrease in an alternating manner along the circumferential direction on the beading portion 21. Since the sealing gasket G1 has both the region having the first contact portion 33a and the region without the first contact portion 33a, the compression ratio may change for each region along the circumferential direction on the beading portion 21. It is because there is a difference in the extent of compression of the sealing gasket G1 at the region in which the first contact portion 33a is inserted and the region in which the first contact portion 33a is not inserted, so there is a difference in thickness. Meanwhile, alternatively, when the thickness differs for each location of the sealing gasket G1, the compression ratio at the contact area between the sealing gasket G1 and the first contact portion 33a may be substantially equal to the compression ratio at the non-contact area. In an example, the thickness of the sealing gasket G1 in non-contact with the first contact portion 33a may increase. In this case, it is possible to prevent a phenomenon in which the compression ratio of the sealing gasket G1 at the region without the first contact portion 33a is lower than that of the surrounding region, and avoid the sealing performance degradation in the corresponding region.

Meanwhile, the housing cover 40 may include a venting portion 41 to prevent the increase in internal pressure caused by gas produced in the battery housing 20. The venting portion 41 corresponds to an area that is formed in a part of the housing cover 40 and is more structurally vulnerable than the other areas to easily blow when the internal pressure is applied. The venting portion 41 may be, for example, an area having a smaller thickness than the other areas.

The terminal 50 is electrically connected to the second uncoated region 12 of the electrode assembly 10 through the battery housing 20 on the opposite side to the open portion of the battery housing 20. The terminal 50 may pass through the approximately center of the lower surface of the battery housing 20. For example, the terminal 50 may be coupled

with the current collector (the second current collector) 60 coupled to the second uncoated region 12 or the lead tab coupled to the second uncoated region 12 and may be electrically connected to the electrode assembly 10. Accordingly, the terminal 50 has the same polarity as the second electrode of the electrode assembly 10, and may act as a second electrode terminal T2. When the second uncoated region 12 is a positive electrode tab, the terminal 50 may serve as a positive electrode terminal.

When considering the polarity and function of the terminal 50, the terminal 50 needs to be kept insulated from the battery housing 20 having the contrary polarity. To this end, the insulation gasket G2 may be applied between the terminal 50 and the battery housing 20. Alternatively, insulation may be achieved by coating a part of the surface of the terminal 50 with an insulating material.

By the same reason, the second uncoated region 12 and/or the current collector (the second current collector) 60 need to be kept insulated from the battery housing 20. To this end, the insulator 70 may be interposed between the second uncoated region 12 and the battery housing 20 and/or between the current collector (the second current collector) 60 and the battery housing 20. When the insulator 70 is applied, the terminal 50 may pass through the insulator 70 for electrical connection with the second uncoated region 12.

Meanwhile, in the present disclosure, an outer surface 20a of the closed portion disposed opposite the open portion provided on top of the battery housing 20 may serve as a first electrode terminal T1. When the first uncoated region 11 is a negative electrode tab, the first electrode terminal T1 may be a negative electrode terminal. The cylindrical battery 1 according to the present disclosure has a structure in which the terminal 50 exposed on the lower surface disposed opposite the open portion of the battery housing 20 may be used as the second electrode terminal T2, and the remaining area except an area occupied by the terminal 50 in the lower surface of the battery housing 20 (including the exposed area of the insulation gasket G2 in case that the insulation gasket G2 is exposed to the outside of the terminal 50 on the outer surface 20a of the closed portion) may be used as the first electrode terminal T1. Accordingly, the cylindrical battery 1 according to the present disclosure may connect both the positive electrode/the negative electrode in a direction when electrically connecting the plurality of cylindrical batteries 1, thereby simplifying the electrical connection structure. In addition, since the cylindrical battery 1 according to the present disclosure has a structure in which most of the lower surface opposite the open portion of the battery housing 20 can be used as an electrode terminal, it is possible to have a sufficient area for welding the component for electrical connection.

Referring to FIG. 14 together with FIG. 1, in the cylindrical battery 1 of the present disclosure, the current collector (the first current collector) 30 is configured to be coupled with the first uncoated region 11 and the inner surface of the battery housing 20. The current collector 30 may include a first portion in contact with the inner surface of the battery housing 20, and a second portion coupled with the first uncoated region 11. In this case, when the central region of the first portion (referring to the approximately center of the first portion along the circumferential direction of the electrode assembly 10) is projected onto the plane where the second portion exists, the central region of the first portion and the second portion may be spaced apart from each other along the circumferential direction of the electrode assembly 10.

The sealing gasket G1 may be interposed between the open portion of the battery housing 20 and the current collector 30, and in this case, the first portion may be interposed between the inner surface of the battery housing 20 and the sealing gasket G1. Preferably, the first portion may be interposed between the beading portion 21 of the battery housing 20 and the sealing gasket G1.

Meanwhile, the first portion and the second portion may be disposed on different planes in the winding axial direction of the electrode assembly 10. That is, the first portion and the second portion may be spaced apart from each other along the heightwise direction (parallel to the Z axis) of the cylindrical battery 1.

Referring to FIG. 25 together with FIG. 1, the current collector (the second current collector) 60 is coupled to the bottom of the electrode assembly 10. The current collector 60 is made of a metal having conductive properties, and is electrically coupled to the second uncoated region 12. The current collector 60 may be coupled onto the coupling surface (the bent surface) 102 (see FIG. 15) formed by bending the end of the second uncoated region 12 in the direction parallel to the current collector 60. The bending direction of the second uncoated region 12 may be the radial direction, and for example, the direction toward the core of the electrode assembly 10. When the second uncoated region 12 has the bent shape as described above, the space occupied by the second uncoated region 12 in the vertical direction reduces, thereby improving the energy density. In addition, when the current collector 60 is coupled onto the coupling surface 102 formed by the bend of the second uncoated region 12, the increased coupling area may lead to the improved coupling strength and the reduced contact resistance. This is the same case with the first uncoated region 11 described previously.

The current collector (the second current collector) 60 includes a tab coupling portion (a second tab coupling portion) 62 and a terminal coupling portion 63. The current collector 60 may further include an edge portion 61. The edge portion 61 is positioned below the electrode assembly 10 and has an approximately rim shape having an empty space S inside. Although the drawings of the present disclosure show the edge portion 61 having an approximately circular rim shape, the present disclosure is not limited thereto. The edge portion 61 may have an approximately square rim shape, hexagonal rim shape, octagonal rim shape, or any other rim shape as opposed to those shown in the drawings.

The tab coupling portion 62 may extend inward from the edge portion 61 and is coupled with the second uncoated region 12. As described above, the coupling between the current collector 60 and the second uncoated region 12 may have at least approximately 50% overlap with the uniform stack number zone where the number of overlapping layers of the segments is approximately at the maximum and is approximately uniformly maintained. That is, the tab coupling portion 62 of the current collector 60 may be coupled with the second uncoated region 12 at least approximately 50% overlap with the uniform stack number zone.

The terminal coupling portion 63 is spaced apart from the tab coupling portion 62. The terminal coupling portion 63 may be disposed inside the edge portion 61. The terminal coupling portion 63 may be coupled with the terminal 50 as described below by welding. To ensure the weld area for coupling with the flat portion formed on the bottom surface of the terminal 50, the terminal coupling portion 63 may have the diameter that is substantially equal or larger than the diameter of the flat portion formed on the bottom surface

41

of the terminal 50. The terminal coupling portion 63 may be disposed, for example, at the approximately center of the internal space surrounded by the edge portion 61.

The terminal coupling portion 63 may be positioned at the location corresponding to the winding hole H1 formed in the core of the electrode assembly 10. The terminal coupling portion 63 may be configured to cover the winding hole H1 of the electrode assembly 10 to prevent the exposure of the winding hole H1 of the electrode assembly 10. When the winding hole H1 of the electrode assembly 10 is covered as described above, it is possible to prevent the separator disposed in the hole from being damaged due to the flow rate of the electrolyte solution passing through the hole and the consequential exposure of the electrode. To this end, the terminal coupling portion 63 may have a larger diameter or width than the winding hole H1 as described above. However, the present disclosure does not exclude the case where the diameter of the terminal coupling portion 63 is smaller than the diameter of the flat portion formed on the bottom surface of the terminal 50.

The tab coupling portion 62 and the terminal coupling portion 63 are not directly connected to each other, and they are spaced apart from each other and electrically connected by the edge portion 61. Since the current collector 60 of the present disclosure has a structure in which the tab coupling portion 62 and the terminal coupling portion 63 are not directly connected to each other and they are indirectly connected through the edge portion 61, it is possible to disperse impacts applied to the coupled portion between the tab coupling portion 62 and the second uncoated region 12 and the coupled portion between the terminal coupling portion 63 and the terminal 50 when impacts and/or vibrations are applied to the cylindrical battery 1. Accordingly, the current collector 60 of the present disclosure may minimize or prevent damage of the welded portion by external impacts. More specifically, the current collector 60 of the present disclosure may have a structure in which stress concentrates on the connected portion of the edge portion 61 and the terminal coupling portion 63 when external impacts are transmitted to the inside of the battery 1 through the terminal 50. However, the connected portion is not an area in which the welded portion for coupling between components is formed. Accordingly, in the present disclosure, it is possible to effectively prevent defects of products caused by the damage of the welded portion due to external impacts.

The outer diameter of the current collector (the second current collector) 60 may be longer than the outer diameter of the current collector (the first current collector) 30. The outer diameter of the second current collector 60 is twice greater than the distance from the center of the second current collector 60 to the end of the second tab coupling portion 62 (the distance to the edge portion 61 in case that the second current collector 60 includes the edge portion 61). The outer diameter of the first current collector 30 is twice greater than the distance from the center of the first current collector 30 to the outermost side of the first tab coupling portion 32. The second current collector 60 may have the outer diameter close to the inner diameter of the battery housing 20. The second current collector 60 may have the outer diameter ranging from approximately 33% to 98.5% compared to the inner diameter of the battery housing 20. The minimum value of the outer diameter of the second current collector 60 is a numerical value for preventing the resistance from increasing too much. The maximum value of the outer diameter of the second current collector 60 takes into account, for example, the tolerance of the outer diameter of the second current collector 60 that may occur in the

42

manufacture of the current collector 60, the assembly tolerance that occurs when coupling the electrode assembly 10 and the second current collector 60, the tolerance of the inner diameter of the battery housing 20 that may occur in the manufacture of the battery housing 20 and the positional tolerance that may occur when inserting the assembly of the electrode assembly 10 and the second current collector 60 into the battery housing 20. In the present disclosure, when the insulator 70 is applied and the insulator 70 covers up to the top of the outer circumferential surface of the electrode assembly 10, it is necessary to further consider a space for insertion of the insulator 70, and thus a ratio of the outer diameter of the second current collector 60 to the inner diameter of the battery housing 20 is smaller than the maximum value. In view of the tolerance, the outer diameter of the second current collector 60 is limited at a slightly smaller level than the inner diameter of the battery housing 20, while the diameter of the first current collector 30 may be further limited to avoid interference that may occur in the sizing process. To avoid interference, the outer diameter of the first current collector 30 may be approximately equal to or shorter than the inner diameter in the area in which the beading portion 21 of the battery housing 20 is formed.

Meanwhile, when the outer diameter of the first current collector 30 and/or the second current collector 60 is T, the outer diameter of the electrode assembly 10 is JR, and the height of the segment of the first uncoated region 11 and/or the outermost segment of the second uncoated region 12 is F, the following relation equation may be satisfied. Here, the outer diameter of the first current collector 30 is twice larger than the distance from the center of the first current collector 30 to the end of the first tab coupling portion 32, and the outer diameter of the second current collector 60 is twice larger than the distance from the center of the second current collector 60 to the end of the second tab coupling portion 62 (or the outermost side of the edge portion 61).

$$JR - 2 * F \leq T < JR$$

The outer diameter T of the first current collector 30 and/or the second current collector 60 may be equal to or larger than the length obtained by subtracting twice the height F of the segment 11a of the first uncoated region 11 and/or the outermost segment of the second uncoated region 12 from the outer diameter JR of the electrode assembly 10. When this relation equation is satisfied, the first tab coupling portion 32 and/or the second tab coupling portion 62 covers the end of the outermost segment 11a. That is, the first current collector 30 and/or the second current collector 60 may have the outer diameter enough to cover the end of the segment at the last winding turn of the first electrode. In this case, all the segments 11a that form the bent surface 102 where the first tab coupling portion 32 and/or the second tab coupling portion 62 (or the edge portion 61) is coupled may be welded in a state that they are uniformly pressed by the current collector 30, and after the welding, the closely stacked state of the segments 11a may be maintained well. The closely stacked state refers to no gap, in substance, between the segments as shown in FIG. 15. The closely stacked state contributes to the reduction in the resistance of the cylindrical battery 1 below the suitable level (for example, 4 mohm, but greater than 0 mohm, such as 0.01 mohm) for rapid charging.

In another aspect, the outer diameter T of the first current collector 30 and/or the second current collector 60 may be smaller than the outer diameter JR of the electrode assembly 10. When the outer diameter T of the first current collector 30 and/or the second current collector 60 is larger than the

43

outer diameter JR of the electrode assembly 10, a dead space in the battery housing 20 increases, which may adversely affect the energy density of the cylindrical battery 1. Accordingly, the outer diameter T of the first current collector 30 and/or the second current collector 60 is smaller than the outer diameter JR of the electrode assembly 10.

Meanwhile, the extended length L2 of the welded portion along the radial direction of the electrode assembly 10 in coupling the second tab coupling portion 62 of the second current collector 60 and the second uncoated region 12 may be longer than the extended length L1 of the welded portion along the radial direction of the electrode assembly 10 in coupling the first tab coupling portion 32 of the first current collector 30 and the first uncoated region 11. For example, in case that the second current collector 60 is an aluminum positive electrode current collector and the first current collector 30 is a copper negative electrode current collector, when the length L2 is longer than the length L1, the welded portion of the positive electrode current collector having lower electrical conductivity is larger in size, leading to the balanced flow of current in each of the positive electrode current collector and the negative electrode current collector. Here, the extended length of the welded portion used for coupling between the current collectors 30, 60 and the uncoated regions 11, 12 refers to the extended length of the welding bead formed by welding.

On the basis of the core of the electrode assembly 10, the distance to the start point of the welded portion used for coupling between the first tab coupling portion 32 of the first current collector 30 and the first uncoated region 11 may be substantially equal to the distance to the start point of the welded portion used for coupling between the second tab coupling portion 62 of the second current collector 60 and the second uncoated region 12. Here, substantially equal may refer to two equal distances or two distances having the deviation of, for example, approximately 5% or less.

The current collector 60 may further include a bridge portion 64 which extends inward from the edge portion 61 and is connected to the terminal coupling portion 63. The bridge portion 64 may include a taper portion 64a having a continuous and/or stepwise reduction in width along a direction from the inner surface of the edge portion 61 to the terminal coupling portion 63. The taper portion 64a may have a continuous and/or stepwise increase in width along a direction from the connected portion between the terminal coupling portion 63 and the edge portion 61 toward the edge portion 61. When the taper portion 64a is provided, it is possible to increase the rigidity of the component at the connected portion between the bridge portion 64 and the edge portion 61. When the taper portion 64a is provided, it is possible to transfer the current collector 60 and/or the assembly of the current collector 60 and the electrode assembly 10 easily and safely, for example, by a transport device and/or an operator who holds the taper portion 64a in the process of manufacturing the cylindrical battery 1. That is, when the taper portion 64a is provided, it is possible to prevent defects of products that may occur when holding a component to be welded with other component, such as the tab coupling portion 62 or the terminal coupling portion 63.

A plurality of tab coupling portions 62 and/or a plurality of bridge portions 64 may be provided. The number of tab coupling portions 62 and/or bridge portions 64 may be determined, taking into account the resistance level required for the cylindrical battery 1 and the open ratio required for the current collector 60.

Referring to FIGS. 1 and 26, the bridge portion 64 may include a current interruption portion N configured to par-

44

tially reduce the cross-sectional area of the bridge portion 64. The reduction in cross-sectional area of the bridge portion 64 at the area in which the current interruption portion N is formed if formed may be accomplished, for example, through a partial reduction in width and/or thickness. When the current interruption portion N is provided, in the event of the increasing electrical resistance at the area in which the current interruption portion N is formed, causing an overcurrent, the current interruption portion N blows, thereby achieving fast current interruption. A plurality of current interruption portions N may be provided along the lengthwise direction of the bridge portion 64. A plurality of current interruption portions N may be provided along the lengthwise direction of the bridge portion 64. When the plurality of bridge portions 64 is provided, the current interruption portion may be provided in at least one of the plurality of bridge portions 64. Although the drawings of the present disclosure show the current interruption portion N in the shape of a notch, the present disclosure is not limited thereto, and the current interruption portion N may be formed, for example, in the shape of a groove and/or a through-hole. A tape surrounding the bridge portion 64 may be applied to the area in which the current interruption portion N is formed. When the tape is applied, it is possible to prevent impurities, such as molten metal, produced when the current interruption portion N blows from splattering to other components, and avoid a short circuit. In addition, heat generated from the current interruption portion N is not transferred to the outside, thereby allowing the current interruption portion N to blow faster.

Meanwhile, to prevent impurities produced at the time of blowing from entering the electrode assembly 10, the current interruption portion N is preferably provided at the area corresponding to the uniform stack number zone of the second uncoated region 12 described above. In this area, the number of overlapping layers of the segments of the second uncoated region 12 may be maintained at the maximum, and the overlapping segments may serve as a mask. The current interruption portion N may be formed, for example, approximately 40% to 90% away with respect to the radius of the electrode assembly 10 along the radial direction from the core of the electrode assembly 10. Preferably, the current interruption portion N may be disposed at the approximately center between the core and the outermost side of the electrode assembly 10.

The structure of the electrode assembly 10 will be described in more detail with reference to FIGS. 27 to 30. Among the first and second electrodes described above, the following description is based on the first electrode as an example, but the structure of the first electrode may be equally applied to the second electrode.

Referring to FIGS. 27 to 30, the first electrode 110 includes the first electrode current collector 111 of a sheet shape made from a conductive foil, the first active material layer 112 formed on at least one surface of the first electrode current collector 111, and the first uncoated region 11 not coated with an active material at the end of the long side of the first electrode current collector 111.

Preferably, the first uncoated region 11 may include the plurality of notched segments 11a. The plurality of segments 11a forms a plurality of groups, and the height (the length in the Z-axis direction) and/or the width (the length in the X-axis direction) and/or the pitch of the segments 11a in each group may be substantially equal to each other. The number of segments 11a in each group may be smaller or larger than those shown in the drawings. The segment 11a has a geometric shape of a combination of at least one

straight line and/or at least one curve. Preferably, the segment **11a** may have a trapezoidal shape, and modification may be made to the shape, for example, a rectangular, parallelogram, semicircular or a semi-elliptical shape.

Preferably, the height of the segment **11a** may gradually increase along a direction parallel to the winding direction of the electrode assembly **10**, for example, from the core toward the outer circumference. In addition, a core-side uncoated region **11-1** adjacent to the core of the electrode assembly **10** may not include the segment **11a**, and the height of the core-side uncoated region **11-1** may be lower than another uncoated region. In addition, an outer circumferential uncoated region **11-2** adjacent to the outer circumference of the electrode assembly **10** may not include the segment **11a**, and the height of the outer circumferential uncoated region **11-2** may be lower than another uncoated region.

Optionally, the first electrode **110** may include an insulation coating layer **E** that covers the boundary between the active material layer **112** and the first uncoated region **11**. The insulation coating layer **E** includes a polymer resin having insulation properties, and may optionally further include an inorganic filler. The insulation coating layer **E** may function to prevent the end of the active material layer **112** from contacting the active material layer of the opposite polarity on the opposite side through the separator, and structurally support the bending of the segment **11a**. To this end, when the first electrode **110** is wound to form the electrode assembly **10**, at least part of the insulation coating layer **E** is preferably exposed from the separator to the outside.

Referring to FIGS. **27** and **28**, the electrode assembly **10** may be manufactured by a winding method. For convenience of description, the protruding structure of the uncoated regions **11**, **12** extending out of the separator are illustrated in detail, and the illustration of the winding structure of the first electrode, the second electrode and the separator is omitted. The first uncoated region **11** protruding upward extends from the first electrode, and the second uncoated region **12** protruding downward extends from the second electrode.

The height change pattern of the uncoated regions **11**, **12** is schematically shown. That is, the height of the uncoated regions **11**, **12** may irregularly change depending on where the cross section is taken. For example, when the side of the trapezoidal segment **11a** is cut, the height of the uncoated region in cross section is lower than the height of the segment **11a**. Therefore, it should be understood that the height of the uncoated regions **11**, **12** shown in the cross-sectional view of the electrode assembly **10** correspond to an average height of the uncoated regions included in each winding turn.

Referring to FIGS. **27** to **30**, the uncoated regions **11**, **12** may be bent along the radial direction of the electrode assembly **10**, for example, from the outer circumference toward the core. In the uncoated regions **11**, **12**, an area in which bending occurs is indicated by the dotted line box in FIG. **28**. When the uncoated regions **11**, **12** are bent, the segments adjacent to each other in the radial direction overlap in multiple layers to form the bend surface **102** at the upper part and the lower part of the electrode assembly **10**. In this instance, the core-side uncoated region **11-1** (FIG. **27**) is not bent due to its small height, and the height **h** of the segment **11a** bent at the innermost side is approximately equal to or smaller than the sum of the radial length **R** of the winding area formed by the core-side uncoated region **11-1** having no segment structure and 10% of the winding hole

diameter. Thus, the hole formed at the core **C** of the electrode assembly **10** is not closed. As the hole is not closed, it is possible to smoothly perform the electrolyte injection process, thereby improving the electrolyte injection efficiency. In addition, it is possible to easily weld the terminal **50** and the second current collector **60** by inserting the welding tool through the hole (see FIG. **13**).

Meanwhile, referring to FIG. **31**, the plurality of cylindrical batteries **1** may be connected in series and in parallel using a busbar **150** on the cylindrical batteries **1**. The number of cylindrical battery secondaries **1** may be smaller or larger, considering the capacity of the battery pack.

In each cylindrical battery **1**, for example, the terminal **50** may have the positive polarity, and the outer surface **20a** of the closed portion of the battery housing **20** may have the negative polarity, and vice versa. The terminal **50** of the cylindrical battery **1** and the outer surface **20a** of the closed portion disposed on the opposite side to the open portion of the battery housing **20** may be positioned upward (turned upside down, inversely to FIG. **1**).

Preferably, the plurality of cylindrical batteries **1** may be arranged in a plurality of columns and rows. The column is a vertical direction with respect to the ground, and the row is a horizontal direction with respect to the ground. In addition, to maximize the space efficiency, the cylindrical batteries **1** may be arranged in a closest packing structure. The closest packing structure is formed by connecting the centers of the terminal exposure portions of the terminal **50** exposed to the outside of the battery housing **20** into a shape of a right triangle. Preferably, the busbar **150** may be positioned on the plurality of cylindrical batteries **1**, more preferably between adjacent columns. Alternatively, the busbar **150** may be positioned between adjacent rows.

Preferably, the busbar **150** connects in parallel the cylindrical batteries **1** arranged in the same column, and connects in series the cylindrical batteries **1** arranged in two adjacent columns.

Preferably, the busbar **150** may include a body portion **151**, a plurality of first busbar terminals **152** and a plurality of second busbar terminals **153** for serial and parallel connection.

The body portion **151** may extend between the terminals **50** of the adjacent cylindrical batteries **1**, and preferably between the columns of the cylindrical batteries **1**. Alternatively, the body portion **151** may extend along the columns of the cylindrical batteries **1** and may be regularly bent in a zigzag pattern.

The plurality of first busbar terminals **152** may protrude and extend from one side of the body portion **151** toward the terminal **50** of each cylindrical battery **1** and may be electrically coupled to the terminal **50**. The electrical coupling between the first busbar terminal **152** and the terminal **50** may be made by laser welding and ultrasonic welding. In addition, the plurality of second busbar terminals **153** may be electrically coupled to the outer surface **20a** of each cylindrical battery **1** from the other side of the body portion **151**. The electrical coupling between the second busbar terminal **153** and the outer surface **20a** may be made by laser welding and ultrasonic welding.

Preferably, the body portion **151**, the plurality of first busbar terminals **152** and the plurality of second busbar terminals **153** may be made of a single conductive metal plate. The metal plate may be, for example, an aluminum plate or a copper plate, but the present disclosure is not limited thereto. In a variation, the body portion **151**, the plurality of first busbar terminals **152** and the plurality of

47

second busbar terminals **153** may be separately manufactured by the unit of piece and then coupled to each other, for example, through welding.

The cylindrical battery **1** according to the present disclosure includes the terminal **50** having the positive polarity and the outer surface **20a** of the closed portion of the battery housing **20** having the negative polarity, disposed in the same direction, and thus it is possible to easily establish the electrical connection of the cylindrical batteries **1** using the busbar **150**.

In addition, the terminal **50** of the cylindrical battery **1** and the outer surface **20a** of the closed portion of the battery housing **20** have a large area, and thus it is possible to ensure sufficient coupling area of the busbar **150**, thereby sufficiently reducing the resistance of the battery pack including the cylindrical battery **1**.

Preferably, the cylindrical battery may be, for example, a cylindrical battery with the form factor ratio (defined as the product of dividing the diameter of the cylindrical battery by height, or a height (H)-to-diameter (Φ) ratio) of more than about 0.4.

Here, the form factor refers to a value indicating the diameter and height of the cylindrical battery. The cylindrical battery according to an embodiment of the present disclosure may include, for example, 46110 battery, 4875 battery, 48110 battery, 4880 battery and 4680 battery. In the numbers indicating the form factor, the first two numbers indicate the diameter of the battery, and the remaining numbers indicate the height of the battery.

The cylindrical battery according to an embodiment of the present disclosure may be a cylindrical battery having an approximately cylindrical shape, with the diameter of approximately 46 mm, the height of approximately 110 mm and the form factor ratio of approximately 0.418.

The cylindrical battery according to another embodiment may be a cylindrical battery having a substantially cylindrical shape, with the diameter of approximately 48 mm, the height of approximately 75 mm and the form factor ratio of approximately 0.640.

The cylindrical battery according to still another embodiment may be a cylindrical battery having an approximately cylindrical shape, with the diameter of approximately 48 mm, the height of approximately 110 mm and the form factor ratio of approximately 0.418.

The cylindrical battery according to further another embodiment may be a cylindrical battery having an approximately cylindrical shape, with the diameter of approximately 48 mm, the height of approximately 80 mm and the form factor ratio of approximately 0.600.

The cylindrical battery according to yet another embodiment may be a cylindrical battery having an approximately cylindrical shape, with the diameter of approximately 46 mm, the height of approximately 80 mm and the form factor ratio of approximately 0.575.

Conventionally, batteries having the form factor ratio of about 0.4 or less have been used. That is, conventionally, for example, 1865 battery and 2170 battery have been used. The 1865 battery has the diameter of approximately 18 mm, the height of approximately 65 mm and the form factor ratio of approximately 0.277. The 2170 battery has the diameter of approximately 21 mm, the height of approximately 70 mm and the form factor ratio of approximately 0.300.

Referring to FIG. 32, the battery pack **3** according to an embodiment of the present disclosure includes a battery assembly including the plurality of cylindrical batteries **1** according to an embodiment of the present disclosure as described above, electrically connected to each other, and a

48

pack housing **2** which accommodates the same. The illustration of the component for electrical connection such as the busbar, a cooling unit and a power terminal is omitted from the drawings of the present disclosure for convenience of illustration. The electrical connection structure of the plurality of batteries **1** for manufacturing the battery pack **3** is described above with reference to FIG. 30 for illustrative purposes.

Referring to FIG. 33, a vehicle **5** according to an embodiment of the present disclosure may be, for example, an electric vehicle, a hybrid electric vehicle or a plug-in vehicle, and includes the battery pack **3** according to an embodiment of the present disclosure. The vehicle **5** includes a four-wheeled vehicle and a two-wheeled vehicle. The vehicle **5** works using the power supplied from the battery pack **3** according to an embodiment of the present disclosure.

According to the present disclosure, it is possible to significantly reduce the resistance when electrically connecting the electrode assembly to the battery housing. In another aspect, according to the present disclosure, it is possible to improve the coupling strength of the coupled portion between the current collector and the battery housing. In another aspect, according to the present disclosure, it is possible to improve the energy density of the cylindrical battery. In another aspect, according to the present disclosure, it is possible to increase the convenience in the welding process for electrical connection between the battery housing and the current collector in the manufacture of the cylindrical battery, thereby improving the productivity. In another aspect, according to the present disclosure, it is possible to significantly reduce the likelihood that damage may occur in the welded portion between the current collector and the electrode assembly and/or the welded portion between the current collector and the battery housing when vibrations and impacts are applied while the battery is in use. In addition, according to the present disclosure, it is possible to increase the convenience in the welding process for the electrical connection between the battery housing and the current collector in the manufacture of the cylindrical battery, thereby improving the productivity.

While the present disclosure has been hereinabove described with regard to a limited number of embodiments and drawings, the present disclosure is not limited thereto and it is obvious to those skilled in the art that a variety of modifications and changes may be made thereto within the technical aspects of the present disclosure and the appended claims and their equivalent scope.

What is claimed is:

1. A battery, comprising:

an electrode assembly including a first electrode, a second electrode, and a separator between the first electrode and the second electrode,

wherein the first electrode, the second electrode, and the separator are wound about an axis to define a core and an outer circumferential surface of the electrode assembly,

wherein the first electrode has a pair of first sides, a pair of second sides extending between the pair of first sides, a first portion including an active material extending between the pair of first sides, and a second portion extending between the pair of first sides and exposed beyond the separator along a winding direction, and

wherein at least part of the second portion includes an electrode tab;

49

- a battery housing having a first opening at a first end and a second end with a second opening opposite the first end, the battery housing accommodating the electrode assembly through the first opening at the first end;
- a first current collector including a support portion positioned on the electrode assembly, a first tab coupling portion extending from a perimeter of the support portion and coupled with the second portion of the first electrode, and a first housing coupling portion extending from the perimeter of the support portion and electrically coupled onto an inner surface of the battery housing, the first tab coupling portion being separated from the first housing coupling portion so as to not contact the first housing coupling portion, the first tab coupling portion ending in a free end spaced from the support portion; and
- a housing cover which seals the first opening of the battery housing,
- wherein the battery housing includes a beading portion which is formed at an end portion adjacent to the first opening and is press-fit inward, and
- wherein the first housing coupling portion includes:
- a first contact portion directly coupled onto the beading portion of the battery housing; and
- a first connecting portion connecting the support portion to the first contact portion.
2. The battery according to claim 1, wherein the first tab coupling portion and the first housing coupling portion are not directly connected to each other, and are indirectly connected by the support portion.
3. The battery according to claim 1, wherein the first tab coupling portion has at least one injection hole.
4. The battery according to claim 1, wherein the first connecting portion has an upwardly convex structure with respect to an imaginary straight line connecting two ends of the first connecting portion in a longitudinal direction.
5. The battery according to claim 1, wherein the first connecting portion is more upwardly raised than the beading portion.
6. The battery according to claim 1, wherein the beading portion includes:
- an upper beading portion at an upper part with respect to an innermost point; and
- a lower beading portion at a lower part with respect to the innermost point.
7. The battery according to claim 6, wherein the upper beading portion and the lower beading portion are asymmetrical with respect to an imaginary reference plane passing through the innermost point of the beading portion in parallel to a bottom surface of the battery housing.
8. The battery according to claim 6, wherein the first tab coupling portion of the first current collector is disposed at a lower position than the lower beading portion.
9. The battery according to claim 6, wherein at least one of the upper beading portion or the lower beading portion is inclined at a predetermined angle to a lower surface of the battery housing.
10. The battery according to claim 9, wherein the first contact portion is seated on an inclined upper surface of the beading portion.
11. The battery according to claim 6, wherein at least one of the upper beading portion or the lower beading portion, at least in part, is parallel to a lower surface of the battery housing.
12. The battery according to claim 11, wherein the first contact portion is seated on a flat upper surface of the beading portion.

50

13. The battery according to claim 6, wherein the first contact portion is coupled to an upper surface of the beading portion by welding.

14. The battery according to claim 1, wherein at least a part of the first contact portion has a shape of an arc which extends in a circumferential direction along the beading portion of the battery housing.

15. The battery according to claim 1, wherein the first contact portion has a shape of an arc which extends from an intersection between the first connecting portion and the first contact portion in opposite directions along a circumferential direction on the beading portion.

16. The battery according to claim 1, wherein a press-fit depth of the beading portion PD satisfies a formula as set forth below:

$$PD \geq R1_{min} + R2_{min} + W_{bead,min}$$

wherein $R1_{min}$ is a minimum value of a radius of curvature of the beading portion, $W_{bead,min}$ is a minimum value of a welding bead width, and $R2_{min}$ is a minimum value of a radius of curvature at a boundary area between the beading portion and the inner surface of the battery housing.

17. The battery according to claim 1, wherein a press-fit depth of the beading portion is 0.2 mm to 10 mm.

18. The battery according to claim 1, wherein a press-fit depth of the beading portion PD and a maximum press-fit depth PD_{max} satisfy a formula as set forth below:

$$\frac{(R1_{min} + W_{bead,min})/PD_{max} \leq OV/PD \leq (PD_{max} - R2_{min})/PD_{max}}$$

wherein OV is an overlap length, the overlap length being a shortest distance from an end of the first contact portion to a vertical line passing through an innermost point of the beading portion, $R1_{min}$ is a minimum radius of curvature of the beading portion, $W_{bead,min}$ is a minimum welding bead width, and $R2_{min}$ is a minimum radius of curvature at a boundary area between the beading portion and the inner surface of the battery housing.

19. The battery according to claim 13, wherein a weld area between the first contact portion and the beading portion is narrower than a flat upper surface of the beading portion.

20. The battery according to claim 1, wherein a press-fit depth of the beading portion PD and a maximum value of the press-fit depth PD_{max} satisfy a formula as set forth below:

$$\frac{(OV_{min} - 0.5 * W_{bead,min})/PD_{max} \leq W/PD \leq (OV_{max} - 0.5 * W_{bead,min})/PD_{max}}$$

wherein W is a distance from an innermost point of the beading portion to the center point of the welding bead disposed on an outermost side in a radial direction, OV is an overlap length, the overlap length being a shortest distance from an end of the first contact portion to a vertical line passing through the innermost point of the beading portion, OV_{min} is a minimum overlap length, OV_{max} is a maximum overlap length, and $W_{bead,min}$ is a minimum welding bead width.

21. The battery according to claim 20, wherein a minimum value of the distance from the innermost point of the beading portion to the center point of the welding bead disposed on the outermost side in the radial direction W1 and the distance from the innermost point of the beading portion to the center point of the welding bead disposed on the outermost side in the radial direction W satisfy a formula as set forth below:

51

$$W1=R1+0.5*W_{bead,min}$$

$$W=OV-0.5*W_{bead,min}$$
 are satisfied,

wherein R1 is a radius of curvature of the beading portion.

22. The battery according to claim 20, wherein the beading portion, at least in part, has a flat region parallel to a lower surface of the battery housing, and

wherein a length of the flat region of the beading portion in contact with the first current collector is $OV-R1$ where R1 is a radius of curvature of the beading portion.

23. The battery according to claim 22, wherein a width in a radial direction of a welding pattern formed between the beading portion and the first contact portion is $W_{bead,min}$ or more and $OV-R1$ or less.

24. The battery according to claim 23, wherein a ratio of the width in a radial direction of the welding pattern to the length of the flat region is in a range of 10 to 40%.

25. The battery according to claim 1, wherein the first connecting portion includes at least one first bending portion which changes in extension direction at least once.

26. The battery according to claim 25, wherein the at least one first bending portion is bent at an obtuse angle not to overlap with itself, when viewed along a longitudinal direction of the battery housing.

27. The battery according to claim 25, wherein a boundary between the first contact portion and the first connecting portion is bent at an obtuse angle.

28. The battery according to claim 26, wherein the first connecting portion decreases in slope stepwise or gradually toward the beading portion.

29. The battery according to claim 1, wherein an angle between the first tab coupling portion and the first connecting portion is between 0° and 90° .

30. The battery according to claim 1, wherein the first connecting portion supports the housing cover.

31. The battery according to claim 1, wherein the first tab coupling portion and the first contact portion are disposed at a substantially equal height.

32. The battery according to claim 1, wherein the first contact portion has a flat surface which is coupled with an upper surface of the beading portion toward the first opening.

33. The battery according to claim 1, wherein the first current collector has a hole formed at a center.

34. The battery according to claim 33, wherein the hole is provided at a location corresponding to a winding hole formed at a center of the electrode assembly.

35. The battery according to claim 34, wherein a diameter of the hole is equal to or larger than a diameter of the winding hole provided in the core of the electrode assembly.

36. The battery according to claim 1, wherein the first current collector further includes:

a plurality of the first tab coupling portions; and
a second housing coupling portion extending from an end of one of the plurality of the first tab coupling portions and coupled onto the inner surface of the battery housing.

37. The battery according to claim 36, wherein the second housing coupling portion includes:

a second contact portion coupled onto the inner surface of the battery housing; and
a second connecting portion connecting the end of one of the plurality of the first tab coupling portions to the second contact portion.

52

38. The battery according to claim 37, wherein at least part of the second contact portion extends along an inner circumferential surface of the battery housing.

39. The battery according to claim 37, wherein the second connecting portion includes at least one second bending portion which changes in extension direction at least once.

40. The battery according to claim 1, wherein a distance from a center of the first current collector to an end of the first tab coupling portion is substantially equal to or shorter than a distance from a center of a winding hole of the electrode assembly to an innermost side of the beading portion.

41. The battery according to claim 1, wherein an upper surface of the beading portion has a flat region.

42. The battery according to claim 6, wherein at least one welding bead is formed between the beading portion and the first contact portion, and

wherein the at least one welding bead forms a straight line welding pattern extending approximately along a circumferential direction.

43. The battery according to claim 6, wherein at least one welding bead is formed between the beading portion and the first contact portion, and

the at least one welding bead forms an arc welding pattern extending along a circumferential direction.

44. The battery according to claim 6, wherein a welding bead is formed between the beading portion and the first contact portion, the welding bead forms a welding pattern, and

the welding pattern has a shape of a line formed by connecting spot weldings.

45. The battery according to claim 1, wherein a plurality of welding beads formed between the beading portion and the first contact portion is formed within a same first contact portion.

46. The battery according to claim 1, wherein the second electrode has a pair of third sides, a pair of fourth sides extending between the pair of third sides, a third portion including an active material extending between the pair of third sides, and a fourth portion extending between the pair of third sides, and the fourth portion is exposed beyond the separator along the winding direction, and at least part of the fourth portion includes a second electrode tab, and

wherein the battery further comprises a terminal electrically connected to the fourth portion through the second opening at the second end of the battery housing.

47. The battery according to claim 46, further comprising: a second current collector disposed between the electrode assembly and the terminal,

wherein the second current collector includes:
a second tab coupling portion coupled with the fourth portion; and
a terminal coupling portion coupled with the terminal.

48. The battery according to claim 47, wherein the terminal coupling portion covers a winding hole of the electrode assembly.

49. The battery according to claim 47, wherein an outer diameter of the second current collector is larger than an outer diameter of the first current collector.

50. The battery according to claim 47, wherein the fourth portion is bent providing a coupling surface, and the second tab coupling portion is coupled onto the coupling surface.

51. The battery according to claim 1, wherein the battery housing includes a crimping portion which is formed above the beading portion, and is extended and bent around a circumferential edge of the housing cover.

53

52. The battery according to claim 51, wherein the first housing coupling portion is compressed and fixed by the crimping portion.

53. The battery according to claim 51, wherein the battery further comprises:

a sealing gasket positioned in the crimping portion and interposed between the battery housing and the housing cover.

54. The battery according to claim 53, wherein the sealing gasket has a larger thickness at an area that does not contact the first contact portion than at a contact area with the first contact portion.

55. The battery according to claim 53, wherein the sealing gasket has a larger compression ratio at a contact area with the first contact portion than at an area that does not contact the first contact portion.

56. The battery according to claim 53, wherein the sealing gasket has a compression ratio at a contact area with the first contact portion which is substantially equal to a compression ratio at an area that does not contact the first contact portion.

57. The battery according to claim 53, wherein the sealing gasket changes in thickness area by area along a circumferential direction on the beading portion.

58. The battery according to claim 1, wherein the first housing coupling portion is elastically biased on the beading portion.

59. The battery according to claim 27, wherein a connected portion between the first contact portion and the first connecting portion has a complementary shape corresponding to an inner surface of the beading portion.

60. The battery according to claim 1, wherein at least part of the second portion includes a plurality of segments split along the winding direction of the electrode assembly, and the plurality of segments are bent along a radial direction of the electrode assembly forming a bent surface.

61. The battery according to claim 60, wherein the plurality of segments overlap in multiple layers forming the bent surface, and

wherein the bent surface includes an increasing stack number zone in which a number of overlapping layers of the segments sequentially increases to a maximum value from an outer circumference of the electrode assembly to the core and a uniform stack number zone from a radial position at which the number of overlapping layers is at a maximum to a radial position at which an innermost segment exists.

62. The battery according to claim 61, wherein the first tab coupling portion is coupled to the bent surface such that it overlaps with the uniform stack number zone.

63. The battery according to claim 62, wherein the number of overlapping layers of the uniform stack number zone is 10 or more.

64. The battery according to claim 63, wherein the first tab coupling portion is welded to the bent surface, and a weld area of the tab coupling portion overlaps at least 50% with the uniform stack number zone along the radial direction of the electrode assembly.

65. The battery according to claim 1, wherein the second portion and the first tab coupling portion are coupled by welding along a radial direction of the electrode assembly.

66. The battery according to claim 1, wherein the first tab coupling portion is coupled to the second portion by welding while being in parallel to a lower surface of the battery housing.

67. The battery according to claim 65, wherein a welding bead formed between the second portion and the first tab

54

coupling portion forms a straight line welding pattern which extends along the radial direction of the electrode assembly.

68. The battery according to claim 65, wherein a welding bead formed between the first uncoated region and the first tab coupling portion forms a welding pattern, and the welding pattern has a shape of a line formed by connecting spot weldings.

69. The battery according to claim 65, wherein a width of a welding bead formed between the second portion and the first tab coupling portion is 0.1 mm or more.

70. The battery according to claim 1, wherein a plurality of the first tab coupling portions and a plurality of the first housing coupling portions are provided, and

the plurality of first tab coupling portions and the plurality of first housing coupling portions are arranged in a radial pattern, a crisscross pattern or a combined pattern with respect to a center of the first current collector.

71. The battery according to claim 70, wherein each of the plurality of the first housing coupling portions is positioned between adjacent first tab coupling portions.

72. The battery according to claim 1, wherein a plurality of the first housing coupling portions are provided, and wherein the first contact portions of the plurality of the first housing coupling portions are connected to each other and integrally formed.

73. The battery according to claim 1, wherein an outermost point of the first connecting portion is spaced a predetermined distance apart from an innermost point of the beading portion.

74. The battery according to claim 25, wherein an angle between the first contact portion and the first connecting portion is an acute angle due to the first bending portion.

75. The battery according to claim 3, wherein a plurality of the injection holes are provided.

76. The battery according to claim 75, wherein the plurality of the injection holes are symmetrically arranged on left and right sides with respect to a center of the first tab coupling portion in a width direction.

77. The battery according to claim 76, wherein a welding bead coupling the first tab coupling portion and the second portion is formed between the injection holes symmetrically arranged on the left and right sides.

78. The battery according to claim 3, wherein the first tab coupling portion has a larger width at a location a predetermined distance away from a connected portion between the first tab coupling portion and the support portion toward an end of the first tab coupling portion in a longitudinal direction than a width at the connected portion between the first tab coupling portion and the support portion.

79. The battery according to claim 78, wherein the injection hole is formed at the location a predetermined distance away from a connected portion toward the end of the first tab coupling portion in the longitudinal direction.

80. The battery according to claim 79, wherein at least part of an area in which the injection hole is formed is included in an extended area by a larger width at the location the predetermined distance away from the connected portion to the end of the first tab coupling portion than the width at the connected portion between the first tab coupling portion and the support portion.

81. The battery according to claim 3, wherein an end of the first tab coupling portion in the longitudinal direction has a shape of an arc corresponding to an inner circumferential surface of the battery housing.

82. The battery according to claim 67, wherein an extension direction of the welding pattern formed between the second portion and the first tab coupling portion and an

55

extension direction of a welding pattern formed between the beading portion and the first contact portion are perpendicular to each other.

83. The battery according to claim 51, wherein an innermost point of the beading portion is positioned farther inward in a radial direction than an end point of the crimping portion.

84. The battery according to claim 53, wherein the sealing gasket surrounds the housing cover, and

a radial length at a region of the sealing gasket which covers a lower surface of the housing cover is smaller than the radial length at a region of the sealing gasket which covers an upper surface of the housing cover.

85. The battery according to claim 60, wherein a total radial length of the first tab coupling portion T satisfies a formula as set forth below:

$$JR-2 \cdot F \leq T < JR$$

wherein JR is an outer diameter of the electrode assembly, and F is a height of a segment of the plurality of segments positioned on an outermost side of the electrode assembly.

86. The battery according to claim 1, wherein a ratio of an area where the first current collector and an upper surface of the electrode assembly do not contact to an area of a circle having an outer diameter of the electrode assembly as its diameter is 30% or more and less than 100%.

87. The battery according to claim 1, wherein a ratio of an area where the first current collector and the electrode assembly do not contact to an area of a circle having an outer diameter of the electrode assembly as its diameter is 60% or more and less than 100%.

88. The battery according to claim 33, wherein a diameter of the current collector hole is smaller than a diameter of a winding hole in the core of the electrode assembly.

89. The battery according to claim 88, wherein the diameter of the current collector hole is $0.5 \cdot R3$ or more and less than $R3$, where $R3$ is the diameter of the winding hole.

56

90. The battery according to claim 88, wherein the diameter of the current collector hole is $0.7 \cdot R3$ or more and less than $R3$.

91. The battery according to claim 1, wherein a form factor ratio obtained by dividing a diameter of the battery by a height is larger than 0.4.

92. The battery according to claim 1, wherein a measured resistance between a positive electrode and a negative electrode is 4 mohm or less.

93. A battery pack comprising a plurality of batteries including the battery according to claim 1.

94. The battery pack according to claim 93, wherein the plurality of batteries are arranged in a predetermined number of columns, and

wherein a terminal of each of the plurality of batteries and an outer surface of the second end of the battery housing are positioned vertically upward.

95. The battery pack according to claim 94, further comprising a plurality of busbars to connect the plurality of batteries in series and in parallel,

wherein each busbar is positioned on adjacent batteries among the plurality of batteries, and

wherein each busbar includes:

a body portion extending between the adjacent batteries;

a plurality of first busbar terminals extending to a first side direction of the body portion and electrically coupled to terminals of the adjacent batteries disposed in the first side direction; and

a plurality of second busbar terminals extending in a second side direction of the body portion opposite the first side direction and electrically coupled to an outer surface of the second end of the battery housing of each of the adjacent batteries disposed in the second side direction.

96. A vehicle comprising the battery pack according to claim 93.

* * * * *