



US012408443B2

(12) **United States Patent**
Chen et al.

(10) **Patent No.:** **US 12,408,443 B2**

(45) **Date of Patent:** **Sep. 2, 2025**

(54) **LAYOUT OF INTEGRATED CIRCUIT**

(71) Applicant: **UNITED MICROELECTRONICS CORP.**, Hsin-Chu (TW)

(72) Inventors: **Ruei-Yau Chen**, Pingtung County (TW); **Wei-Jen Wang**, Tainan (TW); **Kun-Yuan Wu**, Kaohsiung (TW); **Chien-Fu Chen**, Miaoli County (TW); **Chen-Hsien Hsu**, Hsinchu County (TW)

(73) Assignee: **UNITED MICROELECTRONICS CORP.**, Hsin-Chu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/657,811**

(22) Filed: **May 8, 2024**

(65) **Prior Publication Data**

US 2024/0290771 A1 Aug. 29, 2024

Related U.S. Application Data

(62) Division of application No. 17/517,642, filed on Nov. 2, 2021, now Pat. No. 12,328,944.

(30) **Foreign Application Priority Data**

Sep. 28, 2021 (TW) 110135987

(51) **Int. Cl.**
H10D 89/10 (2025.01)

(52) **U.S. Cl.**
CPC **H10D 89/10** (2025.01)

(58) **Field of Classification Search**

CPC H10D 89/10
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,302,660 B2 11/2007 Shimamura
7,943,966 B2 5/2011 Becker
8,698,205 B2 4/2014 Tzeng
10,990,740 B2 4/2021 Kim

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2011-134838 A 7/2011
KR 10-2020-0018134 2/2020

(Continued)


Primary Examiner — Timor Karimov

(74) *Attorney, Agent, or Firm* — Winston Hsu

(57) **ABSTRACT**

An integrated circuit layout includes an upper active region comprising a first edge and a second edge extending along a first direction and respectively adjacent to an upper cell boundary by a distance D3 and a distance D4. A first gate line is disposed on the upper active region, extends along a second direction, and protrudes from the first edge by a length L3. A second gate line is disposed on the upper active region, extends along the second direction, and protrudes from the second edge by a length L4. Two dummy gate lines respectively extend along the second direction and are disposed at two sides of the upper active region and away from the upper cell boundary by a distance S. The first direction and the second direction are perpendicular. The distances D3, D4, S and the lengths L3 and L4 have the relationships: $L3 \leq D3 - S$, $L4 \leq D4 - S$, and $D3 \neq D4$.

9 Claims, 10 Drawing Sheets

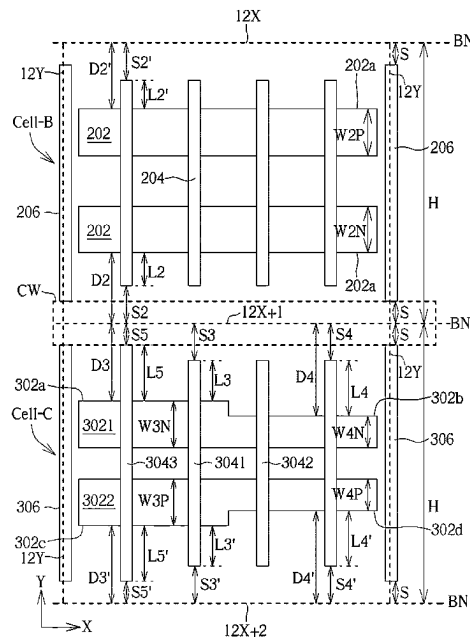

(56)

References Cited

U.S. PATENT DOCUMENTS

2005/0280031	A1 *	12/2005	Yano	H10D 84/907 257/210
2011/0133253	A1	6/2011	Nakanishi	
2018/0004882	A1	1/2018	Hsieh	
2019/0123063	A1	4/2019	Hino	
2020/0328201	A1	10/2020	Li	
2020/0411063	A1	12/2020	Fujiwara	
2024/0014203	A1	1/2024	Li	

FOREIGN PATENT DOCUMENTS

KR	10-2020-0121739	10/2020
TW	202129529 A	8/2021
TW	202131216 A	8/2021
TW	202131218 A	8/2021
TW	202133020 A	9/2021
WO	2012/023247 A1	2/2012

* cited by examiner

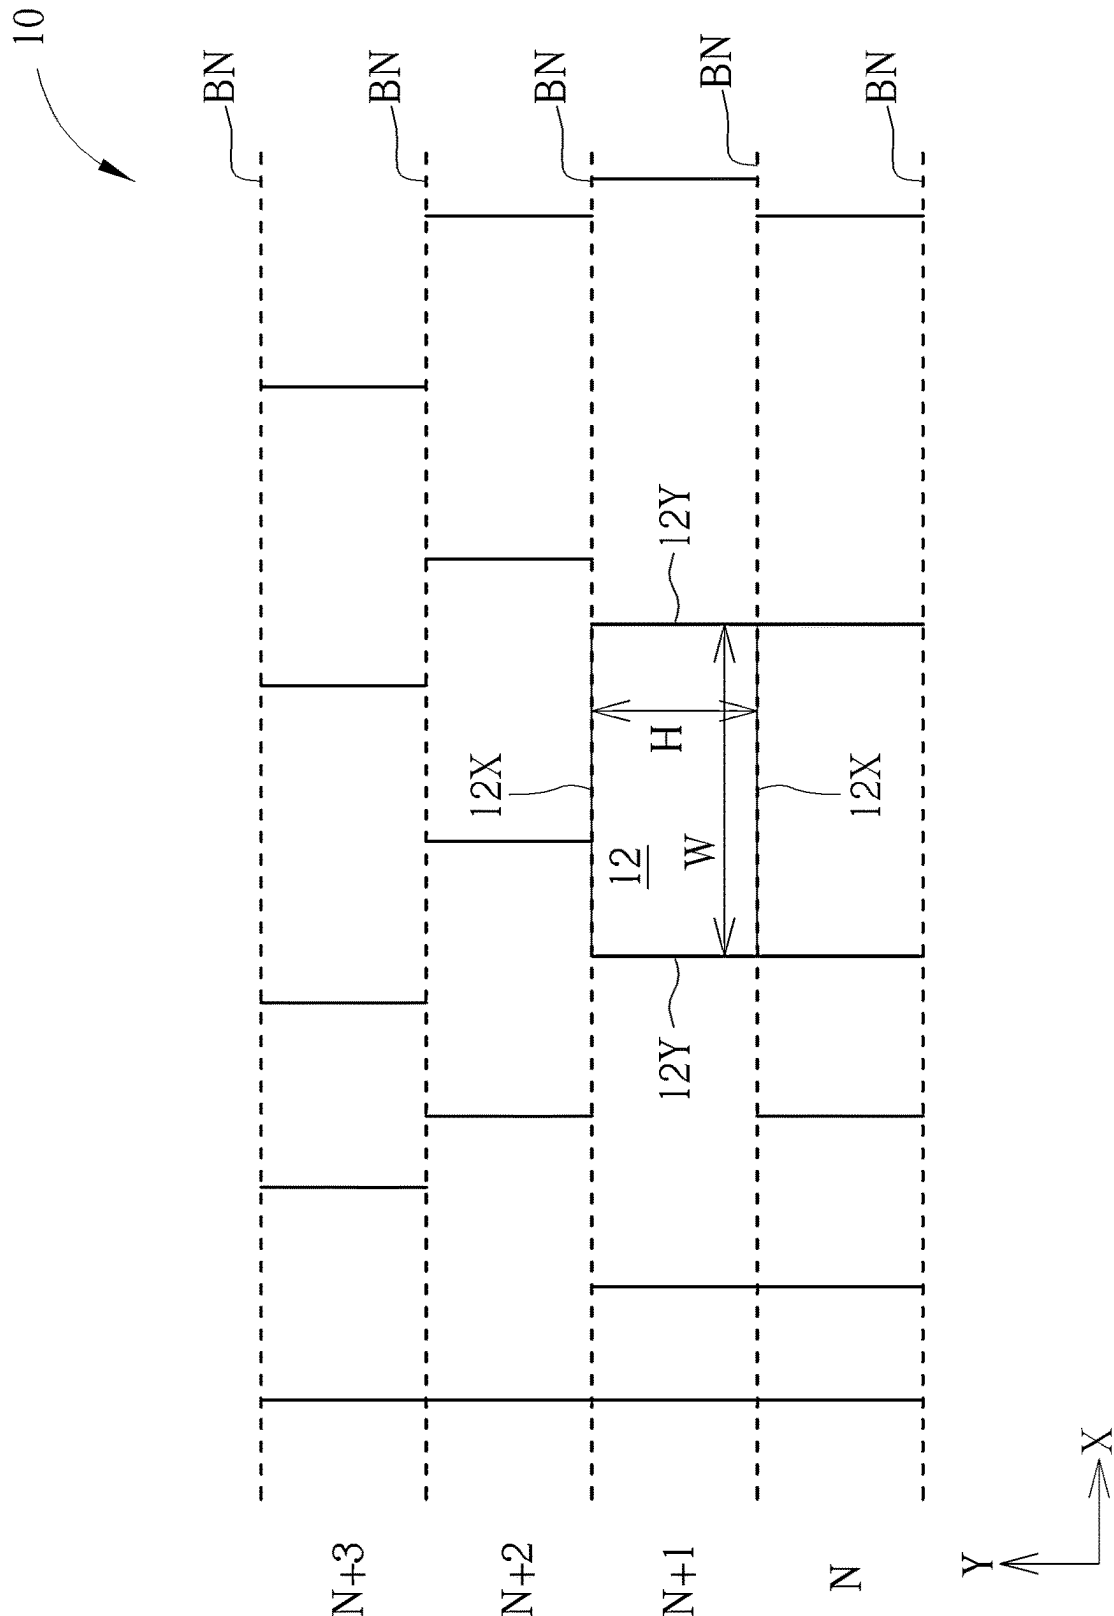


FIG. 1

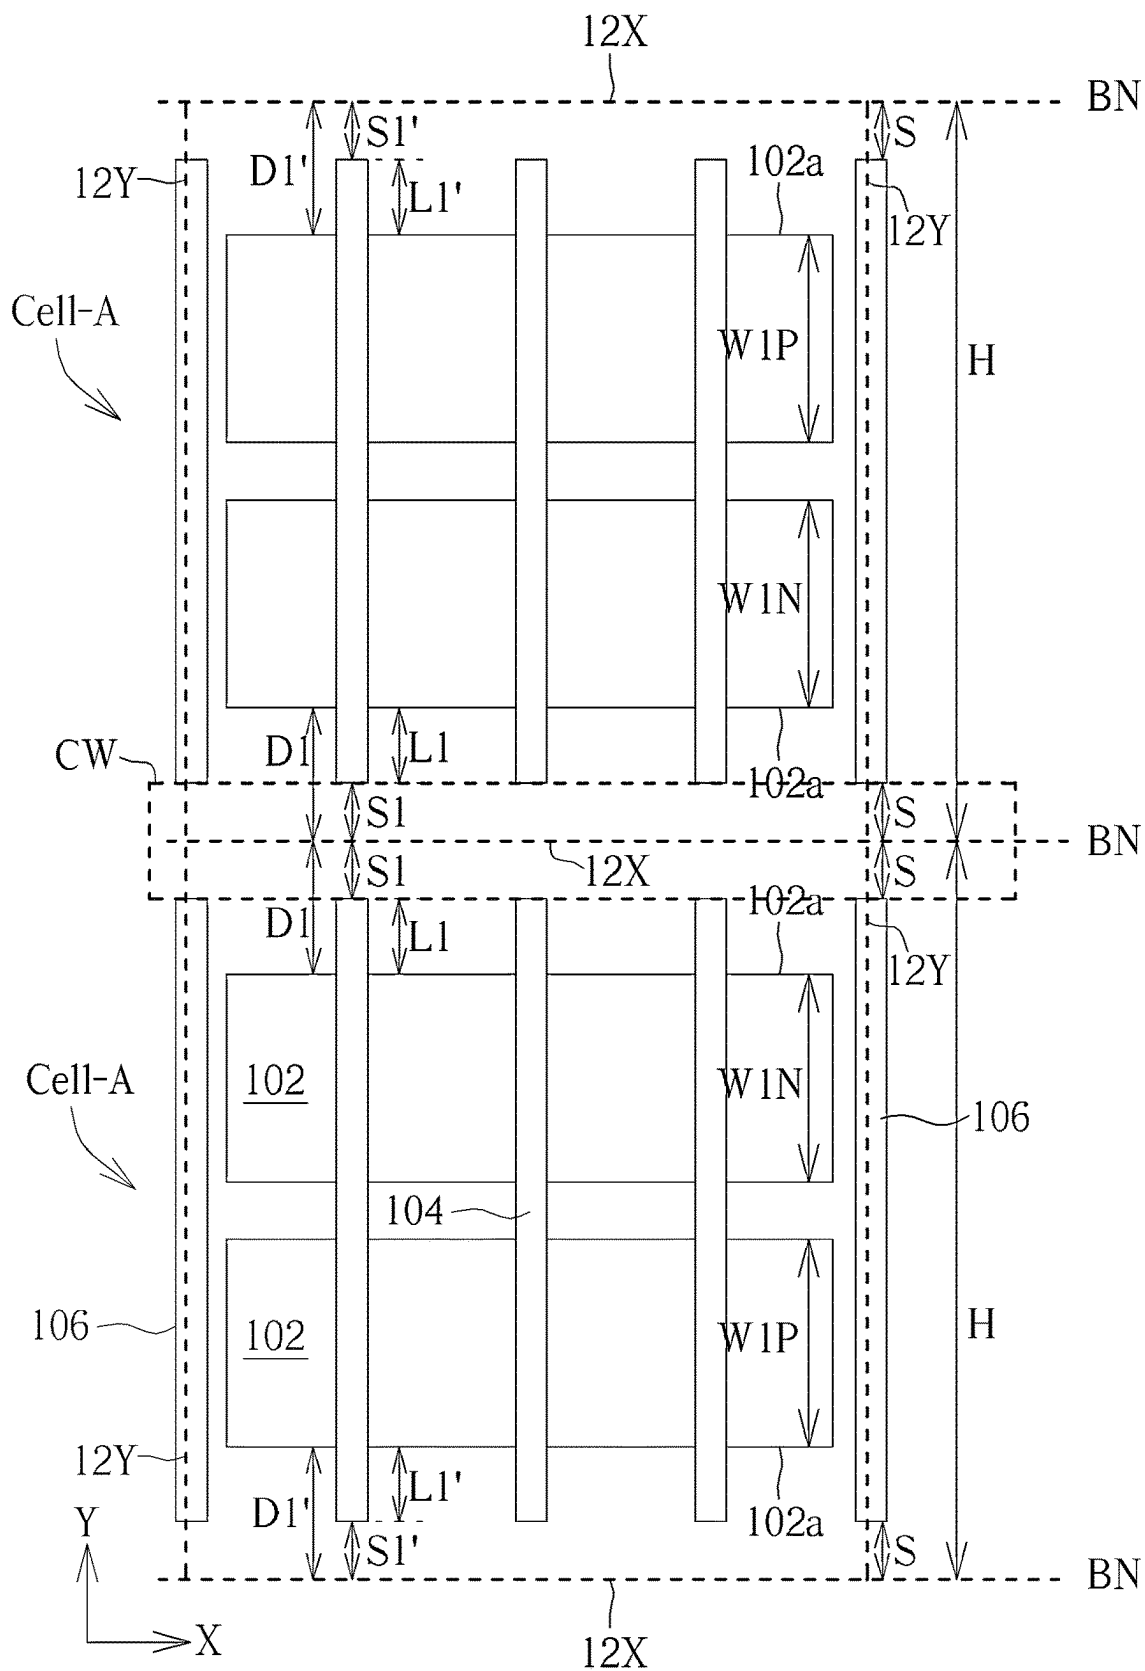


FIG. 2

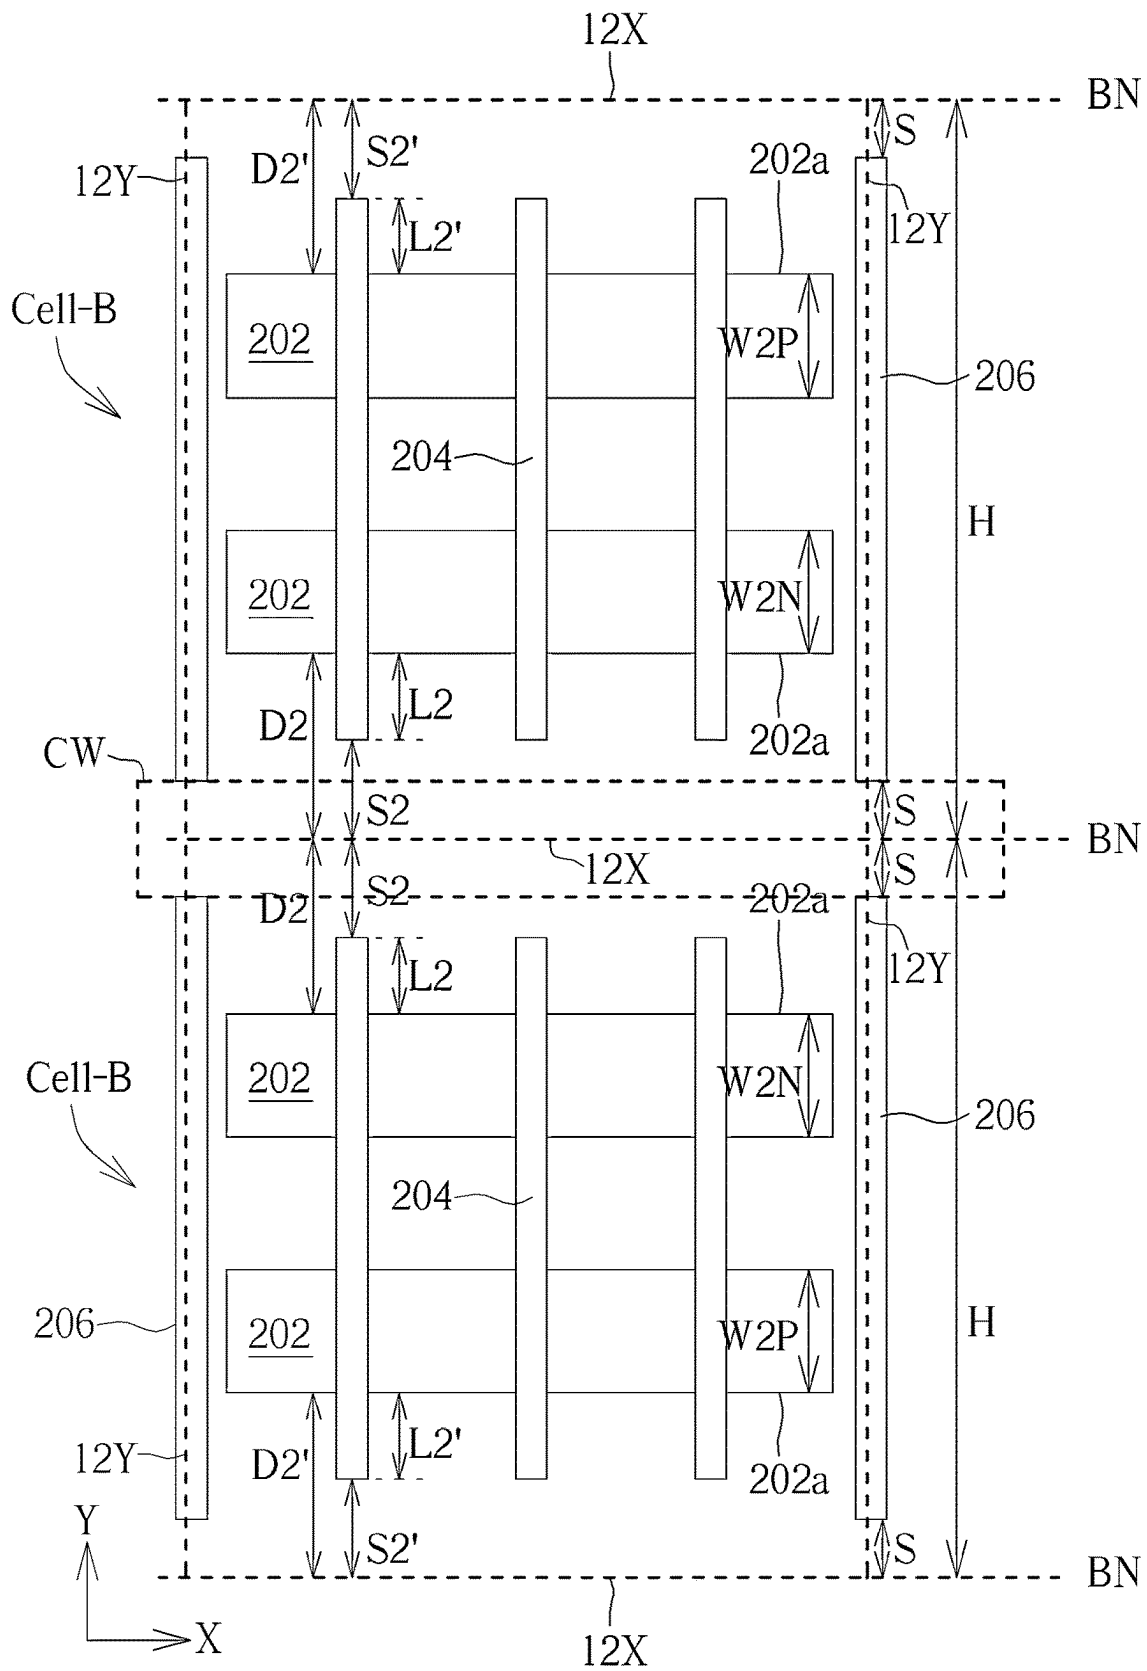


FIG. 3

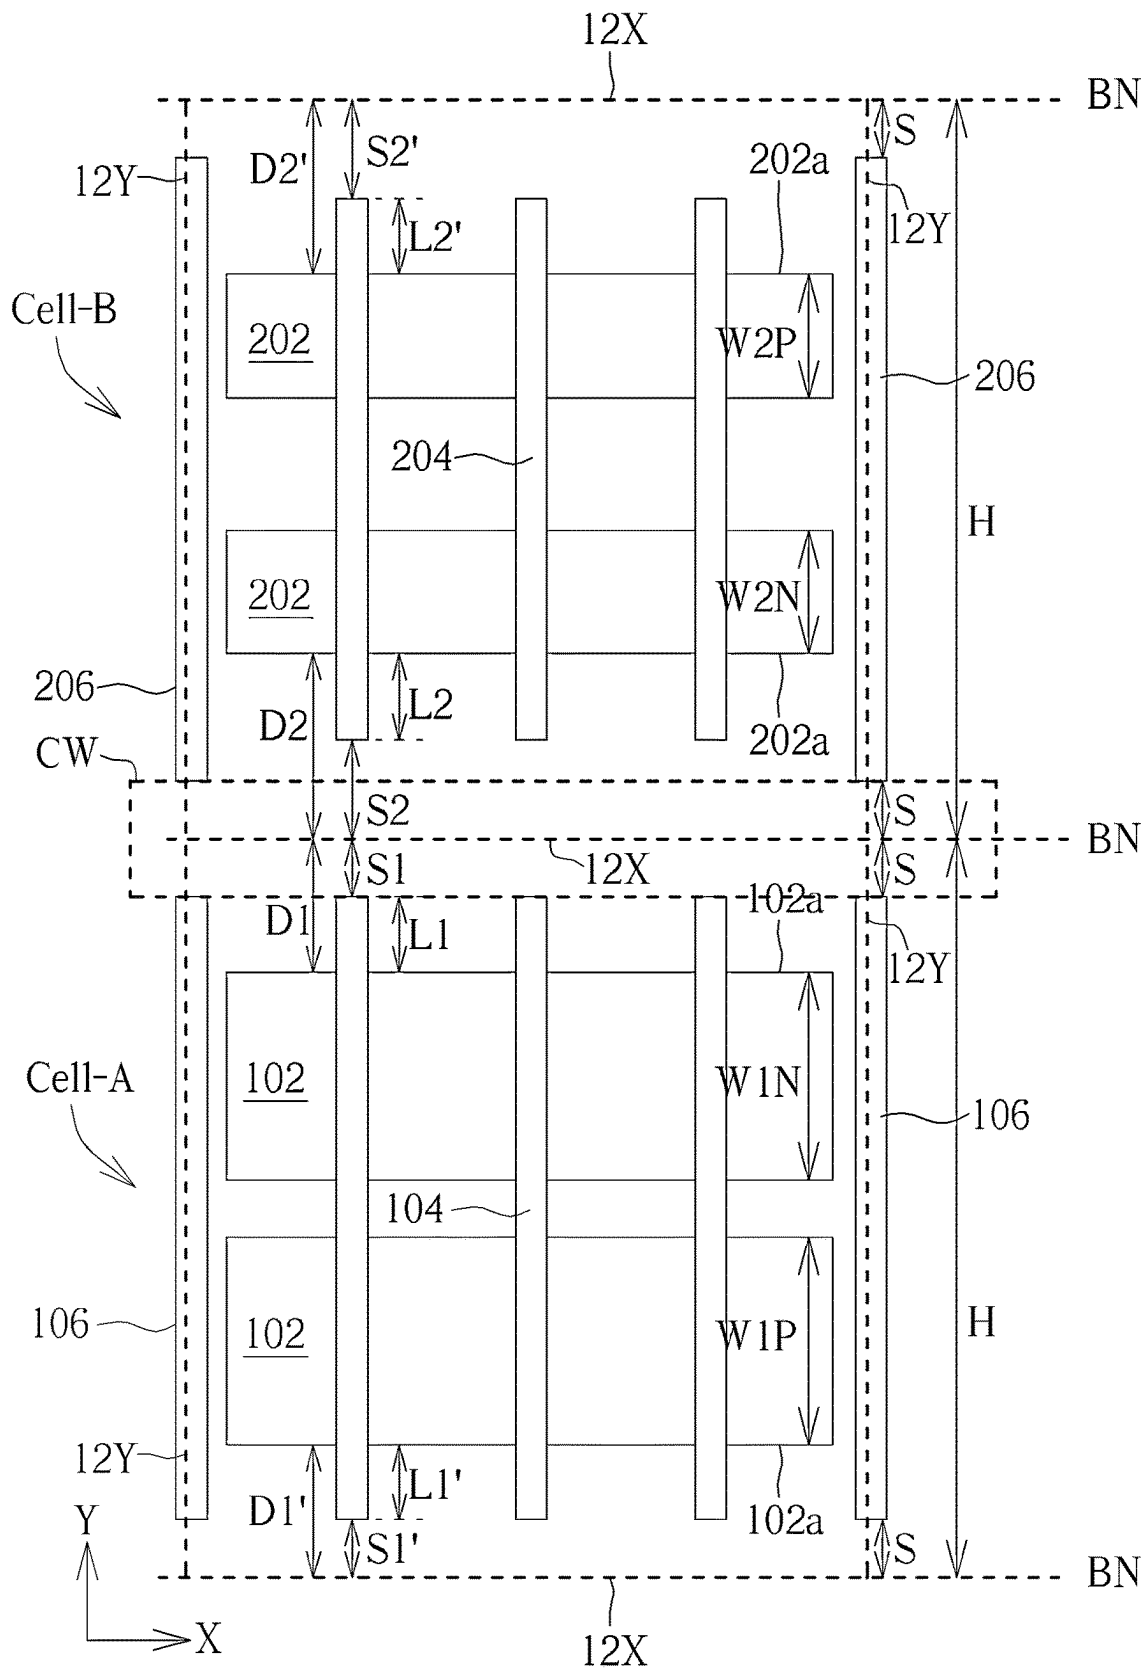


FIG. 4

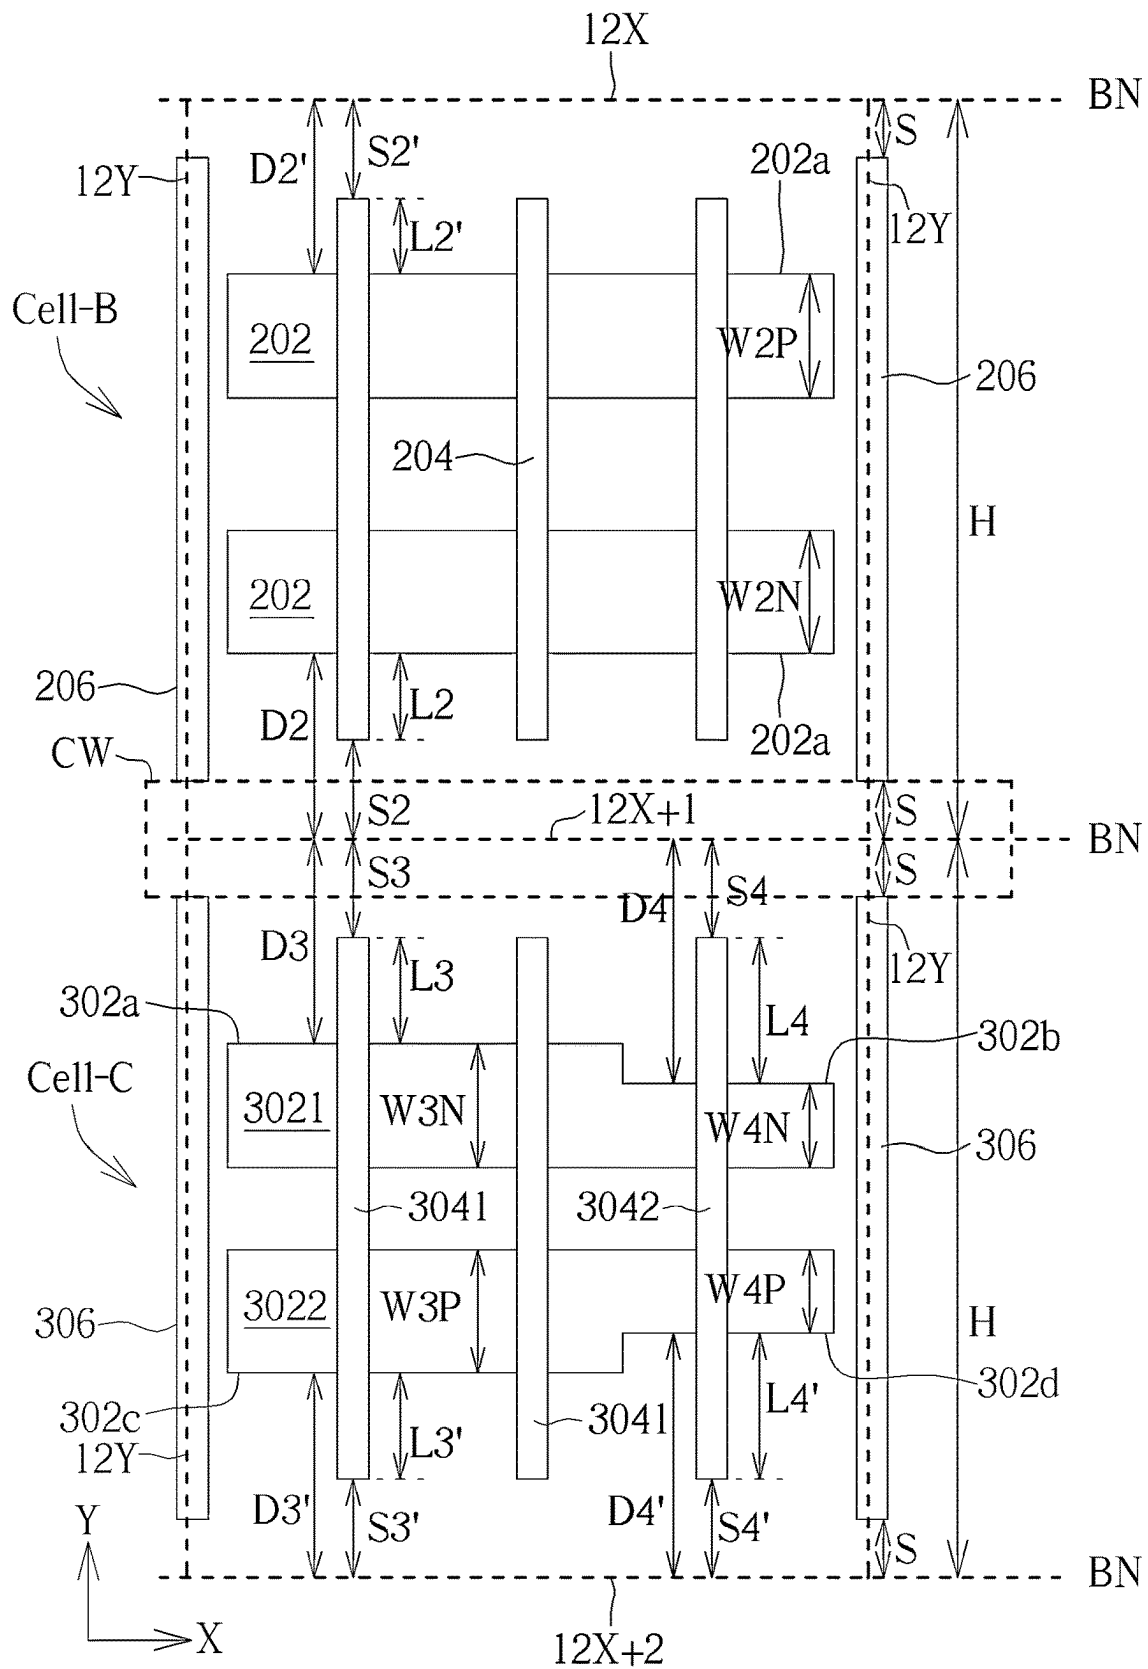


FIG. 5

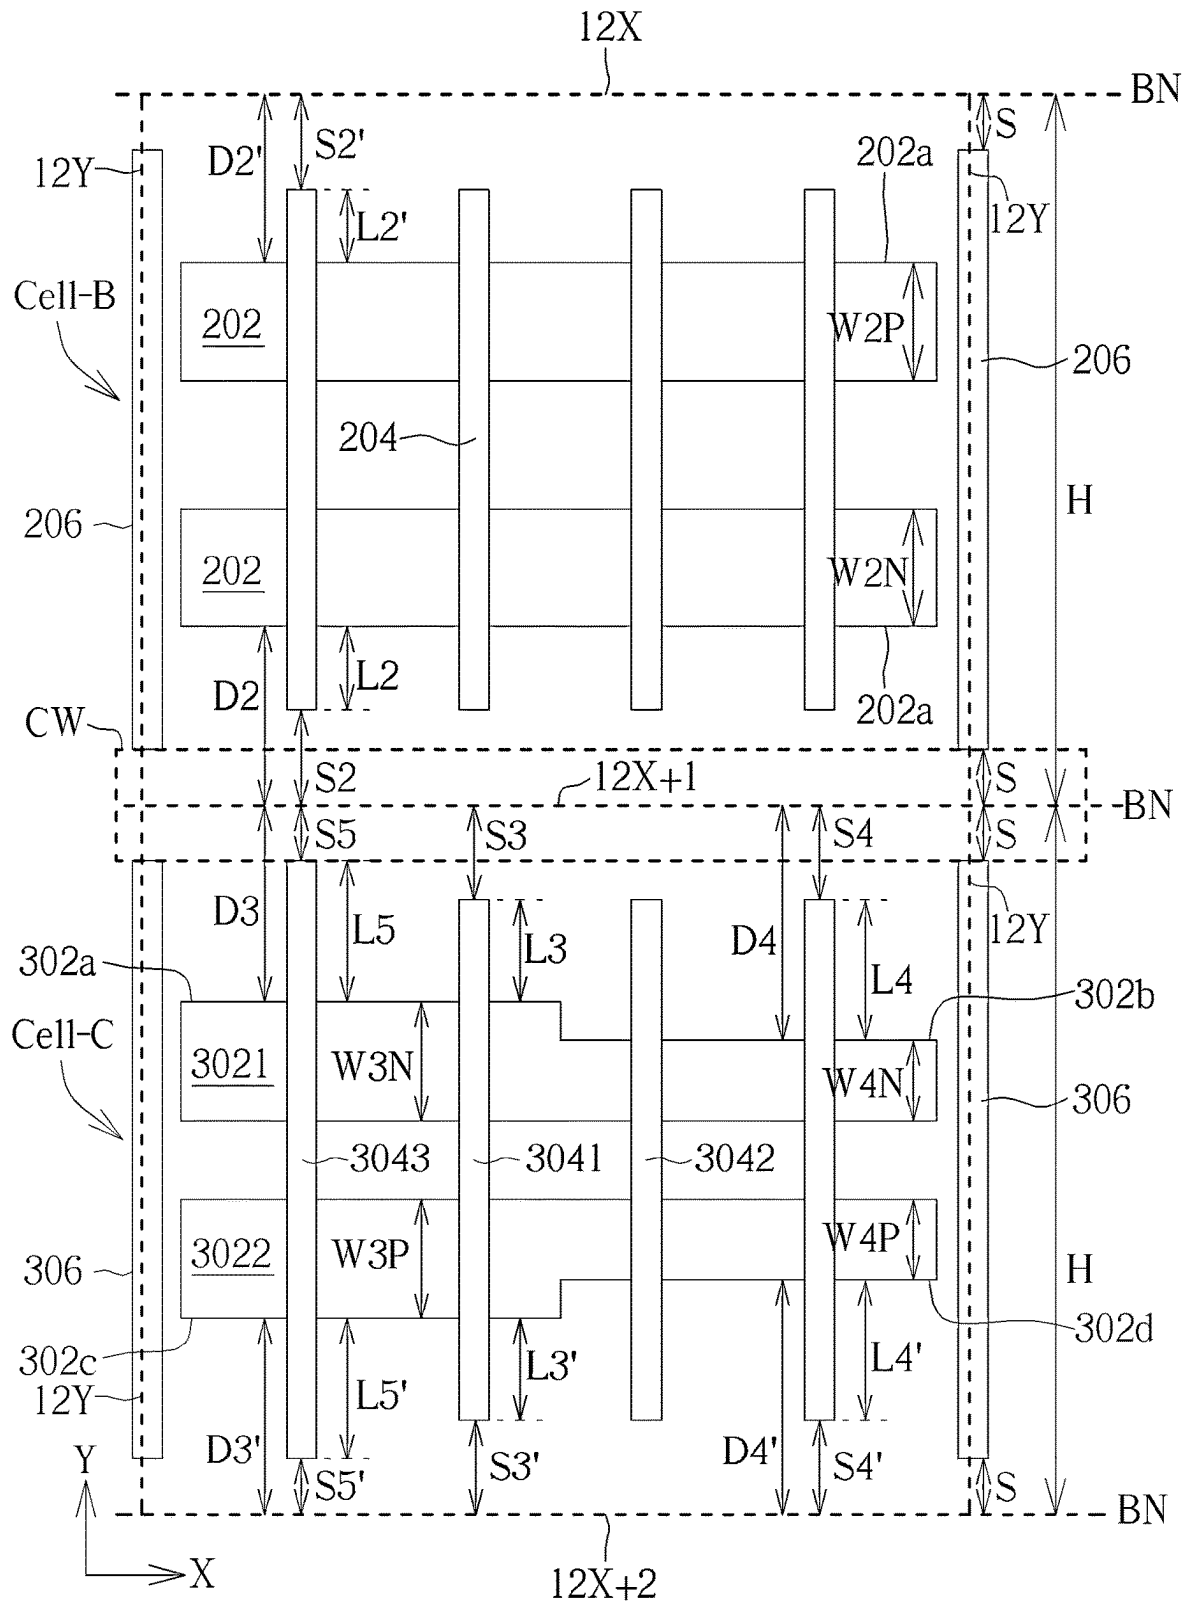


FIG. 6

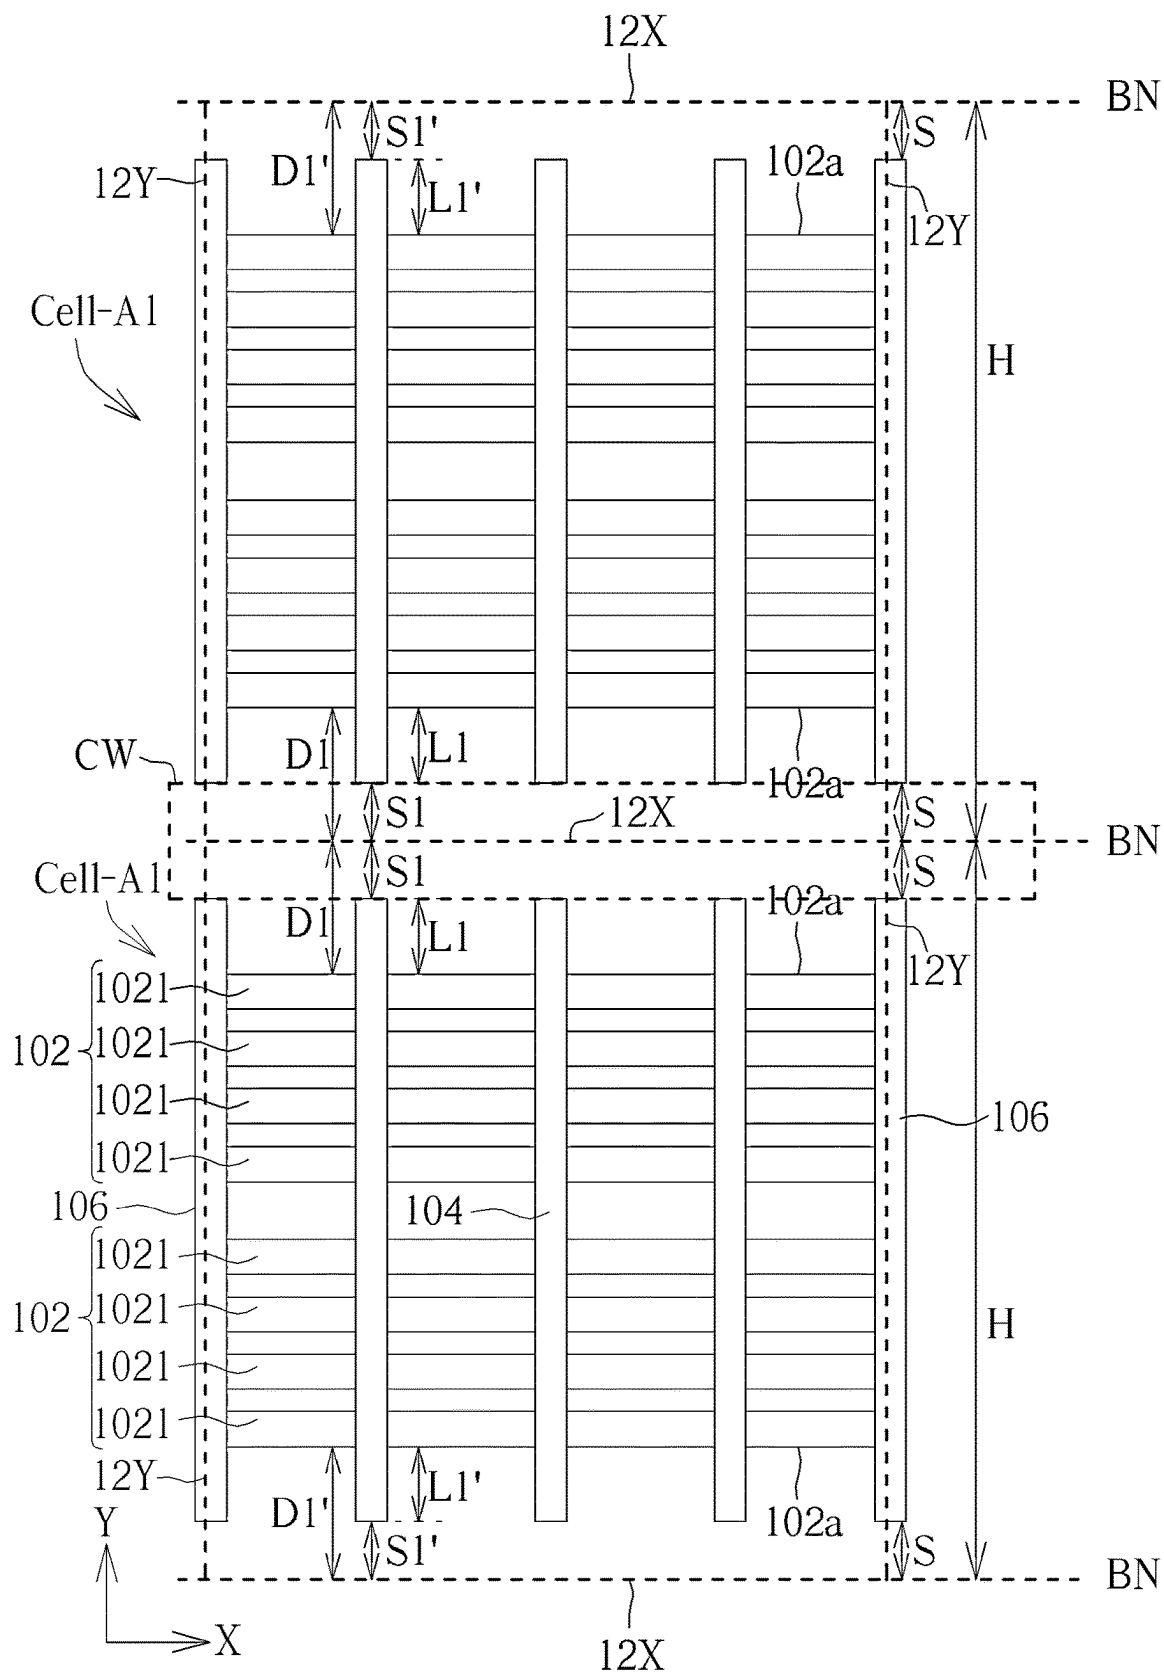


FIG. 7

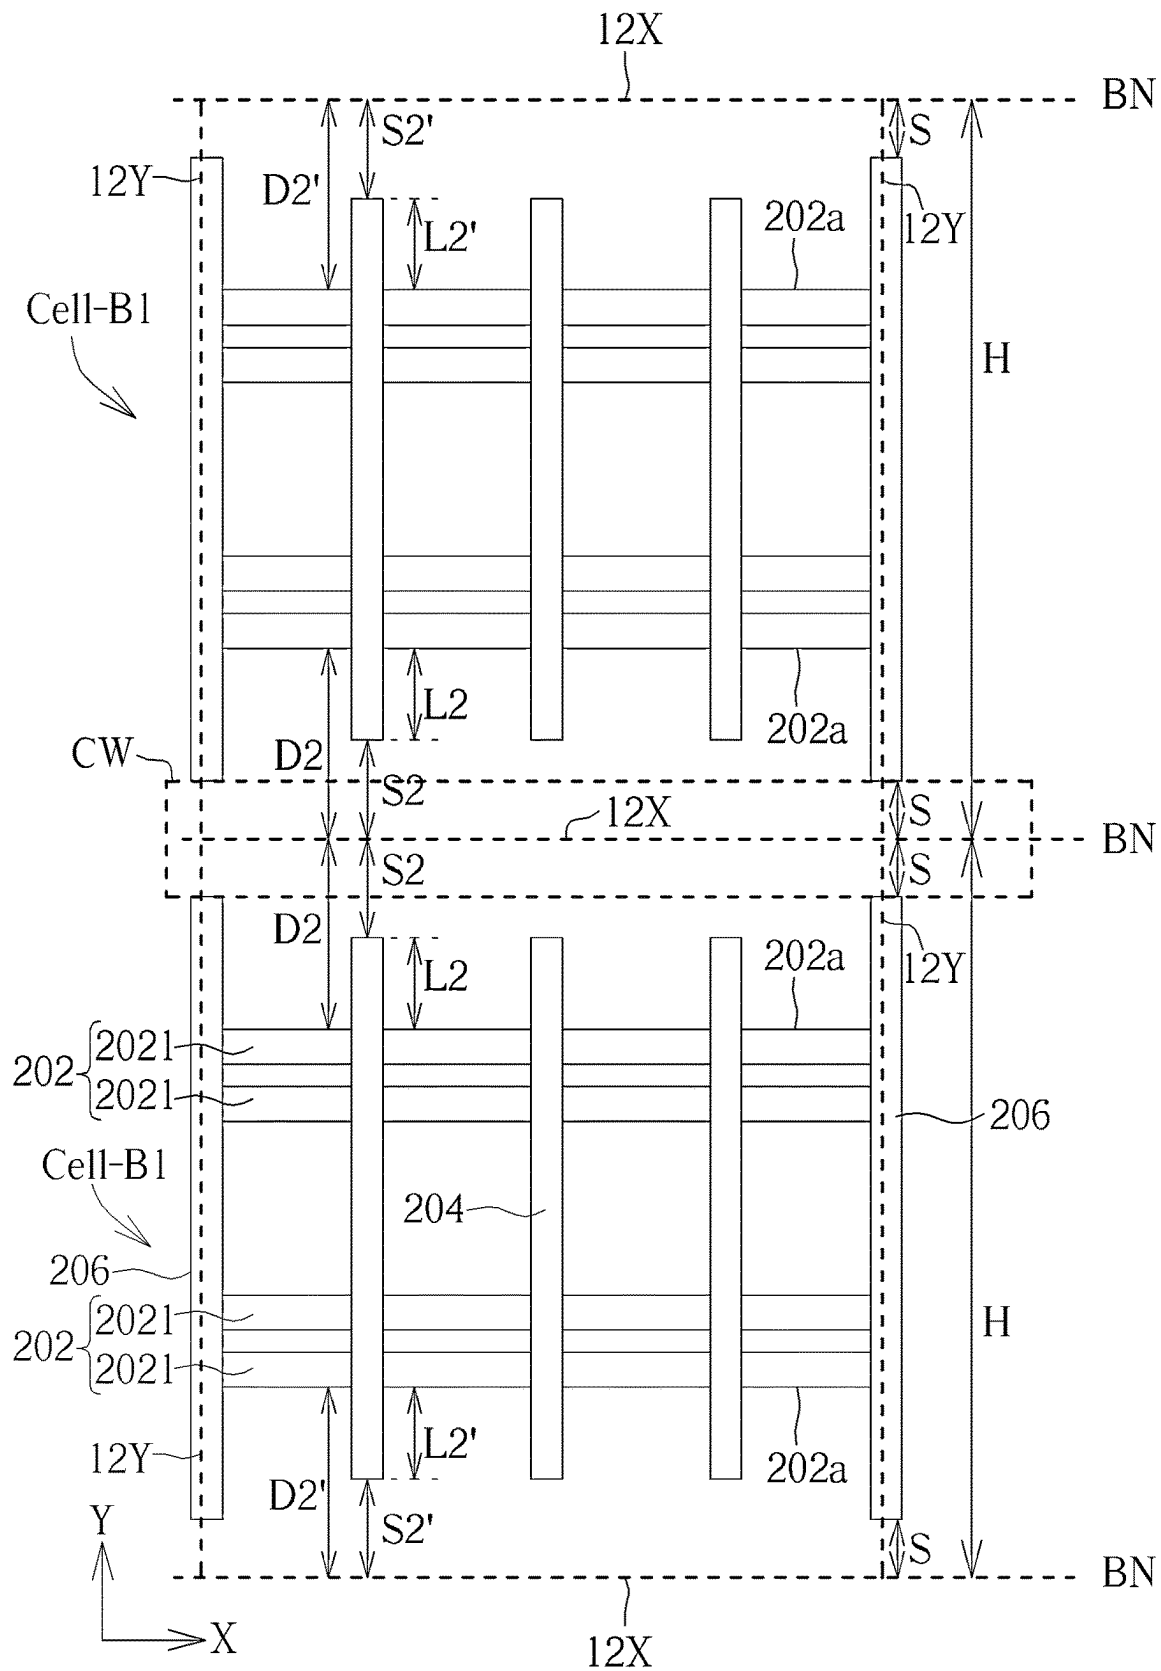


FIG. 8

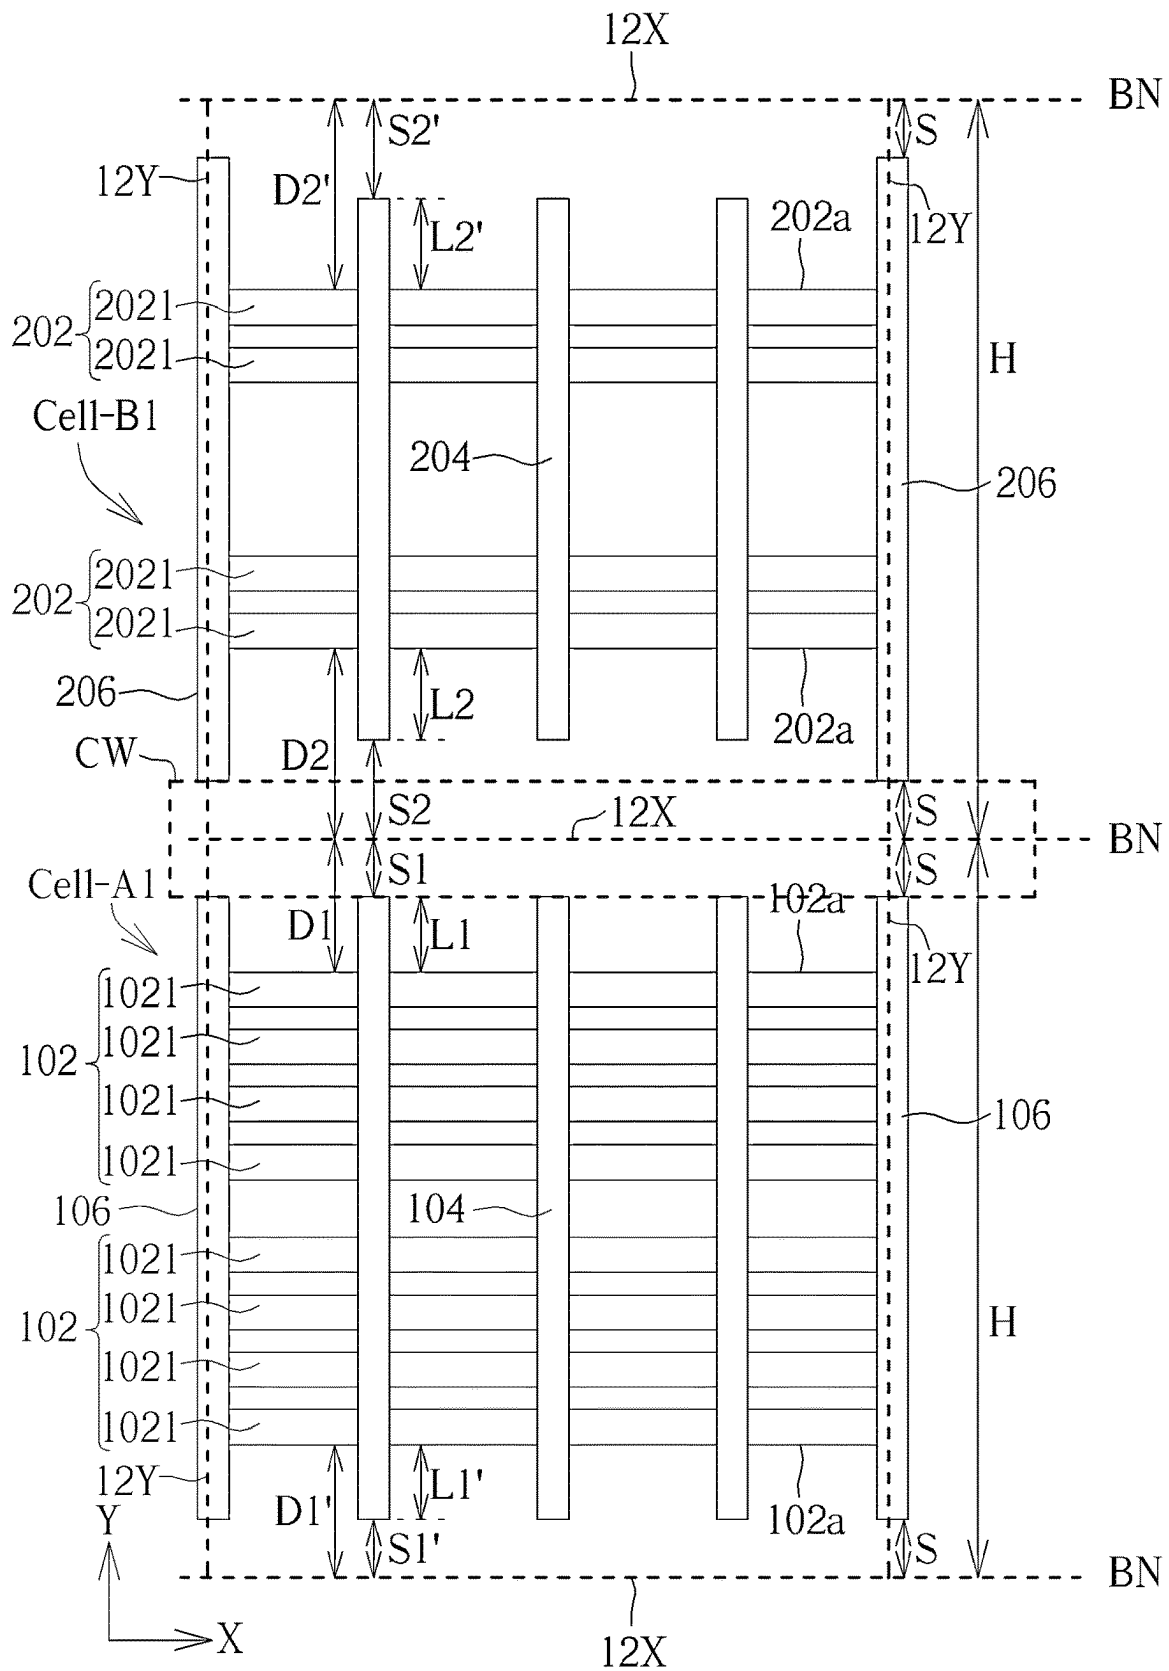


FIG. 9

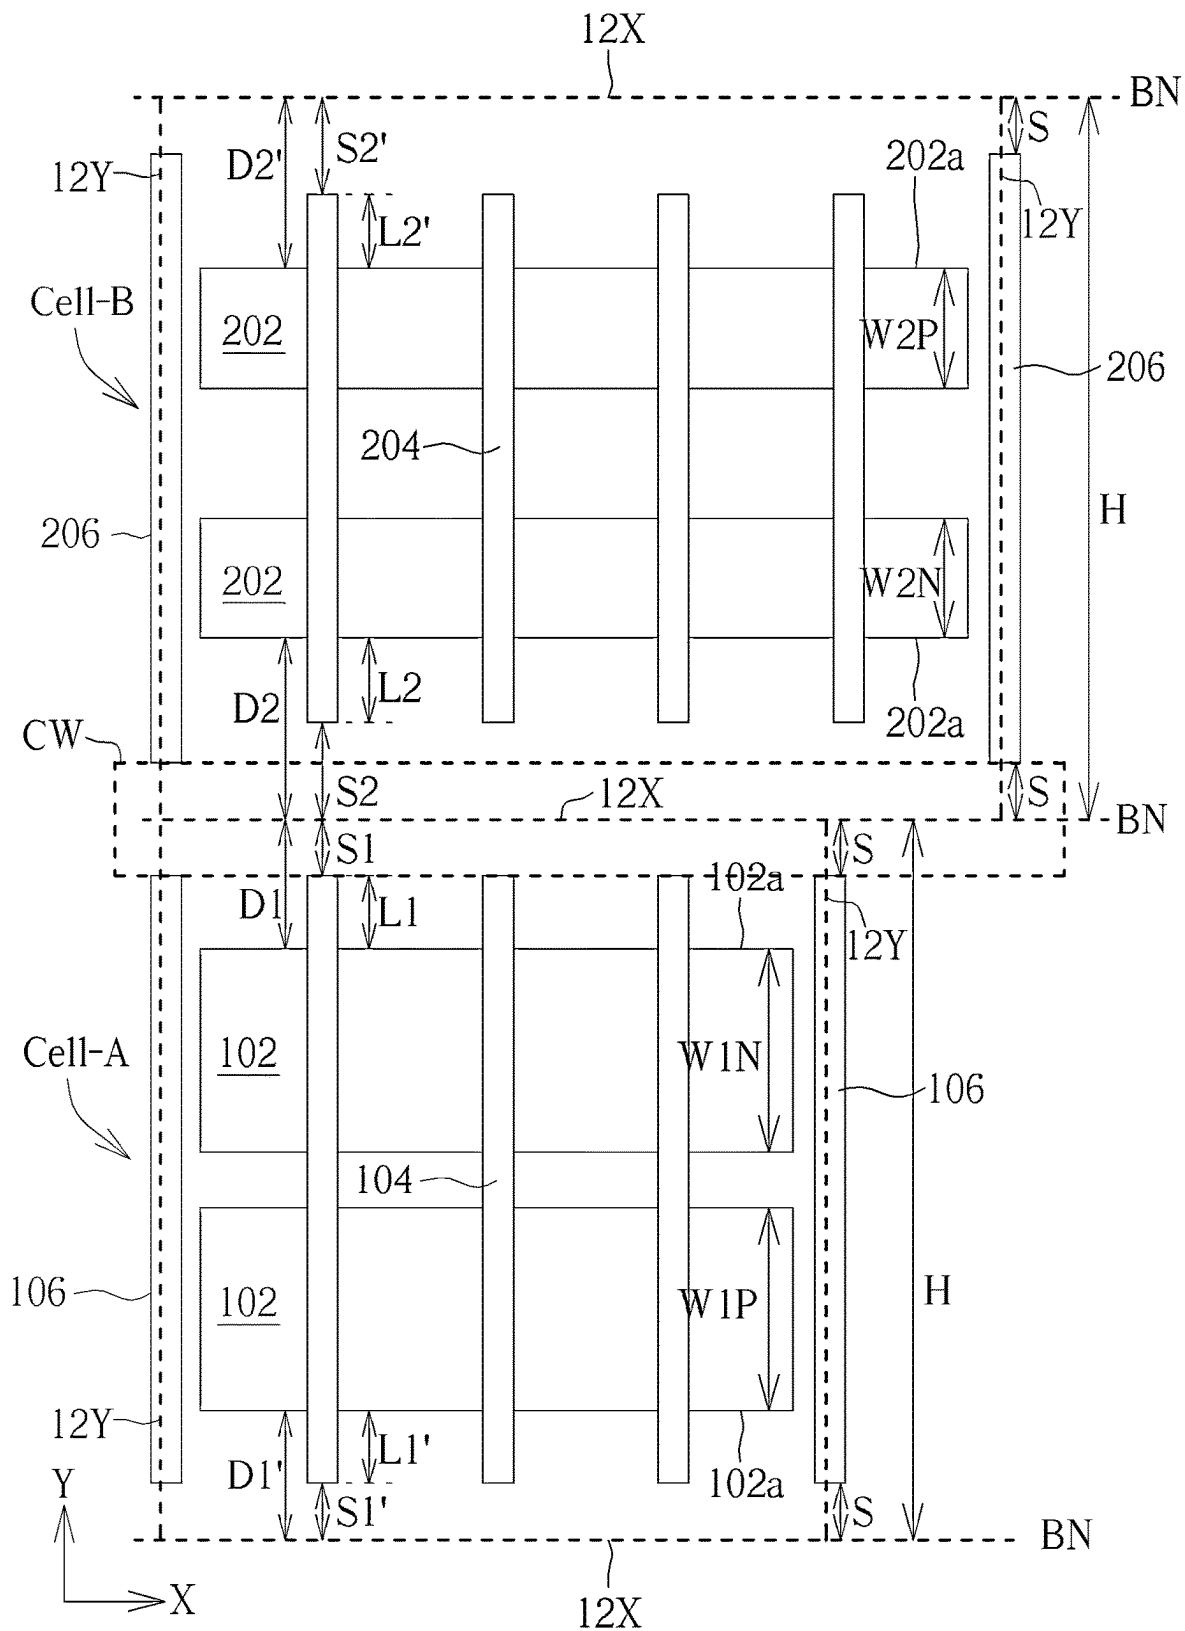


FIG. 10

1

LAYOUT OF INTEGRATED CIRCUIT

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a division of U.S. application Ser. No. 17/517,642, filed on Nov. 2, 2021. The content of the application is incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an integrated circuit layout. More particularly, the present invention relates to an integrated circuit layout including standard cells having a same cell height but different active region widths.

2. Description of the Prior Art

As the needs for better performance and various applications are increased, the integrated circuits (ICs) has become more and more complicated and usually includes hundreds of thousands or millions of logic gates. In the industry, to facilitate circuit design process, circuit units of specific functions commonly used in an integrated circuit are usually designed into standard cells with logic gates, such as NAND cells, NOR cells, d-flip-flop cells, latch cells, I/O cells, OP amplifier cells, ADC cells, DAC cells. After verifying the manufacturability for mass production of the standard cells, standard cell libraries including the verified standard cells may be authorized to the chip designers to construct functional circuitries by utilizing automated computer-aided design (CAD) tools such as logic simulator, logic synthesizer, and automatic placer & router. In this way, a complex and large integrated circuit may be correctly constructed within a short period of time.

A standard cell library of a specific function usually includes standard cells designed for different powers which may be mix used by the chip designer in a flexible way to obtain a desire performance. When the standard cells have different cell heights, mix using the standard cells may easily produce irregular patterns and useless blank areas in the layout. This not only causes a waste of space, but also reduces the efficiency of the automated layout process due to the lower pattern regularity. To resolve the above problems, a common approach taken currently is to put the standard cells with different cell heights into different routing blocks and electrically connect the standard cells by metal interconnections. However, this has adversely limited the design flexibility. The extended length of the metal interconnections may also increase the power loss.

SUMMARY OF THE INVENTION

The present invention is directed to provide standard cells and an integrated circuit layout including the standard cells which may have an improved design flexibility and manufacturability.

According to an embodiment of the present invention, an integrated circuit layout includes an upper cell boundary extending along a first direction, an upper active region comprising a first edge and a second edge extending along the first direction and adjacent to the upper cell boundary, wherein the first edge is away from the upper cell boundary by a distance D3, the second edge is away from the upper cell boundary by a distance D4, a first gate line disposed on

2

the upper active region and extending along a second direction to protrude from the first edge of the upper active region by a length L3, a second gate line disposed on the upper active region and extending along the second direction to protrude from the second edge of the upper active region by a length L4, and two dummy gate lines disposed at two sides of the upper active region, extending along the second direction, and away from the upper cell boundary by a distance S, wherein the first direction and the second direction are perpendicular, the distance D3, the distance D4, the distance S, the length L3 and the length L4 comprise the relationships:

$$L3 \leq D3 - S;$$

$$L4 \leq D4 - S; \text{ and}$$

$$D3 \neq D4.$$

These and other objectives of the present invention will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the preferred embodiment that is illustrated in the various figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are schematic drawings and included to provide a further understanding of the embodiments, and are incorporated in and constitute a part of this specification. The drawings illustrate some of the embodiments and, together with the description, serve to explain their principles. Relative dimensions and proportions of parts of the drawings have been shown exaggerated or reduced in size and are not necessarily drawn to scale, for the sake of clarity and convenience in the drawings. The same reference signs are generally used to refer to corresponding or similar features in modified and different embodiments.

FIG. 1 is a schematic plan view of an integrated circuit layout according to an embodiment of the present invention.

FIG. 2 is a partial enlarged plan view of an integrated circuit layout according to an embodiment of the present invention.

FIG. 3 is a partial enlarged plan view of an integrated circuit layout according to an embodiment of the present invention.

FIG. 4 is a partial enlarged plan view of an integrated circuit layout according to an embodiment of the present invention.

FIG. 5 is a partial enlarged plan view of an integrated circuit layout according to an embodiment of the present invention.

FIG. 6 is a partial enlarged plan view of an integrated circuit layout according to an embodiment of the present invention.

FIG. 7 is a partial enlarged plan view of an integrated circuit layout according to an embodiment of the present invention.

FIG. 8 is a partial enlarged plan view of an integrated circuit layout according to an embodiment of the present invention.

FIG. 9 is a partial enlarged plan view of an integrated circuit layout according to an embodiment of the present invention.

FIG. 10 is a partial enlarged plan view of an integrated circuit layout according to an embodiment of the present invention.

DETAILED DESCRIPTION

To provide a better understanding of the present invention to those of ordinary skill in the art, several exemplary embodiments of the present invention will be detailed as follows, with reference to the accompanying drawings using numbered elements to elaborate the contents and effects to be achieved. The accompanying drawings are included to provide a further understanding of the embodiments, and are incorporated in and constitute a part of this specification. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention. Other embodiments may be utilized and that structural, logical and electrical changes may be made without departing from the spirit and scope of the present invention.

For the convenience of illustrating the spatial relationships of the features, the first direction X and the second direction Y which are perpendicular to each other are shown in the drawing. In addition to the orientation shown in the drawings, other orientations (for example, rotated by 90 degrees or other directions) of the present invention may also be explained by the spatially relative descriptions in the specification. It should be noted that the term “gate line width” refers to a width of a gate line taken along the first direction X. The term “dummy gate line width” refers to a width of a dummy gate line taken along the first direction X. The term “gate line length” refers to a length of a gate line taken along the second direction Y. The term “dummy gate line length” refers to a length of a dummy gate line taken along the second direction Y. The term “gate line pitch” refers to a space between the gate lines taken along the first direction X. The term “active region width” refers to a width of an active region taken along the second direction Y. The term “cell width” refers to a width of a standard cell taken along the first direction X. The term “cell height” refers to a height of a standard cell taken along the second direction Y.

The numbers of the gate lines and/or fin structures of the standard cells in the embodiments of the present invention are only examples, and may be modified in other embodiments without departing from the scope of the present invention. The number of the gate lines and/or fin structures of the present invention may be single or plural.

Please refer to FIG. 1, which shows a schematic plan view of an integrated circuit layout 10 according to an embodiment of the present invention. The integrated circuit layout 10 includes plural rows of standard cells abutting along the boundary lines BN. FIG. 1 shows the N row, the N+1 row, the N+2 row and the N+3 row of standard cells, wherein N is a positive integer greater than 1. The boundary lines BN are extending along first direction X. The rows of standard cells are arranged along the second direction Y and are parallel to each other. The first direction X and the second direction Y are perpendicular. The integrated circuit layout 10 may include standard cells with different power arranged in a same row or different rows.

In FIG. 1, a standard cell 12 of the integrated circuit layout 10 is labeled with reference signs for the convenience of illustration. The standard cell 12 includes two cell boundaries 12X that extend along the first direction X and two cell boundaries 12Y that extend along the second direction Y. The cell boundaries 12X overlap the boundary lines BN. The cell boundaries 12Y extend between the boundary lines BN.

A cell height H of the standard cell 12 equals to the length of the cell boundaries 12Y or the distance between the cell boundaries 12X. A cell width W of the standard cell 12 is equal to the length of the cell boundaries 12X or the distance between the cell boundaries 12Y. The standard cells 12 of the integrated circuit layout 10 have a same cell height H, and may have different cell width W. The integrated circuit layout 10 may include standard cells 12 with different powers.

Please refer to FIG. 2, which is a partial enlarged plan view of an integrated circuit layout 10 according to an embodiment of the present invention. The integrated circuit layout 10 includes two standard cells Cell-A respectively disposed in two adjacent rows (such as the N row and the N+1 row shown in FIG. 1) and abutting along a boundary line BN. The left side and right side of the standard cell Cell-A along the first direction X may abut to other standard cells of the same row. The upper side or lower side of the standard cell Cell-A along the second direction Y may abut to another standard cell of another adjacent row. To simplify the drawing, other standard cells are not shown in FIG. 2. The standard cell Cell-A includes two cell boundaries 12X that extend along the first direction X and two cell boundaries 12Y that extend along the second direction Y. The cell boundaries 12X overlap the boundary lines BN. The cell boundaries 12Y extend between the boundary lines BN. The standard cell Cell-A has a cell height H. According to an embodiment, the standard cell Cell-A is a high performance cell.

The standard cell Cell-A includes two active regions 102 arranged along the second direction Y. The active regions 102 of the standard cell Cell-A respectively include an edge 102a that is adjacent to the boundary line BN and extends along the first direction X. The edges 102a of the active regions 102 are away from the boundary lines BN by a distance D1 and a distance D1', respectively.

According to an embodiment of the present invention, the two active regions 102 of the same standard cell Cell-A may have opposite conductivity types, and the active regions 102 at two sides of the boundary line BN and belonging to different standard cells Cell-A may have a same conductivity type. For example, in some embodiments, the two active regions 102 at two sides of the boundary line BN in the middle portion of FIG. 2 may have an n-type conductivity type, and the other two active regions 102 adjacent to the boundary lines BN in the upper portion and lower portion of FIG. 2 may have a p-type conductivity type. In other embodiments, the two active regions 102 at two sides of the boundary line BN in the middle portion of FIG. 2 may have a p-type conductivity type, and the other two active regions 102 adjacent to the boundary lines BN in the upper portion and lower portion of FIG. 2 may have an n-type conductivity type.

The active regions 102 of the standard cell Cell-A may respectively have an active region width W1N and an active region width W1P. The active region width W1N and an active region width W1P may be the same or different according to design needs to obtain desired electrical performance. In some embodiments, the active region width W1N and the active region width W1P may be the same. In other embodiments, the active region width W1N and the active region width W1P are different. The distance D1 and the distance D1' may be adjusted according to the active region width W1N and the active region width W1P, and may be the same or different.

As shown in FIG. 2, each standard cell Cell-A includes a plurality of gate lines 104 that are arranged in parallel and

5

equally spaced (away from each other by a gate line pitch) along the first direction X and extend along the second direction Y to cross the active regions 102 of the standard cell Cell-A. The standard cell Cell-A also includes two dummy gate lines 106 disposed at two sides of the active regions 102. The dummy gate lines 106 extend along the second direction Y and are parallel to the gate lines 104. According to an embodiment of the present invention, the dummy gate lines 106 may be away from the gate lines 104 by the gate line pitch of the gate lines 104. The overlapping regions of the active regions 102 and the gate lines 104 are the channel regions of the transistors of the standard cell Cell-A. The currents of the channel regions and the ON or OFF states of the transistors are controlled by the gate lines 104. It is noteworthy that the line ends (end-caps) of the gate lines 104 of the standard cell Cell-A respectively protrude from the edges 102a of the active regions 102 by a length L1 and a length L1' and are away from the boundary lines BN by a distance S1 and a distance S1'. The distance S1, the distance D1 and the length L1 have the relationship: $S1 = D1 - L1$. The distance S1', the distance D1' and the length L1' have the relationship: $S1' = D1' - L1'$. The length L1 and the length L1' may be referred to as end-cap lengths of the gate lines 104. It is important that the length L1 and the length L1' are larger than a minimum design rule of the integrated circuit layout 10 (for example, 25 nm, 30 nm, 35 nm, 40 nm, 45 nm, 50 nm, or any value within a range defined by any of the above values) to prevent impact on current control ability of the gate lines 104 caused by line-end shorting due to process variation. According to an embodiment of the present invention, the line ends of the dummy gate lines 106 is away from the boundary lines BN by a distance S. It is also important that the distance D1, the distance S, and the length L1 have the relationship: $L1 \leq D1 - S$. The distance D1', the distance S, and the length L1' have the relationship: $L1' \leq D1' - S$.

By the relationships as illustrated above, the integrated circuit layout 10 provided by the present invention may meet the requirements of manufacturability. More specifically, as the design rule of the standard cells of the integrated circuit layout 10 has become more and more critical for a higher device density, a gate line cut process may be used to manufacture the gate lines 104 and/or the dummy gate lines 106 on a substrate. A gate line cut process includes forming cut windows in an etching mask (such as a photoresist layer) to expose pre-determined portions of a continuous gate line (or dummy gate line) pattern and etching away the exposed pre-determined portions to cut the continuous gate line pattern into segmented patterns. By the relationships as illustrated above, the line ends of the gate lines 104 of the standard cell Cell-A would not overlap the cut window for segmenting continuous dummy gate lines into the dummy gate lines 106, so that the gate line cut process does not cut any portion of the line ends of the gate lines 104. Accordingly, sufficient end-cap lengths (the length L1 and the length L1') of the gate lines 104 may be ensured for better control of channel current.

FIG. 2 exemplarily shows an embodiment where the length L1 and the length L1' of the line ends (end-caps) of the gate lines 104 are respectively the maximum lengths allowed by the relationships as illustrated above. That is, FIG. 2 shows an embodiment where $L1 = D1 - S1$ and $L1' = D1' - S1$. The distance S1 and the distance S1' are the same as the distance S. The gate lines 104 and the dummy gate lines 106 have a same gate line length. The line ends of the gate lines 104 and the dummy gate lines 106 are aligned with each other along the first direction X and are flush with an edge

6

of the cut window CW for the gate line cut process (only the cut window CW between the standard cells Cell-A are shown for the sake of simplicity). The width of the cut window CW on the second direction Y is equal to the distance between the line ends of the adjacent dummy gate lines 106 along the second direction Y, that is, two times of the distance S. In other embodiments, when at least one of the relationships $L1 < D1 - S$ and $L1' < D1' - S$ are met, at least one of the distance S1 and the distance S1' would be larger than the distance S, and the gate lines 104 may have a gate line length smaller than a dummy gate line length of the dummy gate lines 106. According to an embodiment of the present invention, the distance D1 is equal to the distance D1', the length L1 is equal to the length L1', and the distance S1 is equal to the distance S1'.

In the embodiment shown in FIG. 2, the standard cells Cell-A in the upper side and lower side of FIG. 2 have a same number of gate lines 104, and the gate lines 104 of the standard cells Cell-A are aligned along the second direction Y. The dummy gate lines 106 of the standard cells Cell-A are also aligned along the second direction Y. The width (gate line width) of the gate lines 104 and the width (dummy gate line width) of the dummy gate lines 106 may be the same or different.

Please refer to FIG. 3, which is a partial enlarged plan view of an integrated circuit layout 10 according to an embodiment of the present invention. The integrated circuit layout 10 includes two standard cells Cell-B respectively disposed in two adjacent rows (such as the N row and the N+1 row as shown in FIG. 1) and abutting along a boundary line BN. The left side and right side of the standard cell Cell-B along the first direction X may abut to other standard cells of the same row. The upper side or lower side of the standard cell Cell-B along the second direction Y may abut to another standard cell of another adjacent row. To simplify the drawing, other standard cells are not shown in FIG. 3. The standard cell Cell-B includes two cell boundaries 12X that extend along the first direction X and two cell boundaries 12Y that extend along the second direction Y. The cell boundaries 12X overlap the boundary lines BN. The cell boundaries 12Y extend between the boundary lines BN. The standard cell Cell-B has a cell height H. According to an embodiment, the standard cell Cell-B is a low power cell.

The standard cell Cell-B includes two active regions 202 arranged along the second direction Y. The active regions 202 of the standard cell Cell-B respectively include an edge 202a that is adjacent to the boundary line BN and extends along the first direction X. The edges 202a of the active regions 202 are away from the boundary lines BN by a distance D2 and a distance D2', respectively.

According to an embodiment of the present invention, the two active regions 202 of the same standard cell Cell-B may have opposite conductivity types, and the active regions 202 at two sides of the boundary line BN and belonging to different standard cells Cell-B may have a same conductivity type. For example, in some embodiments, the two active regions 202 at two sides of the boundary line BN in the middle portion of FIG. 3 may have an n-type conductivity type, and the other two active regions 202 adjacent to the boundary lines BN in the upper portion and lower portion of FIG. 3 may have a p-type conductivity type. In other embodiments, the two active regions 202 at two sides of the boundary line BN in the middle portion of FIG. 3 may have a p-type conductivity type, and the other two active regions 202 adjacent to the boundary lines BN in the upper portion and lower portion of FIG. 3 may have an n-type conductivity type.

The active regions **202** of the standard cell Cell-B may respectively have an active region width $W2N$ and an active region width $W2P$. The active region width $W2N$ and an active region width $W2P$ may be the same or different according to design needs to obtain desired electrical performance. In some embodiments, the active region width $W2N$ and the active region width $W2P$ may be the same. In other embodiments, the active region width $W2N$ and the active region width $W2P$ are different. The distance $D2$ and the distance $D2'$ may be adjusted according to the active region width $W2N$ and the active region width $W2P$, and may be the same or different.

As shown in FIG. 3, each standard cell Cell-B includes a plurality of gate lines **204** that are arranged in parallel and equally spaced (away from each other by a gate line pitch) along the first direction X and extend along the second direction Y to cross the active regions **202** of the standard cell Cell-B. The standard cell Cell-B also includes two dummy gate lines **206** disposed at two sides of the active regions **202**. The dummy gate lines **206** extend along the second direction Y and are parallel to the gate lines **204**. According to an embodiment of the present invention, the dummy gate lines **206** may be away from the gate lines **204** by the gate line pitch of the gate lines **204**. The overlapping regions of the active regions **202** and the gate lines **204** are the channel regions of the transistors of the standard cell Cell-B. The currents of the channel regions and the ON or OFF states of the transistors are controlled by the gate lines **204**. It is noteworthy that the line ends (end-caps) of the gate lines **204** of the standard cell Cell-B respectively protrude from the edges **202a** of the active regions **102** by a length $L2$ and a length $L2'$ and are away from the boundary lines BN by a distance $S2$ and a distance $S2'$. The distance $S2$, the distance $D2$ and the length $L2$ have the relationship: $S2=D2-L2$. The distance $S2'$, the distance $D2'$ and the length $L2'$ have the relationship: $S2'=D2'-L2'$. The length $L1$ and the length $L1'$ may be referred to as end-cap lengths of the gate lines **104**. It is important that the length $L2$ and the length $L2'$ are larger than a minimum design rule of the integrated circuit layout **10** (for example, 25 nm, 30 nm, 35 nm, 40 nm, 45 nm, 50 nm, or any value within a range defined by any of the above values) to prevent impact on current control ability of the gate lines **204** caused by line-end shorting due to process variation. According to an embodiment of the present invention, the line ends of the dummy gate lines **206** is away from the boundary lines BN by a distance S . It is also important that the distance $D2$, the distance S , and the length $L2$ have the relationship: $L2 \leq D2 - S$. The distance $D2'$, the distance S , and the length $L2'$ have the relationship: $L2' \leq D2' - S$.

By the relationships as illustrated above, when the design rule of the standard cells of the integrated circuit layout **10** has become more and more critical and a gate line cut process is used to manufacture the gate lines **204** and/or the dummy gate lines **206** on a substrate, the line ends of the gate lines **204** of the standard cell Cell-B would not overlap the cut window and would not be etched or cut during the gate line cut process. Therefore, it is ensured that the gate lines **204** manufactured on the substrate have desired gate line lengths and the end-cap lengths of the gate lines **204** (the length $L2$ and the length $L2'$) are sufficient for better control of channel current. The integrated circuit layout **10** of the present invention may meet the requirements of manufacturability.

FIG. 3 exemplarily shows an embodiment where $L2 < D2 - S$ and $L2' < D2' - S$. The distance $S2$ and the distance $S2'$ are larger than the distance S . The gate line length of the

gate lines **204** is larger than the dummy gate line length of the dummy gate lines **206**. The line ends of the gate lines **204** are away from the edge of the cut window CW by a distance and are not flush with the edge of the cut window CW .

According to an embodiment of the present invention, the distance $D2$ is equal to the distance $D2'$, the length $L2$ is equal to the length $L2'$, and the distance $S2$ is equal to the distance $S2'$.

Please refer to FIG. 4, which is a partial enlarged plan view of an integrated circuit layout **10** according to an embodiment of the present invention. The integrated circuit layout **10** includes a standard cells Cell-A and a standard cell Cell-B respectively disposed in two adjacent rows (such as the N row and the $N+1$ row as shown in FIG. 1) and abutting along a boundary line BN . The left side and right side of the standard cell Cell-A and the standard cell Cell-B along the first direction X may abut to other standard cells of the same row. The upper side or lower side of the standard cell Cell-A and the standard cell Cell-B along the second direction Y may abut to another standard cell of another adjacent row. To simplify the drawing, other standard cells are not shown in FIG. 4. The standard cell Cell-A and the standard cell Cell-B respectively include two cell boundaries **12X** that extend along the first direction X and two cell boundaries **12Y** that extend along the second direction Y . The cell boundaries **12X** overlap the boundary lines BN . The cell boundaries **12Y** extend between the boundary lines BN . The standard cell Cell-A and the standard cell Cell-B are standard cells for different powers but have a same cell height H . According to an embodiment of the present invention, the standard cell Cell-A is a high performance cell, and the standard cell Cell-B is a low power cell.

Detailed descriptions about the active regions **102**, **202**, gate lines **104**, **204**, dummy gate lines **106**, **206**, distance $D1$, distance $D1'$, distance $D2$, distance $D2'$, distance S , distance $S1$, distance $S1'$, distance $S2$, distance $S2'$ and the conductivity type of the active regions **102**, **202** of the standard cell Cell-A and the standard cell Cell-B may be referred to the descriptions of FIG. 2 and FIG. 3, and would not be repeated herein for brevity. This embodiment is to show the features that, the active region **102** of the standard cell Cell-A and the active region **202** of the standard cell Cell-B at two sides of the boundary line BN in the middle portion of FIG. 4 have a same conductivity type (such as an n-type conductivity type) and respectively have an active region width $W1N$ and an active region width $W2N$, wherein the active region width $W1N$ is larger than the active region width $W2N$. The other active region **102** of the standard cell Cell-A adjacent to the boundary line BN in the lower portion of FIG. 4 and the other active region **202** of the standard cell Cell-B adjacent to the boundary line BN in the upper portion of FIG. 4 have a same conductivity type (such as a p-type conductivity type) and respectively have an active region width $W1P$ and an active region width $W2P$, wherein the active region width $W1P$ is larger than the active region width $W2P$.

The gate lines **104** of the standard cell Cell-A and the gate lines **204** of the standard cell Cell-B may have a same gate line width or different gate line widths. The gate lines **104** and the gate lines **204** may be arranged in a same gate line pitch along the first direction X , so that the gate lines **104** and the gate lines **204** are aligned along the second direction Y . The dummy gate lines **106** of the standard cell Cell-A and the dummy gate lines **206** of the standard cell Cell-B may have a same dummy gate line width and a same dummy gate line length, and are aligned along the second direction Y . It is noteworthy that in this embodiment, the distance $D1$ and

the distance **D2** between the boundary line **BN** (such as the boundary line **BN** in the middle portion of FIG. 4) and the edge **102a** of the active region **102** of the standard cell **Cell-A** and the edge **202a** of the active region **202** of the standard cell **Cell-B** at two sides of the boundary line **BN** are different. Furthermore, the distance **D1**, the distance **D2**, the distance **S**, the length **L1**, the length **L2** have the relationships:

$$\begin{aligned} L1 &\leq D1 - S; \\ L2 &\leq D2 - S; \text{ and} \\ D1 &\neq D2. \end{aligned}$$

By the relationships as illustrated above, the gate lines **104** and the dummy gate lines **106** of the standard cell **Cell-A** and the gate lines **204** and dummy gate lines **206** of the standard cell **Cell-B** may be manufactured on a substrate by a gate line cut process without the risk of cutting any necessary portion of the line ends of the gate lines **104**, **204**. It is ensured that the gate lines **104**, **204** manufactured on the substrate have desired gate line lengths, and the end-cap lengths of the gate lines **104** (the length **L1** and the length **L1'**) and the end-cap lengths of the gate lines **204** (the length **L2** and the length **L2'**) are sufficient for better control of channel current. The integrated circuit layout **10** of the present invention may meet the requirements of manufacturability.

FIG. 4 exemplarily shows an embodiment where **D1**<**D2**, **L1**=**D1**-**S**, and **L2**<**D2**-**S**. The line ends of the gate lines **104** are flush with the edge of the cut window **CW**. The line ends of the gate lines **204** are away from the edge of the cut window **CW** by a distance. The line ends of the dummy gate lines **106** and **206** are flush with the edge of the cut window **CW**. The length **L2** may be equal to or larger than the length **L1**. When the distance **D1'** the length **L1'** of the standard cell **Cell-A** and the distance **S** have the relationship: **L1'**=**D1'**-**S**, the gate lines **104** and the dummy gate lines **106** may have a same gate line length. The gate line length of the gate line **204** of the standard cell **Cell-B** is smaller than the dummy gate line length of the dummy gate lines **206**.

Please refer to FIG. 5, which is a partial enlarged plan view of an integrated circuit layout **10** according to an embodiment of the present invention. The integrated circuit layout **10** includes a standard cell **Cell-B** and a standard cell **Cell-C** respectively disposed in two adjacent rows (such as the **N** row and the **N+1** row as shown in FIG. 1) and abutting along a boundary line **BN**. The left side and right side of the standard cell **Cell-B** and the standard cell **Cell-C** along the first direction **X** may abut to other standard cells of the same row. The upper side or lower side of the standard cell **Cell-B** and the standard cell **Cell-C** along the second direction **Y** may abut to another standard cell of another adjacent row. To simplify the drawing, other standard cells are not shown in FIG. 5. The standard cell **Cell-B** and the standard cell **Cell-C** respectively include two cell boundaries **12X** that extend along the first direction **X** and two cell boundaries **12Y** that extend along the second direction **Y**. The cell boundaries **12X** overlap the boundary lines **BN**. The cell boundaries **12Y** extend between the boundary lines **BN**. The standard cell **Cell-B** and the standard cell **Cell-C** are different types of low power cells that have a same cell height **H**.

Detailed descriptions about the active regions **202**, gate lines **204**, dummy gate lines **206**, distance **D2**, distance **D2'**, distance **S**, distance **S2**, distance **S2'** and the conductivity

type of the active regions **202** of the standard cell **Cell-B** may be referred to the descriptions of FIG. 3, and would not be repeated herein for brevity. The following description will focus on the standard cell **Cell-C**. For the clarity of explanation, some features of the standard cell **Cell-C** are defined as following: the cell boundary **12X** of the standard cell **Cell-C** overlapping the boundary line **BN** in the middle portion of FIG. 5 is referred to as the upper cell boundary **12X+1**; the cell boundary **12X** of the standard cell **Cell-C** overlapping the boundary line **BN** in the lower portion of FIG. 5 is referred to as the lower cell boundary **12X+2**; the active region **302** adjacent to the upper cell boundary **12X+1** is referred to as the upper active region **3021**; and the active region **302** adjacent to the lower cell boundary **12X+2** is referred to as the lower active region **3022**.

According to an embodiment of the present invention, the upper active region **3021** of the standard cell **Cell-C** and the active region **302** of the standard cell **Cell-B** adjacent to the upper cell boundary **12X+1** have a same conductivity type, such as an n-type conductivity type, and the lower active region **3022** of the standard cell **Cell-C** have a conductivity type opposite to the conductivity type of the upper active region **3021**, such as a p-type conductivity type. According to another embodiment of the present invention, the upper active region **3021** of the standard cell **Cell-C** and the active region **302** of the standard cell **Cell-B** adjacent to the upper cell boundary **12X+1** may have a p-type conductivity type, and the lower active region **3022** of the standard cell **Cell-C** may have an n-type conductivity type. The upper active region **3021** and the lower active region **3022** respectively have a wider portion and a narrower portion having different active region widths. For example, as shown in FIG. 5, the upper active region **3021** has a wider portion having an active region width **W3N** and a narrower portion having an active region width **W4N**, wherein the active region width **W3N** is larger than the active region width **W4N**. The lower active region **3022** has a wider portion having an active region width **W3P** and a narrower portion having an active region width **W4P**, wherein the active region width **W3P** is larger than the active region width **W4P**. The edges of the wider portion and the narrower portion of the upper active region **3021** and the lower active region **3022** are away from the adjacent boundary lines **BN** by different distances to produce a step profile.

The wider portion of the upper active region **3021** includes a first edge **302a** that extends along the first direction **X** and is away from the upper cell boundary **12X+1** by a distance **D3**. The narrower portion of the upper active region **3021** includes a second edge **302b** that extends along the first direction **X** and is away from the upper cell boundary **12X+1** by a distance **D4**. The wider portion of the lower active region **3022** includes a third edge **302c** that extends along the first direction **X** and is away from the lower cell boundary **12X+2** by a distance **D3'**. The narrower portion of the lower active region **3022** includes a fourth edge **302d** that extends along the first direction **X** and is away from the lower cell boundary **12X+2** by a distance **D4'**. The distance **D3** is different from the distance **D4** (**D3**≠**D4**). The distance **D3'** is different from the distance **D4'** (**D3'**≠**D4'**). FIG. 5 exemplarily shows an embodiment where the distance **D3** is smaller than the distance **D4** (**D3**<**D4**) and the distance **D3'** is smaller than the distance **D4'** (**D3'**<**D4'**).

The standard cell **Cell-C** includes a plurality of gate lines that are arranged in parallel and equally spaced (away from each other by a gate line pitch) along the first direction **X**, wherein the gate lines includes a gate line **3041** that extends along the second direction **Y** to cross the wider portions of

11

the upper active region **3021** and the lower active region **3022** and a gate line **3042** that extends along the second direction Y to cross the narrower portions of the upper active region **3021** and the lower active region **3022**. The line ends (end-caps) of the gate line **3041** respectively protrude from the first edge **302a** and the third edge **302c** by a distance **L3** and a distance **L3'** and are away from the boundary lines BN (away from the upper cell boundary **12X+1** and the lower cell boundary **12X+2**) by distance **S3** and a distance **S3'**, wherein $S3=D3-L3$, and $S3'=D3'-L3'$. The line ends (end-caps) of the gate line **3042** respectively protrude from the second edge **302b** and the fourth edge **302d** by a distance **L4** and a distance **L4'** and are away from the boundary lines BN (away from the upper cell boundary **12X+1** and the lower cell boundary **12X+2**) by a distance **S4** and a distance **S4'**, wherein $S4=D4-L4$, and $S4'=D4'-L4'$. The length **L4** may be equal to or larger than the length **L3**. The length **L4'** may be equal to or larger than the length **L3'**. The overlapping regions of the upper active region **3021**, the lower active region **3022** and the gate line **3041** and the gate line **3042** are channel regions of the transistors of the standard cell Cell-C. It is important that the length **L3**, the length **L3'**, the length **L4** and the length **L4'** are larger than a minimum design rule of the integrated circuit layout **10** (for example, 25 nm, 30 nm, 35 nm, 40 nm, 45 nm, 50 nm, or any value within a range defined by any of the above values) to prevent impact on current control ability of the gate line **3041** and the gate line **3042** caused by line-end shorting due to process variation.

The standard cell Cell-C also includes two dummy gate lines **306** disposed at two sides of the upper active region **3021** and the lower active region **3022**. The dummy gate lines **306** extend along the second direction Y and are parallel to the gate line **3041** and the gate line **3042**. According to an embodiment of the present invention, the dummy gate lines **306** may be away from the gate lines by the gate line pitch of the standard cell Cell-C. The line ends of the dummy gate lines **306** are away from the boundary lines BN (away from the upper cell boundary **12X+1** and the lower cell boundary **12X+2**) by a distance **S**. It is also important that the distance **D3**, the distance **D4**, the distance **S**, the length **L3** and the length **L4** have the relationships:

$$L3 \leq D3 - S;$$

$$L4 \leq D4 - S; \text{ and}$$

$$D3 \neq D4.$$

The distance **D3'**, the distance **D4'**, the distance **S**, the length **L3'** and the length **L4'** have the relationships:

$$L3' \leq D3' - S;$$

$$L4' \leq D4' - S; \text{ and}$$

$$D3' \neq D4'.$$

By the relationships as illustrated above, the gate lines **3041**, **3042** and the dummy gate lines **306** of the standard cell Cell-C may be manufactured on a substrate by a gate line cut process without the risk of cutting any necessary portion of the line ends of the gate lines **3041**, **3042**. It is ensured that the gate lines **3041**, **3042** manufactured on the substrate have desired gate line lengths, and the end-cap

12

lengths of the gate line **3041** (the length **L3** and the length **L3'**) and the end-cap lengths of the gate line **3042** (the length **L4** and the length **L4'**) are sufficient for better control of channel current. The integrated circuit layout **10** of the present invention may meet the requirements of manufacturability.

FIG. 5 exemplarily shows an embodiment where $D3 < D4$, $L3 < D3 - S$, $L4 < D4 - S$, and $L3 < L4$. The distance **S3** and the distance **S4** are larger than the distance **S**. The gate line lengths of the gate lines **3041**, **3042** are smaller than the dummy gate line length of the dummy gate line **306**. The line ends of the dummy gate lines **304** are flush with the edge of the cut window CW. The line ends of the gate lines **3041**, **3042** are away from the edge of the cut window CW and are not flush with the edge of the cut window CW. In some embodiments, the distance **S3** and the distance **S4** are equal, the distance **S3'** and the distance **S4'** are equal, and the line ends of the gate lines **3041**, **3042** are aligned along the first direction X. In some embodiments, the distance **D3'**, the distance **D4'**, the length **L3'**, the length **L4'**, the distance **S3'** and the distance **S4'** are equal to the distance **D3**, the distance **D4**, the length **L3**, the length **L4**, the distance **S3** and the distance **S4**, respectively.

The gate line width of the gate lines **3041**, **3042** of the standard cell Cell-C and the gate line width of the gate lines **204** of the standard cell Cell-B may be the same or different. In some embodiments, the gate lines **3041**, **3042** of the standard cell Cell-C and the gate lines **204** of the standard cell Cell-B have a same gate line width.

Please refer to FIG. 6, which is a partial enlarged plan view of an integrated circuit layout **10** according to an embodiment of the present invention. The integrated circuit layout **10** includes a standard cell Cell-B and a standard cell Cell-C respectively disposed in two adjacent rows (such as the N row and the N+1 row as shown in FIG. 1) and abutting along a boundary line BN. The left side and right side of the standard cell Cell-B and the standard cell Cell-C along the first direction X may abut to other standard cells of the same row. The upper side or lower side of the standard cell Cell-B and the standard cell Cell-C along the second direction Y may abut to another standard cell of another adjacent row. To simplify the drawing, other standard cells are not shown in FIG. 6. The standard cell Cell-B and the standard cell Cell-C respectively include two cell boundaries **12X** that extend along the first direction X and two cell boundaries **12Y** that extend along the second direction Y. The cell boundaries **12X** overlap the boundary lines BN. The cell boundaries **12Y** extend between the boundary lines BN. The standard cell Cell-B and the standard cell Cell-C are different types of low power cells that have a same cell height H.

Detailed descriptions about the active regions, gate lines, dummy gate lines, and the conductivity types of the active regions of the standard cell Cell-B and the standard cell Cell-C may be referred to the descriptions of FIG. 3 and FIG. 5, and would not be repeated herein for brevity. This embodiment is to show the features that, the standard cell Cell-C further includes a gate line **3043** that extends along the second direction Y to cross the wider portions of the upper active region **3021** and the lower active region **3022**. The line ends of the gate line **3043** respectively protrude from the first edge **302a** and the third edge **302c** by a distance **L5** and a distance **L5'** and are away from the boundary lines BN (away from the upper cell boundary **12X+1** and the lower cell boundary **12X+2**) by distance **S5** and a distance **S5'**, wherein $S5=D3-L5$, and $S5'=D3'-L5'$. It is important that the length **L5** and the length **L5'** are larger than a minimum design rule of the integrated circuit layout

13

10 (for example, 25 nm, 30 nm, 35 nm, 40 nm, 45 nm, 50 nm, or any value within a range defined by any of the above values) to prevent impact on current control ability of the gate line 3043 caused by line-end shorting due to process variation. It is also important that the distance D3, the distance S, the length L5 have the relationship: $L5 \leq D3 - S$, and the distance D3', the distance S, the length L5' have the relationship: $L5' \leq D3' - S$, wherein the distance S is the distance between the line ends of the dummy gate lines 306 and the boundary lines BN.

By the relationships as illustrated above, the gate lines 3041, 3042, and 3043 and the dummy gate lines 306 of the standard cell Cell-C may be manufactured on a substrate by a gate line cut process without the risk of cutting any necessary portion of the line ends of the gate lines 3041, 3042, and 3043. It is ensured that the gate lines 3041, 3042, and 3043 manufactured on the substrate have desired gate line lengths, and the end-cap lengths of the gate line 3041 (the length L3 and the length L3'), the end-cap lengths of the gate line 3042 (the length L4 and the length L4') and the end-cap lengths of the gate line 3043 (the length L5 and the length L5') are sufficient for better control of channel current. The integrated circuit layout 10 of the present invention may meet the requirements of manufacturability.

FIG. 6 exemplarily shows an embodiment where $L5 > L3$, $L5 = D3 - S$, and $S5 = S$. The line end of the gate line 3043 having the end-cap length L5 is flush with the edge of the cut window CW while the line end of the gate line 3041 having the end-cap length L3 is away from the edge of the cut window CW and is not flush with the edge of the cut window CW. The gate line length of the gate line 3043 is larger than the gate lines 3041 and 3042. When $L5' = D3' - S$, and $S5' = S$, the gate line length of the gate line 3043 is the same as the dummy gate line length of the dummy gate line 306.

Please refer to FIG. 7, which is a partial enlarged plan view of an integrated circuit layout 10 according to an embodiment of the present invention. The integrated circuit layout 10 includes two standard cells Cell-A1 respectively disposed in two adjacent rows (such as the N row and the N+1 row as shown in FIG. 1) and abutting along a boundary line BN. The left side and right side of the standard cell Cell-A1 along the first direction X may abut to other standard cells of the same row. The upper side or lower side of the standard cell Cell-A1 along the second direction Y may abut to another standard cell of another adjacent row. To simplify the drawing, other standard cells are not shown in FIG. 7. The standard cell Cell-A1 includes two cell boundaries 12X that extend along the first direction X and two cell boundaries 12Y that extend along the second direction Y. The cell boundaries 12X overlap the boundary lines BN. The cell boundaries 12Y extend between the boundary lines BN. The standard cell Cell-A1 has a cell height H. According to an embodiment, the standard cell Cell-A1 is a high performance cell.

Detailed descriptions about the gate lines 104, the dummy gate lines 106 and the conductivity types of the active regions 102 may be referred to the descriptions about the standard cells Cell-A shown in FIG. 2, and would not be repeated herein for brevity. A main difference between the standard cell Cell-A1 and the standard cell Cell-A is the design of the active region 102. The active regions 102 of the standard cells Cell-A1 respectively include a plurality of fin structures 1021 in a same size, such as four fin structures 1021. The fin structures 1021 extend along the first direction X and are arranged in parallel along the second direction Y

14

In some embodiments, the line ends of the fin structures 1021 are covered by the dummy gate lines 106 and are not exposed.

As shown in FIG. 7, the edges 102a of two of the fin structures 1021 that are most adjacent to the boundary line BN are away from the boundary line BN by a distance D1 and a distance D1', respectively. The line ends of the gate lines 104 respectively protrude from the edges 102a of the two fin structures 1021 by a length L1 and a length L1'. It is important that when the line ends of the dummy gate lines 106 are away from the boundary line BN by the distance S, the distance D1, the distance S, the length L1 have the relationship: $L1 \leq D1 - S$, and the distance D1', the distance S, the length L1' have the relationship: $L1' \leq D1' - S$.

Please refer to FIG. 8, which is a partial enlarged plan view of an integrated circuit layout 10 according to an embodiment of the present invention. The integrated circuit layout 10 includes two standard cells Cell-B1 respectively disposed in two adjacent rows (such as the N row and the N+1 row as shown in FIG. 1) and abutting along a boundary line BN. The left side and right side of the standard cell Cell-B1 along the first direction X may abut to other standard cells of the same row. The upper side or lower side of the standard cell Cell-B1 along the second direction Y may abut to another standard cell of another adjacent row. To simplify the drawing, other standard cells are not shown in FIG. 8. The standard cell Cell-B1 includes two cell boundaries 12X that extend along the first direction X and two cell boundaries 12Y that extend along the second direction Y. The cell boundaries 12X overlap the boundary lines BN. The cell boundaries 12Y extend between the boundary lines BN. The standard cell Cell-B1 has a cell height H. According to an embodiment, the standard cell Cell-B1 is a low power cell.

Detailed descriptions about the gate lines 204, the dummy gate lines 206 and the conductivity types of the active regions 202 may be referred to the descriptions about the standard cells Cell-B shown in FIG. 3, and would not be repeated herein for brevity. The main difference between the standard cell Cell-B1 and the standard cell Cell-B is the design of the active region 202. The active regions 202 of the standard cells Cell-B1 respectively include a plurality of fin structures 2021 in a same size, such as four fin structures 2021. The fin structures 2021 extend along the first direction X and are arranged in parallel along the second direction Y. In some embodiments, the line ends of the fin structures 2021 are covered by the dummy gate lines 206 and are not exposed.

As shown in FIG. 8, the edges 202a of two of the fin structures 2021 that are most adjacent to the boundary line BN are away from the boundary line BN by a distance D2 and a distance D2', respectively. The line ends of the gate lines 204 respectively protrude from the edges 202a of the two fin structures 2021 by a length L2 and a length L2'. It is important that when the line ends of the dummy gate lines 206 are away from the boundary line BN by the distance S, the distance D2, the distance S, the length L2 have the relationship: $L2 \leq D2 - S$, and the distance D2', the distance S, the length L2' have the relationship: $L2' \leq D2' - S$.

Please refer to FIG. 9, which is a partial enlarged plan view of an integrated circuit layout 10 according to an embodiment of the present invention. The integrated circuit layout 10 includes a standard cell Cell-A1 and a standard cell Cell-B1 respectively disposed in two adjacent rows (such as the N row and the N+1 row as shown in FIG. 1) and abutting along a boundary line BN. The left side and right side of the standard cell Cell-A1 and the standard cell

15

Cell-B1 along the first direction X may abut to other standard cells of the same row. The upper side or lower side of the standard cell Cell-A1 and the standard cell Cell-B1 along the second direction Y may abut to another standard cell of another adjacent row. To simplify the drawing, other standard cells are not shown in FIG. 9. The standard cell Cell-A1 and the standard cell Cell-B1 respectively include two cell boundaries 12X that extend along the first direction X and two cell boundaries 12Y that extend along the second direction Y. The cell boundaries 12X overlap the boundary lines BN. The cell boundaries 12Y extend between the boundary lines BN. The standard cell Cell-A1 and the standard cell Cell-B1 are standard cells for different powers but have a same cell height H. According to an embodiment of the present invention, the standard cell Cell-A1 is a high performance cell, and the standard cell Cell-B1 is a low power cell.

Detailed descriptions about the gate lines 104, 204, dummy gate lines 106, 206, and the conductivity types of the active regions 102, 202 of the standard cell Cell-A1 and the standard cell Cell-B1 may be referred to the descriptions of FIG. 2, FIG. 3, FIG. 7 and FIG. 8, and would not be repeated herein for brevity. This embodiment is to show the features that, the numbers of the fin structures 1021 of the standard cell Cell-A1 and the fin structures 2021 of the standard cell Cell-B1 are different, and the distance D1 between the edge 102a of the fin structure 1021 of the standard cell Cell-A1 and the boundary line BN (the one between the standard cell Cell-A1 and the standard cell Cell-B1) is different from the D2 between the edge 202a of the fin structure 2021 of the standard cell Cell-B1 and the boundary line BN. Furthermore, the distance D1, the distance D2, the distance S, the length L1 and the length L2 have the relationship:

$$L1 \leq D1 - S;$$

$$L2 \leq D2 - S; \text{ and}$$

$$D1 \neq D2.$$

Please refer to FIG. 10, which is a partial enlarged plan view of an integrated circuit layout 10 according to an embodiment of the present invention. The integrated circuit layout 10 includes a standard cells Cell-A and a standard cell Cell-B respectively disposed in two adjacent rows (such as the N row and the N+1 row as shown in FIG. 1) and abutting along a boundary line BN. The left side and right side of the standard cell Cell-A and the standard cell Cell-B along the first direction X may abut to other standard cells of the same row. The upper side or lower side of the standard cell Cell-A and the standard cell Cell-B along the second direction Y may abut to another standard cell of another adjacent row. To simplify the drawing, other standard cells are not shown in FIG. 4. The standard cell Cell-A and the standard cell Cell-B respectively include two cell boundaries 12X that extend along the first direction X and two cell boundaries 12Y that extend along the second direction Y. The cell boundaries 12X overlap the boundary lines BN. The cell boundaries 12Y extend between the boundary lines BN. The standard cell Cell-A and the standard cell Cell-B are standard cells for different powers but have a same cell height H. According to an embodiment of the present invention, the standard cell Cell-A is a high performance cell, and the standard cell Cell-B is a low power cell.

Detailed descriptions about the gate lines 104, 204, the dummy gate lines 106, 206, the active regions 102, 202 and

16

the conductivity types of the active regions 102, 202 may be referred to the descriptions of FIG. 4, and would not be repeated herein for brevity. This embodiment is to show the features that, the numbers of the gate lines 104 of the standard cell Cell-A and the gate lines 204 of the standard cell Cell-B are different, and are arranged along the first direction X by a same gate line pitch. The standard cell Cell-A and the standard cell Cell-B have different cell widths, but have a same cell height. For example, as shown in FIG. 10, the standard cell Cell-A has three gate lines 104, the standard cell Cell-B has four gate lines 204, and the cell width of the standard cell Cell-B is larger than the cell width of the standard cell Cell-A. At least a portion of the gate line 104 is aligned with a portion of the gate line 204 along the second direction Y. In some embodiments, one of the dummy gate lines 106 and one of the dummy gate lines 206 are aligned along the second direction Y, and the other dummy gate lines 106 is aligned with one of the gate lines 204 along the second direction Y. The numbers of the gate lines 104 and gate lines 204 are example and should not be taken as a limitation to the present invention. Other numbers of gate lines 104 and gate lines 204 are included in the scope of the present invention.

In summary, the standard cells for forming an integrated circuit layout provided by the present invention all have a same cell height, so they can be conveniently mix used in a same routing block of an integrated circuit layout no matter the standard cells have a same width or different cell widths. Furthermore, along a boundary line between the rows of the standard cells, the end-cap length L (the length by which the gate line protruding from the edge of the active region), the distance D between the edge of the active region and the boundary line, and the distance S between the line end of the dummy gate line and the boundary line have the relationship: $L \leq D - S$. In this way, the gate lines and dummy gate lines of the integrated circuit layout may be manufactured on a substrate by a gate line cut process without the risk of cutting any necessary portion of the gate lines, and the end-cap lengths of the gate lines may be ensured. The integrated circuit layout provided by the present invention may meet the requirements of manufacturability.

Those skilled in the art will readily observe that numerous modifications and alterations of the device and method may be made while retaining the teachings of the invention. Accordingly, the above disclosure should be construed as limited only by the metes and bounds of the appended claims.

What is claimed is:

1. An integrated circuit layout, comprising:
 - an upper cell boundary extending along a first direction;
 - an upper active region comprising a first edge and a second edge extending along the first direction and adjacent to the upper cell boundary, wherein the first edge is away from the upper cell boundary by a distance D3, the second edge is away from the upper cell boundary by a distance D4;
 - a first gate line disposed on the upper active region and extending along a second direction to protrude from the first edge of the upper active region by a length L3;
 - a second gate line disposed on the upper active region and extending along the second direction to protrude from the second edge of the upper active region by a length L4;
 - a third gate line disposed on the upper active region and extending along the second direction to protrude from

17

the first edge of the upper active region by a length **L5**, wherein the length **L3** is equal to or smaller than the length **L5**; and

two dummy gate lines disposed at two sides of the upper active region, extending along the second direction, and away from the upper cell boundary by a distance **S**, wherein the first direction and the second direction are perpendicular, the distance **D3**, the distance **D4**, the distance **S**, the length **L3** and the length **L4** comprise the relationships:

$$L3 \leq D3 - S;$$

$$L4 \leq D4 - S; \text{ and}$$

$$D3 \neq D4.$$

2. The integrated circuit layout according to claim **1**, wherein the length **L4** is equal to or larger than the length **L3**.

3. The integrated circuit layout according to claim **1**, wherein a gate line length of the first gate line along the second direction is equal to or smaller than a dummy gate line length of the two dummy gate lines along the second direction.

4. The integrated circuit layout according to claim **1**, wherein the first gate line and the second gate line comprise a same gate line length along the second direction.

5. The integrated circuit layout according to claim **1**, wherein first gate line is away from the upper cell boundary

18

by a distance **S3**, and the second gate line is away from the upper cell boundary by a distance **S4**, wherein the distance **S3** and the distance **S4** are equal to or larger than the distance **S**, respectively.

6. The integrated circuit layout according to claim **1**, wherein a gate line length of the second gate line along the second direction is equal to or smaller than a gate line length of the third gate line along the second direction.

7. The integrated circuit layout according to claim **1**, further comprising:

a lower cell boundary opposite to the upper cell boundary and extending along the first direction;

a lower active region disposed between the upper active region and the lower cell boundary and comprising a third edge and a fourth edge extending along the first direction and adjacent to the lower cell boundary, wherein the third edge of the lower active region is away from the lower cell boundary by the distance **D3**, the fourth edge of the lower active region is away from the lower cell boundary by the distance **D4**.

8. The integrated circuit layout according to claim **7**, wherein the first gate line extends along the second direction to cross the lower active region and protrude from the third edge by the length **L3**, and the second gate line extends along the second direction to cross the lower active region and protrude from the fourth edge by the length **L4**.

9. The integrated circuit layout according to claim **7**, wherein the two dummy gate lines extend along the second direction to two sides of the lower active region and are away from the lower cell boundary by the distance **S**.

* * * * *