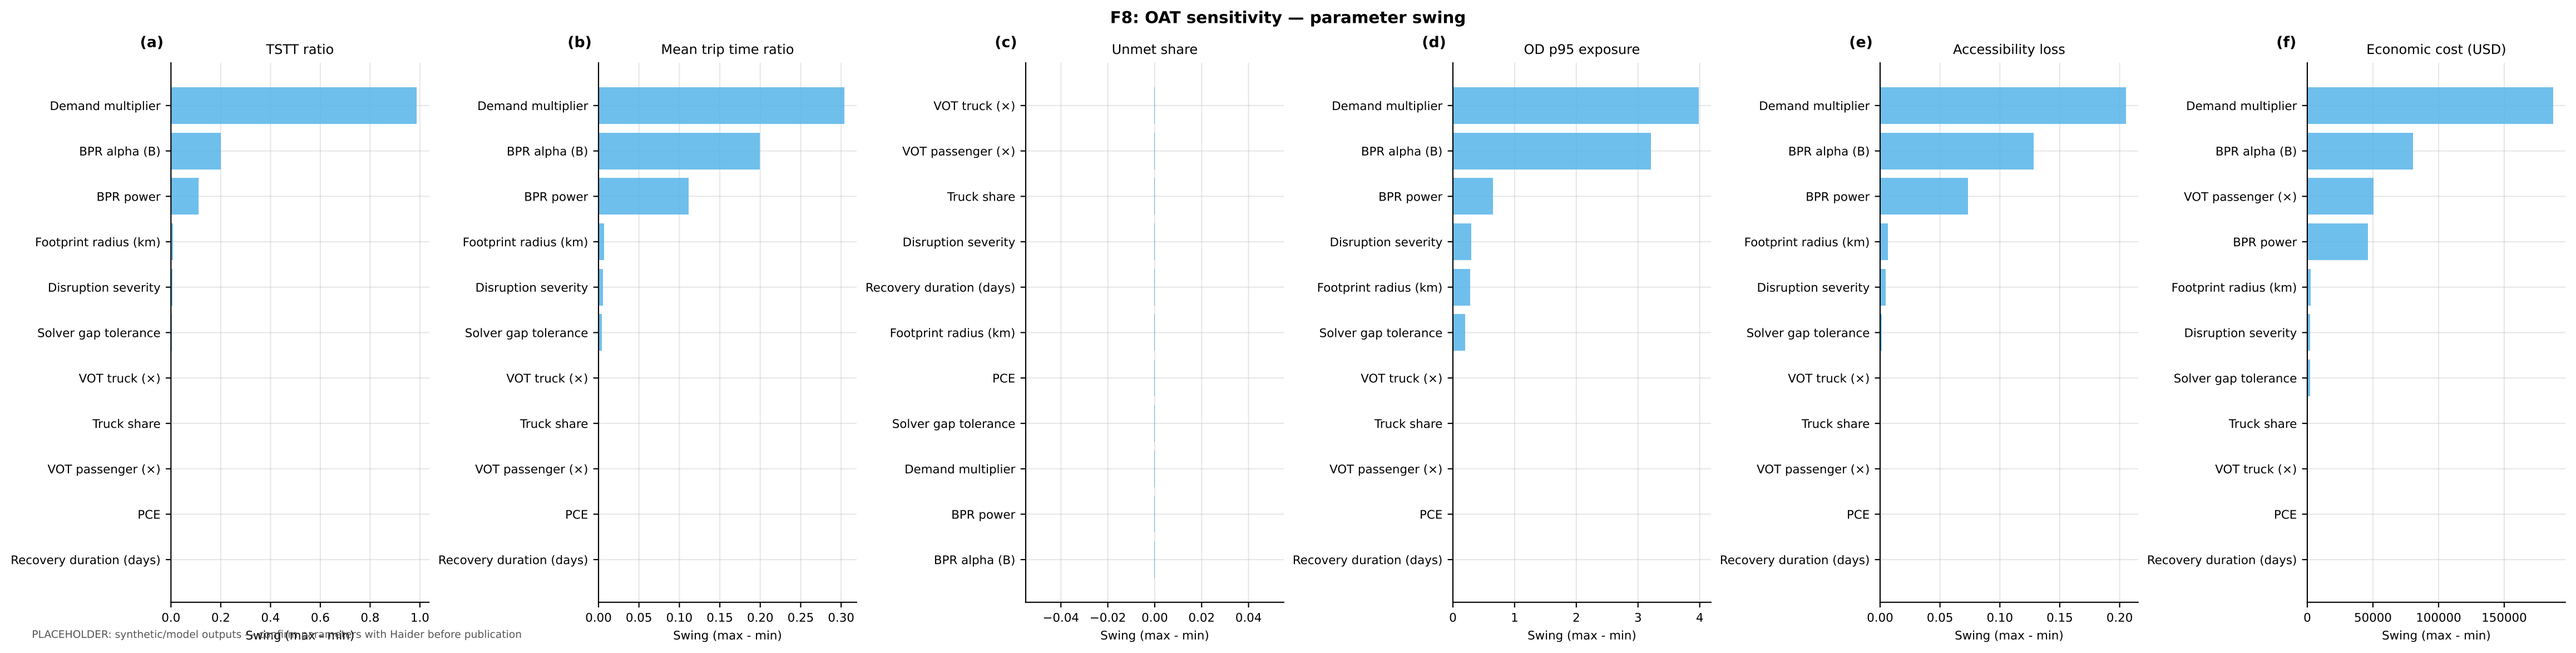
F8: OAT sensitivity — parameter swing
(a)
TSTT ratio
(b)
Mean trip time ratio
(c)
Unmet share
(d)
OD p95 exposure
(e)
Accessibility loss
(f)
Economic cost (USD)
Demand multiplier
BPR alpha (B)
BPR power
Footprint radius (km)
Disruption severity
Solver gap tolerance
VOT truck (×)
Truck share
VOT passenger (×)
PCE
Recovery duration (days)
Swing (max - min)
PLACEHOLDER: synthetic/model outputs — replace with real runs with Haider before publication