

# Computer Networks

## CS3001

### (Section BDS-7A)

## Lecture 28

Instructor: Dr. Syed Mohammad Irteza  
Assistant Professor, Department of Computer Science  
05 December, 2023

# CSMA (carrier sense multiple access)

simple **CSMA**: listen before transmit:


- if channel sensed idle: transmit entire frame
- if channel sensed busy: defer transmission
- human analogy: don't interrupt others!

**CSMA/CD**: CSMA with *collision detection*

- collisions *detected* within short time
- colliding transmissions aborted, reducing channel wastage
- collision detection easy in wired, difficult with wireless
- human analogy: the polite conversationalist


# CSMA: collisions

- collisions can *still* occur with carrier sensing:
  - **propagation delay** means two nodes may not hear each other's just-started transmission
- **collision**: entire packet transmission time wasted
  - distance & propagation delay play role in determining collision probability

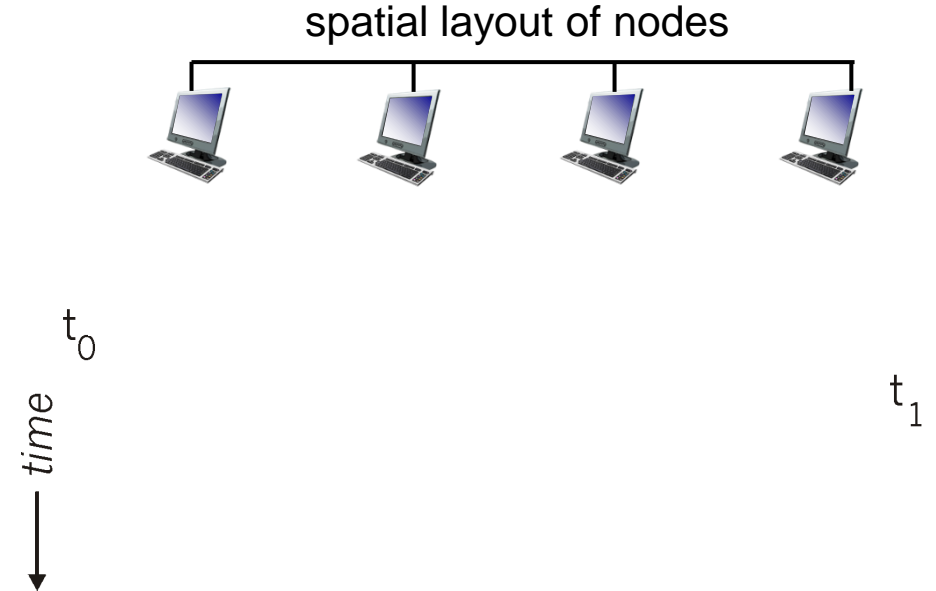

# CSMA/CD:

- CSMA/CD reduces the amount of time wasted in collisions
  - transmission aborted on collision detection

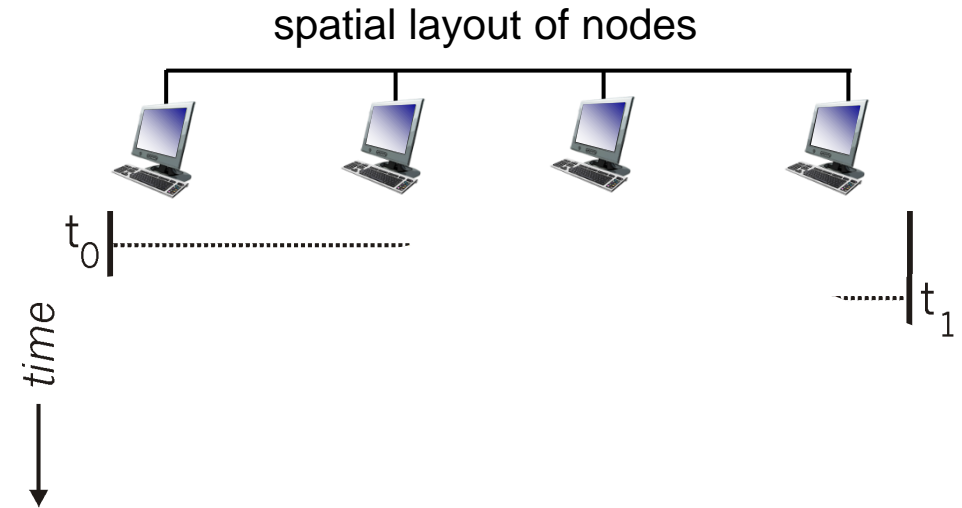

# Ethernet CSMA/CD algorithm

1. Ethernet receives datagram from network layer, creates frame
2. If Ethernet senses channel:
  - if **idle**: start frame transmission.
  - if **busy**: wait until channel idle, then transmit
3. If entire frame transmitted without collision - done!
4. If another transmission detected while sending: abort, send jam signal
5. After aborting, enter *binary (exponential) backoff*:
  - after  $m$ th collision, chooses  $K$  at random from  $\{0, 1, 2, \dots, 2^m - 1\}$ . Ethernet waits  $K \cdot 512$  bit times, returns to Step 2
  - more collisions: longer backoff interval

# “Taking turns” MAC protocols

## channel partitioning MAC protocols:

- share channel *efficiently* and *fairly* at high load
- inefficient at low load: delay in channel access,  $1/N$  bandwidth allocated even if only 1 active node!

## random access MAC protocols

- efficient at low load: single node can fully utilize channel
- high load: collision overhead


## “taking turns” protocols

- look for best of both worlds!

# “Taking turns” MAC protocols

## polling:


- centralized controller “invites” other nodes to transmit in turn
- typically used with “dumb” devices
- concerns:
  - polling overhead
  - latency
  - single point of failure (master)
- Bluetooth uses polling

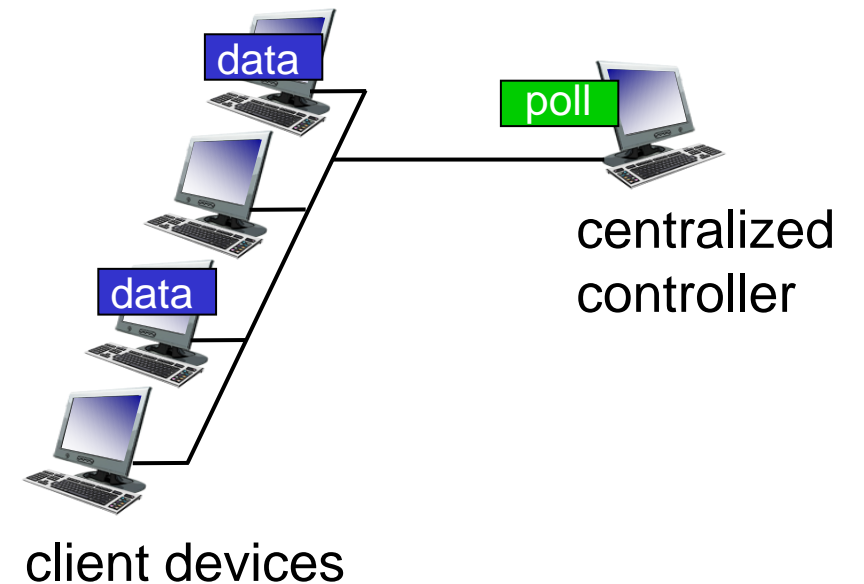

# “Taking turns” MAC protocols


## token passing:

- control *token* message explicitly passed from one node to next, sequentially
  - transmit while holding token
- concerns:
  - token overhead
  - latency
  - single point of failure (token)

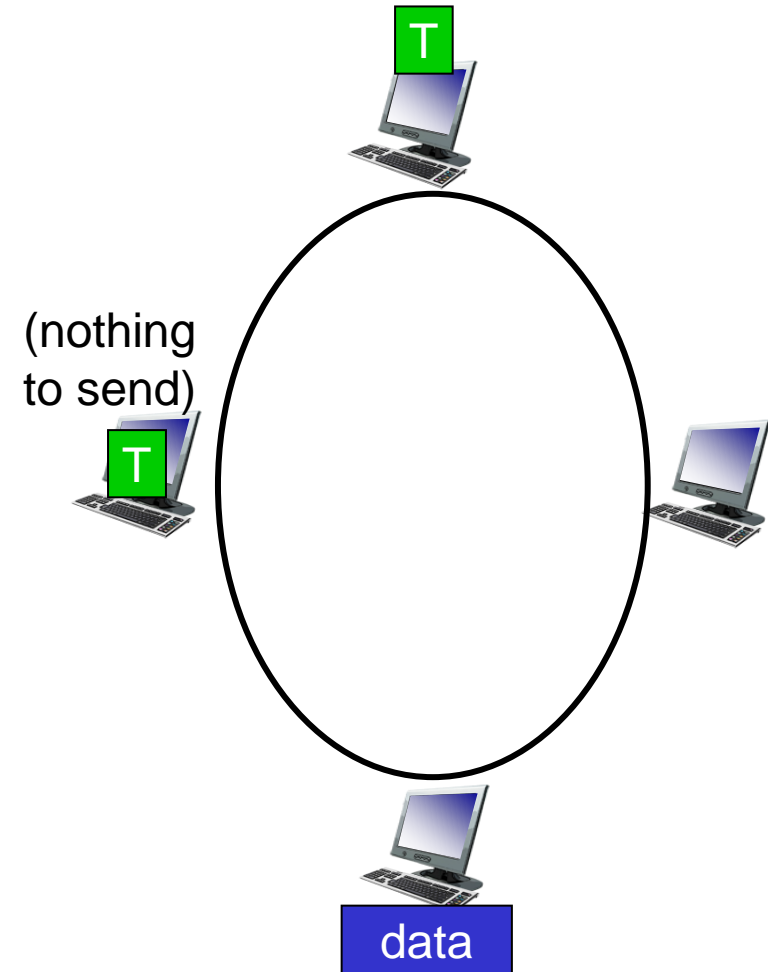



# Cable access network: FDM, TDM *and* random access!

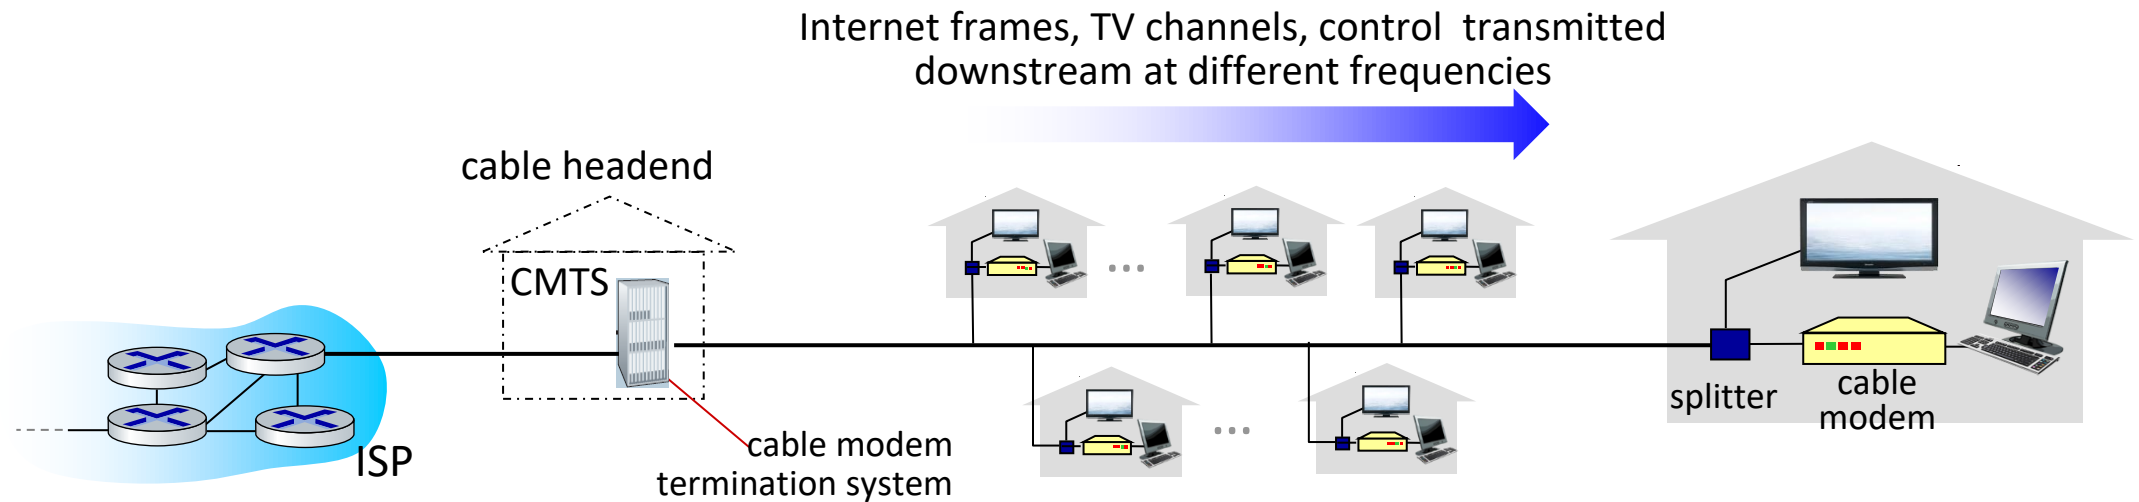

- **multiple** downstream (broadcast) FDM channels: up to 1.6 Gbps/channel
  - single CMTS transmits into channels
- **multiple** upstream channels (up to 1 Gbps/channel)
  - **multiple access**: all users contend (random access) for certain upstream channel time slots; others assigned TDM

# Summary of MAC protocols

- **channel partitioning**, by time, frequency or code
  - Time Division, Frequency Division
- **random access** (dynamic),
  - ALOHA, S-ALOHA, CSMA, CSMA/CD
  - carrier sensing: easy in some technologies (wire), hard in others (wireless)
  - CSMA/CD used in Ethernet
  - CSMA/CA used in 802.11
- **taking turns**
  - polling from central site, token passing
  - Bluetooth, FDDI, token ring

# Link layer, LANs: roadmap

- introduction
- error detection, correction
- multiple access protocols
- **LANs**
  - **addressing, ARP**
  - Ethernet
  - switches
  - VLANs
- link virtualization: MPLS
- data center networking



- a day in the life of a web request


# MAC addresses

- 32-bit IP address:
  - *network-layer* address for interface
  - used for layer 3 (network layer) forwarding
  - e.g.: 128.119.40.136
- MAC (or LAN or physical or Ethernet) address:
  - function: used “locally” to get frame from one interface to another physically-connected interface (same subnet, in IP-addressing sense)
  - 48-bit MAC address (for most LANs) burned in NIC ROM, also sometimes software settable
  - e.g.: 1A-2F-BB-76-09-AD
    - hexadecimal (base 16) notation  
(each “numeral” represents 4 bits)

# MAC addresses

each interface on LAN

- has unique 48-bit **MAC** address
- has a locally unique 32-bit IP address (as we've seen)

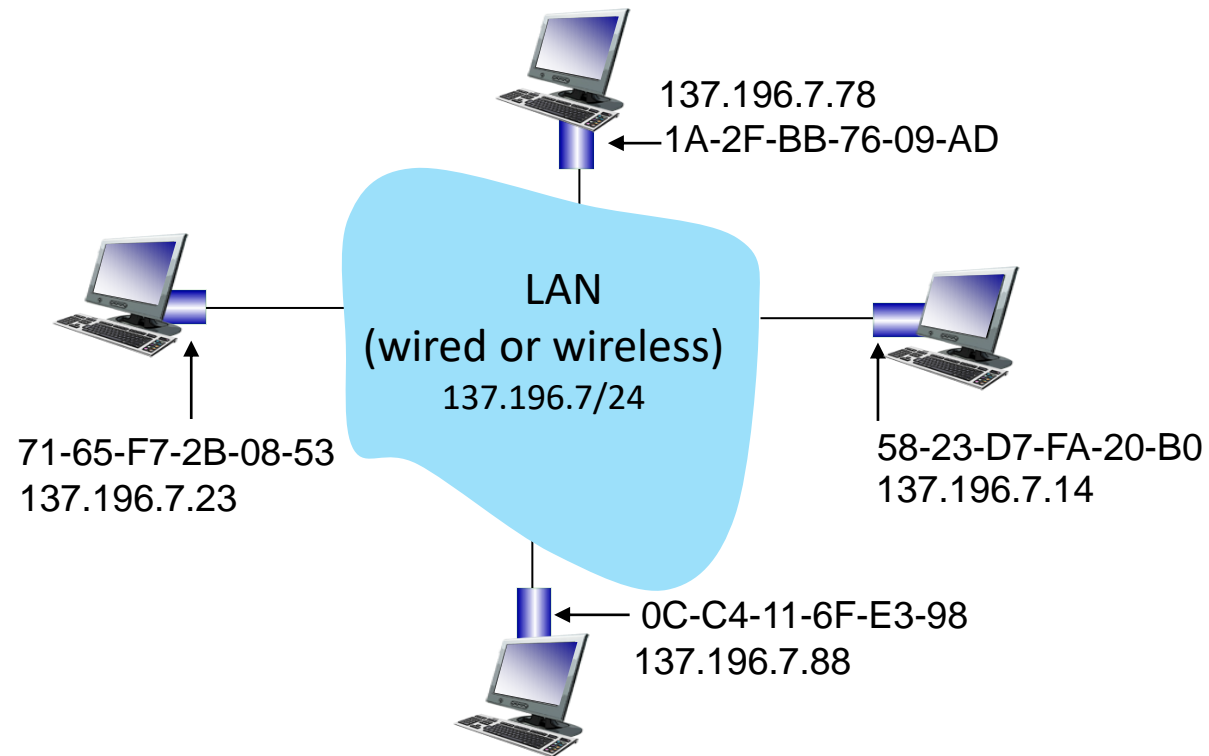


# MAC addresses

- MAC address allocation administered by IEEE
- manufacturer buys portion of MAC address space (to assure uniqueness)
- analogy:
  - MAC address: like Social Security Number
  - IP address: like postal address
- MAC flat address: portability
  - can move interface from one LAN to another
  - recall IP address *not* portable: depends on IP subnet to which node is attached

# ARP: address resolution protocol

*Question:* how to determine interface's MAC address, knowing its IP address?

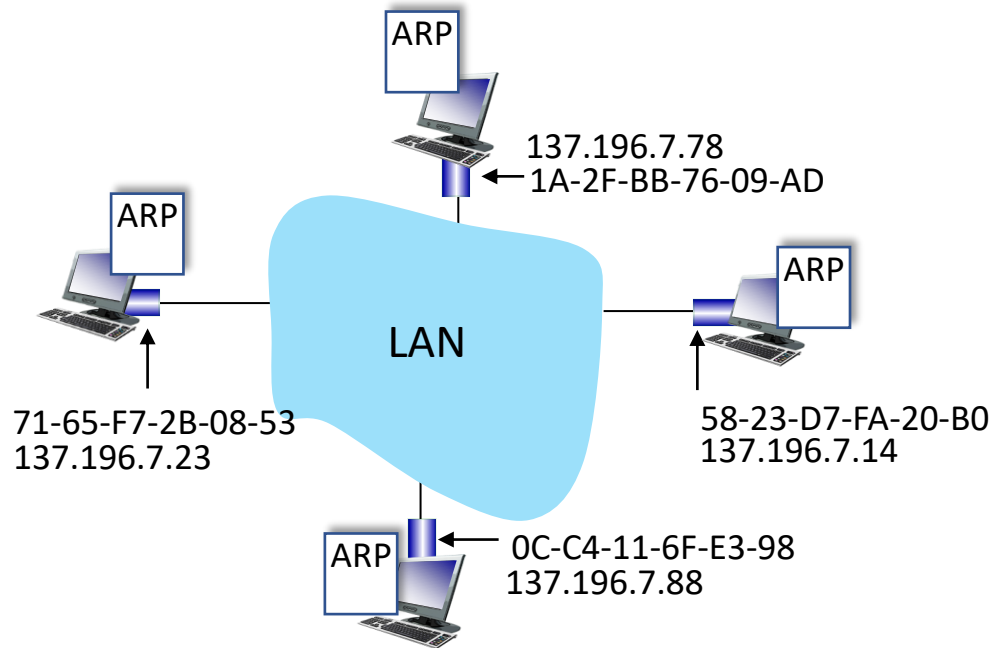

**ARP table:** each IP node (host, router) on LAN has table

- IP/MAC address mappings for some LAN nodes:  
< IP address; MAC address; TTL >
- TTL (Time To Live): time after which address mapping will be forgotten (typically 20 min)

# ARP protocol in action

example: A wants to send datagram to B


- B's MAC address not in A's ARP table, so A uses ARP to find B's MAC address

A broadcasts ARP query, containing B's IP addr

- ①
- destination MAC address = FF-FF-FF-FF-FF-FF
  - all nodes on LAN receive ARP query

ARP table in A

IP addr	MAC addr	TTL

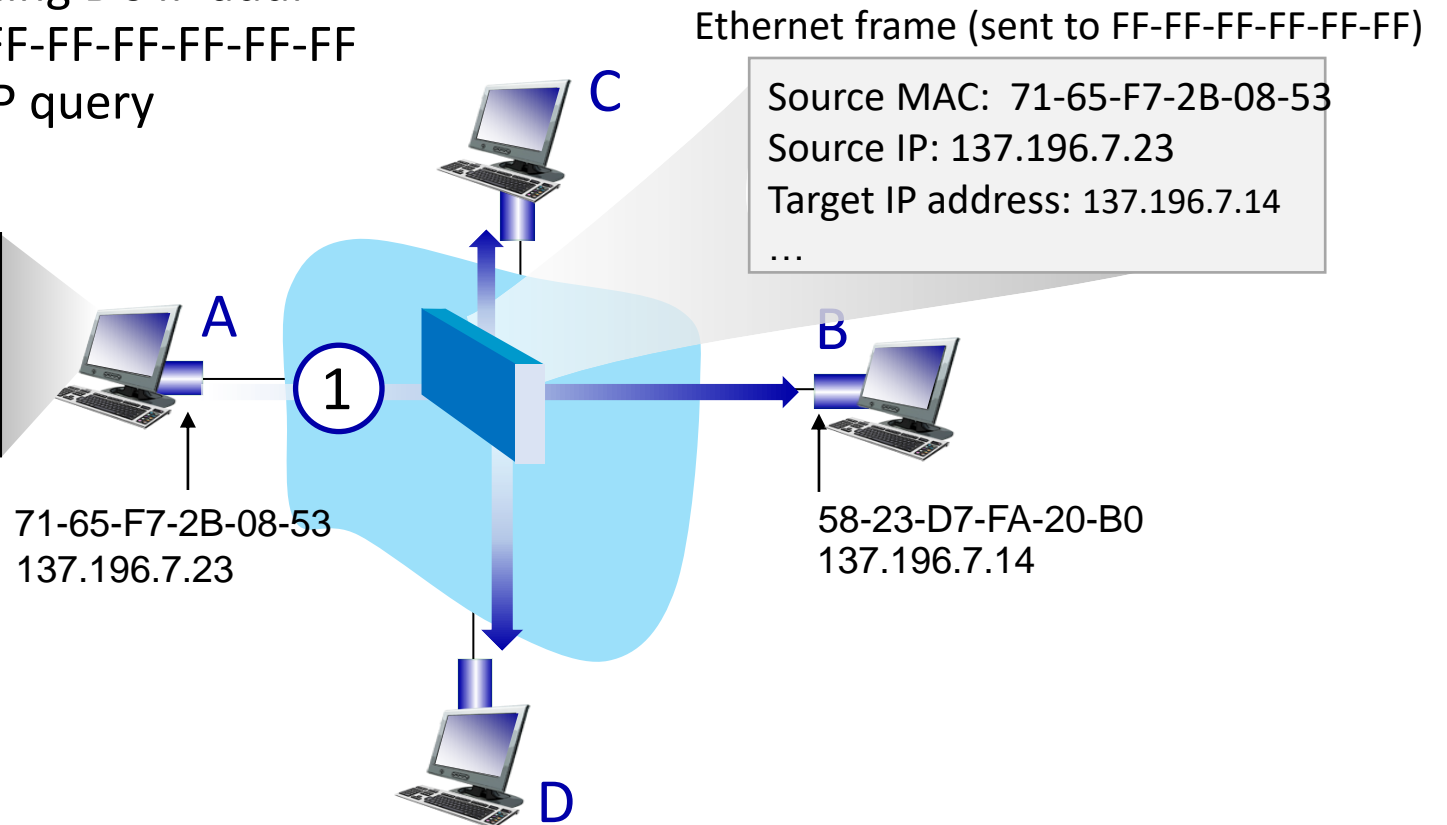




# ARP protocol in action

example: A wants to send datagram to B


- B's MAC address not in A's ARP table, so A uses ARP to find B's MAC address

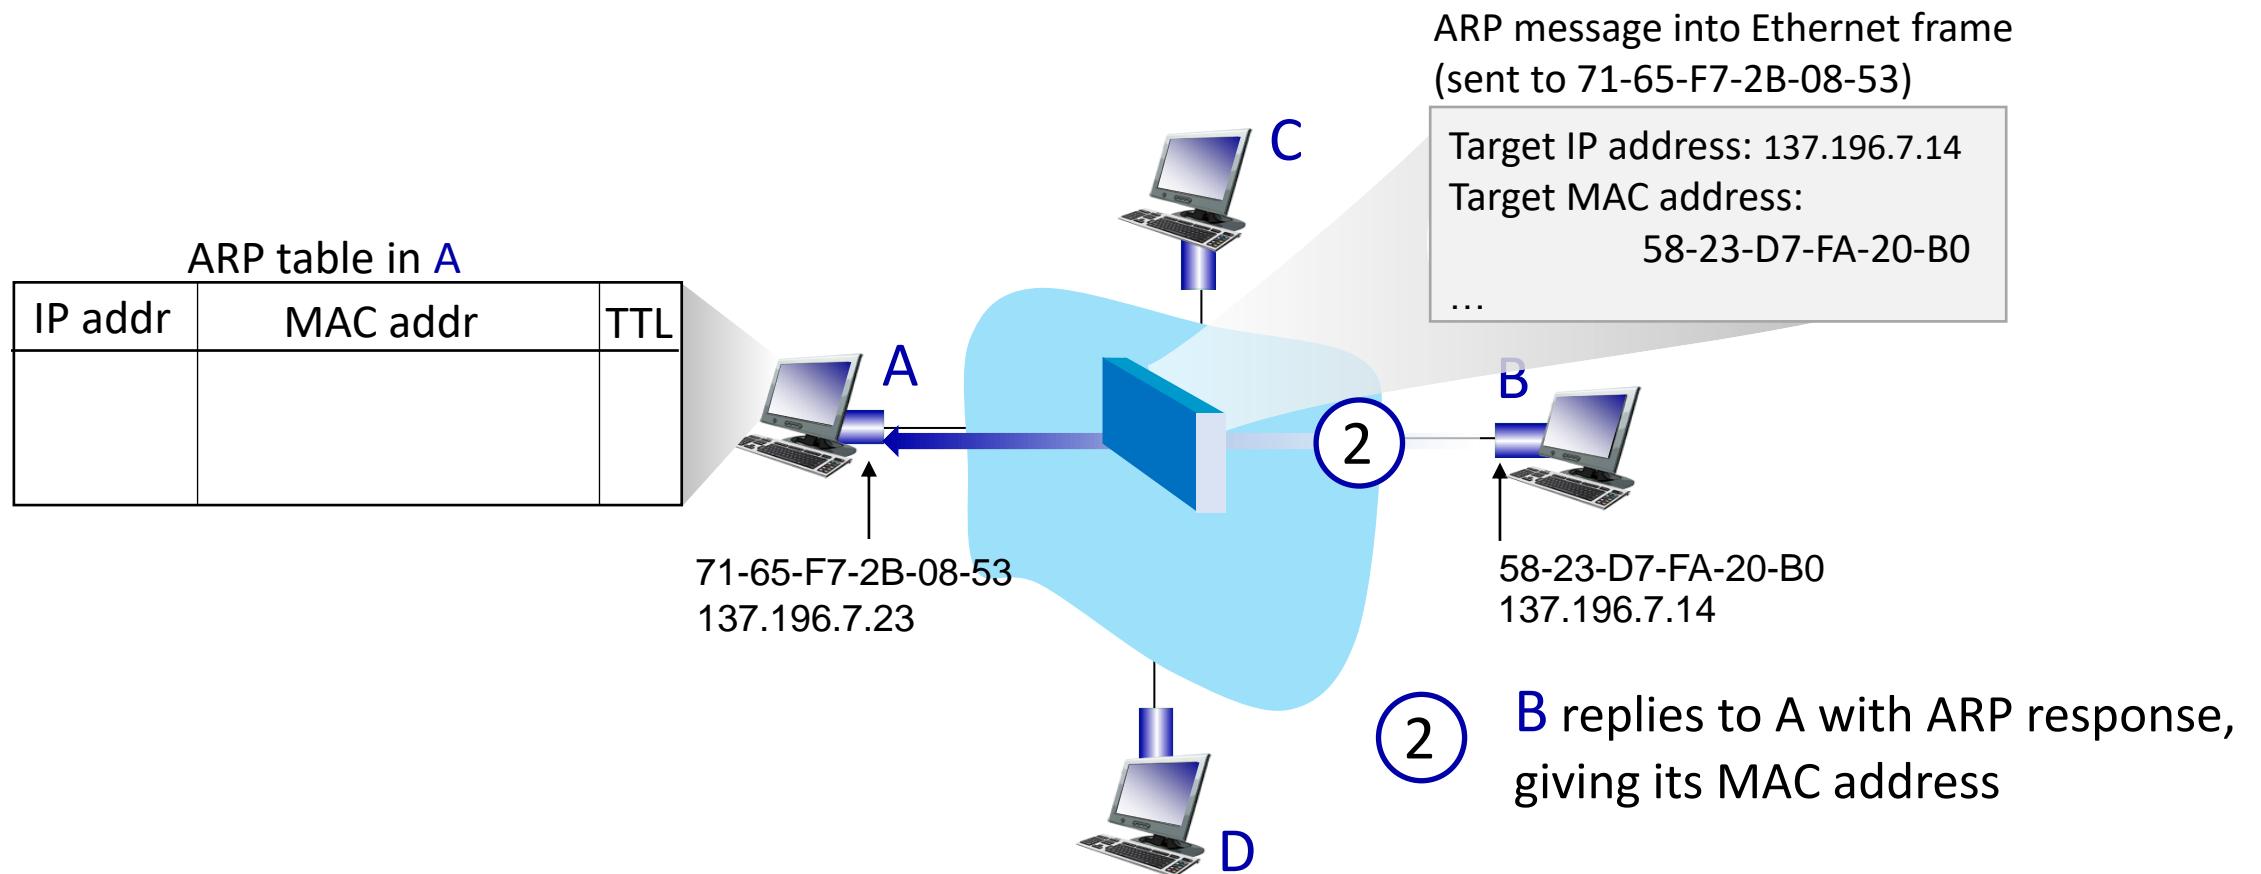

# ARP protocol in action

example: A wants to send datagram to B


- B's MAC address not in A's ARP table, so A uses ARP to find B's MAC address

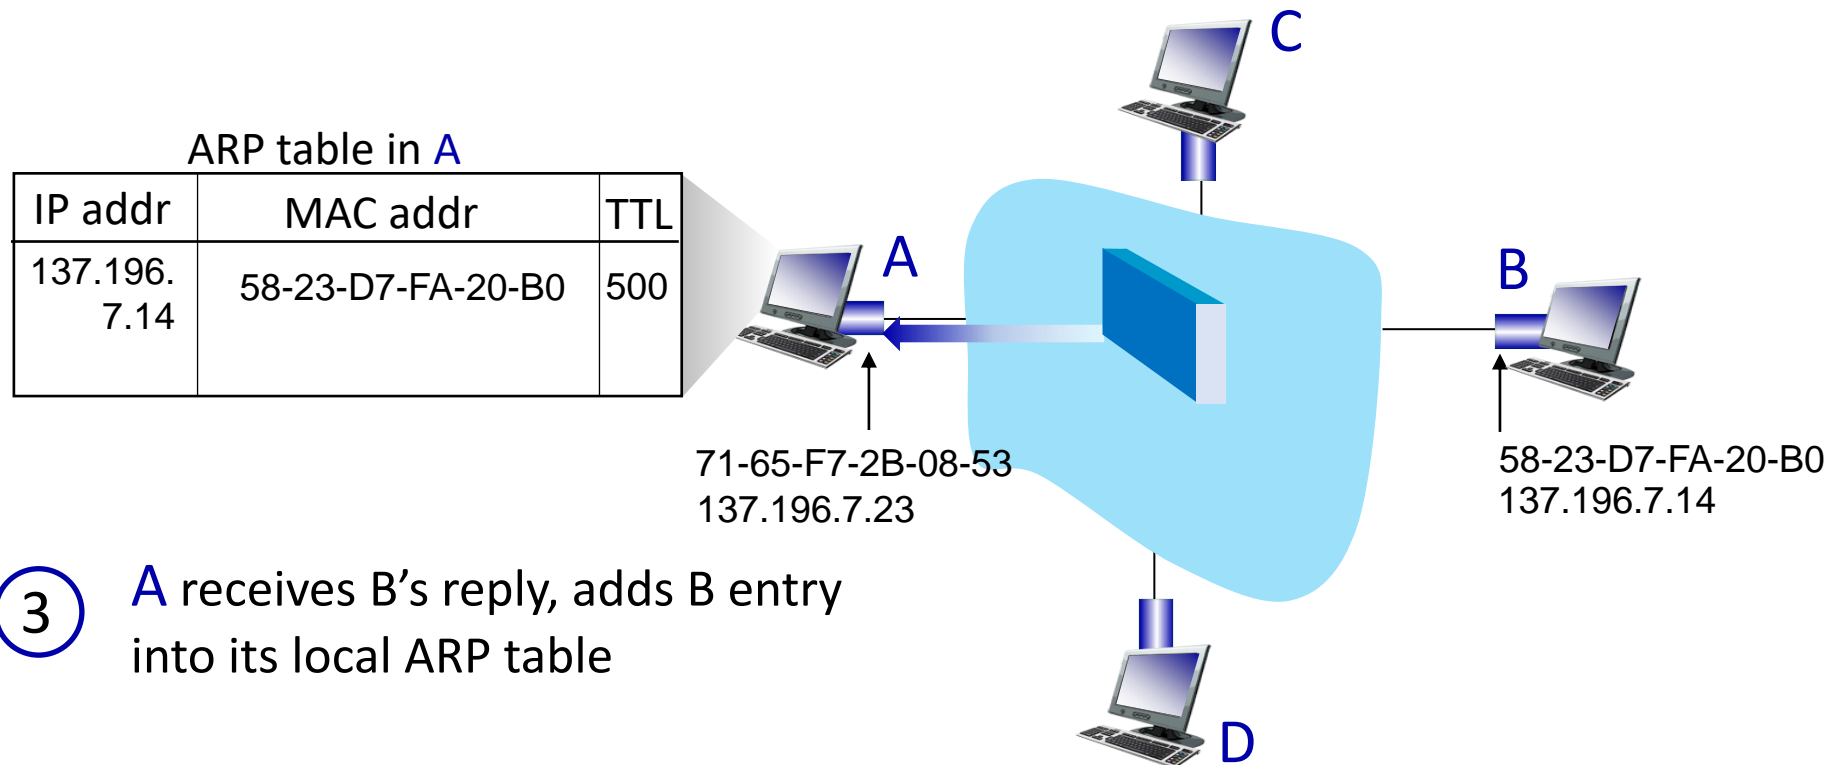

# Routing to another subnet: addressing


walkthrough: sending a datagram from *A* to *B* via *R*

- focus on addressing – at IP (datagram) and MAC layer (frame) levels
- assume that:
  - A knows B's IP address
  - A knows IP address of first hop router, R (how?)
  - A knows R's MAC address (how?)

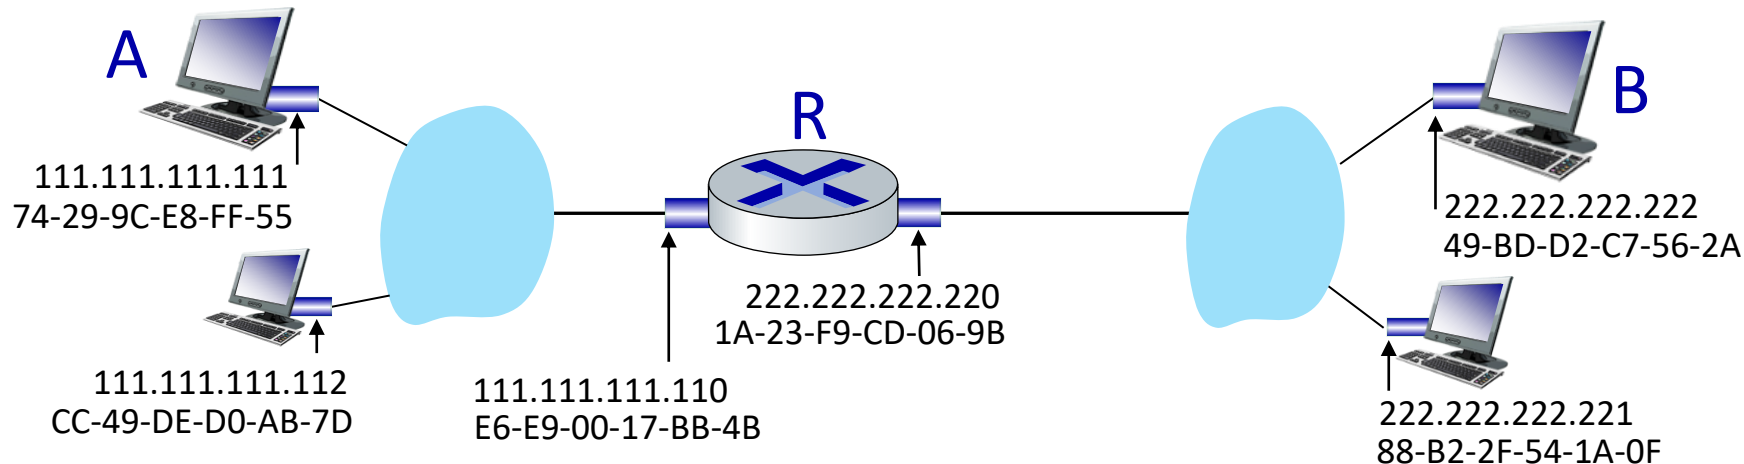


# Routing to another subnet: addressing

- A creates IP datagram with IP source A, destination B
- A creates link-layer frame containing A-to-B IP datagram
  - **R's** MAC address is frame's destination

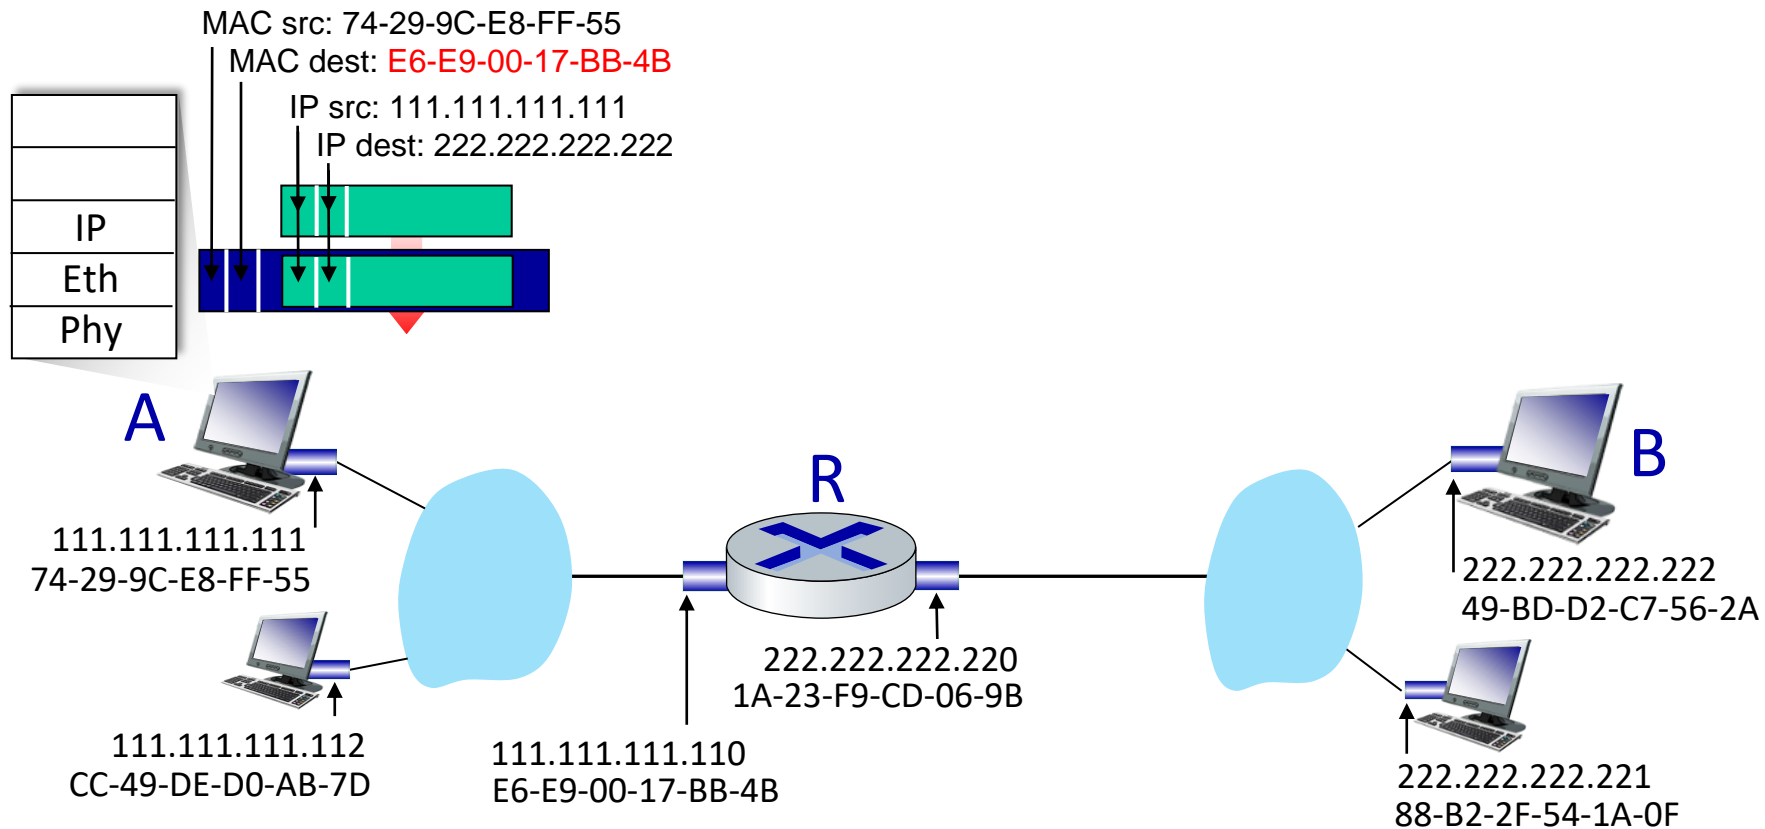


# Routing to another subnet: addressing

- frame sent from A to R
- frame received at R, datagram removed, passed up to IP

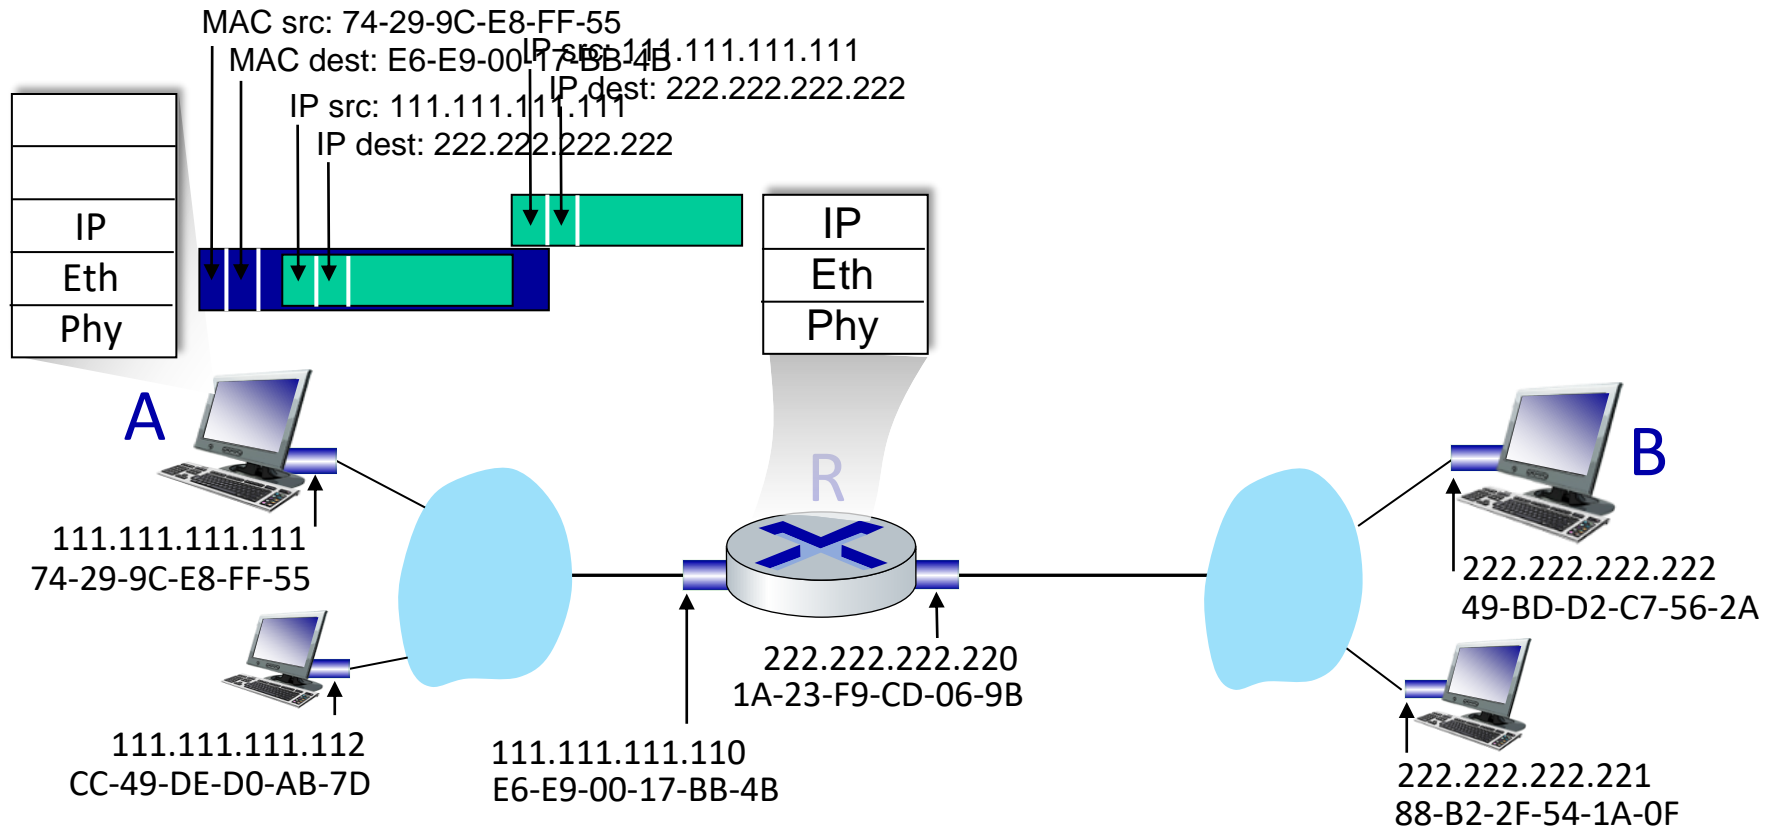


# Routing to another subnet: addressing

- R determines outgoing interface, passes datagram with IP source A, destination B to link layer
- R creates link-layer frame containing A-to-B IP datagram. Frame destination address: B's MAC address

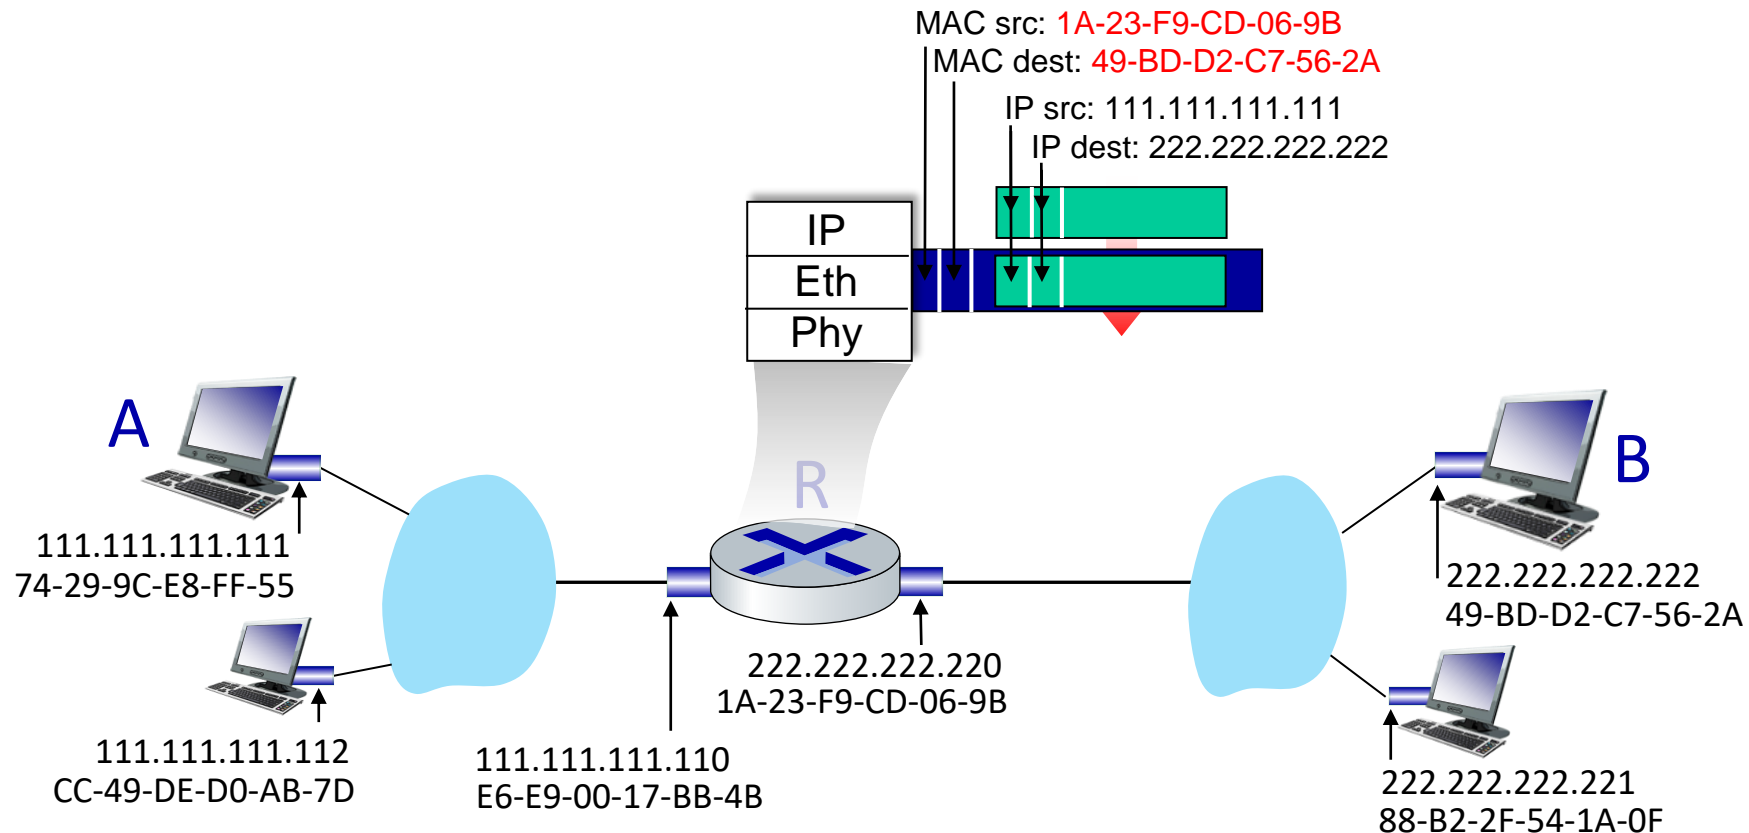


# Routing to another subnet: addressing

- R determines outgoing interface, passes datagram with IP source A, destination B to link layer
- R creates link-layer frame containing A-to-B IP datagram. Frame destination address: B's MAC address
- transmits link-layer frame

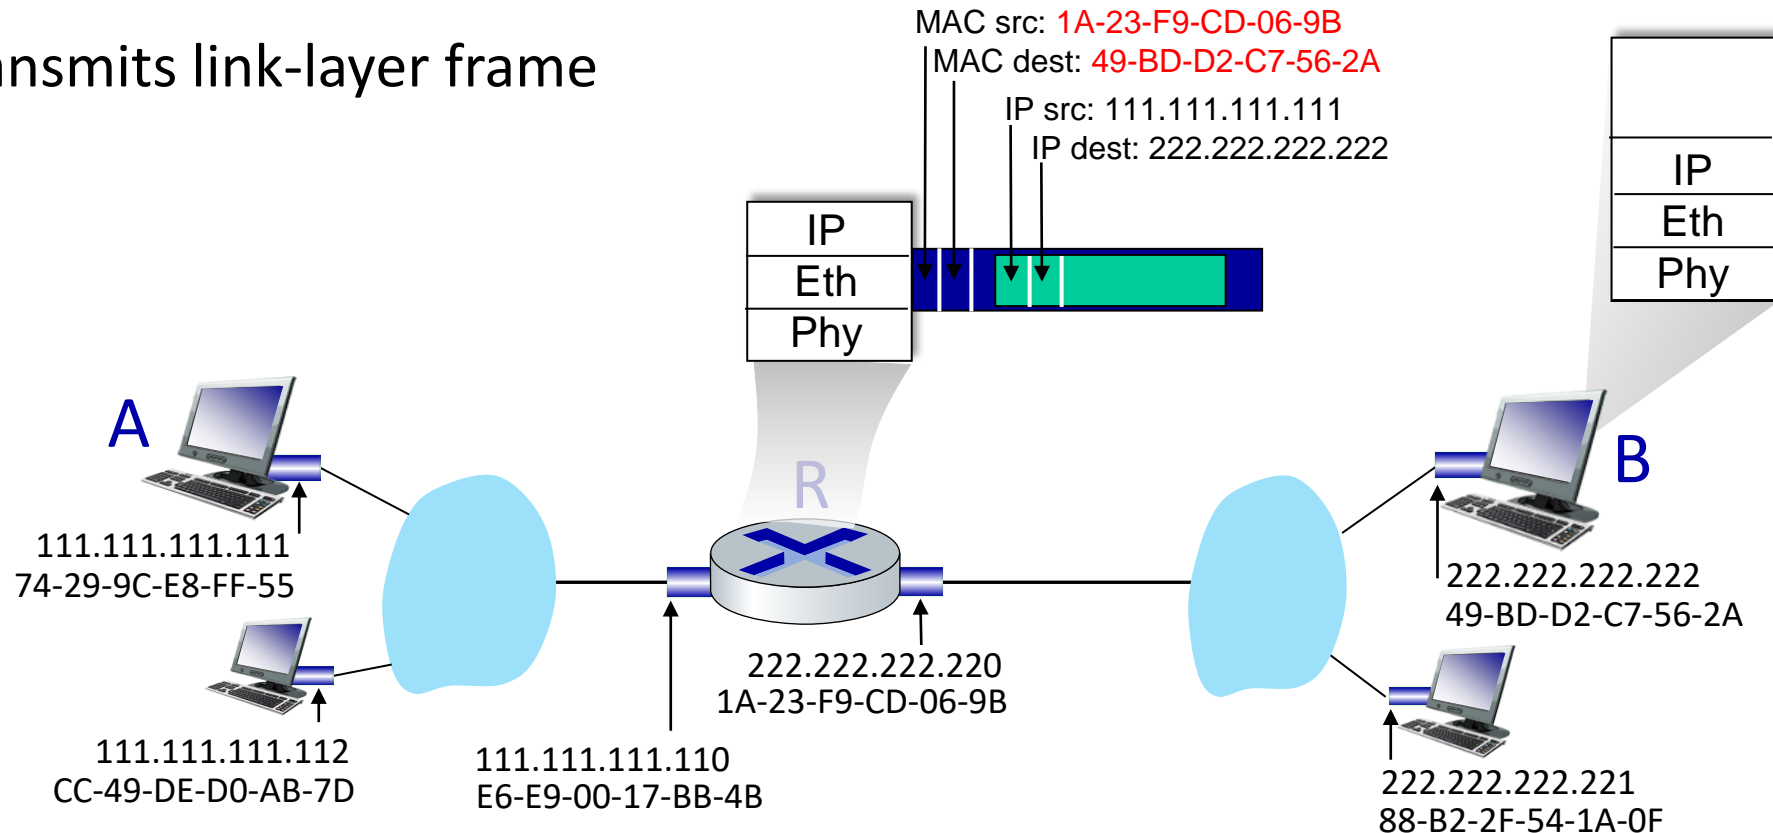

# Routing to another subnet: addressing

- B receives frame, extracts IP datagram destination B
- B passes datagram up protocol stack to IP

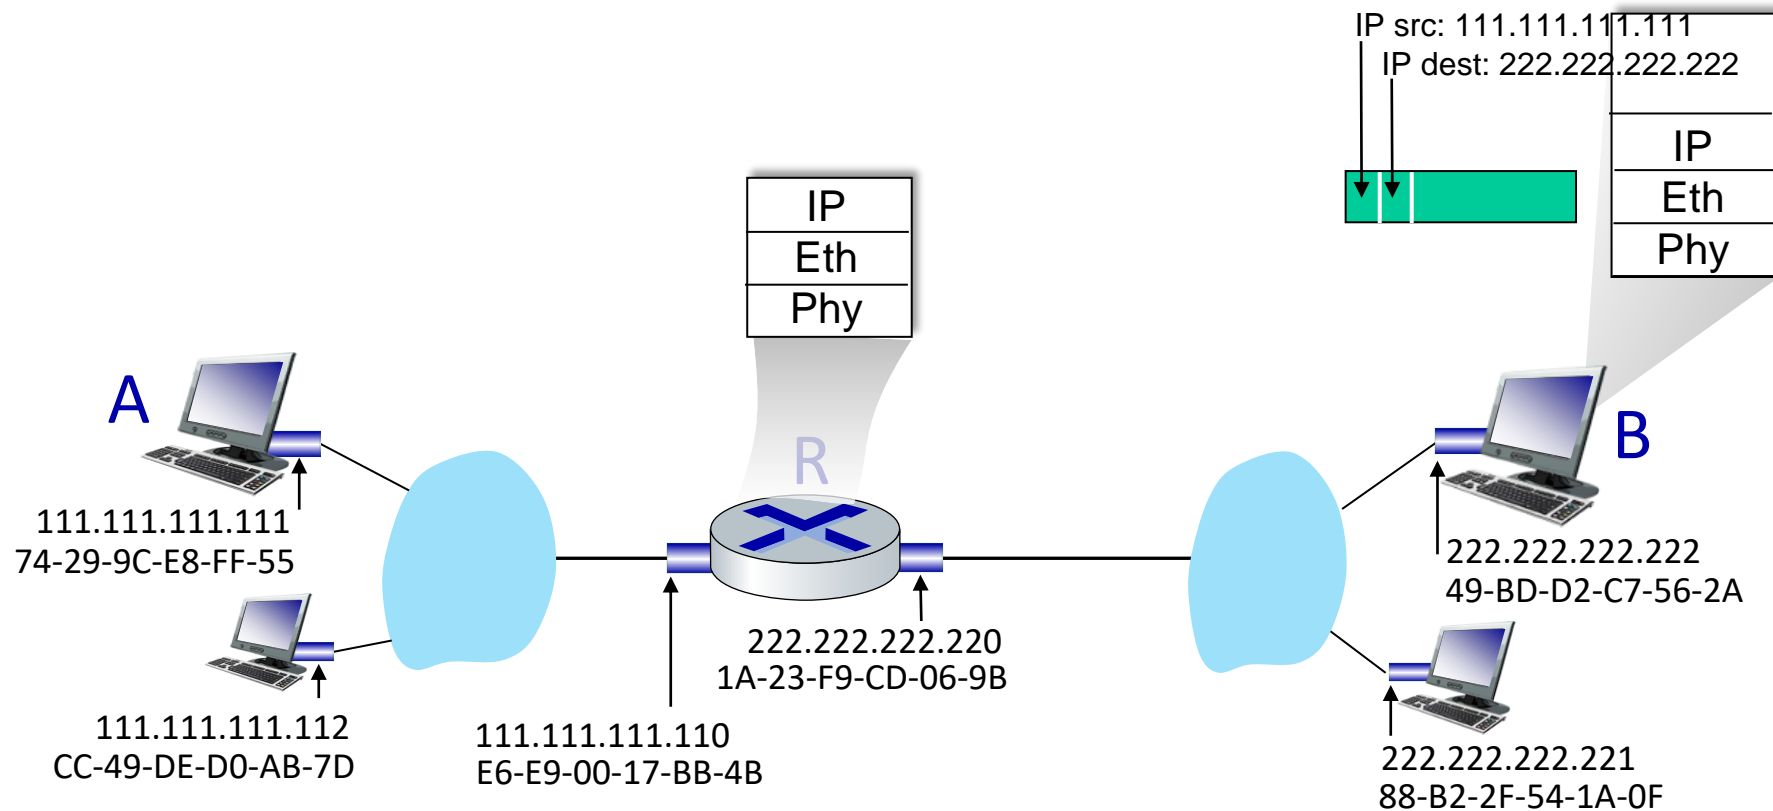



# Link layer, LANs: roadmap

- introduction
- error detection, correction
- multiple access protocols
- **LANs**
  - addressing, ARP
  - **Ethernet**
  - switches
  - VLANs
- link virtualization: MPLS
- data center networking




- a day in the life of a web request

# Ethernet

“dominant” wired LAN technology:

- first widely used LAN technology
- simpler, cheap
- kept up with speed race: 10 Mbps – 400 Gbps
- single chip, multiple speeds (e.g., Broadcom BCM5761)

*Metcalfe's Ethernet sketch*

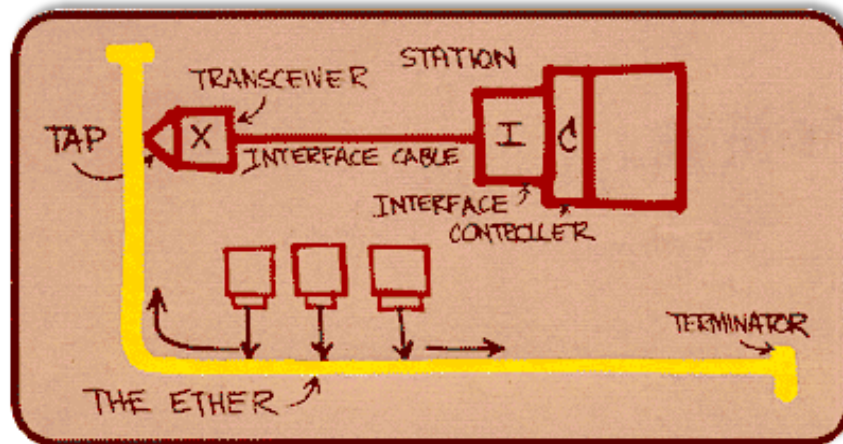



Bob Metcalfe: Ethernet co-inventor,  
2022 ACM Turing Award recipient



# Ethernet: physical topology

- **bus:** popular through mid 90s
  - all nodes in same collision domain (can collide with each other)
- **switched:** prevails today
  - active link-layer 2 *switch* in center
  - each “spoke” runs a (separate) Ethernet protocol (nodes do not collide with each other)

bus: coaxial cable

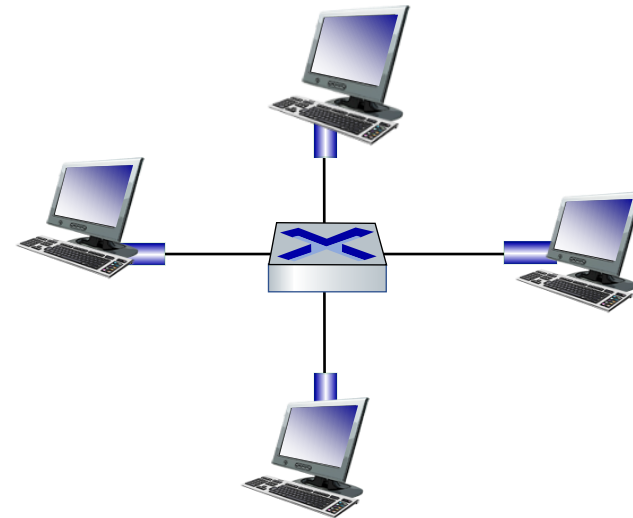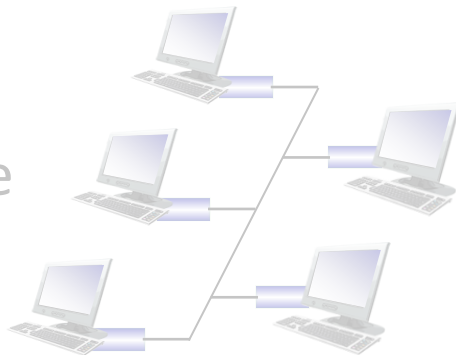

switched

# Ethernet frame structure


sending interface encapsulates IP datagram (or other network layer protocol packet) in **Ethernet frame**



*preamble:*

- used to synchronize receiver, sender clock rates
- 7 bytes of 10101010 followed by one byte of 10101011

# Ethernet frame structure (more)

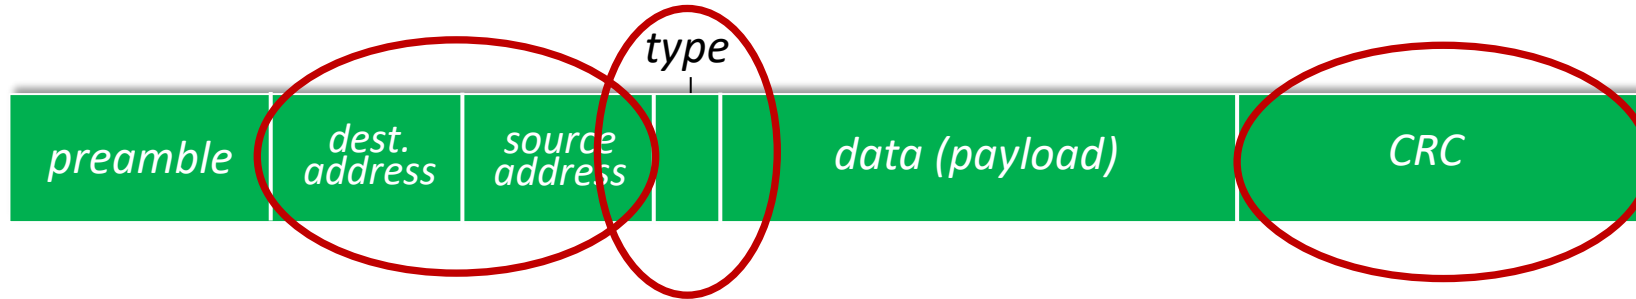


- **addresses:** 6 byte source, destination MAC addresses
  - if adapter receives frame with matching destination address, or with broadcast address (e.g., ARP packet), it passes data in frame to network layer protocol
  - otherwise, adapter discards frame
- **type:** indicates higher layer protocol
  - mostly IP but others possible, e.g., Novell IPX, AppleTalk
  - used to demultiplex up at receiver
- **CRC:** cyclic redundancy check at receiver
  - error detected: frame is dropped

# Ethernet: unreliable, connectionless

- **connectionless**: no handshaking between sending and receiving NICs
- **unreliable**: receiving NIC doesn't send ACKs or NAKs to sending NIC
  - data in dropped frames recovered only if initial sender uses higher layer rdt (e.g., TCP), otherwise dropped data lost
- Ethernet's MAC protocol: unslotted **CSMA/CD with binary backoff**

# 802.3 Ethernet standards: link & physical layers

- *many* different Ethernet standards
  - common MAC protocol and frame format
  - different speeds: 2 Mbps, ... 100 Mbps, 1Gbps, 10 Gbps, 40 Gbps, 80 Gbps
    - different physical layer media: fiber, cable

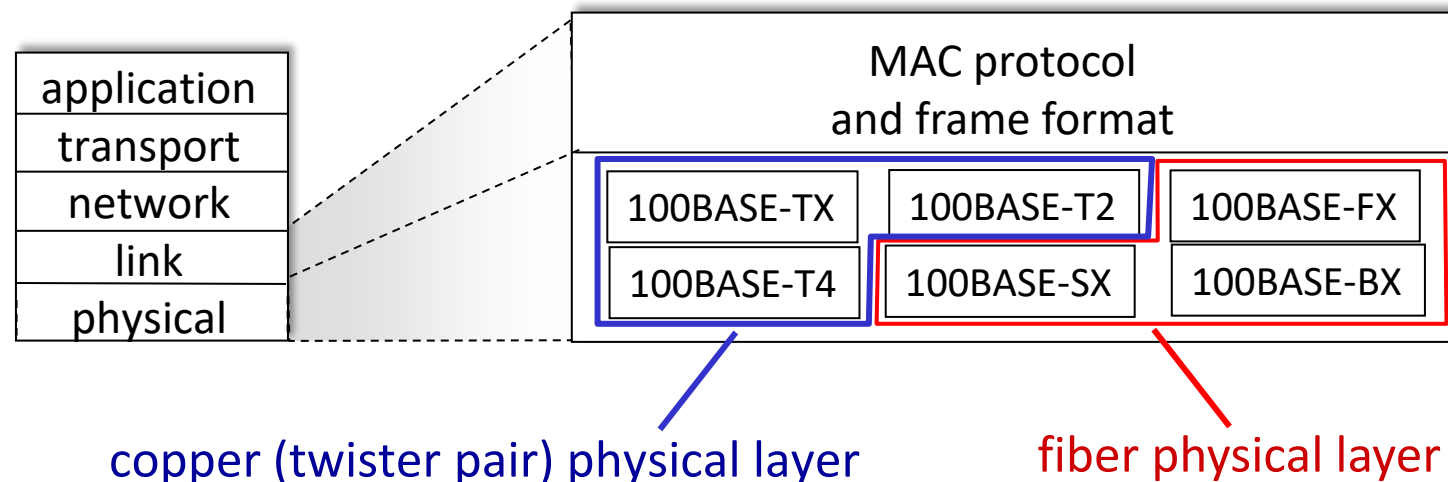

# Link layer, LANs: roadmap

- introduction
- error detection, correction
- multiple access protocols
- **LANs**
  - addressing, ARP
  - Ethernet
  - **switches**
  - VLANs
- link virtualization: MPLS
- data center networking



- a day in the life of a web request




# Ethernet switch

- Switch is a **link-layer** device: takes an *active* role
  - store, forward Ethernet (or other type of) frames
  - examine incoming frame's MAC address, *selectively* forward frame to one-or-more outgoing links when frame is to be forwarded on segment, uses CSMA/CD to access segment
- **transparent**: hosts *unaware* of presence of switches
- **plug-and-play, self-learning**
  - switches do not need to be configured


# Switch: multiple simultaneous transmissions

- hosts have dedicated, direct connection to switch
- switches buffer packets
- Ethernet protocol used on *each* incoming link, so:
  - no collisions; full duplex
  - each link is its own collision domain
- **switching**: A-to-A' and B-to-B' can transmit simultaneously, without collisions

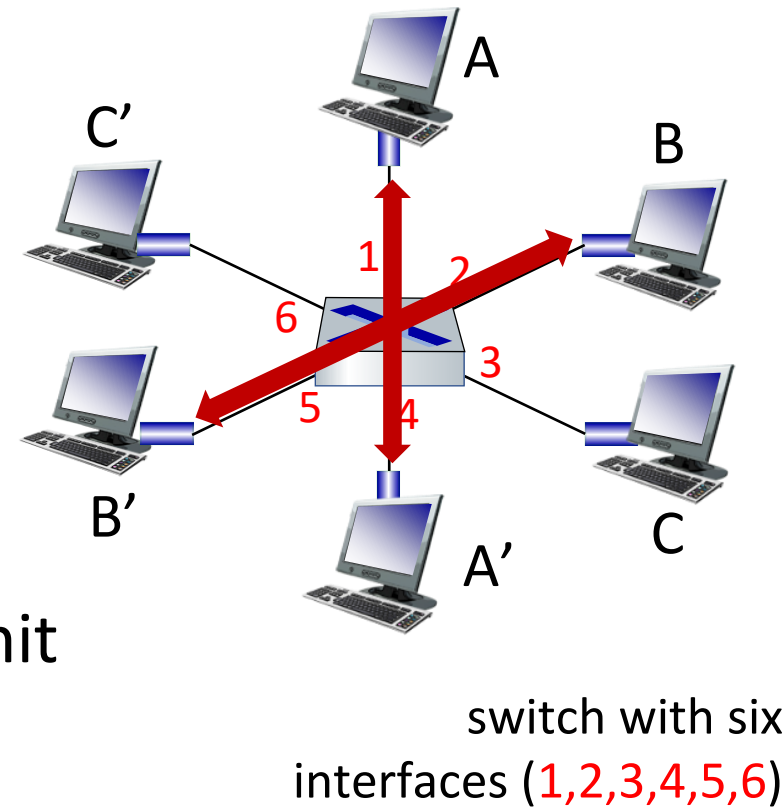

# Switch: multiple simultaneous transmissions

- hosts have dedicated, direct connection to switch
- switches buffer packets
- Ethernet protocol used on *each* incoming link, so:
  - no collisions; full duplex
  - each link is its own collision domain
- **switching:** A-to-A' and B-to-B' can transmit simultaneously, without collisions
  - but A-to-A' and C to A' can *not* happen simultaneously

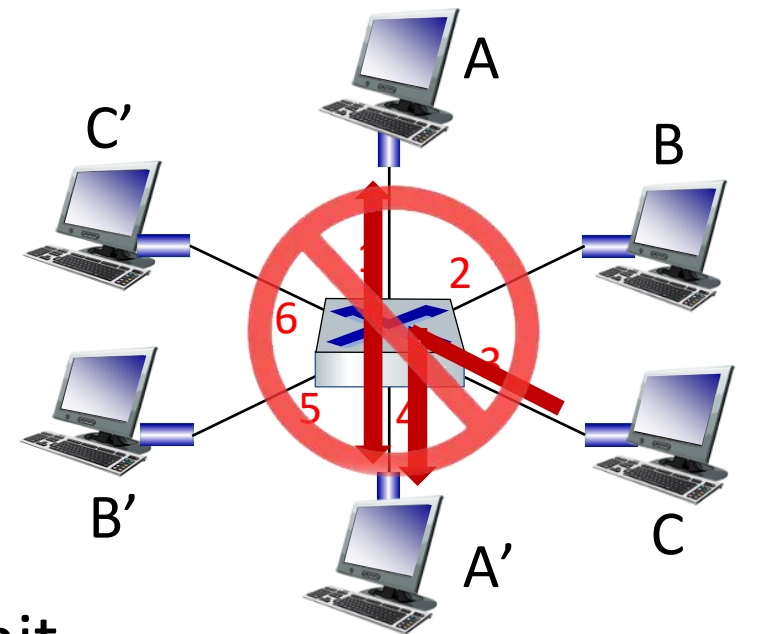

# Switch forwarding table


Q: how does switch know A' reachable via interface 4, B' reachable via interface 5?

A: each switch has a **switch table**, each entry:

- (MAC address of host, interface to reach host, time stamp)
- looks like a routing table!


Q: how are entries created, maintained in switch table?

- something like a routing protocol?

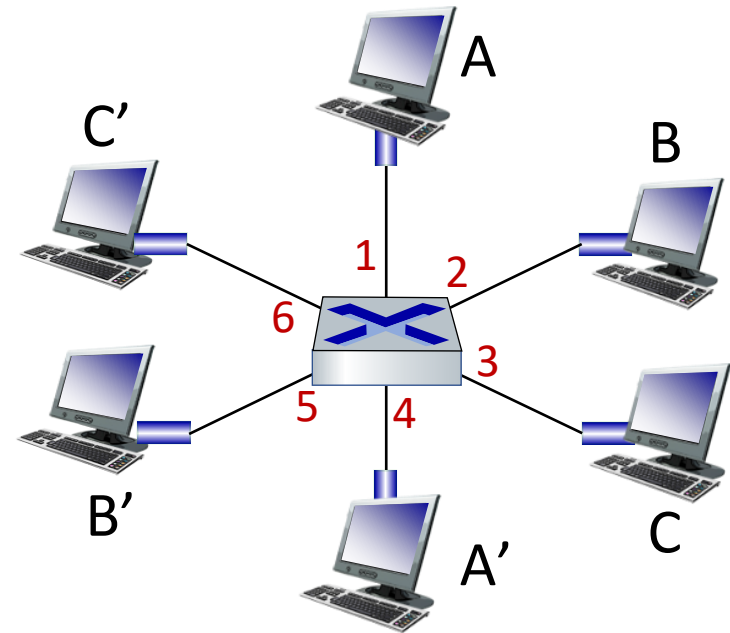

# Switch: self-learning

- switch *learns* which hosts can be reached through which interfaces
  - when frame received, switch “learns” location of sender: incoming LAN segment
  - records sender/location pair in switch table

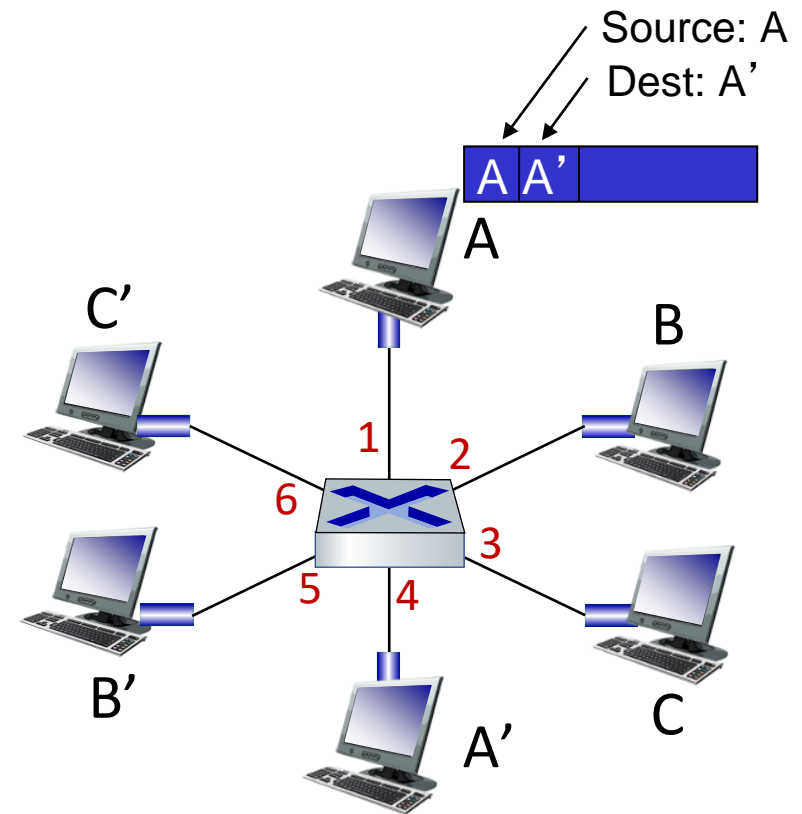

MAC addr	interface	TTL
A	1	60

*Switch table  
(initially empty)*

# Switch: frame filtering/forwarding

when frame received at switch:

1. record incoming link, MAC address of sending host

2. index switch table using MAC destination address

3. if entry found for destination

then {

if destination on segment from which frame arrived

then drop frame


else forward frame on interface indicated by entry

}

else flood /\* forward on all interfaces except arriving interface \*/

# Self-learning, forwarding: example

- frame destination, A',  
location unknown: **flood**
- destination A location  
known: **selectively send**  
**on just one link**

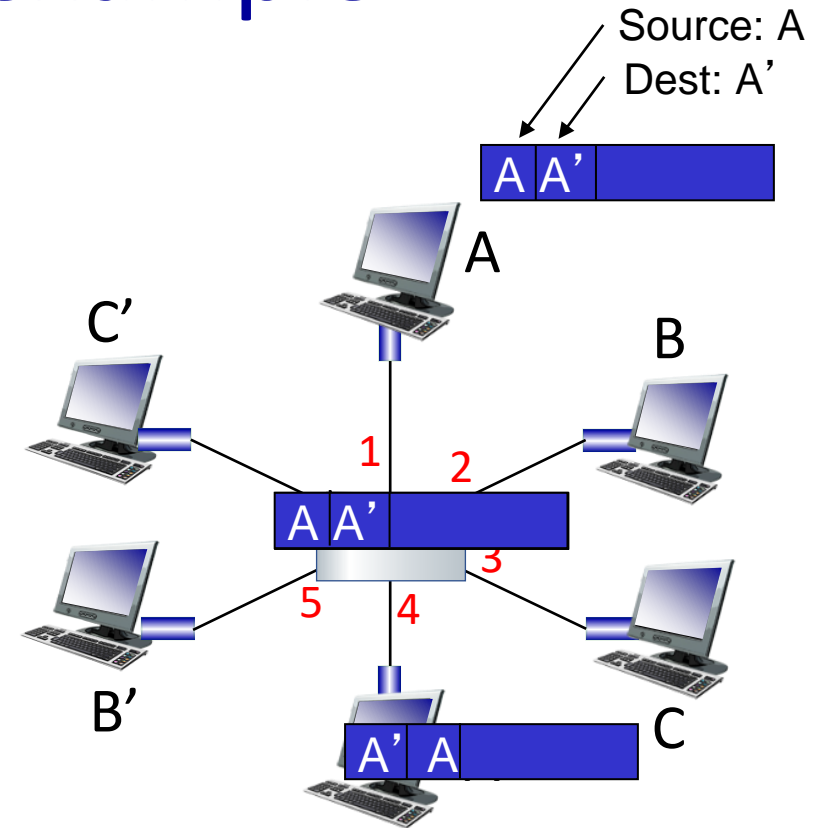


MAC addr	interface	TTL
A	1	60
A'	4	60

*switch table  
(initially empty)*

# Interconnecting switches

self-learning switches can be connected together:

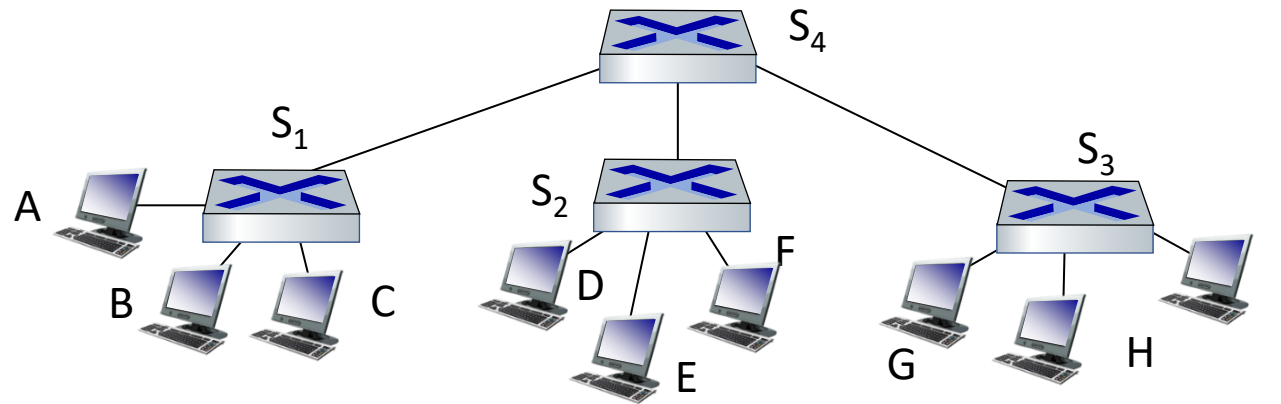


Q: sending from A to G - how does S<sub>1</sub> know to forward frame destined to G via S<sub>4</sub> and S<sub>3</sub>?

- A: self learning! (works exactly the same as in single-switch case!)



# Self-learning multi-switch example

Suppose C sends frame to I, I responds to C

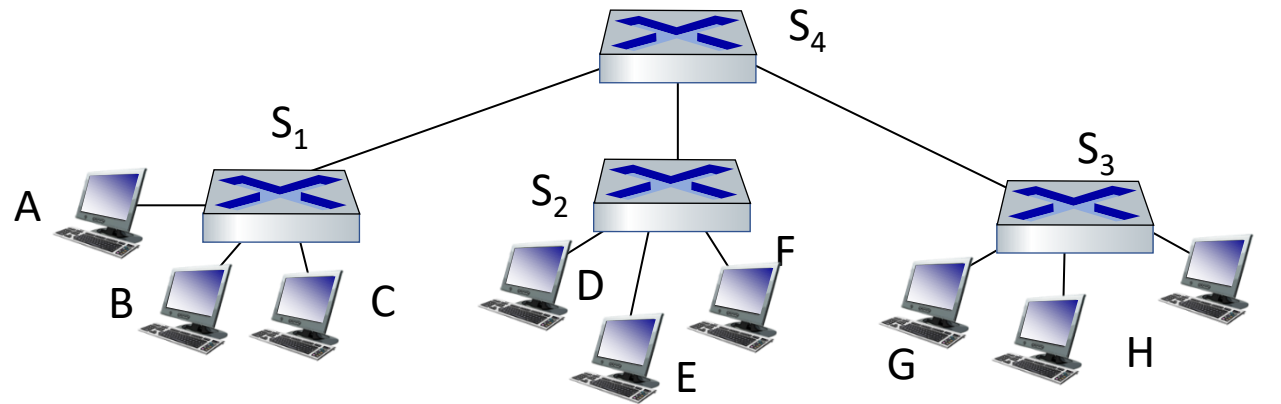

Q: show switch tables and packet forwarding in S<sub>1</sub>, S<sub>2</sub>, S<sub>3</sub>, S<sub>4</sub>