Computer Networks
CS3001
(Section BDS-7A)
Lecture 18

Instructor: Dr. Syed Mohammad Irteza

Assistant Professor, Department of Computer Science

24 October, 2023

Network-layer service model

Network Architecture	Service Model	Quality of Service (QoS) Guarantees ?			
		Bandwidth	Loss	Order	Timing
Internet	best effort	none	no	no	no
ATM	Constant Bit Rate	Constant rate	yes	yes	yes
ATM	Available Bit Rate	Guaranteed min	no	yes	no
Internet	Intserv Guaranteed (RFC 1633)	yes	yes	yes	yes
Internet	Diffserv (RFC 2475)	possible	possibly	possibly	no

Reflections on best-effort service:

- simplicity of mechanism has allowed Internet to be widely deployed adopted
- sufficient provisioning of bandwidth allows performance of real-time applications (e.g., interactive voice, video) to be "good enough" for "most of the time"
- replicated, application-layer distributed services (datacenters, content distribution networks) connecting close to clients' networks, allow services to be provided from multiple locations
- congestion control of "elastic" services helps

It's hard to argue with success of best-effort service model

Network layer: “data plane” roadmap

- Network layer: overview
  - data plane
  - control plane
- What’s inside a router
  - input ports, switching, output ports
  - buffer management, scheduling
- IP: the Internet Protocol
  - datagram format
  - addressing
  - network address translation
  - IPv6

- Generalized Forwarding, SDN
  - Match+action
  - OpenFlow: match+action in action
- Middleboxes

Router architecture overview

high-level view of generic router architecture:

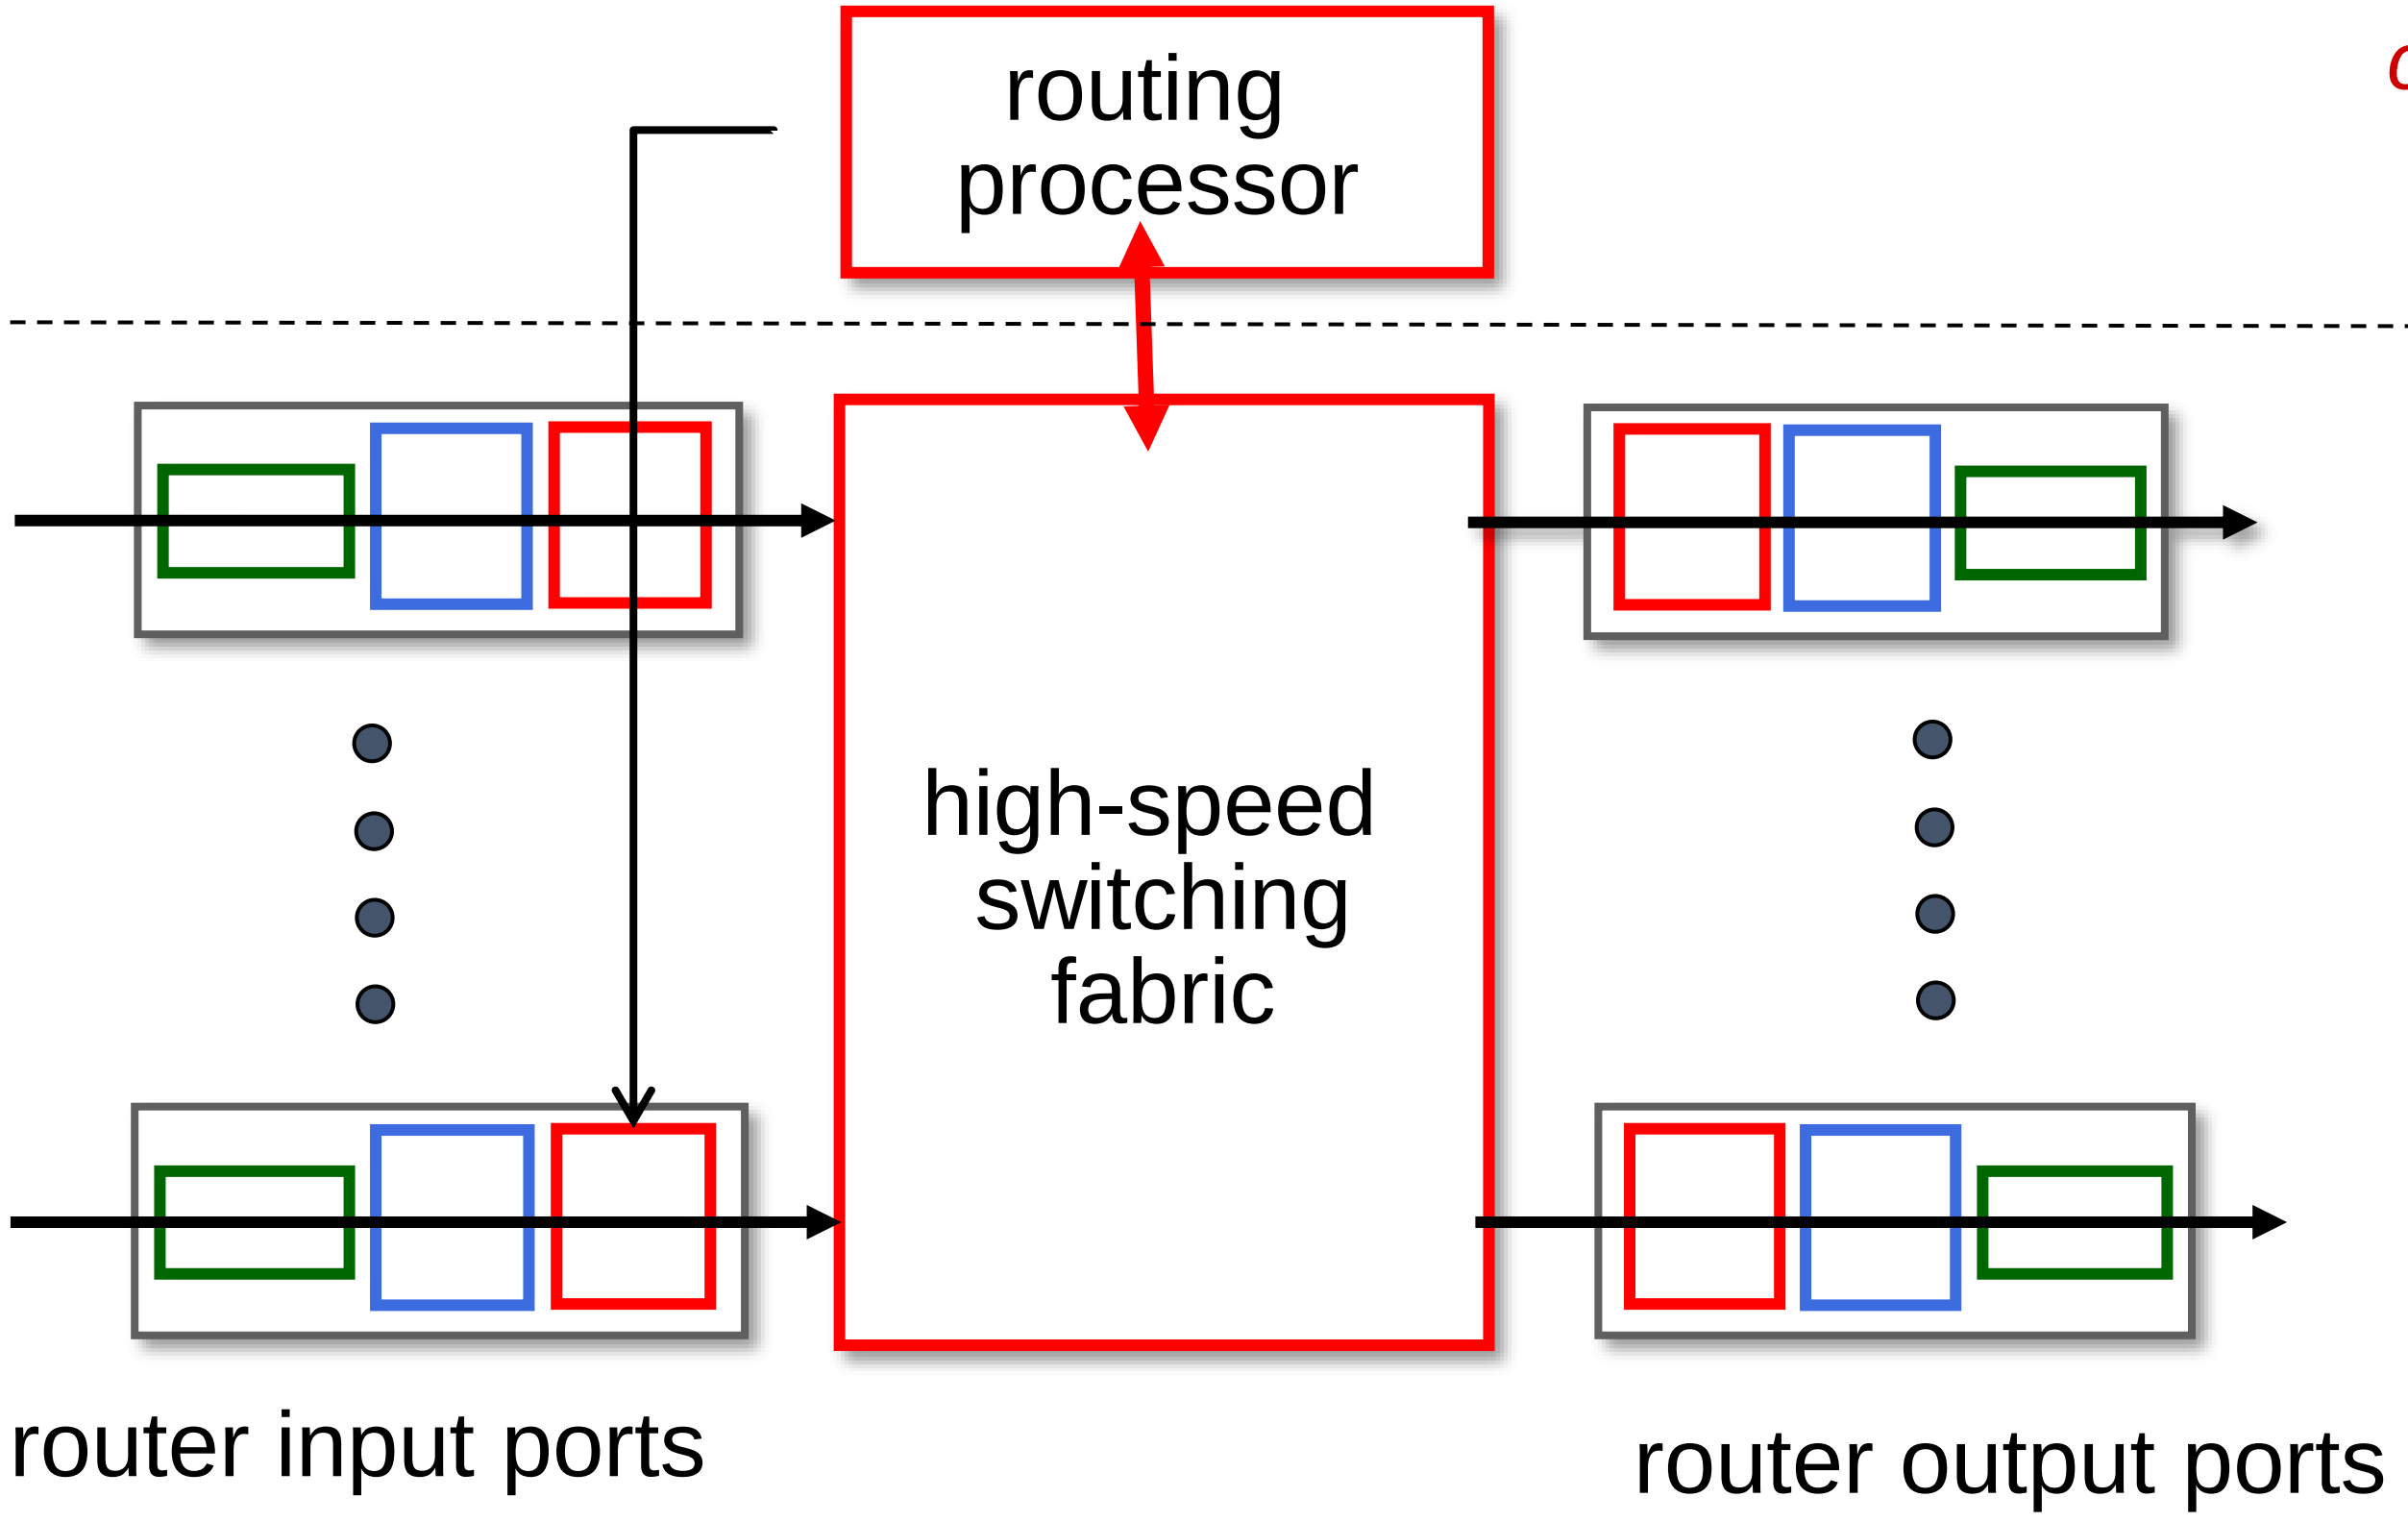

routing, management control plane (software) operates in millisecond time frame

forwarding data plane (hardware) operates in nanosecond timeframe

Router architecture overview

analogy view of generic router architecture:

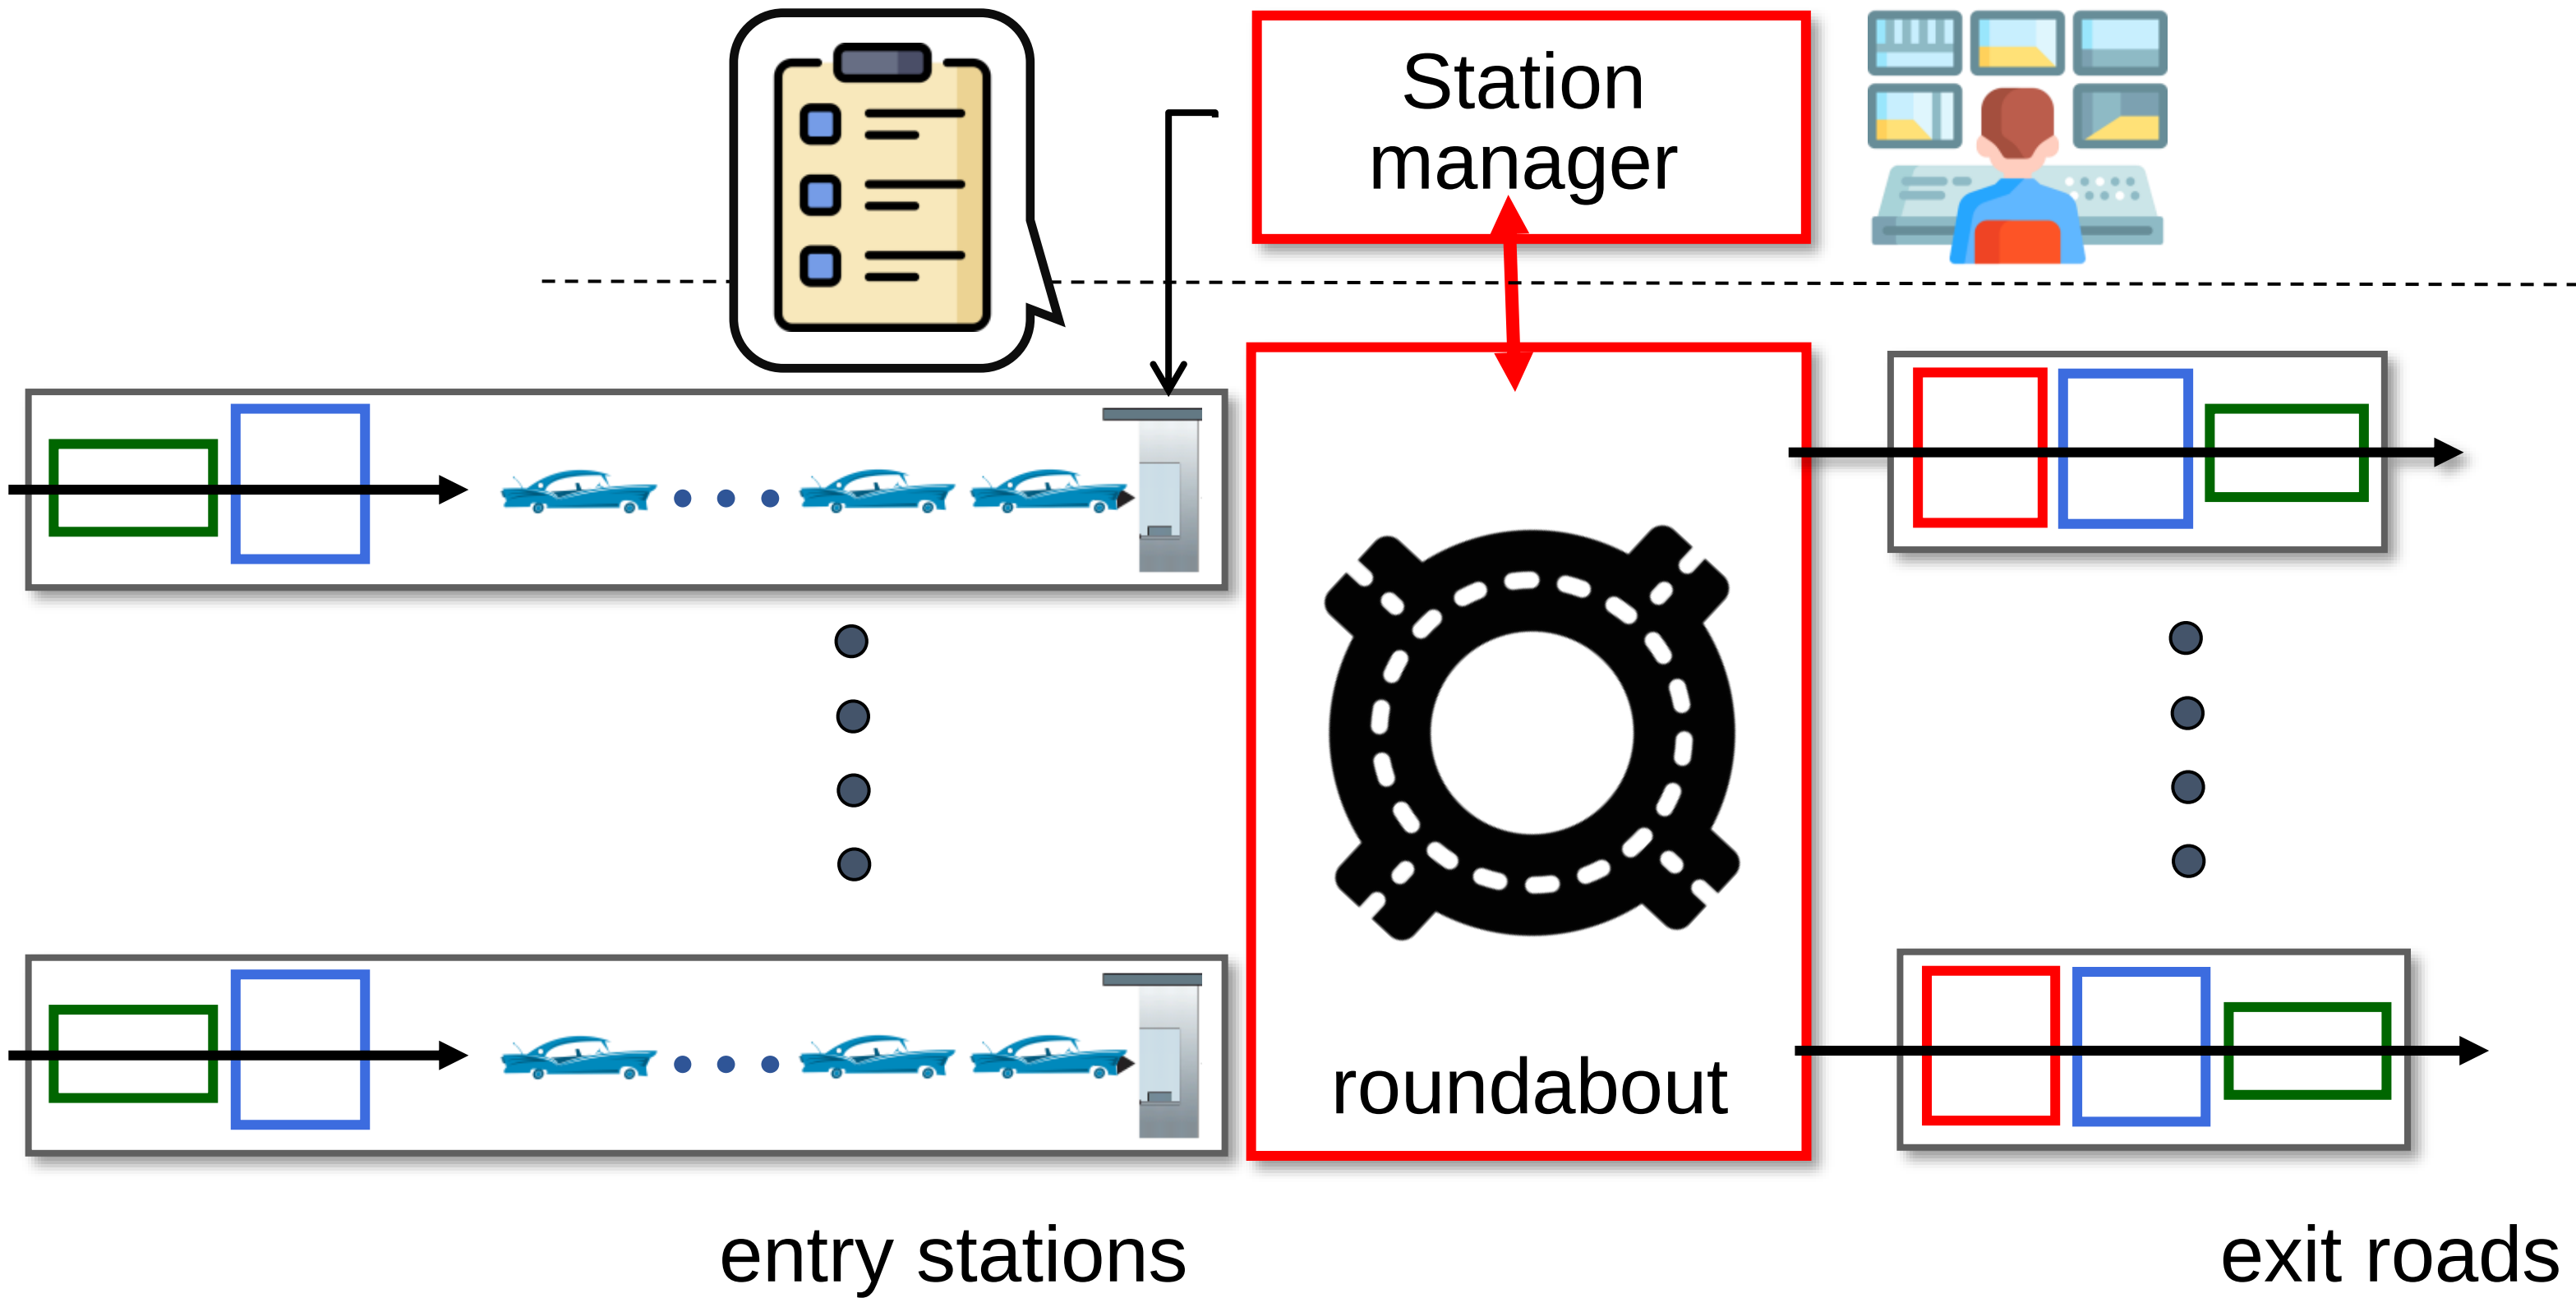

routing, management control plane (software) operates in millisecond time frame

forwarding data plane (hardware) operates in nanosecond timeframe

Input port functions

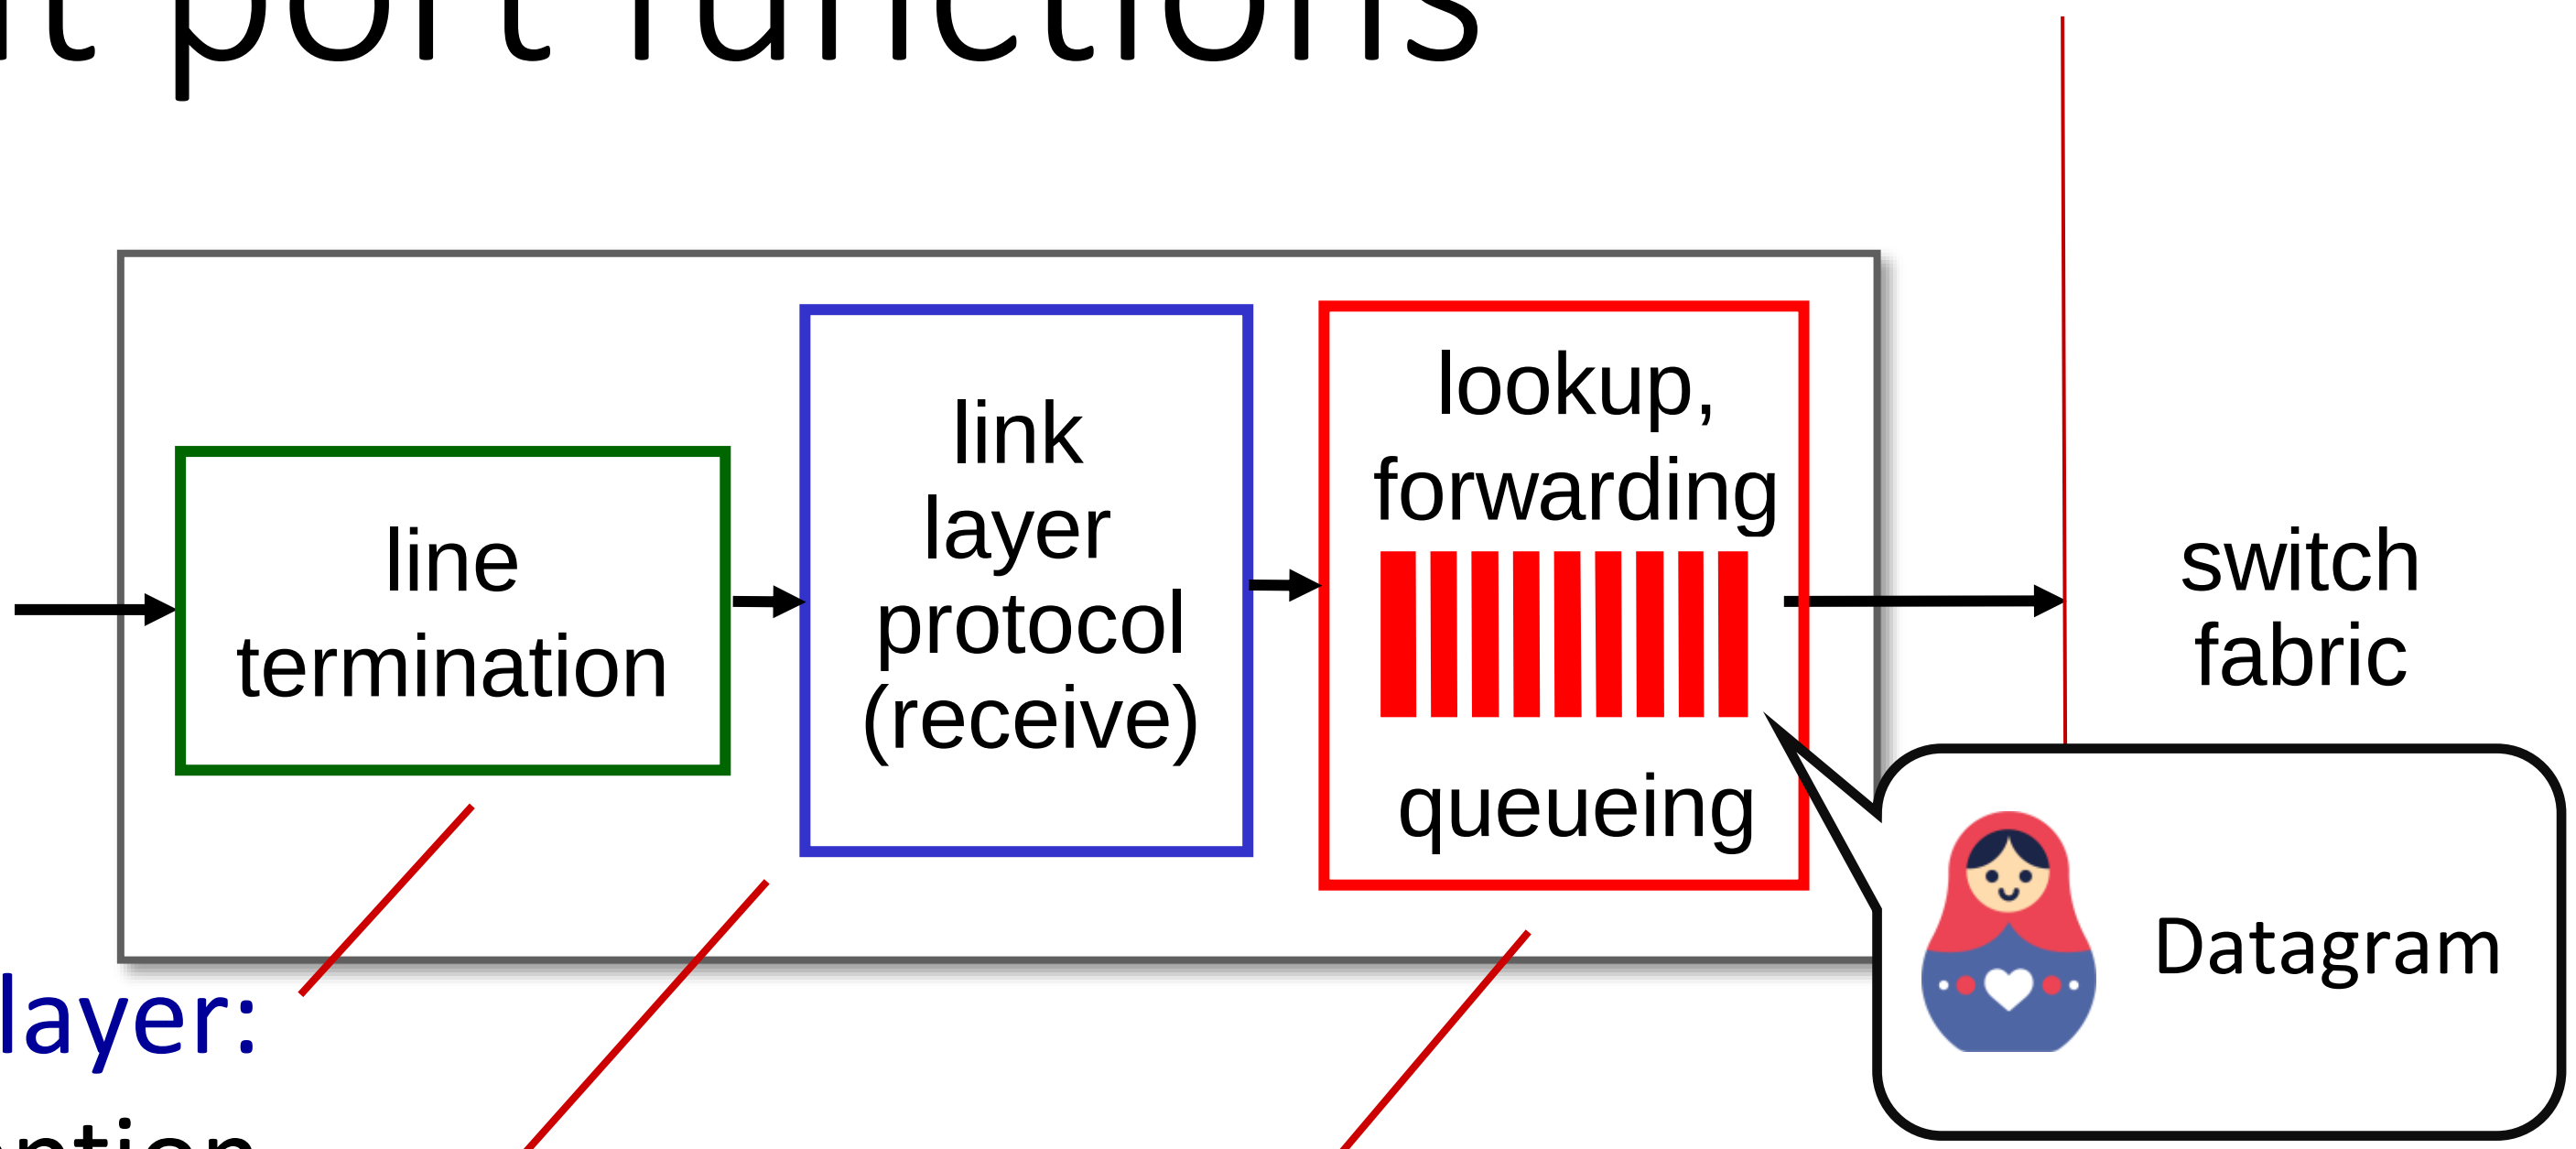

physical layer:
bit-level reception

link layer:
e.g., Ethernet
(chapter 6)


Frame

decentralized switching:

- using header field values, lookup output port using forwarding table in input port memory *("match plus action")*
- goal: complete input port processing at 'line speed'
- **input port queuing:** if datagrams arrive faster than forwarding rate into switch fabric

Input port functions

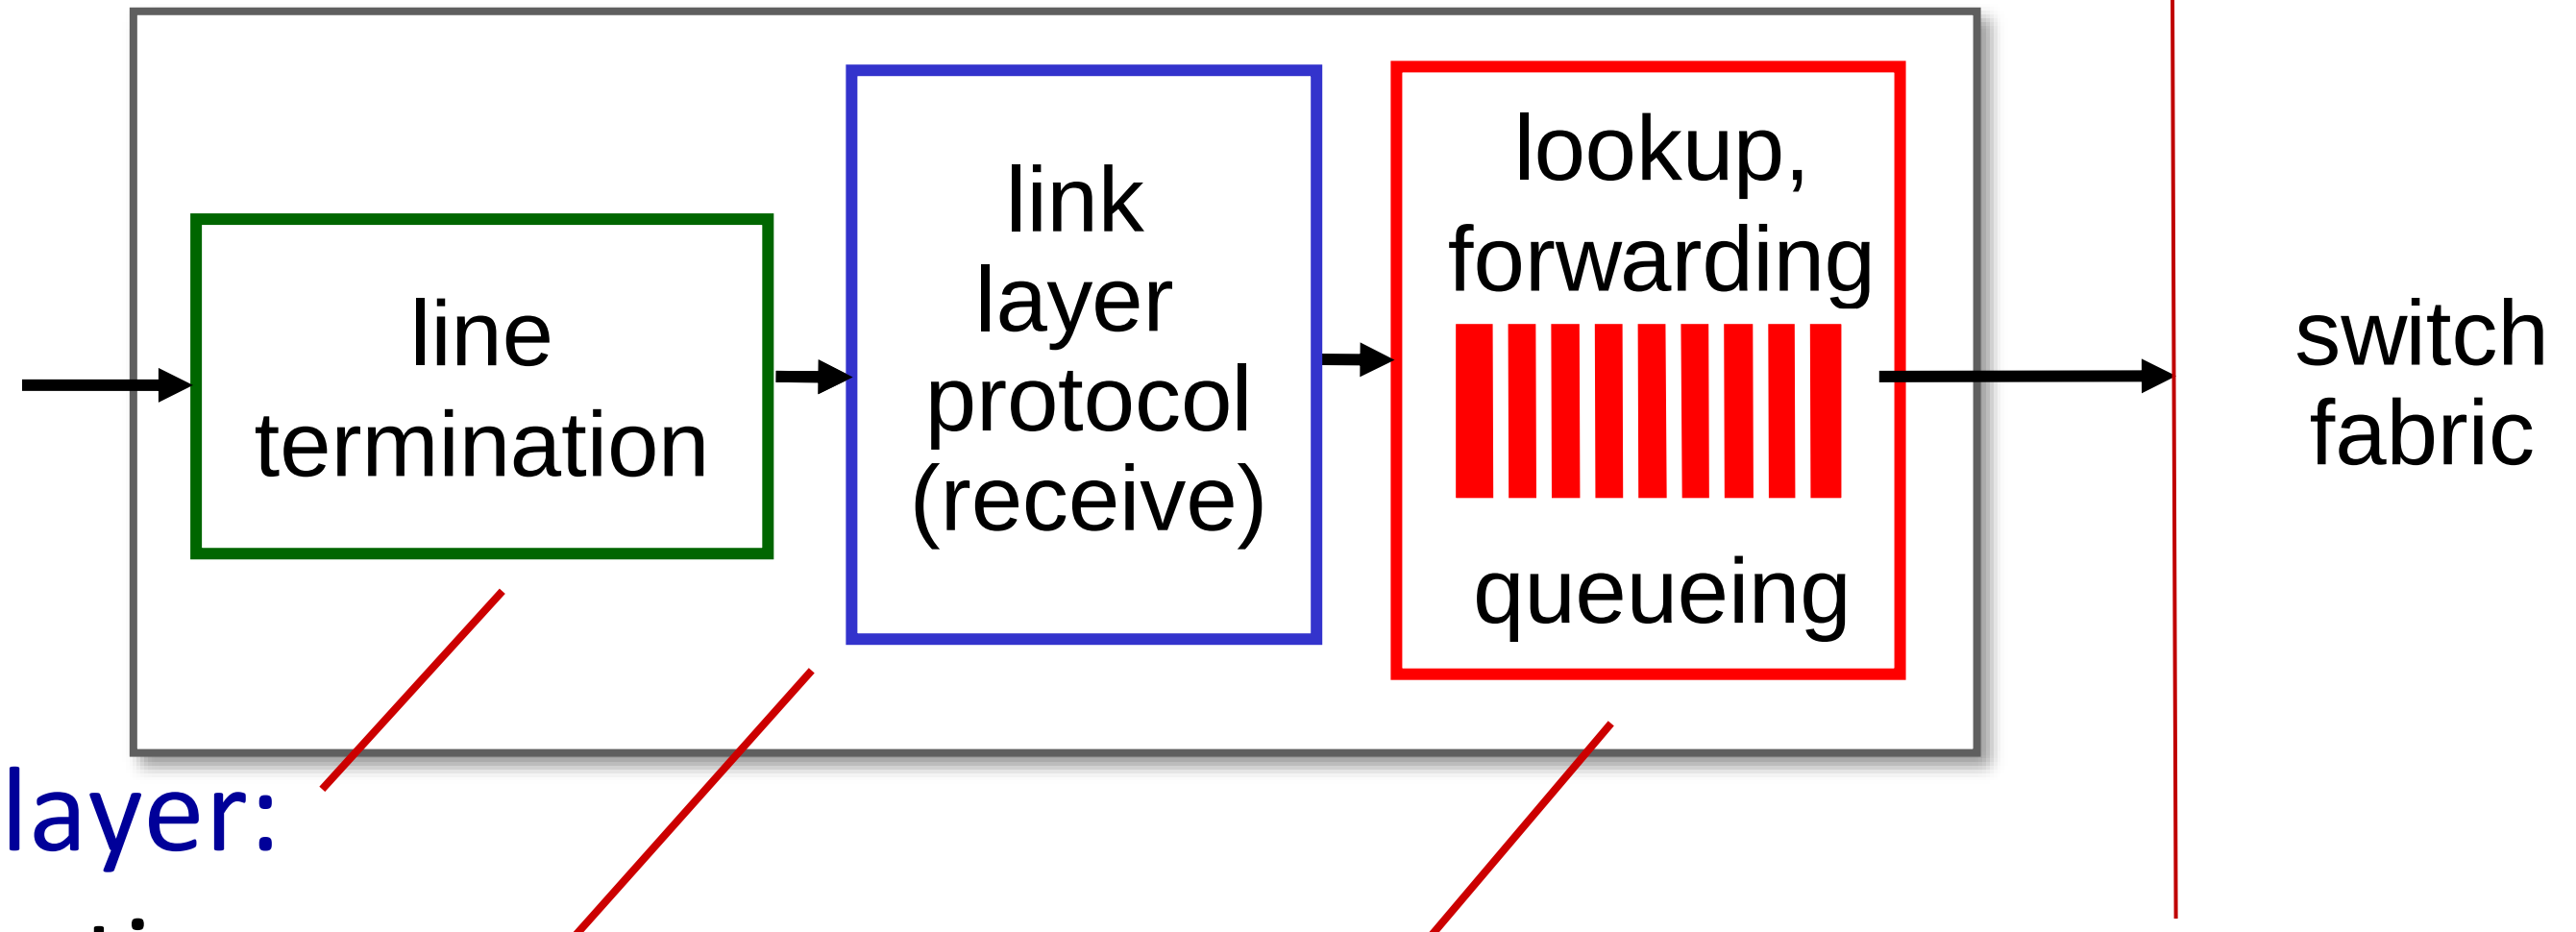

physical layer:
bit-level reception

link layer:
e.g., Ethernet
(chapter 6)

decentralized switching:

- using header field values, lookup output port using forwarding table in input port memory *("match plus action")*
- destination-based forwarding: forward based only on destination IP address (traditional)
- generalized forwarding: forward based on any set of header field values

Destination-based forwarding

forwarding table

Destination Address Range	Link Interface
11001000 00010111 00010000 00000000 through	0
11001000 00010111 00010000 00000100 through 11001000 00010111 00010000 00000111	3
11001000 00010111 00011000 11111111	
11001000 00010111 00011001 00000000 through 11001000 00010111 00011111 11111111	2
otherwise	3

Q: but what happens if ranges don't divide up so nicely?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** ********	0
11001000 00010111 00011000 ********	1
11001000 00010111 00011*** ********	2
otherwise	3

examples:

11001000 00010111 00010110 10100001 which interface?

11001000 00010111 00011000 10101010 which interface?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range				Link interface
11001000	00010111	00010***	********	0
11001000	00010111	00011000	********	1
11001000	00010111	00011***	********	2
otherwise				3

match!

examples:

11001000 00010111 00010110 10100001 which interface?

11001000 00010111 00011000 10101010 which interface?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range				Link interface
11001000	00010111	00010***	********	0
11001000	00010111	00011000	********	1
11001000	00010111	00011***	********	2
otherwise				3

match!

examples:

11001000	00010111	00010110	10100001	which interface?
11001000	00010111	00011000	10101010	which interface?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range				Link interface
11001000	00010111	00010***	********	0
11001000	00010111	00011000	********	1
11001000	00010111	00011***	********	2
otherwise				3

match!

examples:

11001000	00010111	00010110	10100001	which interface?
11001000	00010111	00011000	10101010	which interface?

Longest prefix matching

- we'll see *why* longest prefix matching is used shortly, when we study addressing
- longest prefix matching: often performed using ternary content addressable memories (TCAMs)
  - *content addressable:* present address to TCAM: retrieve address in one clock cycle, regardless of table size
  - Cisco Catalyst: ~1M routing table entries in TCAM

Excluded Topics (Chapter 4)

- What’s Inside A Router (Section 4.2)
- Possibly topics like Middleboxes

Network layer: “data plane” roadmap

- Network layer: overview
  - data plane
  - control plane
- What’s inside a router
  - input ports, switching, output ports
  - buffer management, scheduling
- IP: the Internet Protocol
  - datagram format
  - addressing
  - network address translation
  - IPv6

- Generalized Forwarding, SDN
  - match+action
  - OpenFlow: match+action in action
- Middleboxes

Network Layer: Internet

host, router network layer functions:

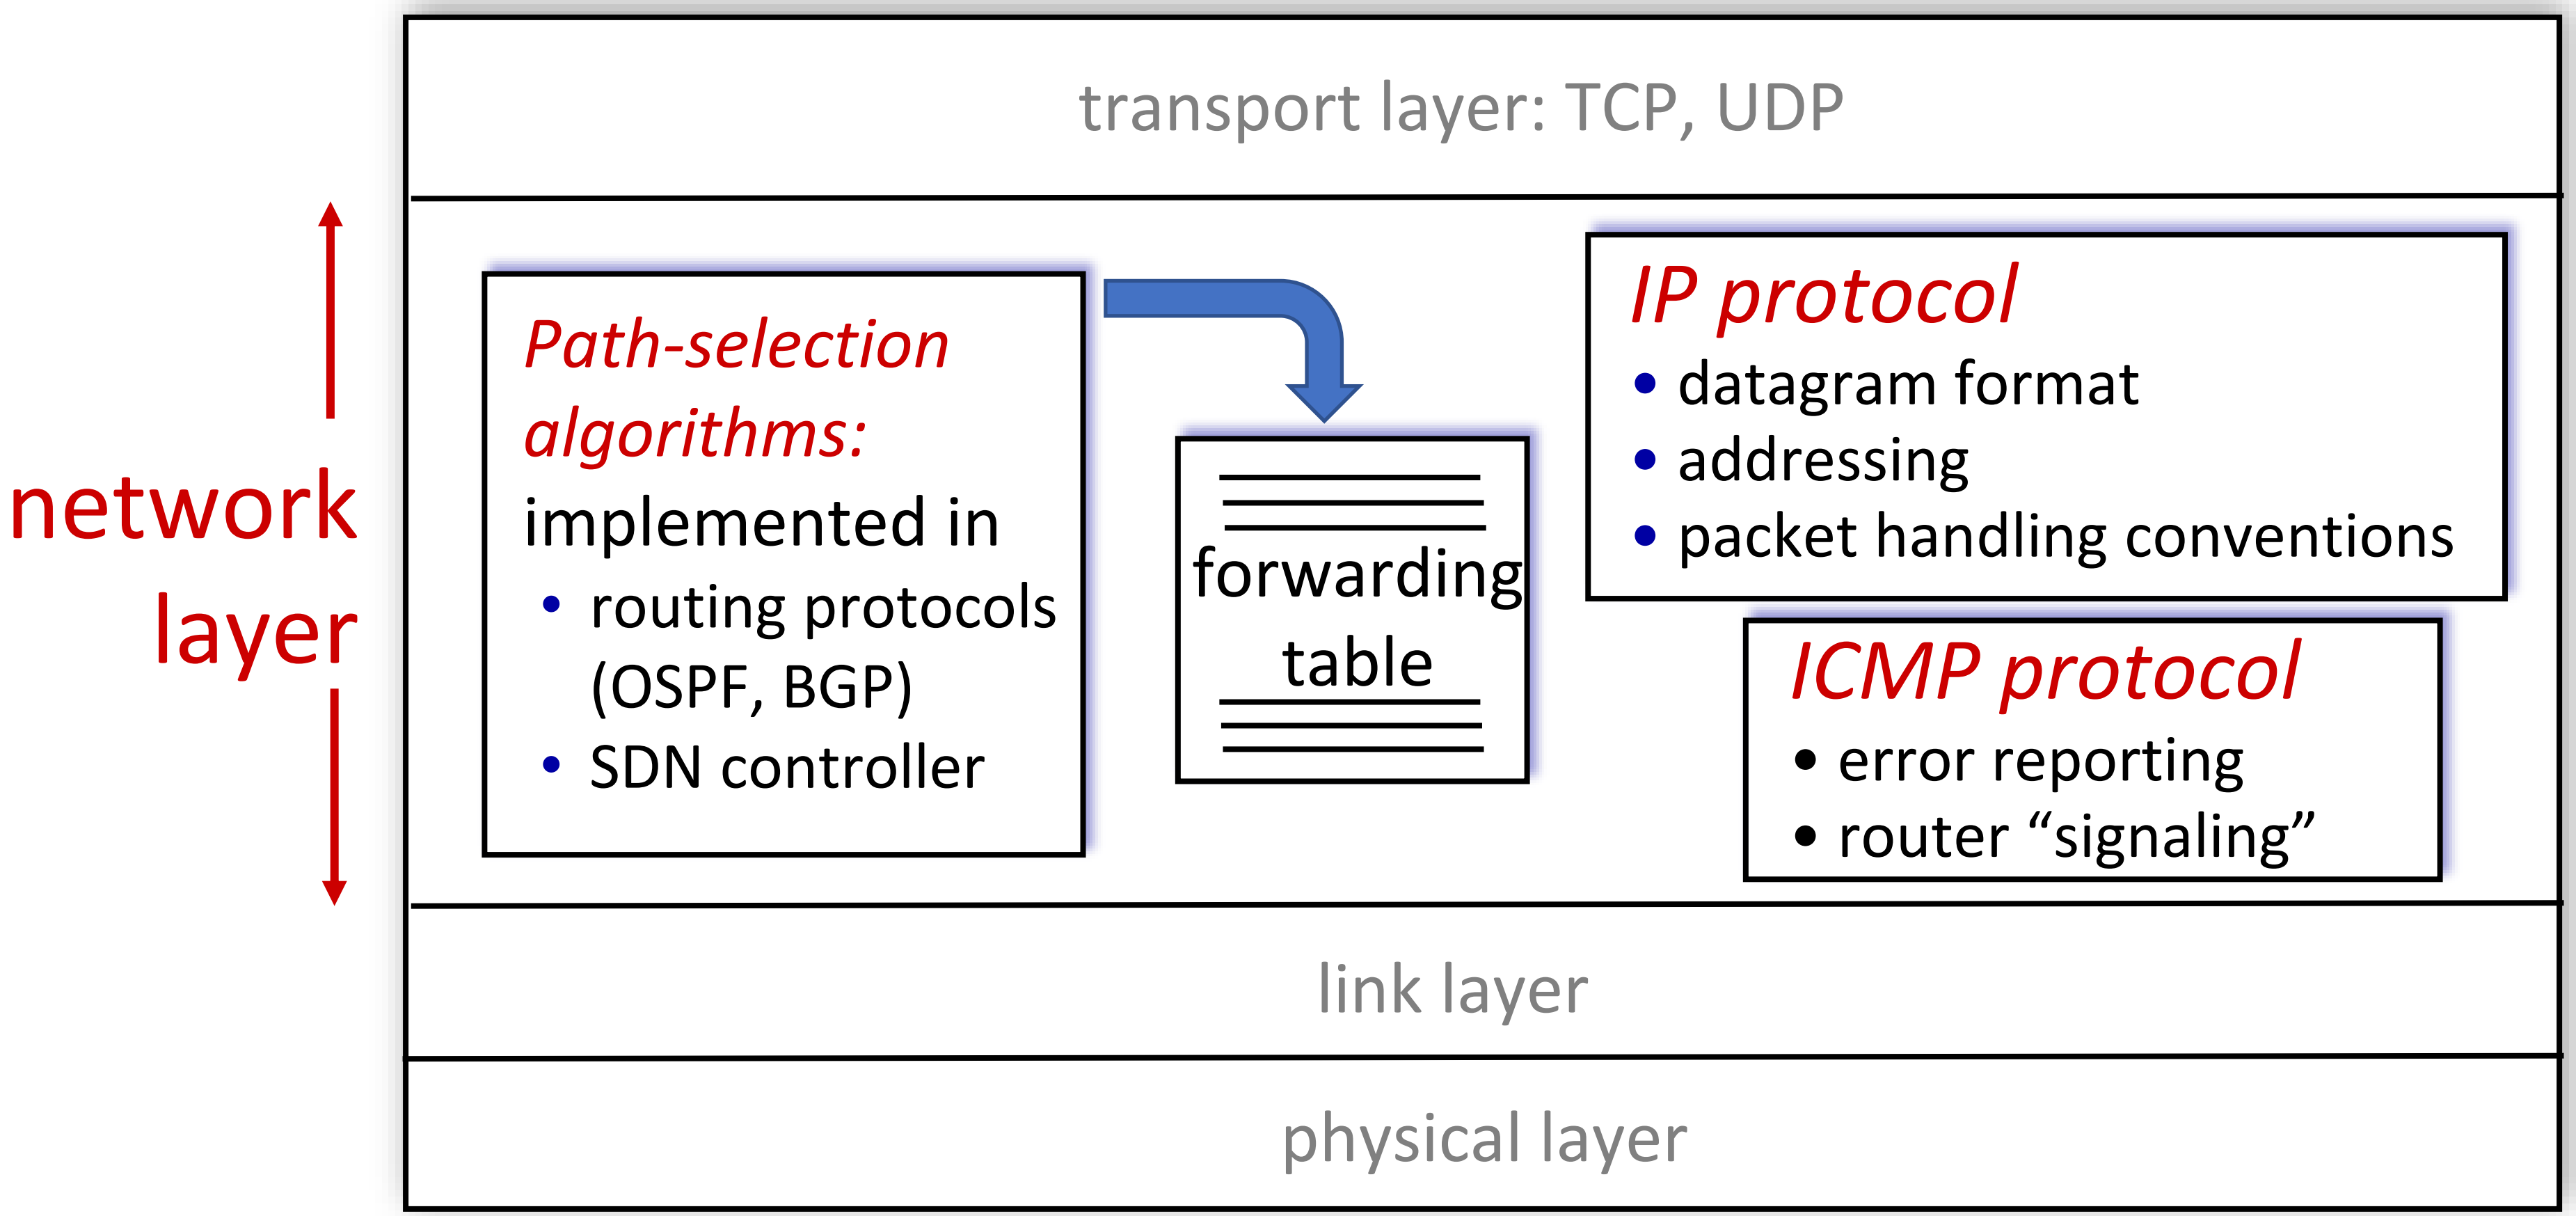

IP Datagram format

IP protocol version number

header length(bytes)

"type" of service:
- diffserv (0:5)
- ECN (6:7)

TTL: remaining max hops
(decremented at each router)

upper layer protocol (e.g., TCP or UDP)

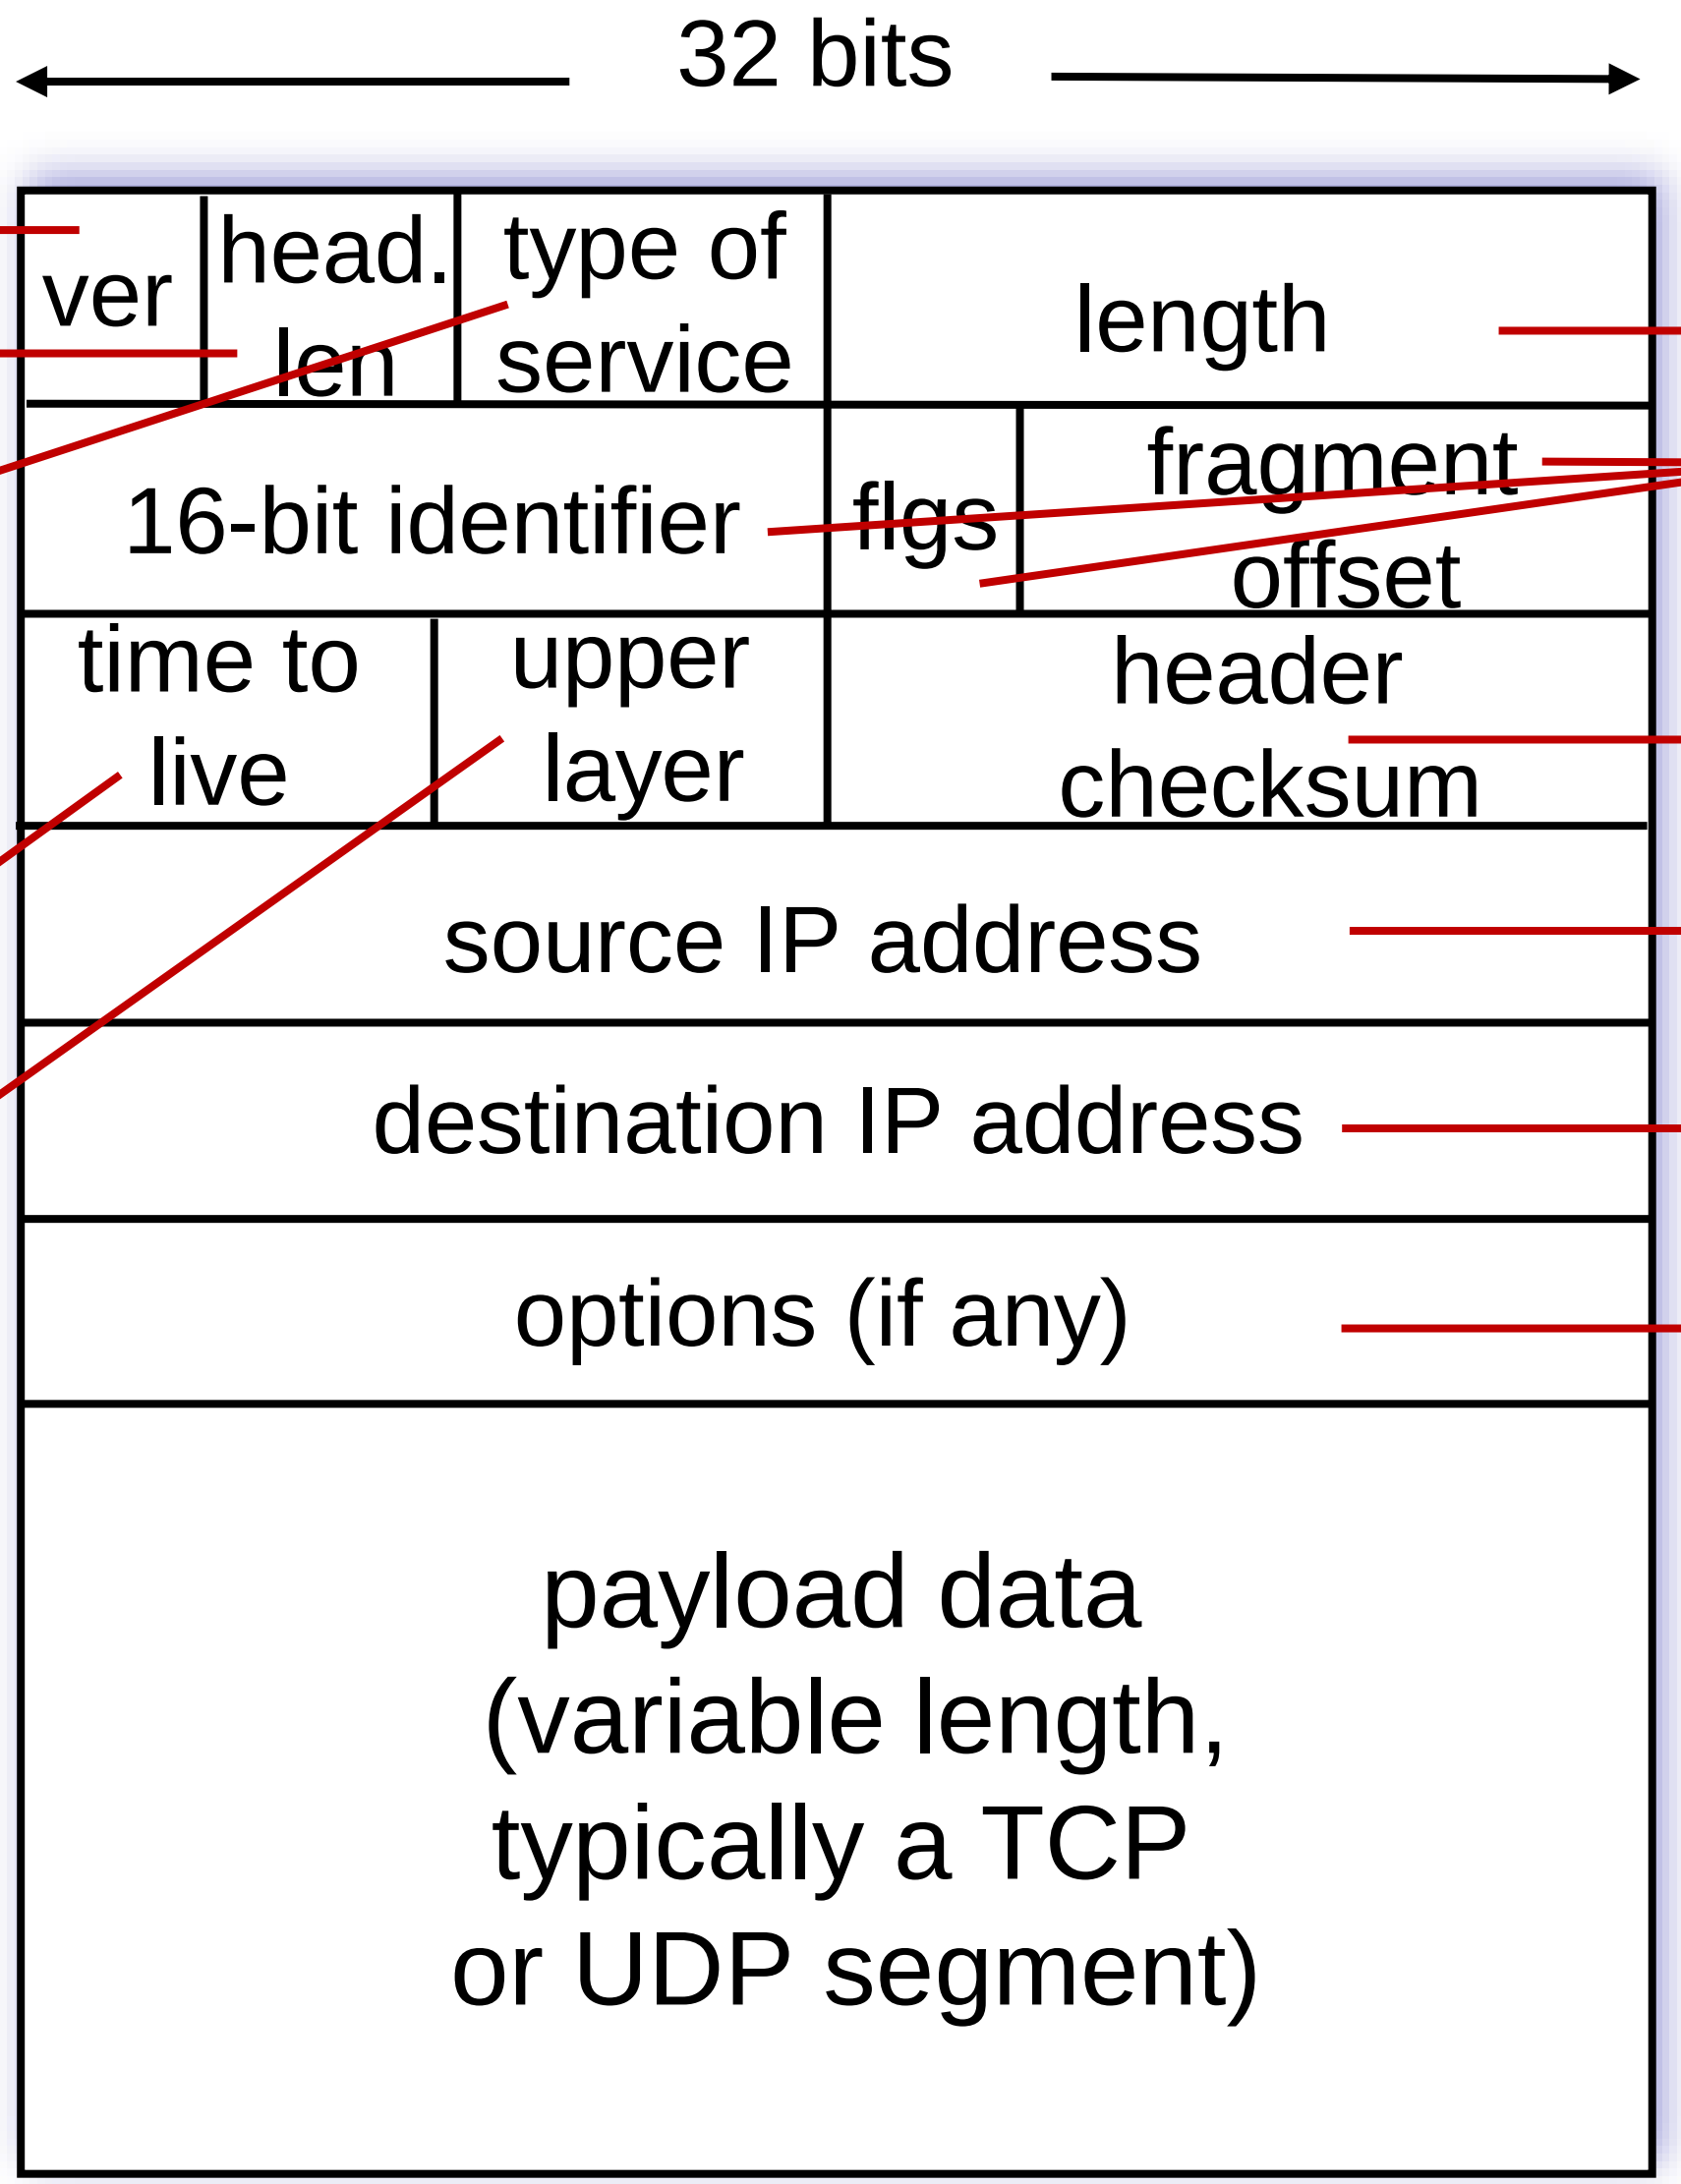

total datagram length (bytes)

fragmentation/ reassembly

header checksum

32-bit source IP address

Maximum length: 64K bytes
Typically: 1500 bytes or less

e.g., timestamp, record route taken

overhead
- 20 bytes of TCP
- 20 bytes of IP
- = 40 bytes + app layer overhead for TCP+IP

IP addressing: introduction

- IP address: 32-bit identifier associated with each host or router *interface*
- interface: connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)

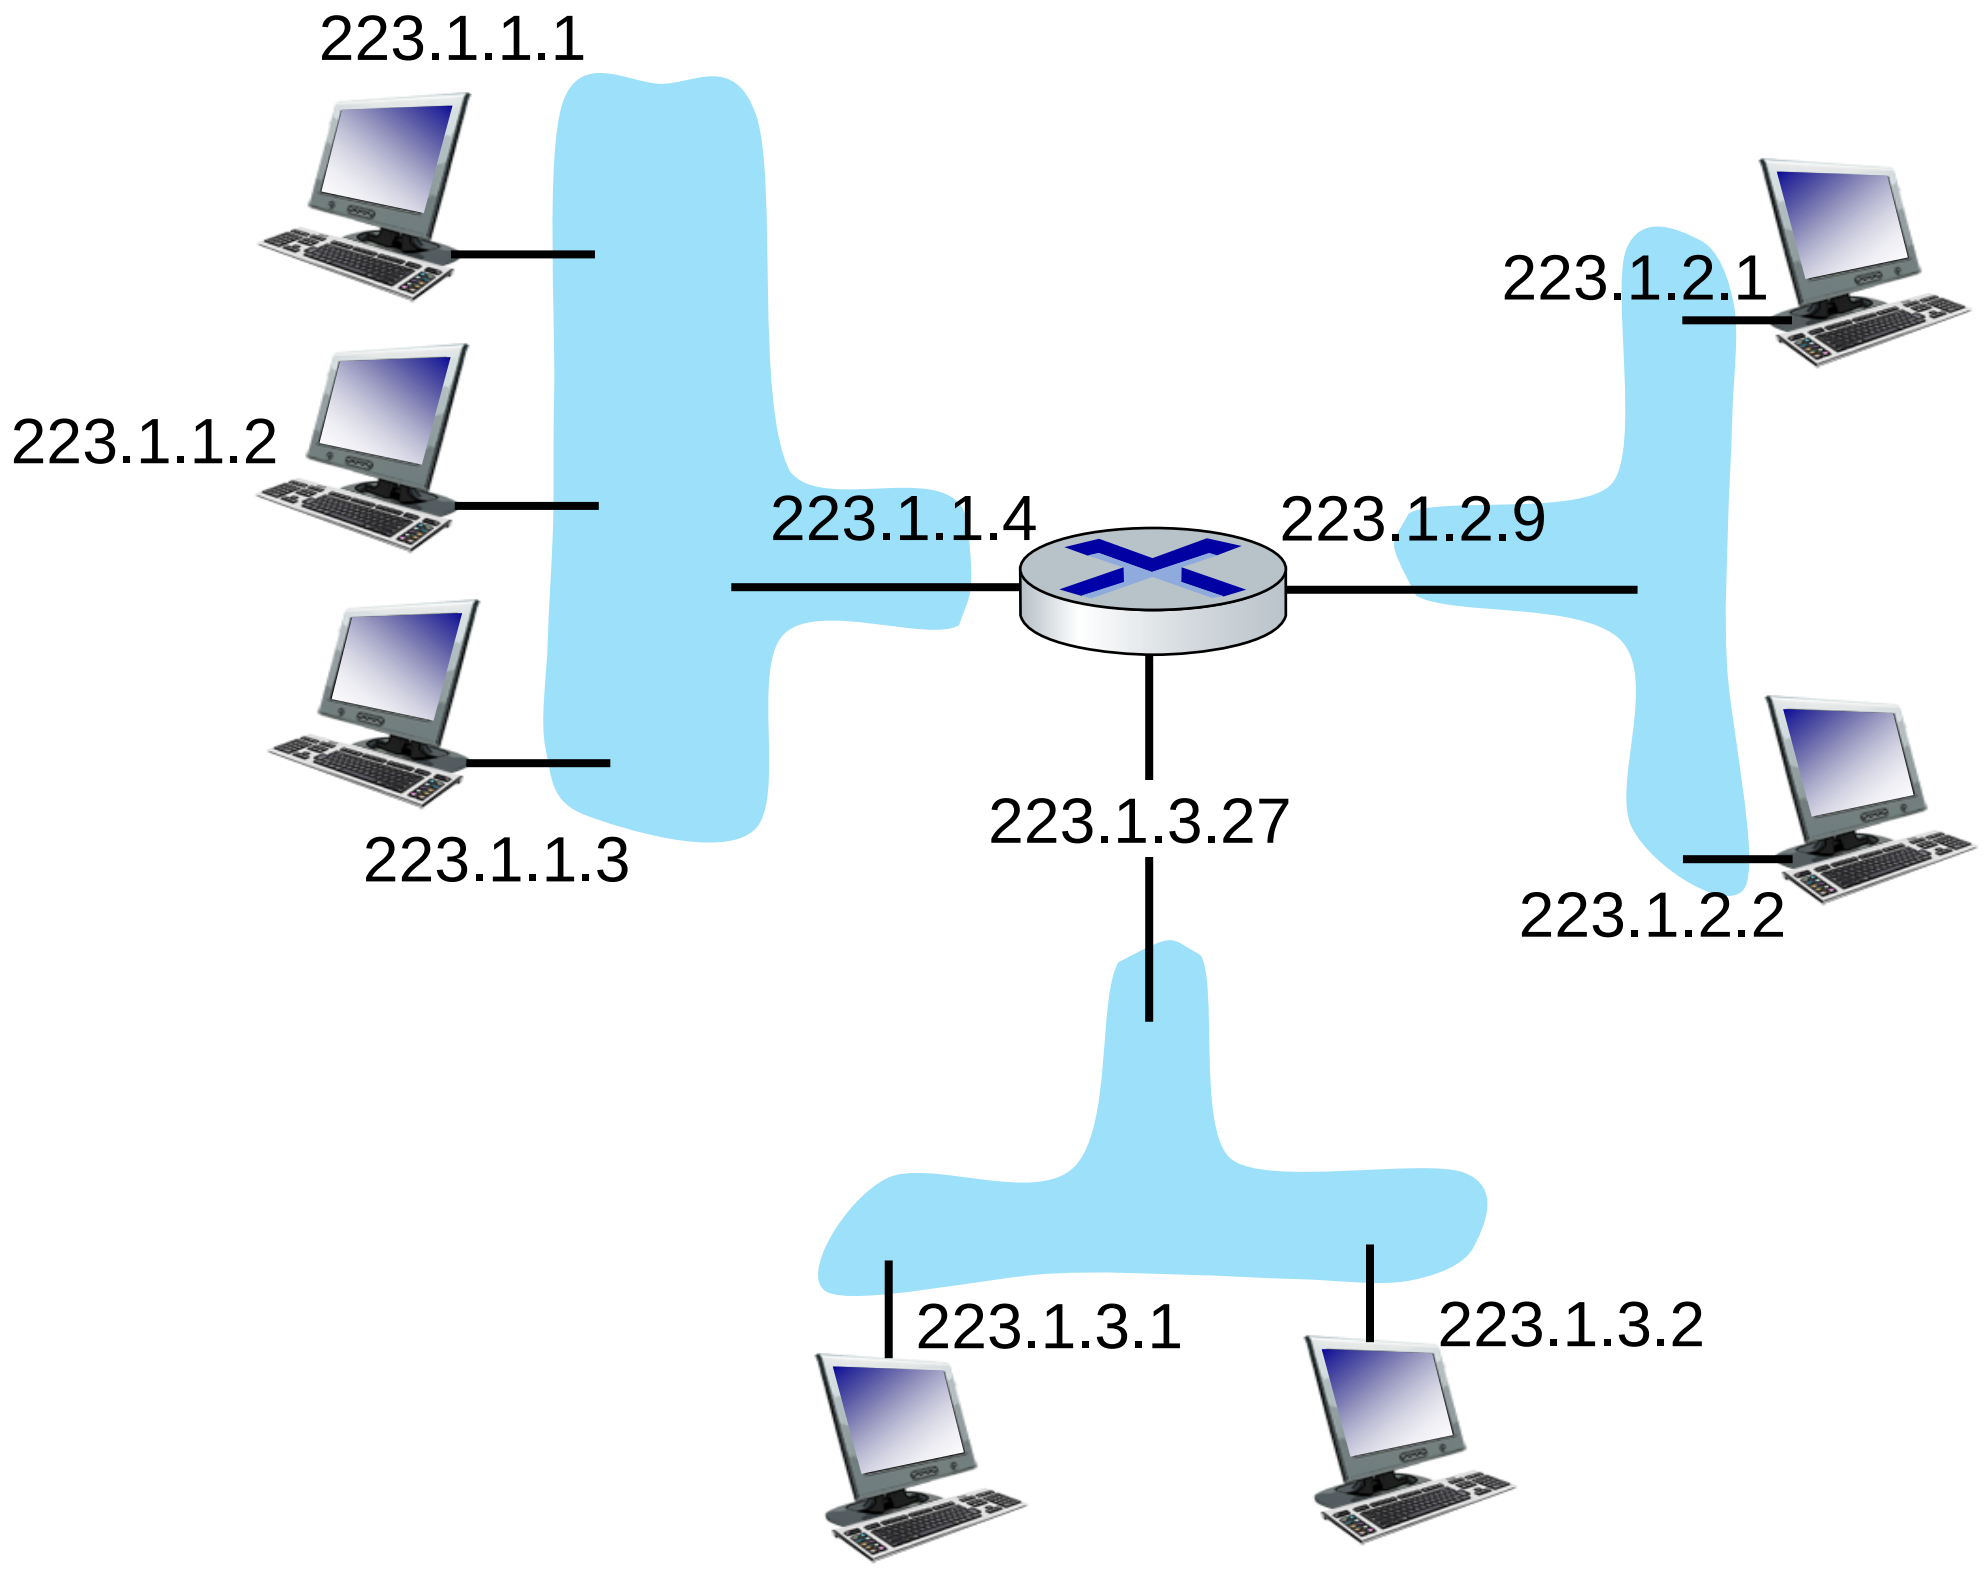

dotted-decimal IP address notation:

$$223.1.1.1 = \underbrace{11011111}_{223}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}$$

IP addressing: introduction

- IP address: 32-bit identifier associated with each host or router *interface*
- interface: connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)

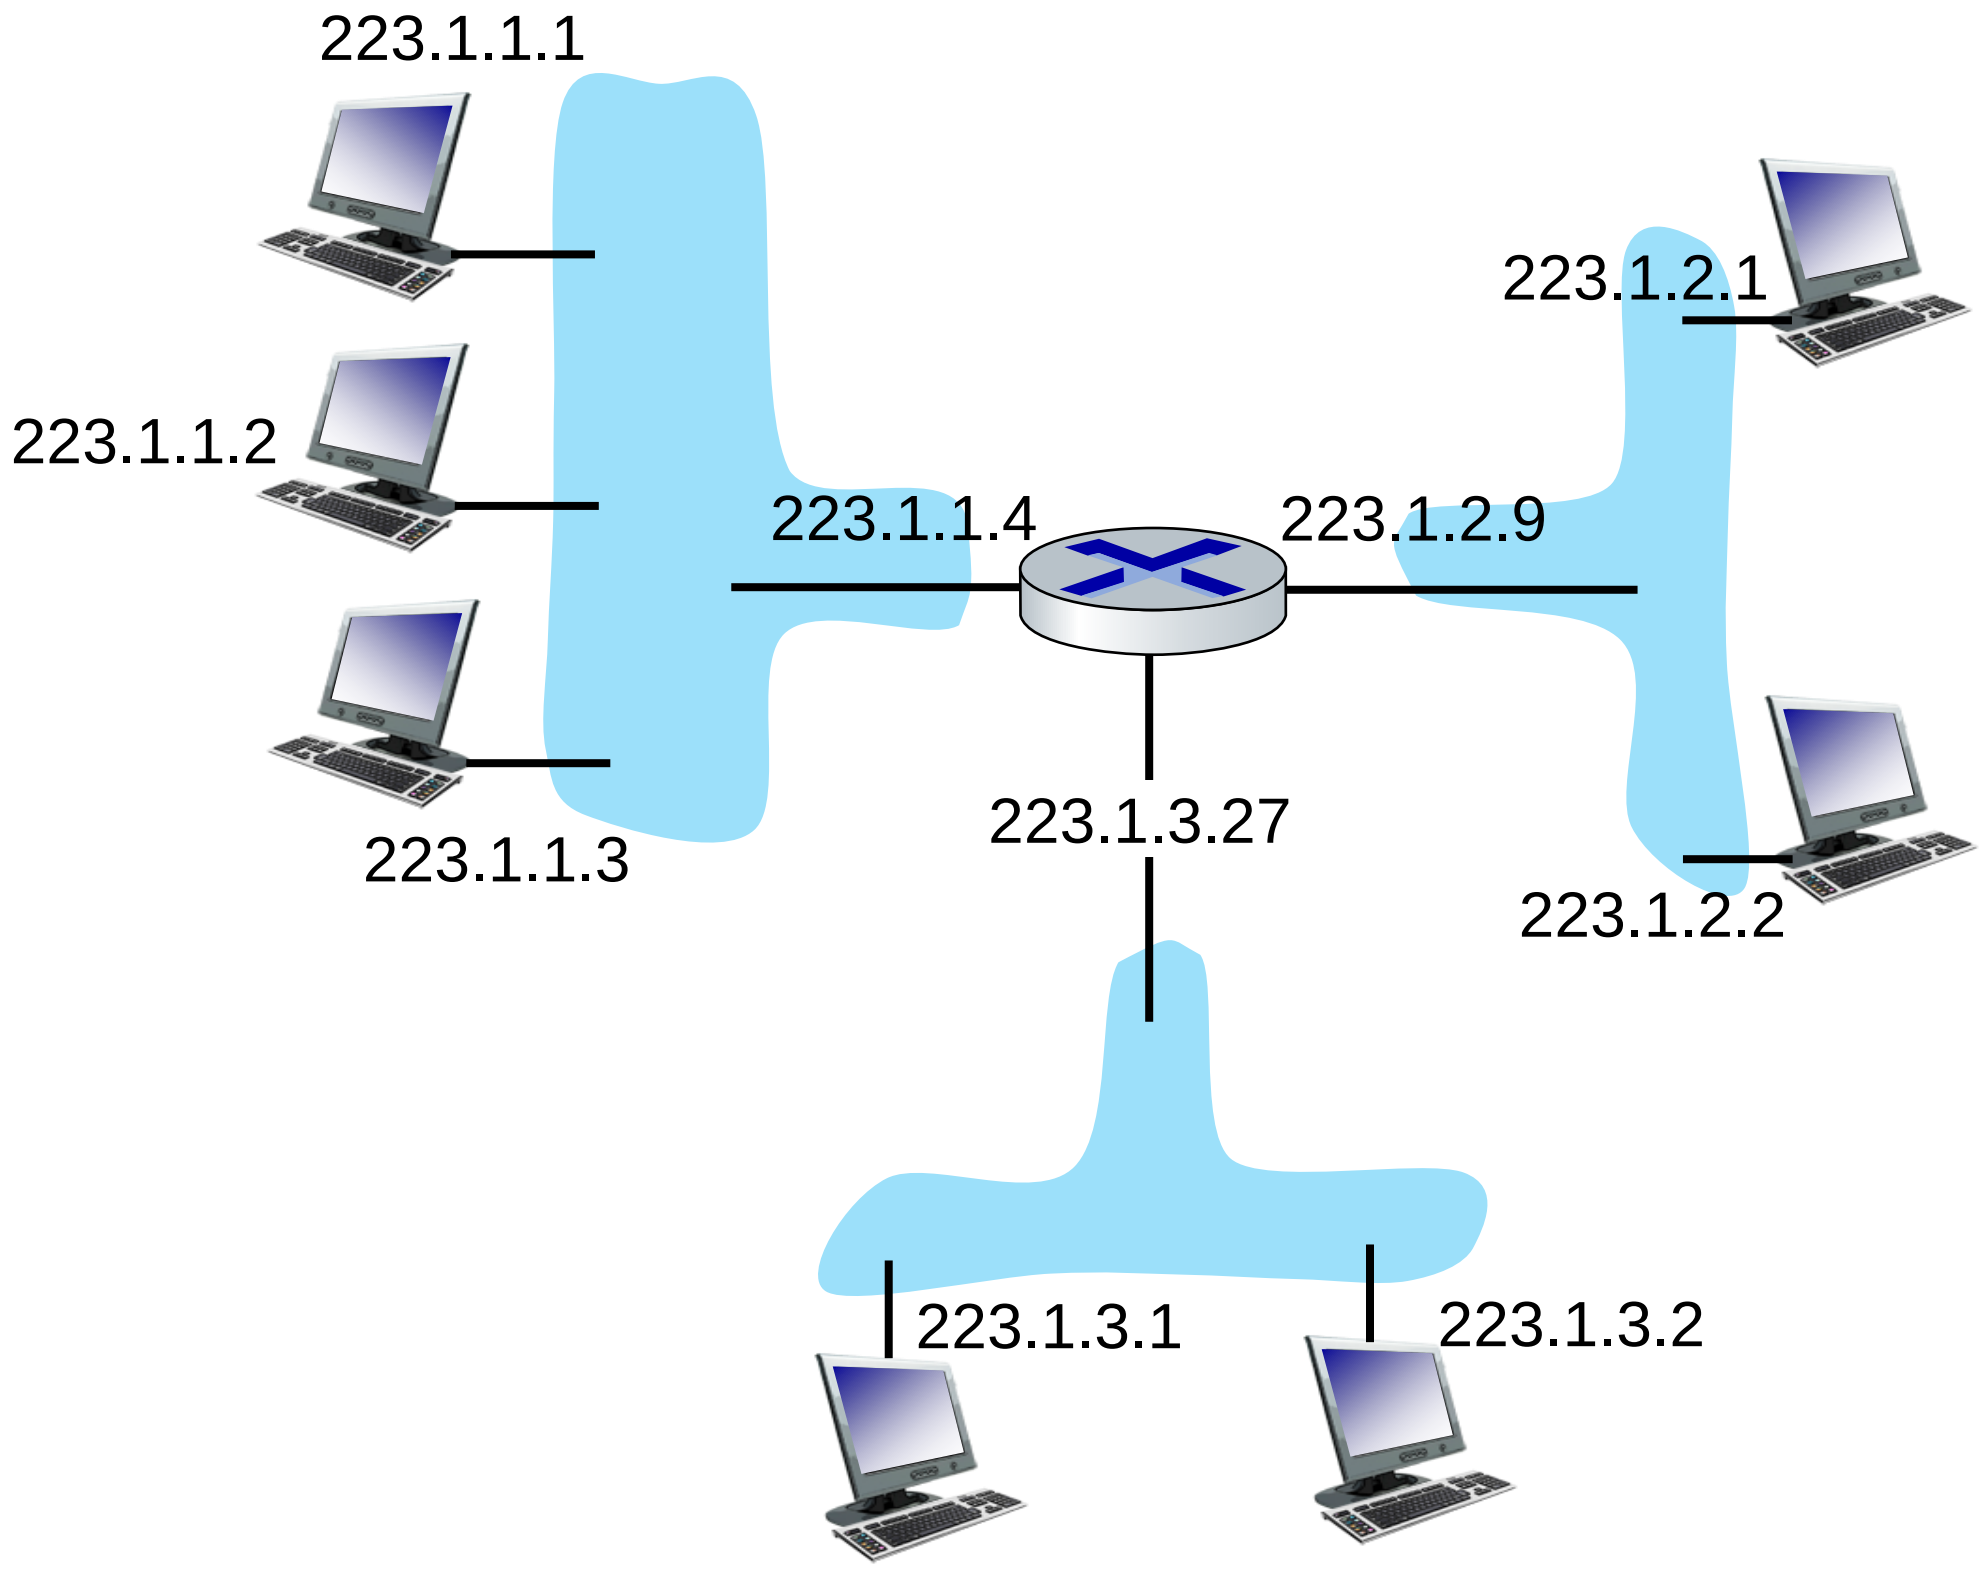

dotted-decimal IP address notation:

223.1.1.1 = 11011111 00000001 00000001 00000001

$\underbrace{11011111}_{223}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}$

IP addressing: introduction

Q: how are interfaces actually connected?

A: we'll learn about that in chapters 6, 7

A: wired Ethernet interfaces connected by Ethernet switches

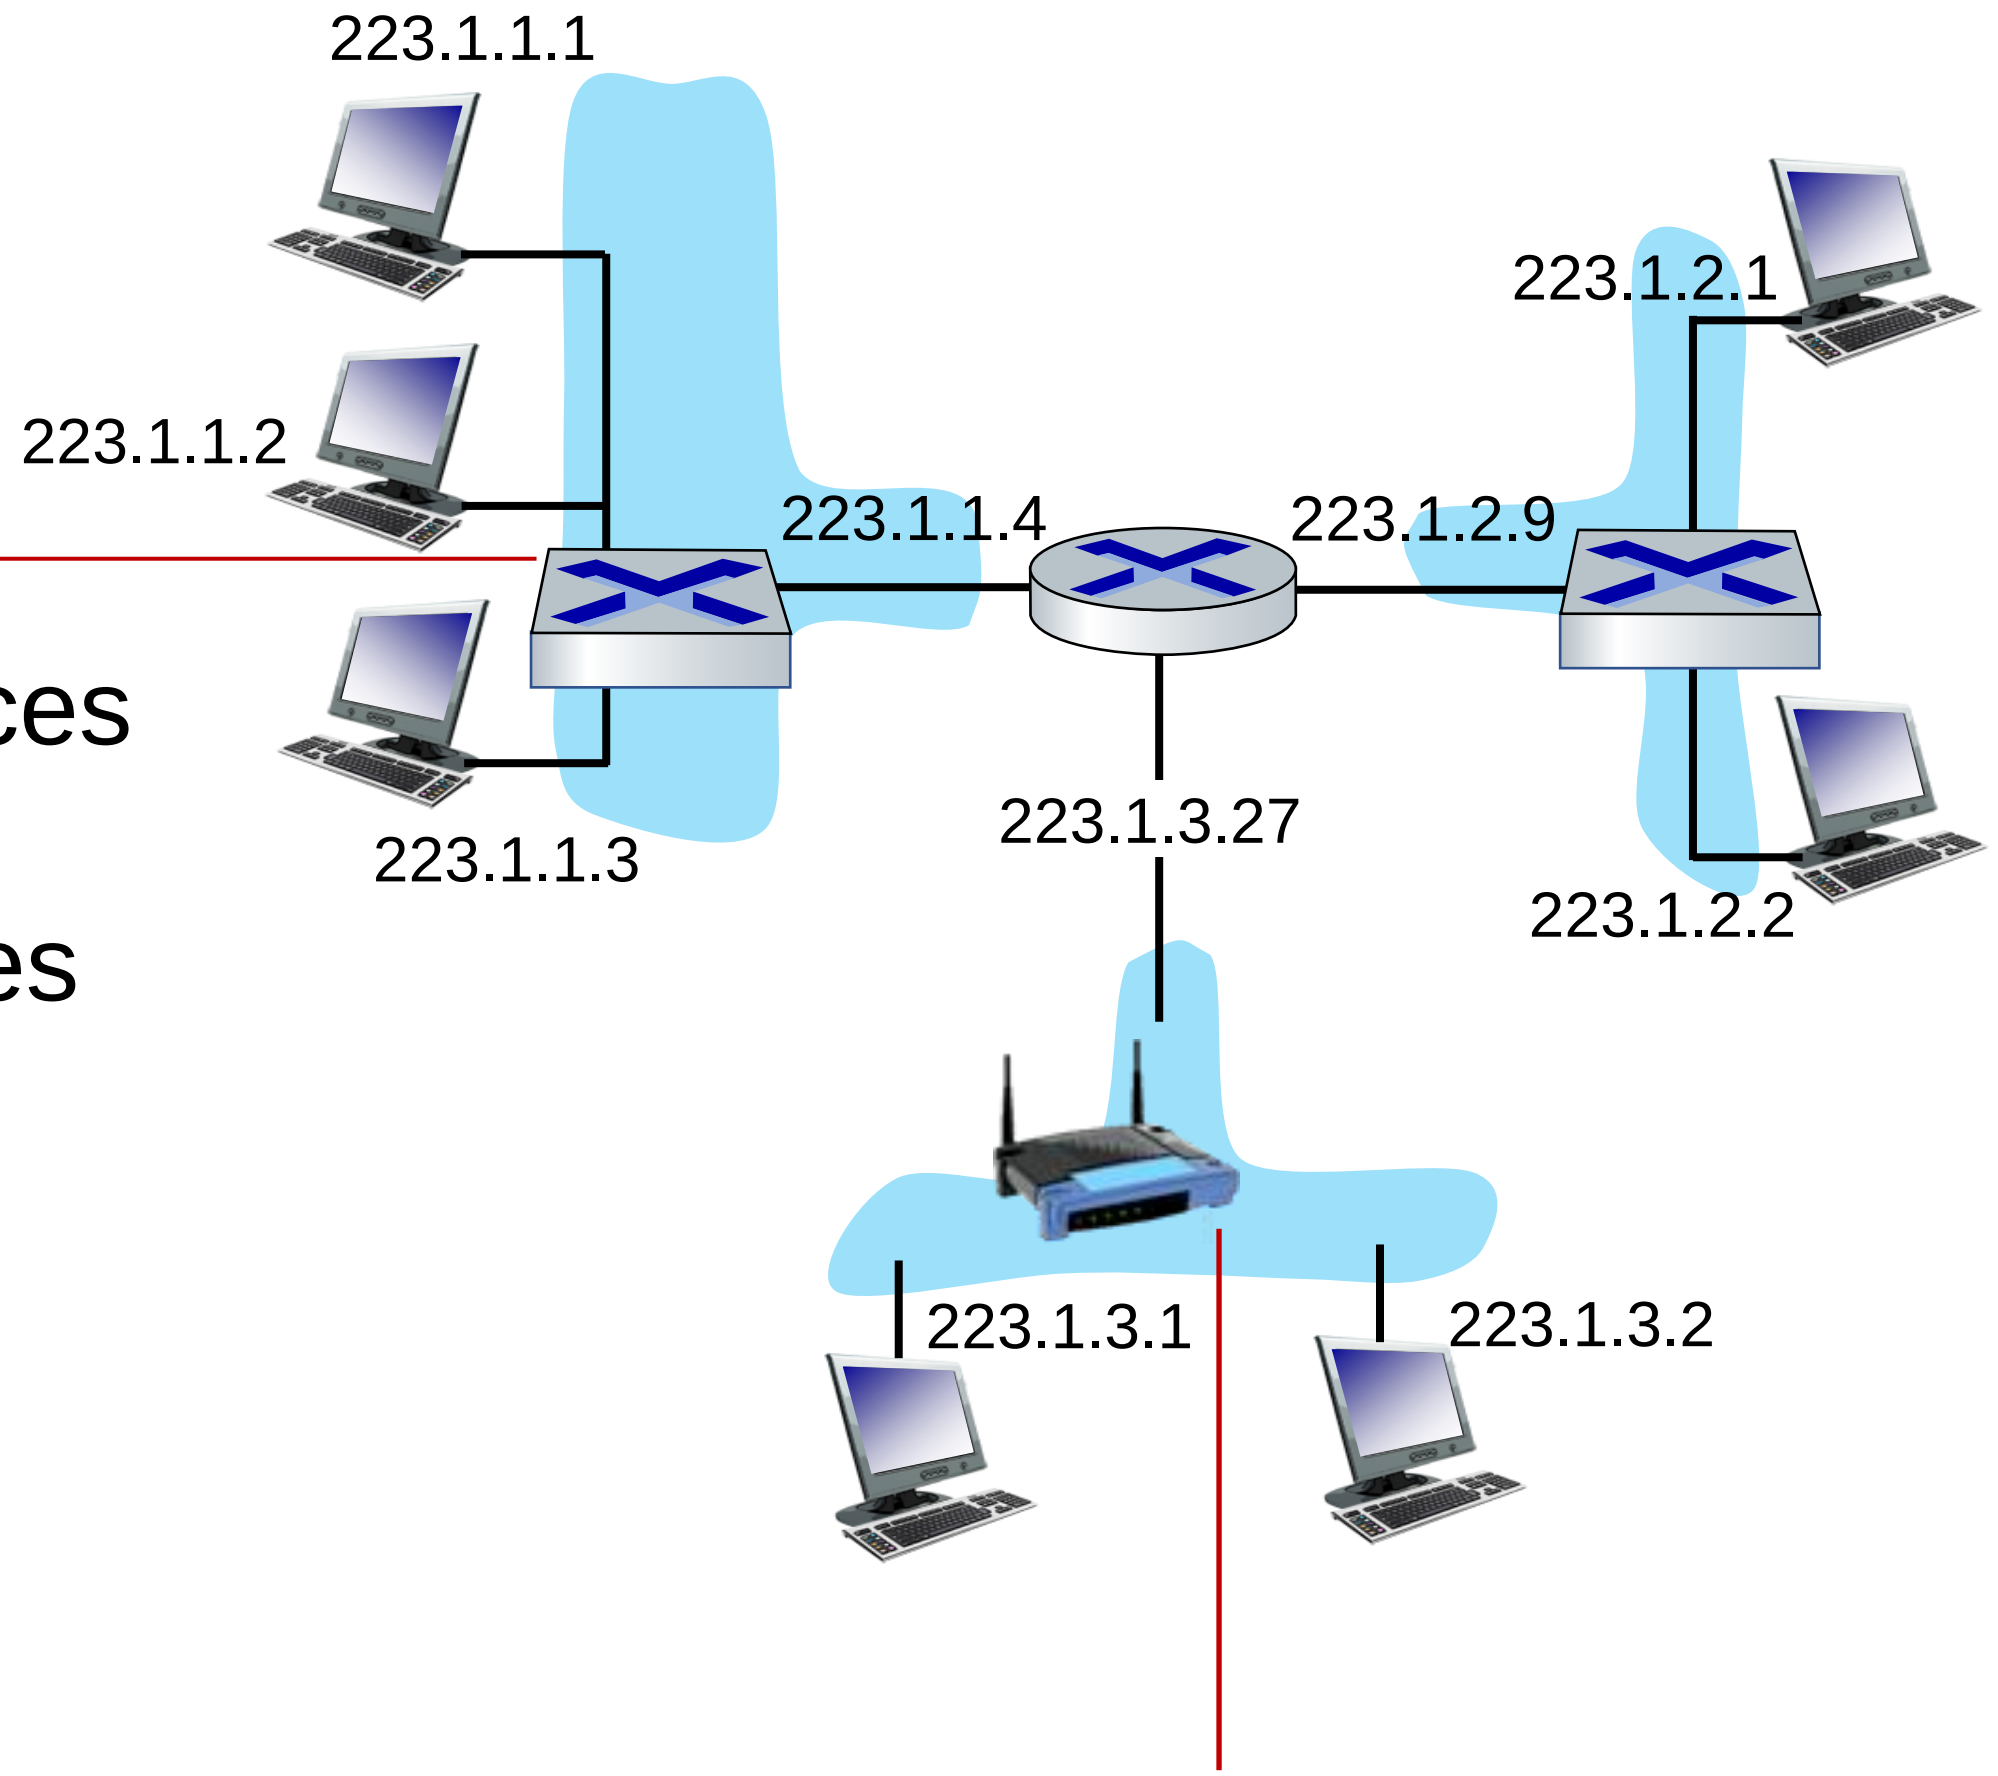

A: wireless WiFi interfaces connected by WiFi base station

For now: don't need to worry about how one interface is connected to another (with no intervening router)