



(12) **United States Patent**
Clark et al.

(10) **Patent No.:** **US 12,407,393 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **SYSTEM AND METHOD FOR SPATIAL AWARENESS OVERLAY ONTO MOBILE AD HOC NETWORK (MANET) FREQUENT MESSAGE PREAMBLES**

(71) Applicant: **Rockwell Collins, Inc.**, Cedar Rapids, IA (US)

(72) Inventors: **Stephen M. Clark**, Evansdale, IA (US); **Tj T. Kwon**, Marion, IA (US); **Brian L. Aanderud**, Eden Prairie, MN (US); **Eric J. Loren**, North Liberty, IA (US); **William B. Sorsby**, Cedar Rapids, IA (US)

(73) Assignee: **Rockwell Collins, Inc.**, Cedar Rapids, IA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 434 days.

(21) Appl. No.: **17/957,881**

(22) Filed: **Sep. 30, 2022**

(65) **Prior Publication Data**

US 2023/0379033 A1 Nov. 23, 2023

Related U.S. Application Data

(63) Continuation-in-part of application No. 17/857,920, filed on Jul. 5, 2022, now Pat. No. 12,287,418, which
(Continued)

(51) **Int. Cl.**
H04B 7/06 (2006.01)
H04L 5/00 (2006.01)

(52) **U.S. Cl.**
CPC **H04B 7/068** (2013.01); **H04L 5/0048** (2013.01)

(58) **Field of Classification Search**
CPC H04B 7/068; H04B 7/0667; H04L 5/0048; H04L 5/005; H04L 5/0051
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,134,113 A 1/1979 Powell
4,399,531 A 8/1983 Grande et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 101330448 A 12/2008
CN 101465793 A 6/2009
(Continued)

OTHER PUBLICATIONS

Seddigh M et al: "Dominating sets and neighbor elimination-based broadcasting algorithms in wireless networks", vol. 13, No. 1, Jan. 1, 2002, pp. 14-25.

(Continued)


Primary Examiner — Keith Ferguson

(74) *Attorney, Agent, or Firm* — Suiter Swantz IP

(57) **ABSTRACT**

A communications node of a mobile ad hoc network (MANET) or like multi-node network may receive a preamble and/or header portion associated with a resource allocation message (e.g., as opposed to the full message) transmitted by another network node in motion relative to the receiving node. The receiving node determines a receiver-side Doppler nulling direction (e.g., for offsetting Doppler shift associated with the motion of the transmitting node relative to the receiving node) by adjusting a receiving frequency of the preamble and/or header portion through one or more nulling frequencies, each nulling frequency associated with a nulling direction for offsetting Doppler shift due to relative motion in that direction. Based on the determination of a receiver-side Doppler nulling frequency, the receiving node can determine a velocity and direction of the relative motion between the receiving and transmitting nodes.

20 Claims, 11 Drawing Sheets

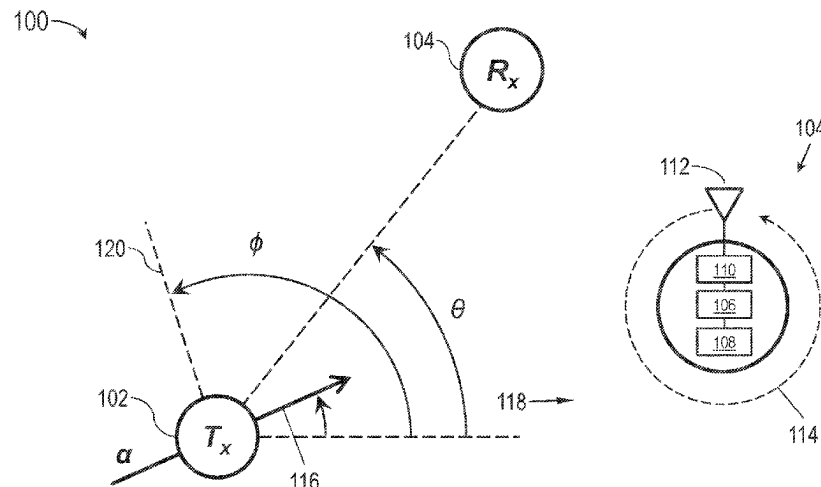

Related U.S. Application Data

is a continuation-in-part of application No. PCT/US2022/024653, filed on Apr. 13, 2022, which is a continuation of application No. 17/233,107, filed on Apr. 16, 2021, now Pat. No. 11,726,162, said application No. 17/857,920 is a continuation of application No. 17/541,703, filed on Dec. 3, 2021, now Pat. No. 12,137,048, which is a continuation-in-part of application No. 17/408,156, filed on Aug. 20, 2021, now Pat. No. 11,737,121, and a continuation-in-part of application No. 17/233,107, filed on Apr. 16, 2021, now Pat. No. 11,726,162, and a continuation-in-part of application No. 17/079,175, filed on Oct. 23, 2020, now Pat. No. 11,304,084, and a continuation-in-part of application No. 17/020,231, filed on Sep. 14, 2020, now Pat. No. 11,296,966, which is a continuation-in-part of application No. 16/987,671, filed on Aug. 7, 2020, now Pat. No. 11,290,942, and a continuation-in-part of application No. 16/698,230, filed on Nov. 27, 2019, now Pat. No. 10,999,778, said application No. 17/857,920 is a continuation of application No. 17/534,061, filed on Nov. 23, 2021, now Pat. No. 11,665,658, application No. 17/957,881 is a continuation-in-part of application No. 17/846,625, filed on Jun. 22, 2022.

- (60) Provisional application No. 63/344,445, filed on May 20, 2022.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,806,934	A	2/1989	Magoon	8,630,291	B2	1/2014	Shaffer et al.
5,835,482	A	11/1998	Allen	8,638,008	B2	1/2014	Baldwin et al.
5,898,902	A	4/1999	Tuzov	8,717,230	B1	5/2014	Fischi et al.
6,072,425	A	6/2000	Vopat	8,717,935	B2	5/2014	Lindem, III et al.
6,115,394	A	9/2000	Balachandran et al.	8,732,338	B2	5/2014	Hutchison et al.
6,148,219	A	11/2000	Engelbrecht et al.	8,798,034	B2	8/2014	Aggarwal et al.
6,195,403	B1	2/2001	Anderson et al.	8,824,444	B1	9/2014	Berenberg et al.
6,496,940	B1	12/2002	Horst et al.	8,849,596	B2	9/2014	Ting et al.
6,611,773	B2	8/2003	Przydatek et al.	8,867,427	B2	10/2014	Taori et al.
6,662,229	B2	12/2003	Passman et al.	8,913,543	B2	12/2014	Zainaldin
6,721,290	B1	4/2004	Kondylis et al.	8,942,197	B2	1/2015	Rudnick et al.
6,744,740	B2	6/2004	Chen	8,964,739	B1	2/2015	Wisehart
6,845,091	B2	1/2005	Ogier et al.	8,989,326	B2	3/2015	An et al.
7,023,818	B1	4/2006	Elliott	9,179,475	B2	11/2015	Koleszar et al.
7,171,476	B2	1/2007	Maeda et al.	9,213,387	B2	12/2015	King et al.
7,242,671	B2	7/2007	Li et al.	9,246,795	B2	1/2016	Madaiah et al.
7,299,013	B2	11/2007	Rotta et al.	9,294,159	B2	3/2016	Duerksen
7,417,948	B2	8/2008	Sjöblom	9,304,198	B1	4/2016	Doerry et al.
7,558,575	B2	7/2009	Losh et al.	9,325,513	B2	4/2016	Liu et al.
7,573,835	B2	8/2009	Sahinoglu et al.	9,345,029	B2	5/2016	Monte et al.
7,633,921	B2	12/2009	Thubert et al.	9,435,884	B2	9/2016	Inoue
7,679,551	B2	3/2010	Petovello et al.	9,516,513	B2	12/2016	Saegrov et al.
7,698,463	B2	4/2010	Ogier et al.	9,544,162	B2	1/2017	Vasseur et al.
7,719,989	B2	5/2010	Yau	9,628,285	B2	4/2017	Császár
7,729,240	B1	6/2010	Crane et al.	9,713,061	B2	7/2017	Ruiz et al.
7,787,450	B1	8/2010	Chan et al.	9,719,803	B2	8/2017	Ratcliff et al.
7,881,229	B2	2/2011	Weinstein et al.	9,858,822	B1	1/2018	Gentry
7,903,662	B2	3/2011	Cohn	9,979,635	B2	5/2018	Hellhake et al.
7,983,239	B1	7/2011	Weinstein et al.	10,067,199	B2	9/2018	Eldridge et al.
8,036,224	B2	10/2011	Axelsson et al.	10,097,469	B2	10/2018	Hui et al.
8,121,741	B2	2/2012	Taft et al.	10,098,051	B2	10/2018	Mosko et al.
8,138,626	B2	3/2012	Jonsson et al.	10,205,654	B2	2/2019	Choi et al.
8,159,954	B2	4/2012	Larsson et al.	10,236,648	B2	3/2019	Irons et al.
8,218,550	B2	7/2012	Axelsson et al.	10,257,655	B2	4/2019	Cody
8,223,660	B2	7/2012	Allan et al.	10,382,897	B1	8/2019	Lanes et al.
8,223,868	B2	7/2012	Lee	10,455,521	B2	10/2019	Hudson et al.
8,341,289	B2	12/2012	Hellhake et al.	10,459,074	B1	10/2019	Omer et al.
8,396,686	B2	3/2013	Song et al.	10,484,837	B2	11/2019	Navalekar et al.
8,490,175	B2	7/2013	Barton et al.	10,531,500	B2	1/2020	Ulinskas
8,553,560	B2	10/2013	Axelsson et al.	10,601,684	B2	3/2020	Hashmi et al.
				10,601,713	B1	3/2020	Turgeman et al.
				10,609,622	B2	3/2020	Bader et al.
				10,785,672	B2	9/2020	Kwan et al.
				10,798,053	B2	10/2020	Nolan et al.
				10,873,429	B1	12/2020	Kwon et al.
				10,931,570	B1	2/2021	Kwon et al.
				10,965,584	B1	3/2021	Kwon et al.
				10,979,348	B1	4/2021	Kwon et al.
				10,993,201	B2	4/2021	Luecke
				10,999,778	B1	5/2021	Kwon et al.
				11,071,039	B2	7/2021	Fallon et al.
				11,082,324	B2	8/2021	Ramanathan et al.
				11,129,078	B2	9/2021	Yates et al.
				11,258,520	B2	2/2022	Goergen et al.
				11,284,295	B1	3/2022	Kwon et al.
				11,290,942	B2	3/2022	Kwon et al.
				11,500,111	B2	11/2022	Frederiksen et al.
				11,528,675	B2	12/2022	Nagaraja et al.
				11,977,173	B2	5/2024	Loren et al.
				12,050,279	B2	7/2024	Stevens et al.
				12,111,406	B2	10/2024	Sorsby et al.
				2002/0018448	A1	2/2002	Amis et al.
				2003/0035589	A1	2/2003	Kim
				2003/0151513	A1	8/2003	Herrmann et al.
				2004/0012859	A1	1/2004	Minefuji
				2004/0028016	A1	2/2004	Billhartz
				2004/0123228	A1	6/2004	Kikuchi et al.
				2004/0213239	A1	10/2004	Lin et al.
				2004/0246902	A1	12/2004	Weinstein et al.
				2005/0025076	A1	2/2005	Chaudhuri et al.
				2005/0033789	A1	2/2005	Sirois
				2005/0141545	A1 *	6/2005	Fein H04W 74/0816 370/445
				2006/0010170	A1	1/2006	Lashley et al.
				2006/0056421	A1	3/2006	Zaki
				2006/0176847	A1	8/2006	Chen et al.
				2007/0086541	A1	4/2007	Moon et al.
				2007/0097880	A1	5/2007	Rajsic
				2007/0109979	A1	5/2007	Fu et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2007/0223497	A1	9/2007	Elson et al.
2007/0299950	A1	12/2007	Kulkarni
2008/0107034	A1	5/2008	Jetcheva et al.
2008/0117904	A1	5/2008	Radha et al.
2008/0219204	A1	9/2008	Lee et al.
2008/0273582	A1	11/2008	Gaal et al.
2008/0291945	A1	11/2008	Luo
2008/0310325	A1	12/2008	Yang
2009/0086713	A1	4/2009	Luo
2009/0203337	A1	8/2009	Sisley et al.
2009/0207694	A1	8/2009	Guigne et al.
2009/0233544	A1	9/2009	Oyman et al.
2009/0290572	A1	11/2009	Gonia et al.
2010/0074101	A1	3/2010	Skalecki et al.
2010/0074141	A1	3/2010	Nguyen
2010/0111065	A1	5/2010	Noh et al.
2010/0226450	A1	9/2010	Tanaka
2010/0246660	A1	9/2010	Matsuo et al.
2011/0006913	A1	1/2011	Chen et al.
2011/0013487	A1	1/2011	Zhou et al.
2011/0053494	A1	3/2011	Kobayakawa
2011/0188378	A1	8/2011	Collins et al.
2011/0312279	A1	12/2011	Tsai et al.
2012/0092208	A1	4/2012	LeMire et al.
2012/0098699	A1	4/2012	Calmettes et al.
2013/0006834	A1	1/2013	Waelbroeck et al.
2013/0069834	A1	3/2013	Duerksen
2013/0094366	A1	4/2013	Lee et al.
2013/0100942	A1	4/2013	Rudnick et al.
2013/0130682	A1	5/2013	Awad et al.
2013/0195017	A1	8/2013	Jamadagni et al.
2013/0197835	A1	8/2013	Jonsson et al.
2013/0250808	A1	9/2013	Hui et al.
2014/0017196	A1	1/2014	Han et al.
2014/0018097	A1	1/2014	Goldstein
2014/0188990	A1	7/2014	Fulks
2014/0229519	A1	8/2014	Dietrich et al.
2014/0236483	A1	8/2014	Beaurepaire et al.
2014/0258201	A1	9/2014	Finlow-Bates
2014/0340192	A1	11/2014	Yamada et al.
2015/0010153	A1	1/2015	Robertson
2015/0025818	A1	1/2015	Das et al.
2015/0071332	A1	3/2015	Xu et al.
2015/0222479	A1	8/2015	Kim et al.
2015/0296335	A1	10/2015	Joshi et al.
2015/0326689	A1	11/2015	Leppänen et al.
2015/0366470	A1	12/2015	Kim et al.
2016/0139241	A1	5/2016	Holz et al.
2016/0150465	A1	5/2016	Jung et al.
2016/0187458	A1	6/2016	Shah et al.
2016/0189381	A1	6/2016	Rhoads
2016/0265968	A1	9/2016	Boutaud
2016/0373997	A1	12/2016	Petersen et al.
2017/0111266	A1	4/2017	Ko
2017/0134227	A1	5/2017	Song et al.
2017/0149658	A1	5/2017	Rimhagen et al.
2017/0168163	A1	6/2017	Small
2017/0366223	A1	12/2017	Stofer et al.
2018/0013665	A1	1/2018	Ko et al.
2018/0026475	A1	1/2018	Gelonese et al.
2018/0098263	A1	4/2018	Luo et al.
2018/0146489	A1	5/2018	Jin et al.
2018/0234336	A1	8/2018	Schumm et al.
2018/0302807	A1	10/2018	Chen et al.
2018/0317226	A1	11/2018	Sakoda
2019/0098625	A1	3/2019	Johnson et al.
2019/0222302	A1	7/2019	Lin et al.
2019/0251848	A1	8/2019	Sivanesan et al.
2019/0317207	A1	10/2019	Schroder et al.
2019/0332067	A1	10/2019	Zhao et al.
2019/0349172	A1	11/2019	Zhang
2020/0011968	A1	1/2020	Hammes et al.
2020/0052997	A1	2/2020	Ramanathan et al.
2020/0092949	A1	3/2020	Donepudi et al.
2020/0196309	A1	6/2020	Amouris
2020/0236607	A1	7/2020	Zhu et al.
2020/0292706	A1	9/2020	Hexsel et al.
2020/0350983	A1	11/2020	Alasti et al.
2020/0371247	A1	11/2020	Marmet
2020/0396708	A1	12/2020	Bharadwaj et al.
2021/0083917	A1	3/2021	Konishi et al.
2021/0153097	A1	5/2021	Du et al.
2021/0201044	A1	7/2021	Herdade et al.
2021/0302956	A1	9/2021	Sudhakaran et al.
2021/0359752	A1	11/2021	Wang et al.
2021/0385879	A1	12/2021	Mahalingam et al.
2022/0030511	A1	1/2022	Wang et al.
2022/0038139	A1	2/2022	Löwenmark et al.
2022/0060959	A1	2/2022	Atungsiri et al.
2022/0069901	A1	3/2022	Tian et al.
2022/0085892	A1	3/2022	Sorge
2022/0086818	A1	3/2022	Nam et al.
2022/0094634	A1	3/2022	Kwon et al.
2022/0143428	A1	5/2022	Goetz et al.
2022/0159741	A1	5/2022	Hoang et al.
2022/0173799	A1	6/2022	Wigard et al.
2022/0198351	A1	6/2022	Beaurepaire et al.
2022/0295492	A1	9/2022	Shattil
2022/0360320	A1	11/2022	Miao et al.
2022/0368410	A1	11/2022	Ma et al.
2023/0057666	A1	2/2023	Kwon et al.
2023/0111316	A1	4/2023	Ma et al.
2023/0118153	A1	4/2023	Amorim et al.
2023/0133633	A1	5/2023	Park et al.
2023/0135149	A1	5/2023	Krishnamurthy et al.
2023/0280435	A1	9/2023	Schatz et al.
2023/0280436	A1	9/2023	Loren et al.
2023/0280437	A1	9/2023	Kwon et al.
2023/0288518	A1	9/2023	Graf et al.
2023/0288519	A1	9/2023	Schatz et al.
2023/0288521	A1	9/2023	Kwon et al.
2023/0296716	A1	9/2023	Dean et al.
2023/0379007	A1	11/2023	Kwon et al.
2023/0379008	A1	11/2023	Sorsby et al.
2023/0393229	A1	12/2023	Loren et al.
2024/0151800	A1	5/2024	Stevens et al.

FOREIGN PATENT DOCUMENTS

CN	101330448	B	12/2010
CN	101465793	B	2/2011
CN	101686179	B	1/2013
CN	103067286	B	6/2016
CN	107645417	A	1/2018
CN	110234147	A	9/2019
CN	115085799	A	9/2022
DE	102010010935	A1	9/2011
EP	1912392	A2	4/2008
EP	2208084	A4	11/2011
EP	2743726	A1	6/2014
EP	2466964	B1	12/2017
EP	3026961	B1	8/2020
GB	2542491	A	3/2017
GB	2568122	B	11/2019
JP	4290684	B2	7/2009
JP	5164157	B2	3/2013
KR	1020040107702	A	12/2004
KR	100568976	B1	4/2006
KR	1020060078814	A	7/2006
KR	101231707	B1	2/2013
KR	1020160071964	A	6/2016
WO	9802762	A2	1/1998
WO	2008157609	A3	3/2009
WO	2012062091	A1	5/2012
WO	2012165938	A1	12/2012
WO	2015114077	A1	8/2015
WO	2015143604	A1	10/2015
WO	2017101575	A1	6/2017
WO	2018077864	A1	5/2018
WO	2019045767	A1	3/2019
WO	2020117427	A1	6/2020
WO	2020165627	A1	8/2020
WO	2020220233	A1	11/2020
WO	2021251902	A1	12/2021

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	2022003386	A1	1/2022
WO	2022202858	A1	9/2022
WO	2022221429	A1	10/2022
WO	2022232336	A1	11/2022
WO	2022233042	A1	11/2022
WO	2022233314	A1	11/2022
WO	2023001520	A1	1/2023
WO	2023030622	A1	3/2023
WO	2023047336	A1	3/2023
WO	2023057655	A1	4/2023
WO	2023067552	A1	4/2023
WO	2023068990	A1	4/2023
WO	2023081918	A1	5/2023

OTHER PUBLICATIONS

Turgut D. et al: "Optimizing clustering algorithm in mobile ad hoc networks using simulated annealing", vol. 3, Mar. 16, 20023, pp. 1492-1497.

Extended European Search Report dated Apr. 4, 2024; European Application No. 21190368.7.

Peng Wang, et al., "Convergence of Satellite and Terrestrial Networks: A Comprehensive Survey networks" IEEEAccess; vol. 4, Dec. 31, 2019.

Pulak K. Chowdhury, et al. "Handover Schemes in Satellite Networks: State-of-the-Art and Future Research Directions" 4th Quarter 2006, vol. 8, No. 4, Oct. 1, 2006.

U.S. Appl. No. 17/408,156, filed Aug. 20, 2021, Tj T. Kwon.

U.S. Appl. No. 17/534,061, filed Nov. 23, 2021, William B. Sorsby.

U.S. Appl. No. 17/857,920, filed Jul. 5, 2022, Eric J. Loren.

U.S. Appl. No. 63/344,445, filed May 20, 2022, Eric J. Loren.

U.S. Appl. No. 16/369,398, filed Mar. 29, 2019, Kwon.

U.S. Appl. No. 17/233,107, filed Apr. 16, 2022, Loren et al.

U.S. Appl. No. 17/541,703, filed Dec. 3, 2021, Kwon et al.

U.S. Appl. No. 17/857,920, filed Jul. 5, 2022, Loren et al.

U.S. Appl. No. 17/233,107, filed Apr. 16, 2021.

PCT Patent Application No. PCT/US22/24653, filed Apr. 13, 2022.

U.S. Appl. No. 17/408,156, filed Aug. 20, 2021.

U.S. Appl. No. 17/534,061, filed Nov. 28, 2021.

U.S. Appl. No. 17/541,703, filed Dec. 3, 2021.

U.S. Appl. No. 17/846,625, filed Jun. 22, 2022.

U.S. Appl. No. 17/857,920, filed Jul. 5, 2022.

U.S. Appl. No. 63/344,445, filed May 20, 2022.

U.S. Appl. No. 17/233,107, filed Apr. 16, 2021, Eric J. Loren.

U.S. Appl. No. 16/987,671, filed Aug. 7, 2021, Kwon et al.

Extended Search Report for European Application No. 21188737.7 dated Dec. 10, 2021, 8 pages.

Extended Search Report in European Application No. 21190368.7 dated Jan. 5, 2022, 10 pages.

Kwon et al., "Efficient Flooding with Passive Clustering (PC) in Ad Hoc Networks", Computer Communication Review. 32. 44-56. 10.1145/510726.510730, Aug. 11, 2003, 13 pages.

Martorella, M. et al., Ground Moving Target Imaging via SDAP-ISAR Processing: Review and New Trends. Sensors 2021, 21, 2391. <https://doi.org/10.3390/s21072391>.

Seddigh et al., "Dominating sets and neighbor elimination-based broadcasting algorithms in wireless networks", IEE Transactions in Parallel and Distributed Systems, IEEE, USA, vol. 13, No. 1, Jan. 1, 2002 (Jan. 1, 2002), pp. 14-25, XP011094090, ISSN: 1045-9219, DOI 10.1109/71.9800214.

Yi et al., "Passive Clustering in Ad Hoc Networks (PC)", URL: <https://tools.ietf.org/html/drafts-yi-manet-pc-00>, Nov. 14, 2001, 31 pages.

* cited by examiner

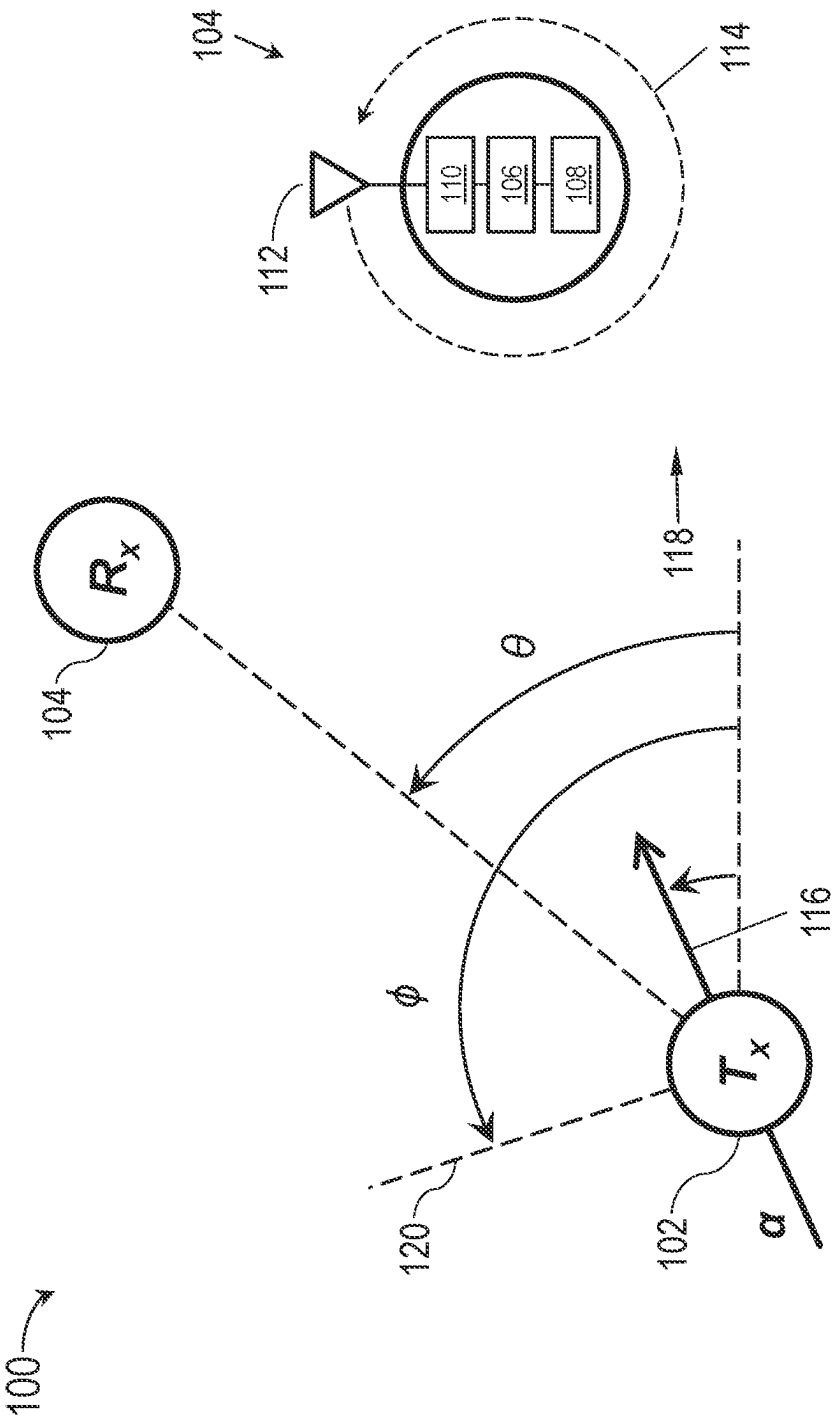


FIG. 1

200

$$\theta = 0, V_T = 1500 \text{ m/s}$$

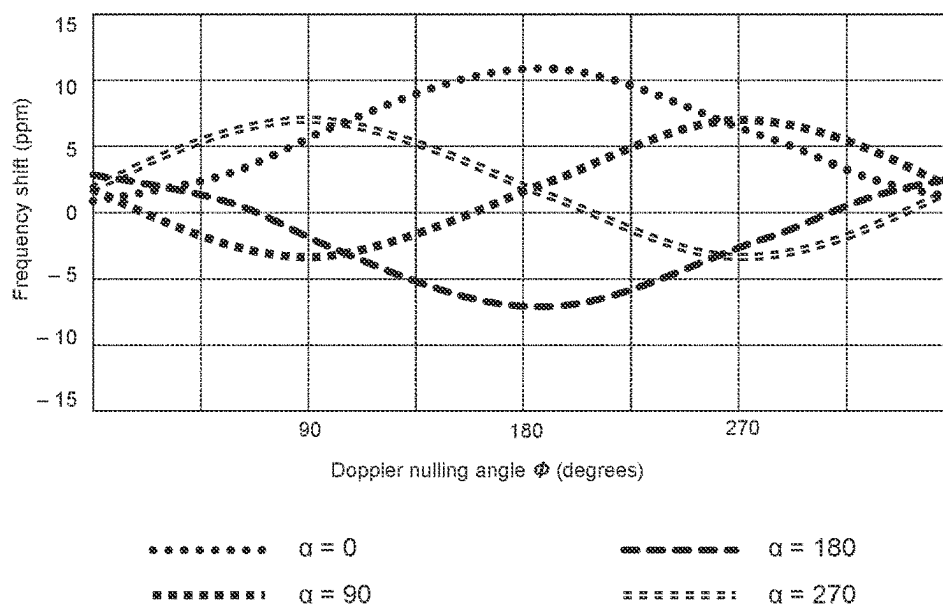


FIG. 2A

200

$$\theta = 0, V_T = 1500 \text{ m/s}$$



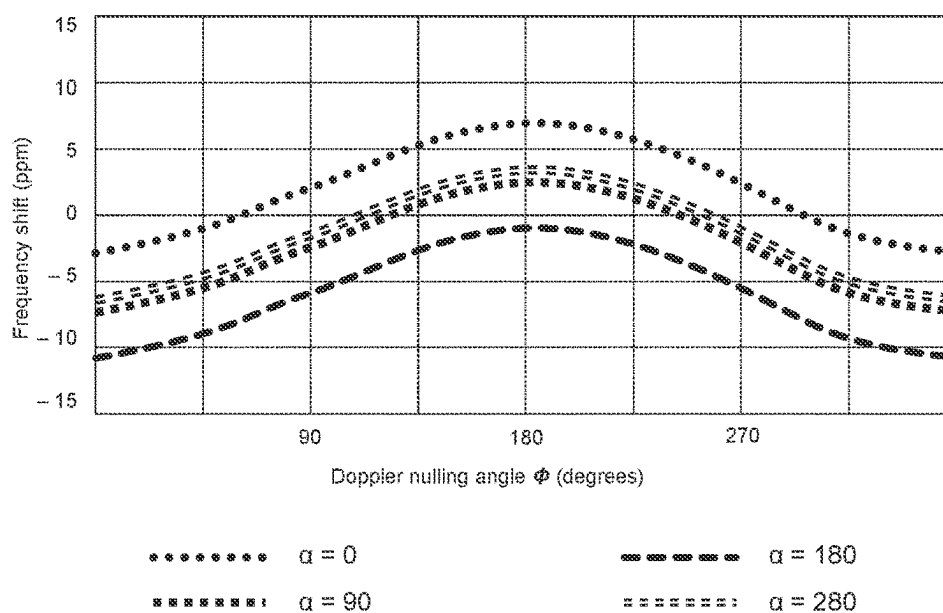


FIG. 2B

**FIG. 3**

400

$$\theta = 0, V_T = 2000 \text{ m/s}, V_R = 1000 \text{ m/s}$$

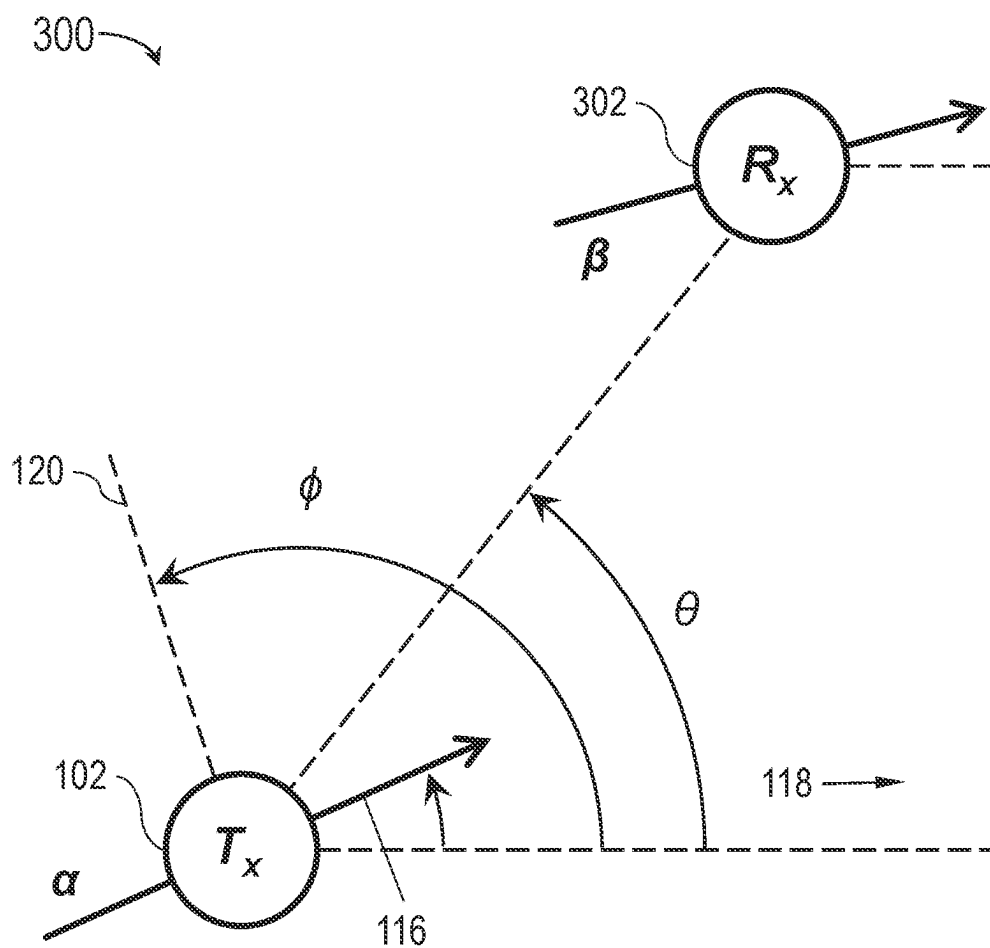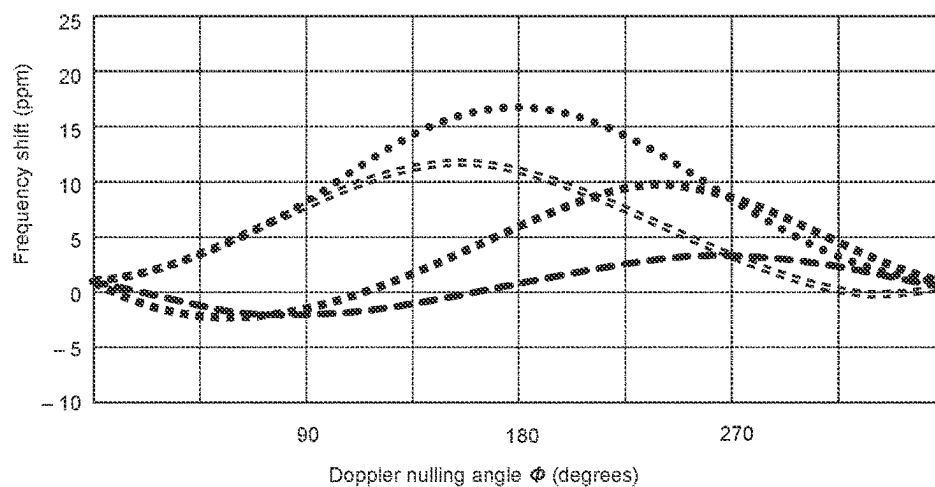


- | | | | |
|-------|--|-------|---|
| | $\{\theta, \alpha, \beta\} = \{0, 0, 180\}$ | ----- | $\{\theta, \alpha, \beta\} = \{0, 90, 90\}$ |
| | $\{\theta, \alpha, \beta\} = \{0, 90, 180\}$ | ===== | $\{\theta, \alpha, \beta\} = \{0, 0, 90\}$ |

FIG. 4A

400

$$V_T = V_R = 1500 \text{ m/s}$$

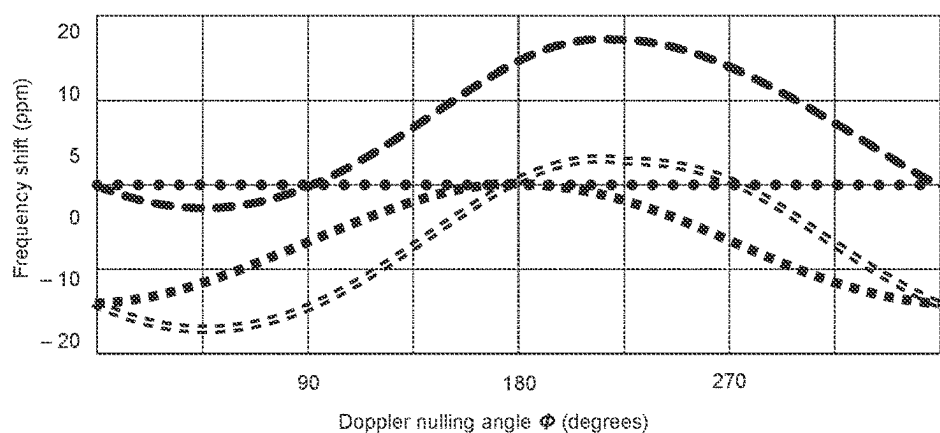

- | | | | |
|-------|--|-------|--|
| | $\{\theta, \alpha, \beta\} = \{90, 45, 45\}$ | ----- | $\{\theta, \alpha, \beta\} = \{90, 45, 225\}$ |
| | $\{\theta, \alpha, \beta\} = \{180, 45, 135\}$ | ===== | $\{\theta, \alpha, \beta\} = \{180, 45, 225\}$ |

FIG. 4B

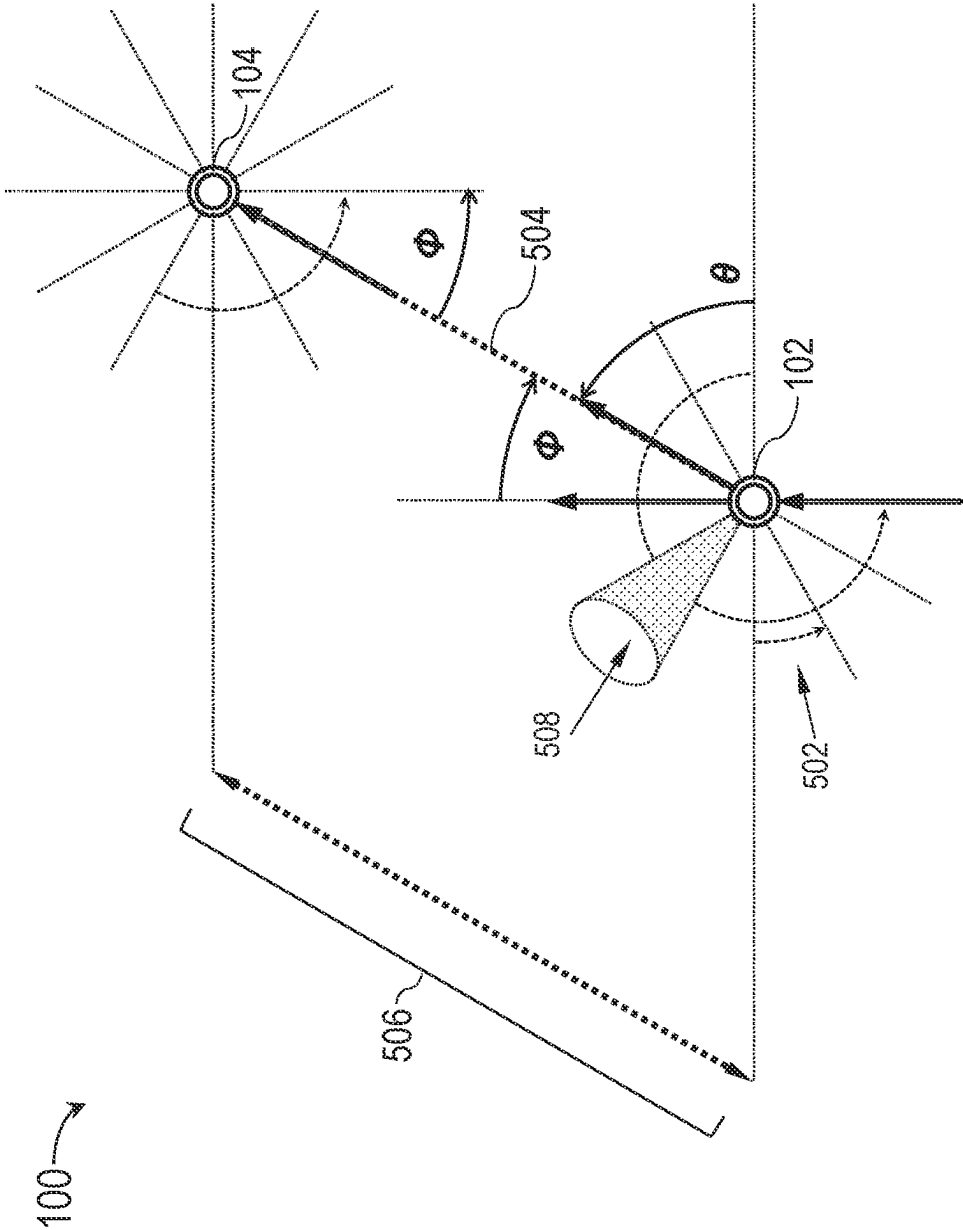


FIG. 5

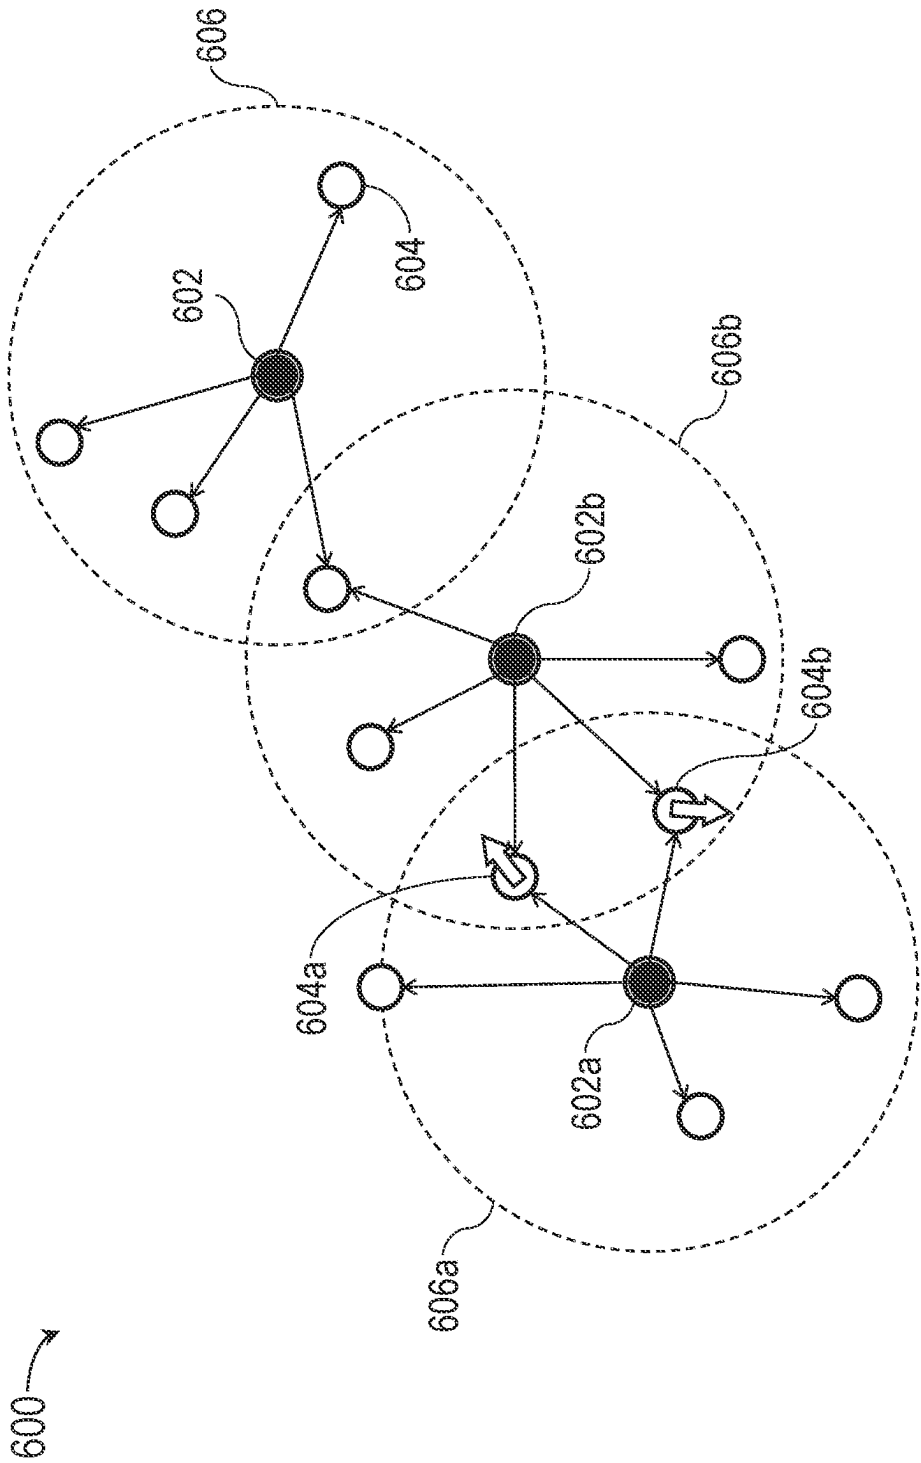


FIG. 6

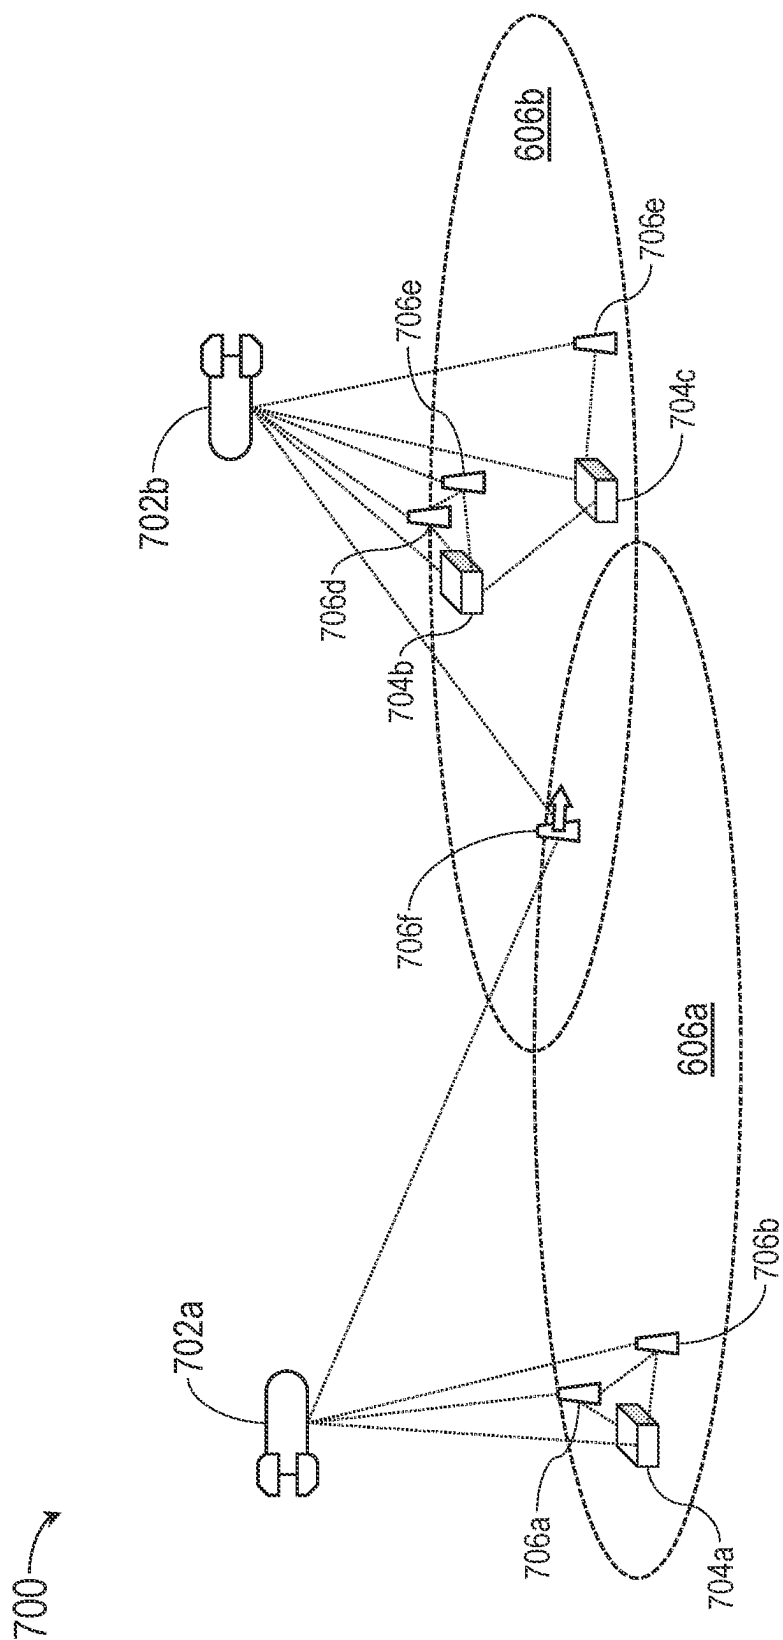


FIG. 7A

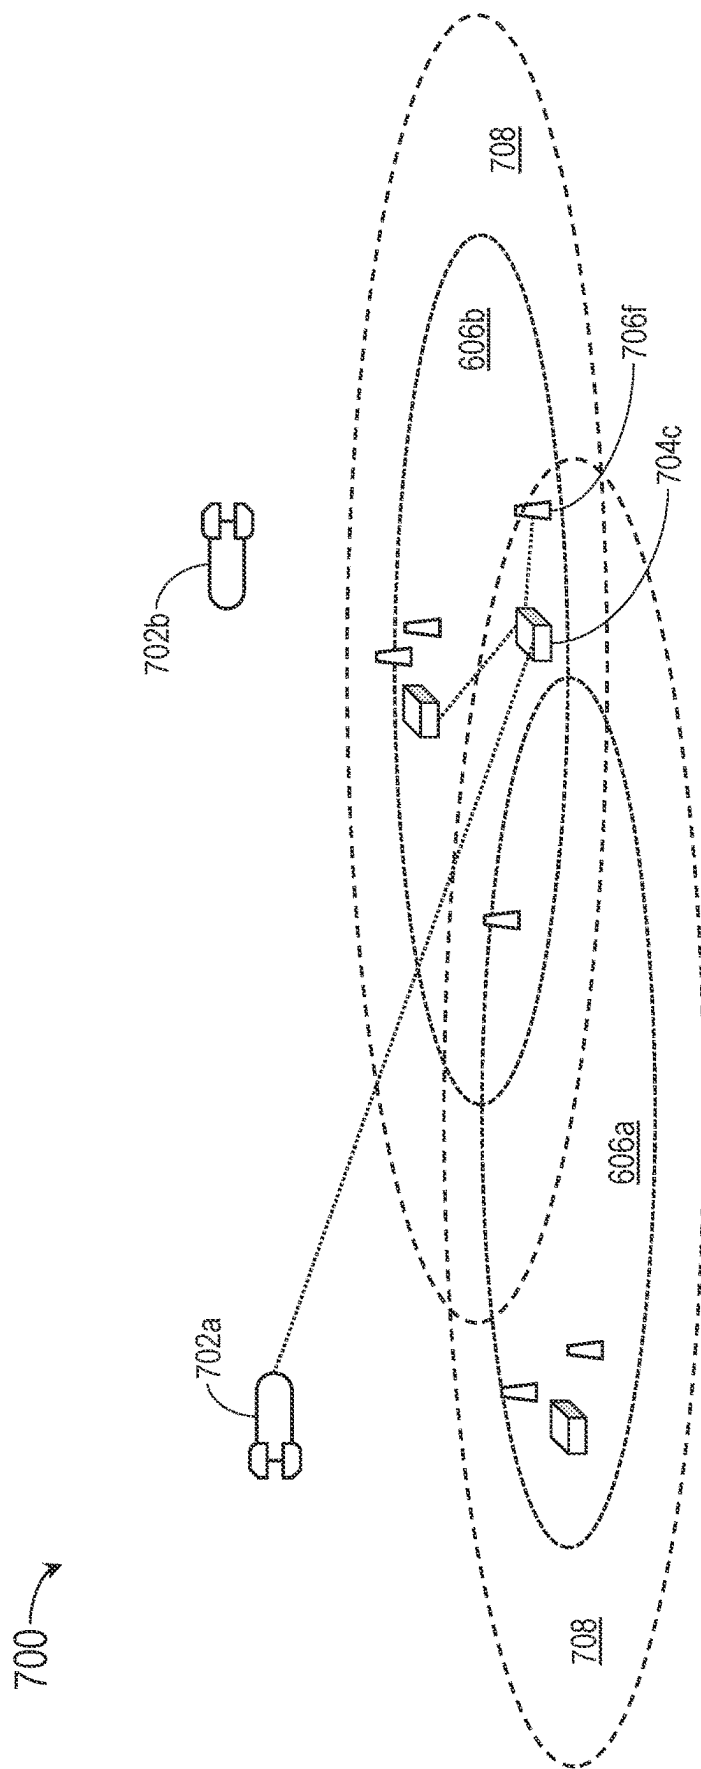


FIG. 7B

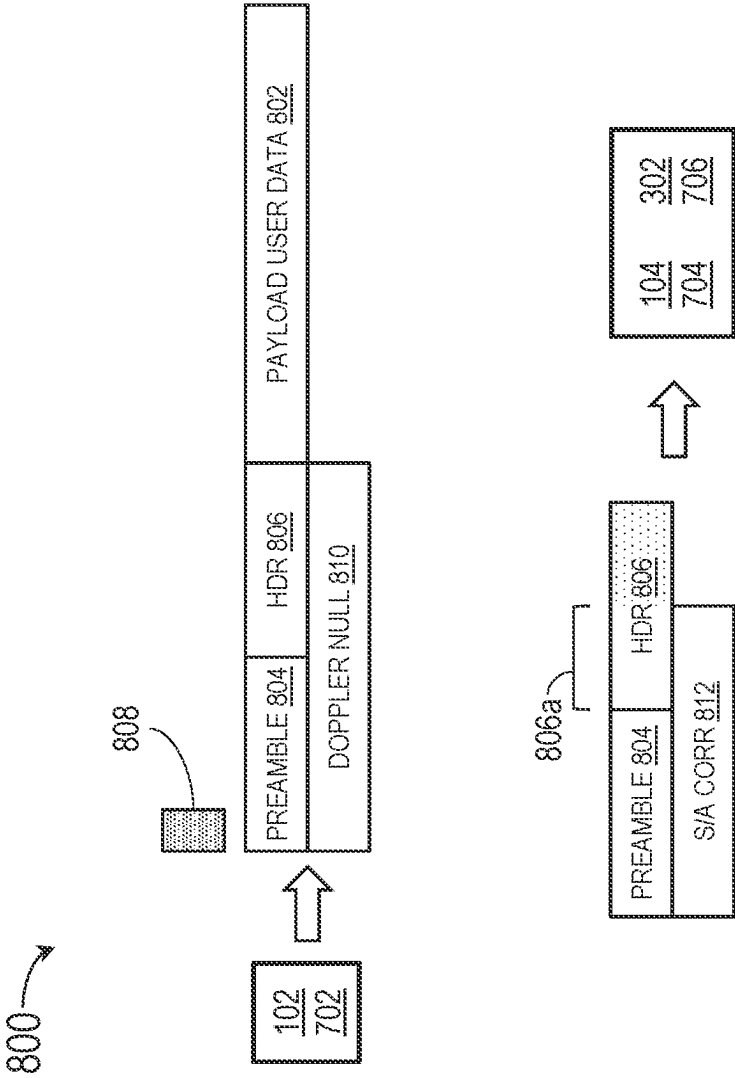


FIG. 8A

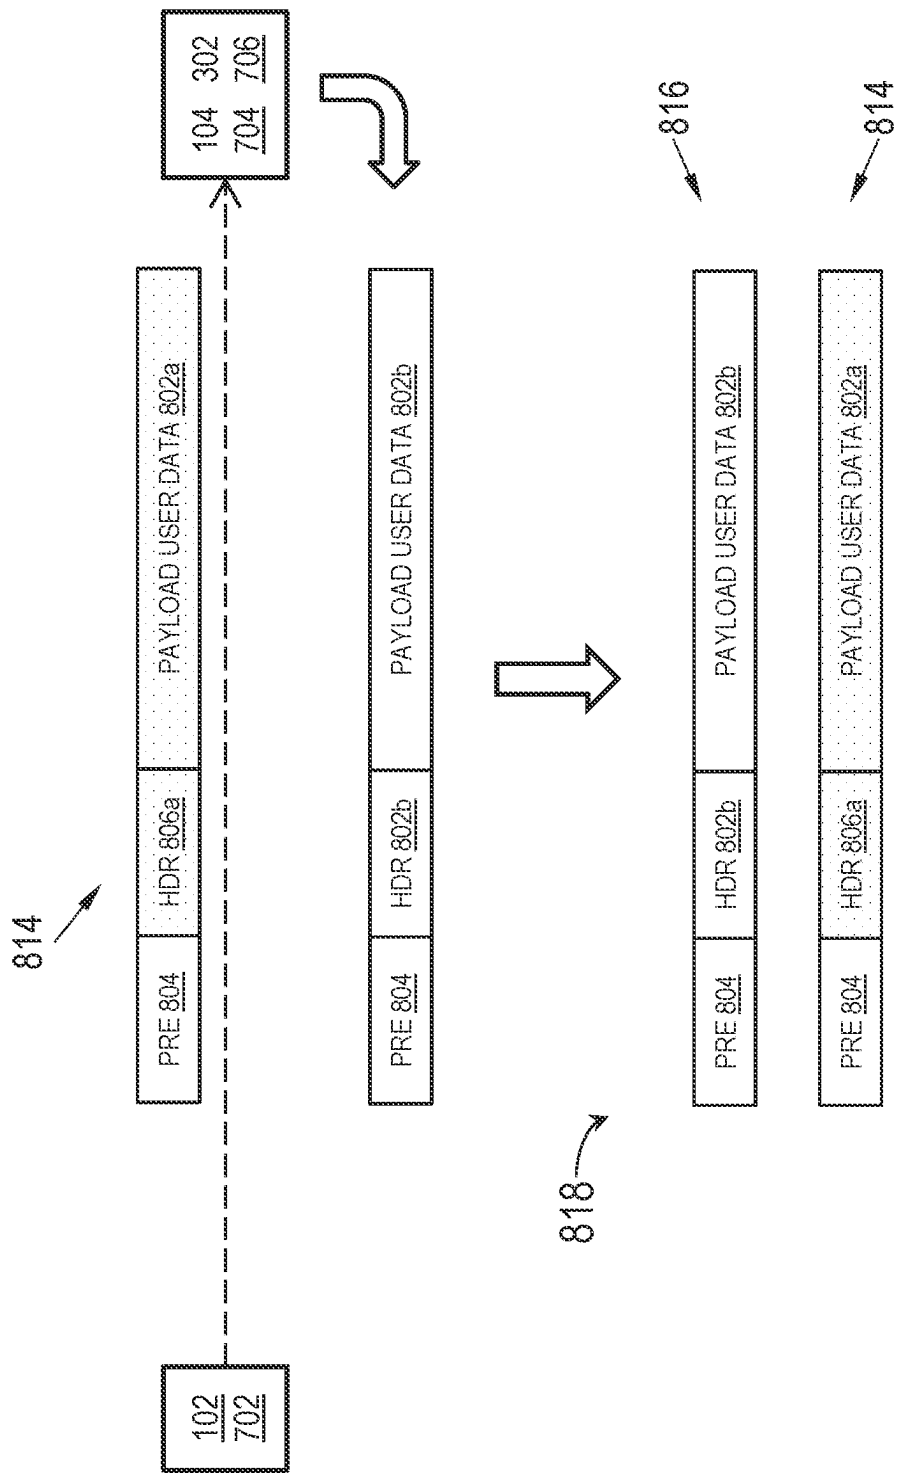
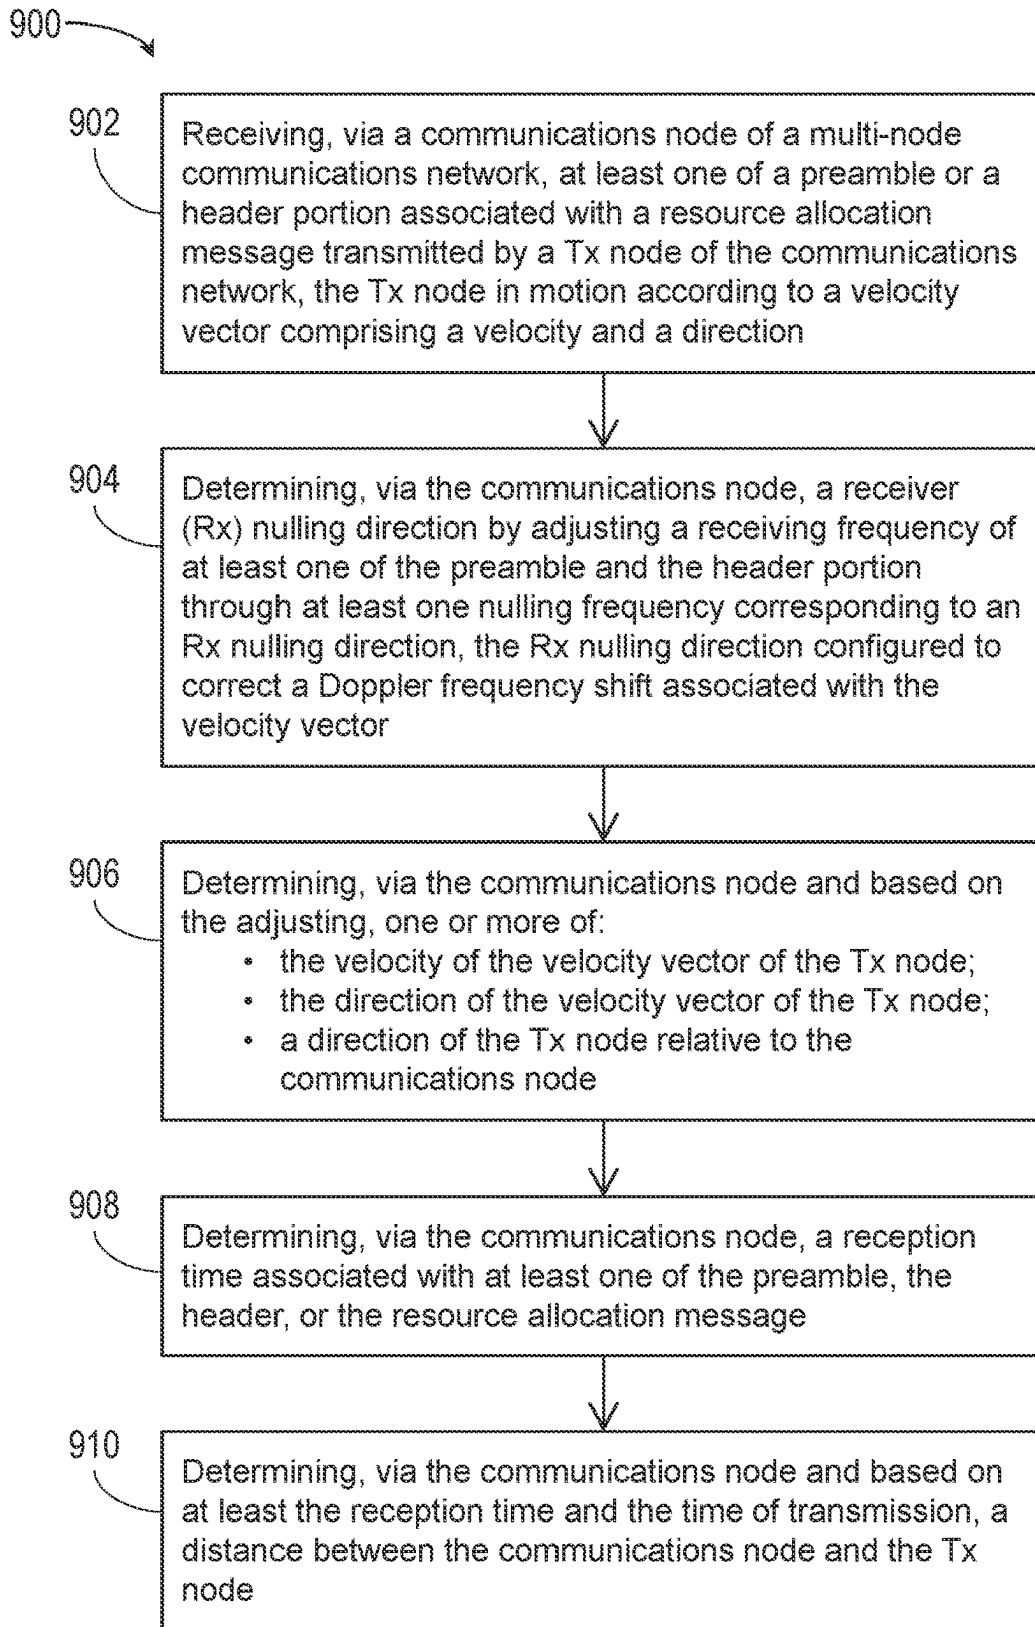


FIG. 8B

**FIG. 9**

1

SYSTEM AND METHOD FOR SPATIAL AWARENESS OVERLAY ONTO MOBILE AD HOC NETWORK (MANET) FREQUENT MESSAGE PREAMBLES

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is related to and claims priority from the following U.S. Patent Applications:

- (a) U.S. patent application Ser. No. 17/233,107, filed Apr. 16, 2021;
- (b) PCT Patent Application No. PCT/US22/24653, filed Apr. 13, 2022;
- (c) U.S. patent application Ser. No. 17/408,156, filed Aug. 20, 2021;
- (d) U.S. patent application Ser. No. 17/534,061, filed Nov. 28, 2021;
- (e) U.S. patent application Ser. No. 17/541,703, filed Dec. 3, 2021;
- (f) U.S. patent application Ser. No. 17/846,625, filed Jun. 22, 2022;
- (g) U.S. patent application Ser. No. 17/857,920, filed Jul. 5, 2022; and
- (h) U.S. Provisional Patent Application No. 63/344,445, filed May 20, 2022.

Said U.S. and PCT patent applications Ser. Nos. 17/233,107; PCT/US22/24653; 17/408,156; 17/534,061; 17/541,703; 17/846,625; 17/857,920; and 63/344,445 are herein incorporated by reference in their entirety.

BACKGROUND

Mobile Ad-hoc NETWORKS (MANET; e.g., “mesh networks”) are known in the art as quickly deployable, self-configuring wireless networks with no pre-defined network topology. Each communications node within a MANET is presumed to be able to move freely. Additionally, each communications node within a MANET may be required to forward (relay) data packet traffic. Data packet routing and delivery within a MANET may depend on a number of factors including, but not limited to, the number of communications nodes within the network, communications node proximity and mobility, power requirements, network bandwidth, user traffic requirements, timing requirements, and the like.

In the context of MANETs and other multi-node communication networks, topology learning is the key task of routing mechanisms especially for proactive routing. Topology learning is non-trivial and requires significant over-the-air control packet exchanges due to the frequent topology changes caused by node mobility and channel condition changes. It is very hard to construct accurate topology of a large MANET. Existing routing protocols utilize small hello packet exchanges to identify neighbor nodes. Hello messaging with neighbor list is a commonly used mechanism to learn the 1st and the 2nd hop neighbors. Local topology learned by hello messaging is delivered via packet flooding or hop-by-hop propagation throughout the connected network. By combining local topology information, each and every communication node may identify efficient routes to all connected communication nodes. Whether by hello messaging or packet flooding, however, topology learning and neighbor discovery are major sources of MANET overhead.

In addition to topology factors, fast-moving platforms (e.g., communications nodes moving relative to each other) experience a frequency Doppler shift (e.g., offset) due to the

2

relative radial velocity between each set of nodes. If the Doppler frequency shift is large enough, the communication receiver must implement algorithms that estimate and correct for this doppler shift before performing demodulation. If the receiver does not perform the necessary compensation, the system will operate with a reduced receiver sensitivity and loss of performance—when experiencing large relative velocity between nodes.

SUMMARY

In a first aspect, a receiving (Rx) node of a mobile ad hoc communications network (MANET) or like multi-node network is disclosed. In embodiments, the Rx node receives a preamble and/or header portion (e.g., a full header or partial portion thereof) of a resource allocation message sent by a transmitting (Tx) node of the network, where the Tx node is in motion according to a particular velocity vector (e.g., having a velocity and a direction) relative to a common reference frame known to both nodes (e.g., known to all nodes of the network), and the motion of the Tx node relative to the Rx node is associated with a Doppler frequency shift. The Rx node determines a receiver-side Doppler nulling direction (e.g., to offset the Doppler shift) by adjusting a receiving frequency of the resource allocation message through a set of nulling frequencies each corresponding to a Doppler nulling direction (e.g., where each nulling frequency offsets a relative Doppler shift in the given nulling direction). Based on the frequency adjustment, the Rx node determines a relative velocity and/or relative direction of the Tx node (relative to the Rx node).

In some embodiments, the network is a cell-based network, the Rx node is a participating member of a cell of the network, and the Tx node is an administrator of the cell.

In some embodiments, the Tx node is a tactical base station (TBS) of the network.

In some embodiments, the Rx node is a one-hop neighbor of the Tx node. For example, the Rx node may create a replica message based on the received preamble and/or header portion, e.g., if the resource allocation message is overly noisy or improperly demodulated. The replica message may be correlated against the original resource allocation message, and the replica message used by the Rx node as a basis for adjusting the receiving frequency through the set of nulling frequencies.

In some embodiments, the Rx node is a participating member of a cell, and the Tx node is an administrator or TBS of a different cell of the network.

In some embodiments, the Rx node is in transition from the current cell to the cell administered by the Tx node.

In some embodiments, the common reference frame, as well as the relative motion between the Tx and Rx nodes, is three-dimensional.

In some embodiments, the Rx node determines the receiver-side nulling direction by adjusting the receiving frequency through a set of step frequencies. For example, each step frequency may correspond to an incremental arc section (e.g., 10, 15, 20 degrees).

In some embodiments, the Rx node is also in motion according to a receiver-side velocity vector (e.g., having a velocity and a direction). For example, based on receiver-side adjustments to the receiving frequency (e.g., and transmitter-side adjustments to the transmitting frequency by the Tx node), the Rx node determines a relative velocity vector (velocity, direction), e.g., the difference in velocity vectors between the Tx and Rx nodes.

In some embodiments, the Tx node is associated with a transmitter-side Doppler nulling direction, and the Rx node determines the receiver-side Doppler nulling direction by adjusting the receiving frequency to a nulling frequency corresponding to a nulling direction opposite the transmitter-side Doppler nulling direction.

In some embodiments, the Rx node is time synchronized with the Tx node.

In some embodiments, the resource allocation message (or preamble or header portion thereof) is associated with a time of transmission (TOT) by the Tx node, the TOT known to the Rx node. For example, the Rx node determines a time of arrival (TOA) of the resource allocation message/preamble/header portion at the Rx node, and can determine, based on the TOT and TOA, a distance between the Tx and Rx nodes.

In a further aspect, a transmitting (Tx) node of a MANET or like multi-node network is also disclosed. In embodiments, the Tx node is in motion according to a velocity vector (having a velocity and a direction) relative to a common reference frame known to each node of the network. For example, the Tx node is an administrator or otherwise associated with a cell (e.g., of a cell-based network) and transmits (e.g., at predetermined intervals) to participating nodes of the cell resource allocation messages having a preamble and a header. The Tx node determines a transmitter-side Doppler nulling direction (e.g., to offset Doppler frequency shift associated with the relative motion of the Tx node) by adjusting a transmitting frequency of the preamble or header (or of the resource allocation message) through a nulling frequency corresponding to a particular Doppler nulling direction (e.g., for offsetting Doppler shift due to relative motion in that direction).

In some embodiments, the Tx node determines the transmitter-side Doppler nulling frequency by adjusting the transmitting frequency through a set of step frequencies, where each step frequency is associated with an incremental arc section (e.g., 10, 15, 20 degrees).

In some embodiments, the Tx node is a tactical base station (TBS) configured for administration of the network cell.

In a still further aspect, a method is disclosed. In embodiments, the method includes receiving, via a receiving (Rx) node of a MANET or like multi-node network, a preamble and/or header portion of a resource allocation message sent by a Tx node of the network, the Tx node in motion according to a velocity vector having a velocity and a direction. The method includes determining, via the Rx node, a receiver-side nulling direction (e.g., for offsetting a Doppler frequency shift associated with the motion of the Tx node relative to the Rx node) by adjusting a receiving frequency of the message, preamble, and/or header portion through a nulling frequency corresponding to a Doppler nulling direction (e.g., for offsetting Doppler shift due to relative motion in said direction). The method includes, based on the adjustment of the receiving frequency/determination of the Rx-side nulling frequency, determining a relative velocity vector of the Tx node relative to the Rx node (e.g., a relative velocity, a relative direction).

In some embodiments, the method includes creating, via the Rx node, a replica message (e.g., a replica header portion and/or replica data payload) based on a noisy or incorrectly demodulated resource allocation message, and performing receiver-side frequency adjustment based on a correlation of the replica message and the resource allocation message.

In some embodiments, the method includes adjusting, via the Rx node, the receiving frequency through a set of step

frequencies, each step frequency corresponding to an incremental arc section or Doppler nulling direction.

In some embodiments, the Tx and Rx nodes are time synchronized, and the preamble, header portion, and/or message is associated with a time of transmission (TOT) by the Tx node that is also known to the Rx node, and the method includes determining, via the Rx node, a time of arrival (TOA) of the preamble, header portion, and/or message at the Rx node. The method includes determining, based on the TOT and TOA, an estimate of the distance between the Tx and Rx nodes.

In some embodiments, the network is a cell-based network wherein the Rx node is a participating member of a cell within the network, and the Tx node is a tactical base station (TBS) configured for cell administration (e.g., either of the cell of which the Rx node is a participating member, or another cell).

This Summary is provided solely as an introduction to subject matter that is fully described in the Detailed Description and Drawings. The Summary should not be considered to describe essential features nor be used to determine the scope of the Claims. Moreover, it is to be understood that both the foregoing Summary and the following Detailed Description are example and explanatory only and are not necessarily restrictive of the subject matter claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The detailed description is described with reference to the accompanying figures. The use of the same reference numbers in different instances in the description and the figures may indicate similar or identical items. Various embodiments or examples ("examples") of the present disclosure are disclosed in the following detailed description and the accompanying drawings. The drawings are not necessarily to scale. In general, operations of disclosed processes may be performed in an arbitrary order, unless otherwise provided in the claims. In the drawings:

FIG. 1 is a diagrammatic illustration of a transmitting (Tx) and receiving (Rx) node of multi-node communications network, and the components of each node, according to example embodiments of the inventive concepts disclosed herein;

FIGS. 2A and 2B are plots of net Doppler frequency shift as a function of Doppler nulling angle for a mobile Tx node and stationary Rx nodes of the network of FIG. 1 at various angles;

FIG. 3 is a diagrammatic illustration of the multi-node communications network of FIG. 1 wherein both the Tx and Rx nodes are mobile;

FIGS. 4A and 4B are plots of net Doppler frequency shift as a function of Doppler nulling angle for a mobile Tx and Rx nodes of the network of FIG. 3 at various angles, headings, and/or velocities;

FIG. 5 is a diagrammatic illustration of Doppler null scanning operations of the Tx and Rx nodes of the multi-node communications network of FIGS. 1 and 3;

FIG. 6 is a diagrammatic illustration of a cell-based multi-node communications network according to example embodiments of the inventive concepts disclosed herein;

FIGS. 7A and 7B are diagrammatic illustrations of an operating theater implementation of the multi-node communications network of FIG. 6;

FIGS. 8A and 8B are diagrammatic illustrations of Doppler null overlay operations of the multi-node communications networks of FIGS. 1, 3, and 6 according to example embodiments of the inventive concepts disclosed herein;

and FIG. 9 is a flow diagram illustrating a method for mobile ad hoc networking operations according to example embodiments of the inventive concepts disclosed herein.

DETAILED DESCRIPTION

Before explaining one or more embodiments of the disclosure in detail, it is to be understood that the embodiments are not limited in their application to the details of construction and the arrangement of the components or steps or methodologies set forth in the following description or illustrated in the drawings. In the following detailed description of embodiments, numerous specific details may be set forth in order to provide a more thorough understanding of the disclosure. However, it will be apparent to one of ordinary skill in the art having the benefit of the instant disclosure that the embodiments disclosed herein may be practiced without some of these specific details. In other instances, well-known features may not be described in detail to avoid unnecessarily complicating the instant disclosure.

As used herein a letter following a reference numeral is intended to reference an embodiment of the feature or element that may be similar, but not necessarily identical, to a previously described element or feature bearing the same reference numeral (e.g., 1, 1a, 1b). Such shorthand notations are used for purposes of convenience only and should not be construed to limit the disclosure in any way unless expressly stated to the contrary.

Further, unless expressly stated to the contrary, “or” refers to an inclusive or and not to an exclusive or. For example, a condition A or B is satisfied by any one of the following: A is true (or present) and B is false (or not present), A is false (or not present) and B is true (or present), and both A and B are true (or present).

In addition, use of “a” or “an” may be employed to describe elements and components of embodiments disclosed herein. This is done merely for convenience and “a” and “an” are intended to include “one” or “at least one,” and the singular also includes the plural unless it is obvious that it is meant otherwise.

Finally, as used herein any reference to “one embodiment” or “some embodiments” means that a particular element, feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment disclosed herein. The appearances of the phrase “in some embodiments” in various places in the specification are not necessarily all referring to the same embodiment, and embodiments may include one or more of the features expressly described or inherently present herein, or any combination or sub-combination of two or more such features, along with any other features which may not necessarily be expressly described or inherently present in the instant disclosure.

Referring to FIG. 1, a multi-node communications network 100 is disclosed. The multi-node communications network 100 may include multiple communications nodes, e.g., a transmitting (Tx) node 102 and a receiving (Rx) node 104.

In embodiments, the multi-node communications network 100 may include any multi-node communications network known in the art. For example, the multi-node communications network 100 may include a mobile ad-hoc network (MANET) in which the Tx and Rx nodes 102, 104 (as well as every other communications node within the multi-node communications network) is able to move freely and independently. Similarly, the Tx and Rx nodes 102, 104 may

include any communications node known in the art which may be communicatively coupled. In this regard, the Tx and Rx nodes 102, 104 may include any communications node known in the art for transmitting/transceiving data packets.

For example, the Tx and Rx nodes 102, 104 may include, but are not limited to, radios, mobile phones, smart phones, tablets, smart watches, laptops, and the like. In embodiments, the Rx node 104 of the multi-node communications network 100 may each include, but are not limited to, a respective controller 106 (e.g., control processor), memory 108, communication interface 110, and antenna elements 112. (In embodiments, all attributes, capabilities, etc. of the Rx node 104 described below may similarly apply to the Tx node 102, and to any other communication node of the multi-node communication network 100.)

In embodiments, the controller 106 provides processing functionality for at least the Rx node 104 and can include any number of processors, micro-controllers, circuitry, field programmable gate array (FPGA) or other processing systems, and resident or external memory for storing data, executable code, and other information accessed or generated by the Rx node 104. For example, the controller 106 may execute one or more software programs embodied in a non-transitory computer readable medium (e.g., memory 108) that implement techniques described herein. The controller 106 is not limited by the materials from which it is formed or the processing mechanisms employed therein and, as such, can be implemented via semiconductor(s) and/or transistors (e.g., using electronic integrated circuit (IC) components), and so forth.

In embodiments, the memory 108 can be an example of tangible, computer-readable storage medium that provides storage functionality to store various data and/or program code associated with operation of the Rx node 104 and/or controller 106, such as software programs and/or code segments, or other data to instruct the controller 106, and possibly other components of the Rx node 104, to perform the functionality described herein. For example, the memory 108 can store data, such as a program of instructions for operating the Rx node 104, including its components (e.g., controller 106, communication interface 110, antenna elements 112, etc.), and so forth. It should be noted that while a single memory 108 is described, a wide variety of types and combinations of memory (e.g., tangible, non-transitory memory) can be employed. The memory 108 can be integral with the controller 106, can comprise stand-alone memory, or can be a combination of both. Some examples of the memory 108 can include removable and non-removable memory components, such as random-access memory (RAM), read-only memory (ROM), flash memory (e.g., a secure digital (SD) memory card, a mini-SD memory card, and/or a micro-SD memory card), solid-state drive (SSD) memory, magnetic memory, optical memory, universal serial bus (USB) memory devices, hard disk memory, external memory, and so forth.

In embodiments, the communication interface 110 can be operatively configured to communicate with components of the Rx node 104. For example, the communication interface 110 can be configured to retrieve data from the controller 106 or other devices (e.g., the Tx node 102 and/or other nodes), transmit data for storage in the memory 108, retrieve data from storage in the memory, and so forth. The communication interface 110 can also be communicatively coupled with the controller 106 to facilitate data transfer between components of the Rx node 104 and the controller 106. It should be noted that while the communication interface 110 is described as a component of the Rx node

104, one or more components of the communication interface **110** can be implemented as external components communicatively coupled to the Rx node **104** via a wired and/or wireless connection. The Rx node **104** can also include and/or connect to one or more input/output (I/O) devices. In embodiments, the communication interface **110** includes or is coupled to a transmitter, receiver, transceiver, physical connection interface, or any combination thereof.

It is contemplated herein that the communication interface **110** of the Rx node **104** may be configured to communicatively couple to additional communication interfaces **110** of additional communications nodes (e.g., the Tx node **102**) of the multi-node communications network **100** using any wireless communication techniques known in the art including, but not limited to, GSM, GPRS, CDMA, EV-DO, EDGE, WiMAX, 3G, 4G, 4G LTE, 5G, WiFi protocols, RF, LoRa, and the like.

In embodiments, the antenna elements **112** may include directional or omnidirectional antenna elements capable of being steered or otherwise directed (e.g., via the communications interface **110**) for spatial scanning in a full 360-degree arc (**114**) relative to the Rx node **104**.

In embodiments, one or both of the Tx node **102** and Rx node **104** may be moving in an arbitrary direction at an arbitrary speed, and similarly may be moving relative to each other. For example, the Tx node **102** may be moving relative to the Rx node **104** according to a velocity vector **116**, at a relative velocity $\vec{V}_T$ and a relative angular direction (an angle α relative to an arbitrary direction **118** (e.g., due east); θ may be the angular direction of the Rx node relative to due east).

In embodiments, any signal transmitted by the Tx node **102** and received by the Rx node **104** may be associated with a Doppler frequency shift proportional to the relative radial velocity between the Tx and Rx nodes. For example, the relative radial velocity may be defined by the motion of the Tx node **102** or of the Tx and Rx nodes **104** (e.g., if both are in motion), in two or three dimensions.

In embodiments, the Tx node **102** may correct for its own Doppler frequency shift (e.g., due to its own motion according to the velocity vector **116**) by implementing a Doppler nulling protocol, e.g., in an earth-centered earth-fixed (ECEF) reference frame (or in some other reference frame as needed). For example, the Tx node **102** may adjust its transmit frequency to counter the Doppler frequency offset such that there is no net frequency offset (e.g., "Doppler null") for a given Doppler nulling direction **120** (at an angle ϕ relative to the arbitrary direction **118**, e.g., 100 degrees from due east). In embodiments, the communications interface **110** of the Tx node **102** may be informed by the platform (e.g., the controller **106**) of its own velocity vector and orientation (e.g., a, $(\vec{V}_T)$) and may adjust its transmitting frequency to remove the Doppler frequency shift at each Doppler nulling direction **120** and angle ϕ . For example, when the Rx node **104** is stationary, the Doppler shift as seen by the Rx node due to the motion of the Tx node **102** may be

$$\frac{\Delta f_{\text{DOPPLER}}}{f} = \frac{|\vec{V}_T|}{c} \cos(\theta - \alpha).$$

In embodiments, the Tx node **102** may adjust its transmitting frequency (Δf_T) to correct for this Doppler shift, based on its speed $|\vec{V}_T|$ and velocity direction α , such that the transmitter

frequency adjustment Δf_T is proportional to the velocity projection onto the Doppler null direction and is

$$\frac{\Delta f_T}{f} = \frac{|\vec{V}_T|}{c} \cos(\varphi - \alpha)$$

such that the net frequency shift Δf_{net} seen by the Rx node **104** is the sum of these two terms, thus

$$\frac{\Delta f_{\text{net}}}{f} = \frac{|\vec{V}_T|}{c} [\cos(\theta - \alpha) - \cos(\varphi - \alpha)].$$

It is assumed that the velocity vector $|\vec{V}_T|$ and velocity direction α will change slowly relative to periodic measurements of Δf_{net} , such that from the perspective of the Rx node

104 α , $|\vec{V}_T|$, and θ may be regarded as constants.

In embodiments, when the Doppler nulling direction **120** aligns with the receiver direction θ (e.g., the direction of the Rx node **104** relative to the Tx node **102**), the transmitter frequency adjustment Δf_T may compensate exactly for the net Doppler shift Δf_{net} . It may further be assumed that the Rx node **104** is configured to resolve any adjustments to the frequency of the inbound transmitted signal.

In embodiments, by plotting (**200**) the net frequency shift as a function of the Doppler nulling direction when the Rx node **104** is stationary and due east of the Tx node **102** ($\theta=0$), and assuming a consistent Tx node velocity and direction (e.g., 1500 m/s, $\alpha=0$ (e.g., due east)) the sinusoidal plot may maintain an amplitude consistent with Tx speed

$$\left(\frac{|\vec{V}_T|}{c} \right) 1e^6,$$

or 5 ppm) regardless of velocity direction or position. Further, net frequency shift is zero when the Doppler nulling angle **120** is aligned with the relative direction of the Rx node **104** (e.g., $\Phi=0$). Further still, the minimum net frequency shift (e.g., greatest negative frequency shift) occurs when the Doppler nulling direction **120** is aligned with the velocity direction of the Tx node **102** (e.g., $\Phi=\alpha$).

In embodiments, based on the above the stationary Rx node **104** may determine a speed of the Tx node **102** (e.g., $|\vec{V}_T|$), a heading of the Tx node (e.g., α), and a direction of the Tx node relative to the Rx node (e.g., θ). For example, although ambiguities of position direction may exist (e.g., 0 vs. 180 degrees as shown by FIG. 2A; ± 90 degrees as shown by FIG. 2B), it is assumed the Rx node **104** is configured to resolve any such ambiguities, e.g., the Rx node knows whether the Tx node **102** is west or east of it.

Referring now to FIG. 3, the multi-node communications network **300** may be implemented and may function similarly to the multi-node communications network **100** of FIG. 1, except that the Rx node **302** of the multi-node communications network **300** may also be in motion (e.g., characterized by a receiver velocity $|\vec{V}_T|$ and a velocity direction β). In embodiments, the Rx node **302** may adjust its receiver frequency to compensate for its motion as well as the motion of the Tx node **102**. For example, the true Doppler shift as seen by the Rx node **302** (due to the relative radial velocity between the Tx node **102** and the Rx node) may be

$$\frac{\Delta f_{\text{DOPPLER}}}{f} = \frac{|\vec{V}_T|}{c} \cos(\theta - \alpha) - \frac{|\vec{V}_R|}{c} \cos(\theta - \beta).$$

In embodiments, both the Tx node **102** and the Rx node **302** may adjust their respective transmitting and receiving frequencies (Δf_T , Δf_R), each according to their own speed ($|\vec{V}_T|$, $|\vec{V}_R|$) and velocity direction (α , β). For example, the Rx node **302** may adjust its receiving frequency either within, or prior to, the frequency resolution algorithm resolving the adjusted transmitting frequency (e.g., Δf_T) of the received signal, thus

$$\frac{\Delta f_{T\&R}}{f} = \frac{|\vec{V}_T|}{c} \cos(\varphi - \alpha) + \frac{|\vec{V}_R|}{c} \cos(\varphi - \beta).$$

Accordingly, the net frequency shift seen by the Rx node **302** may be the sum of all terms:

$$\frac{\Delta f_{\text{net}}}{f} = \frac{|\vec{V}_T|}{c} [\cos(\theta - \alpha) - \cos(\varphi - \alpha)] - \frac{|\vec{V}_R|}{c} [\cos(\theta - \beta) - \cos(\varphi - \beta)].$$

Referring also to FIGS. **4A** and **4B**, the net frequency shift

$$\frac{\Delta f_{\text{net}}}{f}$$

for moving Tx and Rx nodes **102**, **302** is plotted (**400**) for various relative receiver angles θ or velocity directions α , β . FIG. **4A** assumes a receiver angle $\theta=0$, while FIG. **4B** assumes common transmitter and receiver velocities ($|\vec{V}_T| = |\vec{V}_R|$, e.g., 1500 m/s).

Based on FIGS. **4A** and **4B**, it may be observed that amplitude of net frequency shift

$$\frac{\Delta f_{\text{net}}}{f}$$

(e.g., in ppm) is consistent with relative velocity between the Tx node **102** and Rx node **304**:

$$\frac{||\vec{V}_T| \cos \alpha - |\vec{V}_R| \cos \beta||}{c} * 1e^6.$$

Further, as noted above with respect to FIGS. **2A** and **2B**, the net frequency shift is zero when the Doppler null angle **120** aligns with the receiver direction, e.g., $\Phi=0$. Further still, the minimum net frequency shift occurs when the Doppler null angle **120** aligns with the relative velocity direction:

$$\Phi = (|\vec{V}_T| \cos \alpha - |\vec{V}_R| \cos \beta).$$

As noted above with respect to FIGS. **2A** and **2B**, the velocity and velocity direction of the Tx node **102** may be known to the Rx node **302**, resolving any dual point ambiguities with respect to the receiver angle θ .

Referring now to FIG. **5**, the multi-node communications network **100** is shown.

In embodiments, the Tx node **102** may scan (**500**) through a full 360 degrees of two-dimensional (2D) space in successive steps or intervals **502** (e.g., 36 cycles of 10 degrees each, 24 cycles of 15°, 18 cycles of 20°) to determine a shift or adjustment to the transmitter frequency (e.g., a step frequency) capable of correcting the net Doppler shift for each interval direction. In some embodiments, less intuitive or more obfuscated scan approaches may be utilized.

In embodiments, both the Tx node **102** and Rx node **104** (as well as the mobile Rx node **302**, FIG. **3**) may implement directional discovery of each other (as well as other nodes of the multi-node communications network **100**) by scanning the full 360 degrees (or a subset thereof). For example, the Tx node **102** and Rx node **104** may be time-synchronized to apply Doppler correction respectively for their own motions relative to a common inertial reference frame. As a transmit angle advances, a receive angle retreats by a same amount as the transmit angle advance. This can be understood by first considering the Tx node **102** when the Tx node applies full Doppler correction in its own direction of travel. Next, consider the Rx node **104** directly in line with the path of travel of the Tx node **102**. If the Rx node **104** at the same time similarly applies Doppler correction for the Rx node's motion in line with the Tx node **102**, then at least a near-zero Doppler path (e.g., a near-zero Doppler path or a zero Doppler path) will exist from the Tx node **102** to the Rx node **104**.

When both the receiver node **104** and the transmitter node apply such synchronized Doppler correction relative to the common inertial reference frame, then the Doppler correction can be swept through a plurality of (e.g., some or all) angles so that a zero Doppler path **504** or near-zero Doppler path will exist from the Tx node **102** to the Rx node **104** including the angle resulting in the near-zero Doppler path or the zero Doppler path, the zero Doppler path having zero net frequency offset. For example, an angle resulting in a near-zero Doppler path may be within 5 degrees of the angle resulting in the zero Doppler path. For any combination of positions and motions of the Tx node **102** and the Rx node **104**, there exists a zero-Doppler path when the Doppler nulling angle **120** is equal to a direction angle ϕ . Accordingly, a zero-Doppler path **504** will be available between the Tx node **102** and the Rx node **104** when the two are synchronized to apply Doppler correction for a swept angle ϕ relative to the inertial reference frame of choice. In embodiments, neither the Tx node **102** nor the Rx node **104** need know a direction to the other node in advance.

In embodiments, when the Doppler nulling direction **120** determined by the Tx node **102** with respect to a given transmitted signal aligns with the Doppler nulling direction **120a** determined by the Rx node **104**, e.g., the two Doppler nulling directions **120**, **120a** are offset by 180 degrees, the Rx node may determine an angle of arrival (AOA) of the transmitted signal, and thus the relative direction/receiver angle θ may be known to the Rx node (e.g., and shared with the Tx node). Further, the Tx node **102** and Rx node **104** may share a time of transmission (TOT) and a time of arrival (TOA; e.g., a time the signal is received by the Rx node) of the transmitted signal, and thereby determine a distance **506** between the Tx and Rx nodes based on the transmission delay. In embodiments, distance estimates between the Tx and Rx nodes **102**, **104** may include an error component proportional to relative bias error between the two nodes. For example, if the Tx and Rx nodes **102**, **104** are not perfectly synchronized, any clock error between the two

11

nodes may produce an error component in the distance estimate (e.g., 1 light-microsecond (300 m≈984 ft) for every 1 μs/1000 ns of clock error).

In some embodiments, the 2D scanning approach may be expanded into 3D space. For example, the 2D scan for a given step direction may correspond to a conical coverage area **508**, e.g., a 10-degree, 15-degree, 20-degree cone, and thereby to a 3D fractional coverage area. Accordingly Doppler null scanning for a full spherical region may be achieved by adding additional scanning cycles corresponding to the areas uncovered by the 2D scan.

Referring now to FIG. 6, the mobile ad hoc network **600** (MANET) may be implemented similarly to the multi-node communications networks **100**, **300** of FIGS. 1 and 3, except that the MANET **600** may be organized as a cell-based network of tactical base station (TBS) nodes **602** and user equipment (UE) nodes **604** organized into cells **606**, or subsets of the MANET **600**.

In embodiments, each TBS node **602** and UE node **604** may be implemented and may function similarly to the Tx and/or Rx nodes **102**, **104**, **302** of FIGS. 1 and 3, except that each cell **606** within the MANET **600** may correspond to a subset of the MANET administered by a TBS node **602**. For example, each cell **606** may correspond to a geographical region or a coverage area of the TBS node **602**.

In embodiments, the MANET **600** may correspond to an operating theater, within which each cell **606** may include a set of participating UE nodes **604** in operation within that cell. For example, within each cell **606** a TBS node **602** may control all network communications and allocate communications resources to all participating UE nodes **604**.

For example, participating UE nodes **604** may include ground-based, water-based, or airborne vehicles and individual manpacks operating either within, or remotely from, a vehicle. Similarly, each TBS node **602** may be a ground-based, water-based, or airborne node (e.g., an unmanned aircraft system (UAS)) in control of all network communications within the cell **606** and configured to allocate communications resources to all participating UE nodes **604** currently assigned to that TBS node. For example, resource allocations may be transmitted by each TBS node **602** to its assigned participating UE nodes **604** at regular intervals, e.g., each second.

In embodiments, each TBS node **602** and participating UE node **604** may be stationary or mobile. For example, the participating UE node **604a** assigned to the TBS node **602a** and the cell **606a** may be in motion toward the cell **606b** administered by the TBS **602b**. In embodiments, the participating UE node **604a** may be handed off by the TBS node **602a** to the control of the TBS node **602b**, e.g., while operating within the cell **606b**. For example, the participating UE node **604a** may maintain communications with both TBS nodes **602a-b** while preparing for the transition to the cell **606b** and TBS node **602b**. Similarly, the participating UE node **604b**, in motion away from the cell **606b**, may operate within the coverage areas of both TBS nodes **602a-b** but may remain under the administration of the TBS node **602a** and within the cell **606a**.

Referring to FIG. 7A, the multi-node communications network **700** may be implemented and may function similarly to the multi-node communications networks **100**, **300**, **600** except that the multi-node communications network **700** may be implemented in an operating theater.

In embodiments, the multi-node communications network **700** may include cells **606a**, **606b** respectively administered by airborne TBS nodes **702a**, **702b**. For example, the cells **606a**, **606b** may include participating UE nodes embodied in

12

ground-based vehicles **704a-704c** and roaming users **706a-706f** (e.g., manpacks). The roaming users **706a**, **706b** may maintain communications links with the ground-based vehicle **704a** in addition to the airborne TBS **702a**, the roaming users **706c**, **706d** may maintain communications links with the ground-based vehicle **704b**, and the roaming user **706e** may maintain communications links with the ground-based vehicle **704c** (in the latter two cases, in addition to the airborne TBS **702b**).

In embodiments, the roaming user **704f** may be a participating UE node of the cell **606a** assigned to the airborne TBS **702a**, but in motion toward the cell **606b** administered by the airborne TBS **702b** and thereby in communication with both airborne TBS nodes.

Referring also to FIG. 7B, in embodiments the airborne TBS **702a**, **702b** may be capable of long-haul communications links **708** beyond the normal operating range defining the cells **606a**, **606b**. For example, each airborne TBS **702a**, **702b** may receive regular resource allocation messages from the other airborne TBS. Further, the ground-based vehicle **704c** and roaming user **706f** may be within the long-haul range **708** of the airborne TBS **702a** and may receive regular resource allocation messages therefrom.

Referring now to FIG. 8A, a resource allocation message **800** sent by the TBS **602a-602b** of FIG. 6 and the airborne TBS **702a-702b** of FIG. 7 is shown.

In embodiments, the resource allocation message **800** may include, in addition to a data payload **802**, an acquisition preamble **804** and packet header **806**.

Signal acquisition and detection sensitivity in current modern digital communications systems are most often contingent on a digital correlation sequence. Usable length for such a correlation sequence (and consequent resulting sensitivity) may be limited by Doppler shift as the phase increases across the correlator length, resulting in net correlation accumulation amplitude characterized by the sine cardinal (sinc) function and a net correlation energy that goes like the sine cardinal squared (sinc²) function, e.g.,

$$\text{sinc}^2 x = \frac{\sin^2 x}{x^2}, x \neq 0.$$

With increasing signal frequency offsets, optimal correlator length decreases. Accordingly, the system designer should choose a correlator length suitable to the Doppler requirements. Multiple short length correlation sequences are subsequently often used to allow sensitivity improvement beyond that of a single short correlation sequence (e.g., a random number or pseudorandom number (PR) sequence **808**) but such an approach exhibits degraded sensitivity compared to a single long sequence of the same total length. In the presence of large Doppler shift, even a combination of multiple short sequences may be problematic. While multiple short sequences may be better than nothing, for the same number of bits the approach does not deliver the same sensitivity attainable with coherent detection of a single long sequence without Doppler shift. In summary, currently, a short correlation sequence is relatively unaffected by Doppler shift but has the drawback of yielding low sensitivity, whereas a long correlation sequence may be capable of yielding high sensitivity but only when Doppler shift is minimal.

In embodiments, Tx nodes (**102**, FIG. 1) and Rx nodes (**104**, FIG. 1; **302**, FIG. 3) may perform frequency adjustments to correct for Doppler shift (e.g., Doppler corrections;

13

Doppler null overlay **810** over acquisition preambles **804** and/or packet headers **806** transmitted by the Tx nodes and received by the Rx nodes. For example, referring also to FIGS. 7A and 7B above, acquisition preambles **804** and/or packet headers **806** transmitted by TBS nodes **702** (**702a-702b**, FIGS. 7A-B) may be capable of travel and detection by receiving UE nodes (ground-based vehicles **704**, roaming users **706**) throughout the long-haul range (**708**, FIG. 7B) of the transmitting TBS node, whereas payload user data **802** may be reliably detectable only within the cells (**606a**, **606b**; FIG. 7B) corresponding to the normal coverage range of the transmitting TBS node. In some embodiments, acquisition preambles **804** and/or preamble headers **806** may be received and/or detected, in whole or in part, up to three hops away.

In embodiments, transmitting Tx and TBS nodes **102**, **702** may perform Doppler null overlay **810** over the complete acquisition preamble **804** and packet header **806**, while receiving nodes **104**, **302**, **704**, **706** (e.g., N-hop neighbors within the long-haul range **708** of the transmitting TBS node **702**) may perform spatial aware correlations **812** (e.g., adjusting the receiving frequency of the preamble and/or header to correct for Doppler shift based on the motion of the receiving node) on the acquisition preamble and that portion **806a** of the packet header deducible a priori by the receiving node, e.g., based on protocols observed by the receiving node or throughout the multi-node communications network **100**, **300**, **600**, **700** (e.g., including legacy systems). Some examples of this type of a priori header portion **806a** may include node addresses and/or the encoding mode used to modulate the payload. In embodiments, the deduction of the header portion **806a** may be performed by a priori knowledge of which nodes will transmit at a given time, as well as which mode the transmitting nodes will typically use based on to recent previous transmissions. For example, if the TBS node **702a** shown by FIGS. 7A and 7B needs to transmit resource allocation messages that can be heard by every participating node (**704a**, **706a**, **706b**, **706f**) within its cell **606a**, the TBS node will have to use the most robust mode to encode its payload data to ensure that the data can be delivered to the furthest nodes (e.g., **706f**). This is an opportunity for the TBS node **102**, **702** (referring back to FIG. 8A) to include the header portion **806a** within the correlation window **812** shown by FIG. 8A.

Referring also to FIG. 8B, one-hop neighbors of the transmitting Tx node **102**/TBS node **702** may receive the full resource allocation message (**800**, FIG. 8A) but in a noisy and/or incorrectly demodulated form **814**. For example, one-hop neighbors may include Rx nodes **104**/**302**, ground-based vehicles **704**, and/or roaming users **706** at the outer limits of the cell **606a-606b** administered by the Tx node **102**/transmitting TBS node **702**. In embodiments, the resource allocation message **814** may include an intact acquisition preamble **804**, but one or more of the packet header/header portion **806a** and data payload **802a** may be incorrectly modulated due to noise.

In embodiments, the receiving one-hop neighbor may form a replica resource allocation message **816** based on the incorrectly modulated resource allocation message **814**, performing receiver-side passive spatial awareness correlation **818** over the replica resource allocation message. For example, the replica resource allocation message may include a replica packet header **806b** and/or replica data payload **802b**. In embodiments, the receiving one-hop neighbor may construct a replica packet header **806b**, a replica data payload **802b**, or other portions of a replica resource allocation message **816** via error correction coding

14

of the incorrectly modulated data **814**, e.g., via encoding of the received bits to generate redundant parity bits which may be processed by the receiving node to correct erroneously modulated bits. For example, the error-corrected portions of the incorrectly modulated resource allocation message **814** may be remodulated by the receiving node, producing "corrected" bits for remodulation into the replica packet header **806b** or replica data payload **802b**. In embodiments, the replica resource allocation message **816** may thus serve as a reference for the receiver-side passive spatial awareness correlation **818** against the original incorrectly modulated resource allocation message **814**.

Referring now to FIG. 9, the method **900** may be implemented by the receiver nodes **104**, **302**, **704**, **706** and may include the following steps.

At a step **902**, the receiving (Rx) node receives at least a preamble or a header portion (e.g., a full header or a portion thereof) of a resource allocation message transmitted by a transmitting (Tx) node within the multi-node communications network of which the receiving node is a participating node, the Tx node in motion according to a velocity and a direction associated with a Doppler shift. In some embodiments, the network may be a cell-based network and the Tx node may be a tactical base station (TBS) configured for administration of a cell of which the receiving node is a participating member (e.g., participating user equipment (UE) such as a vehicle-based node or manpack) or for administration of another cell of the network (e.g., a cell of which the receiving node is not a participating member).

At a step **904**, the receiving node determines a receiver-side Doppler nulling direction capable of correcting for Doppler shift associated with the transmitted resource allocation message and with relative motion of the transmitting Tx node and the receiver node by adjusting a receiving frequency of the resource allocation message through at least one nulling direction. For example, the receiving node may also be in motion and correcting for Doppler shift due to its own velocity and direction. In some embodiments, the receiving node may scan through a range of directions relative to a 2D or 3D inertial reference frame, performing Doppler nulling by adjusting the receiver frequency at one or more interval directions within the range.

At a step **906**, the receiving node determines, based on the receiver-side Doppler nulling and transmitter-side Doppler nulling to correct for Doppler shift due to the motion of the Tx node, one or more of: the relative velocity of the Tx node; the velocity direction of the Tx node; and a direction of the Tx node relative to the receiving node, e.g., based on a determined angle of arrival (AOA) of the received transmission.

At a step **908**, the receiving node may determine a time of arrival (TOA) of the preamble, header portion, and/or resource allocation message.

At a step **910**, the receiving node may determine, based on the determined TOA and a time of transmission TOT of the preamble/header portion/resource allocation message by the Tx node, a distance between the receiving node and the Tx node.

CONCLUSION

It is to be understood that embodiments of the methods disclosed herein may include one or more of the steps described herein. Further, such steps may be carried out in any desired order and two or more of the steps may be carried out simultaneously with one another. Two or more of the steps disclosed herein may be combined in a single step,

15

and in some embodiments, one or more of the steps may be carried out as two or more sub-steps. Further, other steps or sub-steps may be carried in addition to, or as substitutes to one or more of the steps disclosed herein.

Although inventive concepts have been described with reference to the embodiments illustrated in the attached drawing figures, equivalents may be employed and substitutions made herein without departing from the scope of the claims. Components illustrated and described herein are merely examples of a system/device and components that may be used to implement embodiments of the inventive concepts and may be replaced with other devices and components without departing from the scope of the claims. Furthermore, any dimensions, degrees, and/or numerical ranges provided herein are to be understood as non-limiting examples unless otherwise specified in the claims.

We claim:

1. A communications node of a multi-node communications network, comprising:

a communications interface including at least one antenna element; and

a controller operatively coupled to the communications interface, the controller including one or more processors;

wherein a common reference frame of the communications network is known to the controller;

and

wherein the controller is configured to:

receive, via the communications interface, at least one of a preamble or a header portion associated with a resource allocation message transmitted by a transmitting (Tx) node of the communications network, the Tx node in motion according to a velocity vector comprising a velocity and a direction;

determine a receiver (Rx) nulling direction by adjusting a receiving frequency of at least one of the preamble or the header portion through at least one nulling frequency corresponding to a nulling direction, the Rx nulling direction configured to correct a Doppler frequency shift associated with the velocity vector;

and

determine, based on the adjusting, one or more of:

the velocity of the velocity vector of the Tx node; the direction of the velocity vector of the Tx node; or

a direction of the Tx node relative to the communications node.

2. The communications node of claim 1, wherein:

the communications node is a participating member of a cell of the communications network;

and

the Tx node is an administrator of the cell.

3. The communications node of claim 2, wherein the Tx node is a tactical base station (TBS) of the communications network.

4. The communications node of claim 2, wherein:

the communications node is a one-hop neighbor of the Tx node;

and

wherein the communications node is configured to:

create a replica message corresponding to the resource allocation message based on the at least one of the preamble or the header portion;

and

determine the receiver (Rx) nulling direction by adjusting a receiving frequency of the replica message through the at least one nulling frequency.

16

5. The communications node of claim 1, wherein:

the communications node is a participating member of a first cell of the communications network;

and

the Tx node is an administrator of a second cell of the communications network.

6. The communications node of claim 5, wherein:

the communications node is configured to transition from the first cell to the second cell.

7. The communications node of claim 1, wherein the common reference frame is a three-dimensional inertial reference frame.

8. The communications node of claim 1, wherein the communications node is configured to determine the Rx nulling direction by adjusting the receiving frequency through two or more step frequencies, the two or more step frequencies corresponding to an arc section of two or more incremental angles.

9. The communications node of claim 1, wherein the velocity vector is a transmitter (Tx) velocity vector comprising a Tx velocity and a Tx direction, and:

the communications node is in motion according to a Rx velocity vector comprising an Rx velocity and an Rx direction;

and

wherein the controller is configured to determine, based on the adjusting, one or more of:

a relative velocity of the Tx node relative to the communications node;

and

a relative direction of the Tx node relative to the communications node.

10. The communications node of claim 9, wherein:

the Tx node is associated with a Tx nulling direction;

and

wherein the controller is configured to determine the Rx nulling direction by adjusting the receiving frequency of at least one of the preamble or the header portion to an Rx nulling direction opposite the Tx nulling direction.

11. The communications node of claim 9, wherein the controller is configured to determine the Rx nulling direction based on a time synchronization with the Tx node.

12. The communications node of claim 11, wherein:

at least one of the preamble, the header portion, or the resource allocation message is associated with a time of transmission TOT known to the controller;

and wherein the controller is configured to:

determine a time of arrival (TOA) associated with at least one of the preamble, the header portion, or the resource allocation message;

and

based on at least the TOA and the TOT determine a distance between the communications node and the Tx node.

13. A communications node of a multi-node communications network, comprising:

a communications interface including at least one antenna element; and

a controller operatively coupled to the communications interface, the controller including one or more processors;

wherein a common reference frame of the communications network is known to the controller,

wherein the communications node is in motion according to a velocity vector comprising a velocity and a direction;

17

and

wherein the communications node is a transmitting (Tx) node associated with a cell of one or more participating communications nodes;

wherein the controller is configured to:

transmit, via the communications interface, at least one resource allocation message to the one or more participating communications nodes, each resource allocation message including at least one of a preamble or a header portion;

and

determine a transmitter (Tx) nulling direction by adjusting a transmitting frequency of at least one of the preamble or the header through at least one nulling frequency corresponding to a nulling direction, the Tx nulling direction configured to correct a Doppler frequency shift associated with the velocity vector.

14. The communications node of claim **13**, wherein the communications node is configured to determine the Tx nulling direction by adjusting the transmitting frequency through two or more step frequencies, the two or more step frequencies corresponding to an arc section of two or more incremental angles.

15. The communications node of claim **13**, wherein the Tx node is a tactical base station (TBS) configured for administration of the cell.

16. A method, comprising:

receiving, via a communications node of a multi-node communications network, at least one of a preamble or a header portion associated with a resource allocation message transmitted by a transmitting (Tx) node of the communications network, the Tx node in motion according to a velocity vector comprising a velocity and a direction;

determining, via the communications node, a receiver (Rx) nulling direction by adjusting a receiving frequency of at least one of the preamble or the header portion through at least one nulling frequency corresponding to an Rx nulling direction, the Rx nulling direction configured to correct a Doppler frequency shift associated with the velocity vector;

and

determining, via the communications node and based on the adjusting, one or more of:

the velocity of the velocity vector of the Tx node;

the direction of the velocity vector of the Tx node;

or

18

a direction of the Tx node relative to the communications node.

17. The method of claim **16**, wherein determining, via the communications node, a receiver (Rx) nulling direction by adjusting a receiving frequency of at least one of the preamble or the header portion through at least one nulling frequency includes:

creating, based on at least one of the preamble or the header portion, a replica message corresponding to the resource allocation message;

and

determining the Rx nulling direction by adjusting a receiving frequency of the replica message through the at least one nulling frequency.

18. The method of claim **16**, wherein determining, via the communications node, a receiver (Rx) nulling direction by adjusting a receiving frequency of at least one of the preamble or the header portion through at least one nulling frequency includes:

adjusting the receiving frequency through two or more step frequencies, the two or more step frequencies corresponding to an arc section of two or more incremental angles.

19. The method of claim **16**, wherein:

the communications node and the Tx node are time synchronized;

wherein at least one of the preamble, the header portion, or the resource allocation message is associated with a time of transmission TOT known to the communications node;

further comprising:

determining, via the communications node, a time of arrival (TOA) associated with at least one of the preamble, the header portion, or the resource allocation message;

and

determining, via the communications node and based on at least the TOA and the TOT a distance between the communications node and the Tx node.

20. The method of claim **16**, wherein:

the multi-node communications network is a cell-based network comprising a plurality of cells;

the communications node is a participating member of a first cell of the plurality of cells;

and

the Tx node is a tactical base station (TBS) configured for administration of at least one cell of the plurality of cells.

* * * * *