



US012416527B2

(12) **United States Patent**
Takiguchi et al.

(10) **Patent No.:** **US 12,416,527 B2**

(45) **Date of Patent:** **Sep. 16, 2025**

(54) **RADIATION THERMOMETER**

(71) Applicant: **HORIBA, Ltd.**, Kyoto (JP)

(72) Inventors: **Yu Takiguchi**, Kyoto (JP); **Sho Fujino**, Kyoto (JP)

(73) Assignee: **HORIBA, LTD.**, Kyoto (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 449 days.

(21) Appl. No.: **17/999,015**

(22) PCT Filed: **Jun. 23, 2021**

(86) PCT No.: **PCT/JP2021/023721**

§ 371 (c)(1),

(2) Date: **Nov. 16, 2022**

(87) PCT Pub. No.: **WO2022/004507**

PCT Pub. Date: **Jan. 6, 2022**

(65) **Prior Publication Data**

US 2023/0194350 A1 Jun. 22, 2023

(30) **Foreign Application Priority Data**

Jun. 29, 2020 (JP) 2020-111469

(51) **Int. Cl.**

G01J 5/02 (2022.01)

G01J 5/00 (2022.01)

(Continued)

(52) **U.S. Cl.**

CPC **G01J 5/0215** (2013.01); **G01J 5/0007** (2013.01); **G01J 5/04** (2013.01); **G01J 5/0802** (2022.01); **G01J 5/0806** (2013.01)

(58) **Field of Classification Search**

CPC G01J 5/0215; G01J 5/0007; G01J 5/04;
G01J 5/0802; G01J 5/0806; G01J 5/06;
G01J 5/02; G01J 5/00

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,512,748 A * 4/1996 Hanson G01J 5/10
250/331

7,402,802 B1 7/2008 Terre et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 107709943 A * 2/2018 G01J 5/0022
CN 109405978 A 3/2019

(Continued)

OTHER PUBLICATIONS

European Patent Office, Extended European Search Report Issued in Application No. 21832673.4, Mar. 22, 2024, Germany, 15 pages.

(Continued)

Primary Examiner — Laura Martin

Assistant Examiner — Julia Fitzpatrick


(74) *Attorney, Agent, or Firm* — Alleman Hall & Tuttle LLP

(57)

ABSTRACT

The present invention downsizes a radiation thermometer and increases a circuit scale, and includes: an infrared sensor; a signal processing unit that processes a signal of the infrared sensor; and a casing that accommodates the infrared sensor and the signal processing unit, in which the signal processing unit is configured by stacking a plurality of substrates with a spacer interposed therebetween.

7 Claims, 7 Drawing Sheets

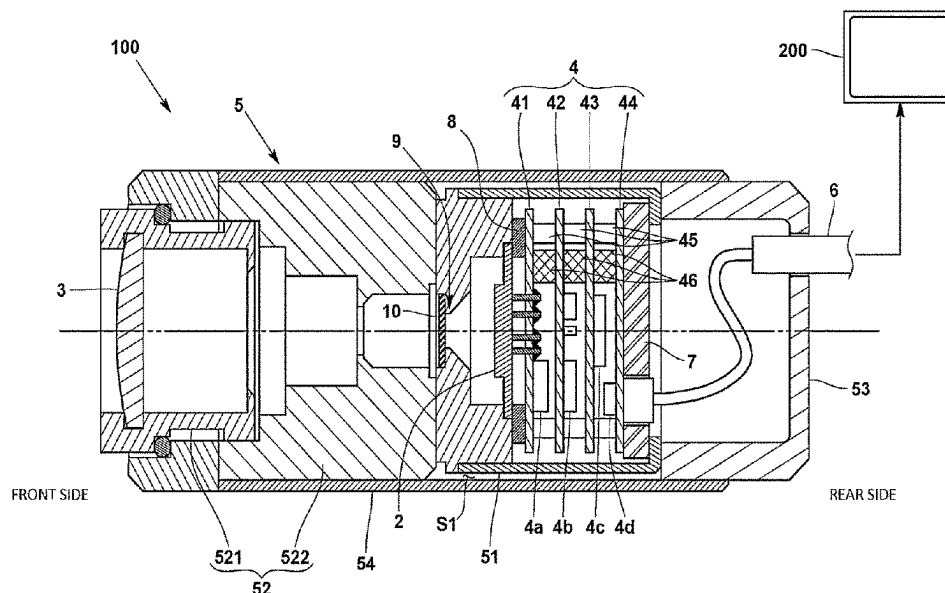

(51)	Int. Cl. G01J 5/04 (2006.01) G01J 5/0802 (2022.01) G01J 5/0806 (2022.01)	DE 19600334 C2 * 11/2002 G01J 5/02 JP S62182426 U 11/1987 JP 2003188489 A 7/2003 JP 2006215012 A * 8/2006 G01J 5/02 JP 2006226864 A 8/2006 JP 2007225455 A 9/2007 JP 2008187284 A 8/2008 JP 2009002739 A 1/2009 JP 2019100987 A 6/2019 KR 20010005869 * 1/2001 WO WO-2007061137 A1 * 5/2007 G01J 5/045
------	---	--

(56) **References Cited**

U.S. PATENT DOCUMENTS

10,309,670 B2 * 6/2019 Kusakame F24F 11/46
 2006/0153273 A1 7/2006 Torii et al.
 2012/0298867 A1 11/2012 Nishikawa et al.
 2017/0223245 A1 8/2017 Park
 2018/0077754 A1 * 3/2018 Ito G01J 5/602
 2019/0310138 A1 * 10/2019 Fujino G01J 1/0411

FOREIGN PATENT DOCUMENTS

DE 19535408 A1 * 3/1997 G01J 5/04
 DE 19842403 A1 * 3/2000 G01J 5/02

OTHER PUBLICATIONS

ISA Japan Patent Office, International Search Report Issued in
 Application No. PCT/JP2021/023721, Sep. 21, 2021, WIPO, 6
 pages.

* cited by examiner

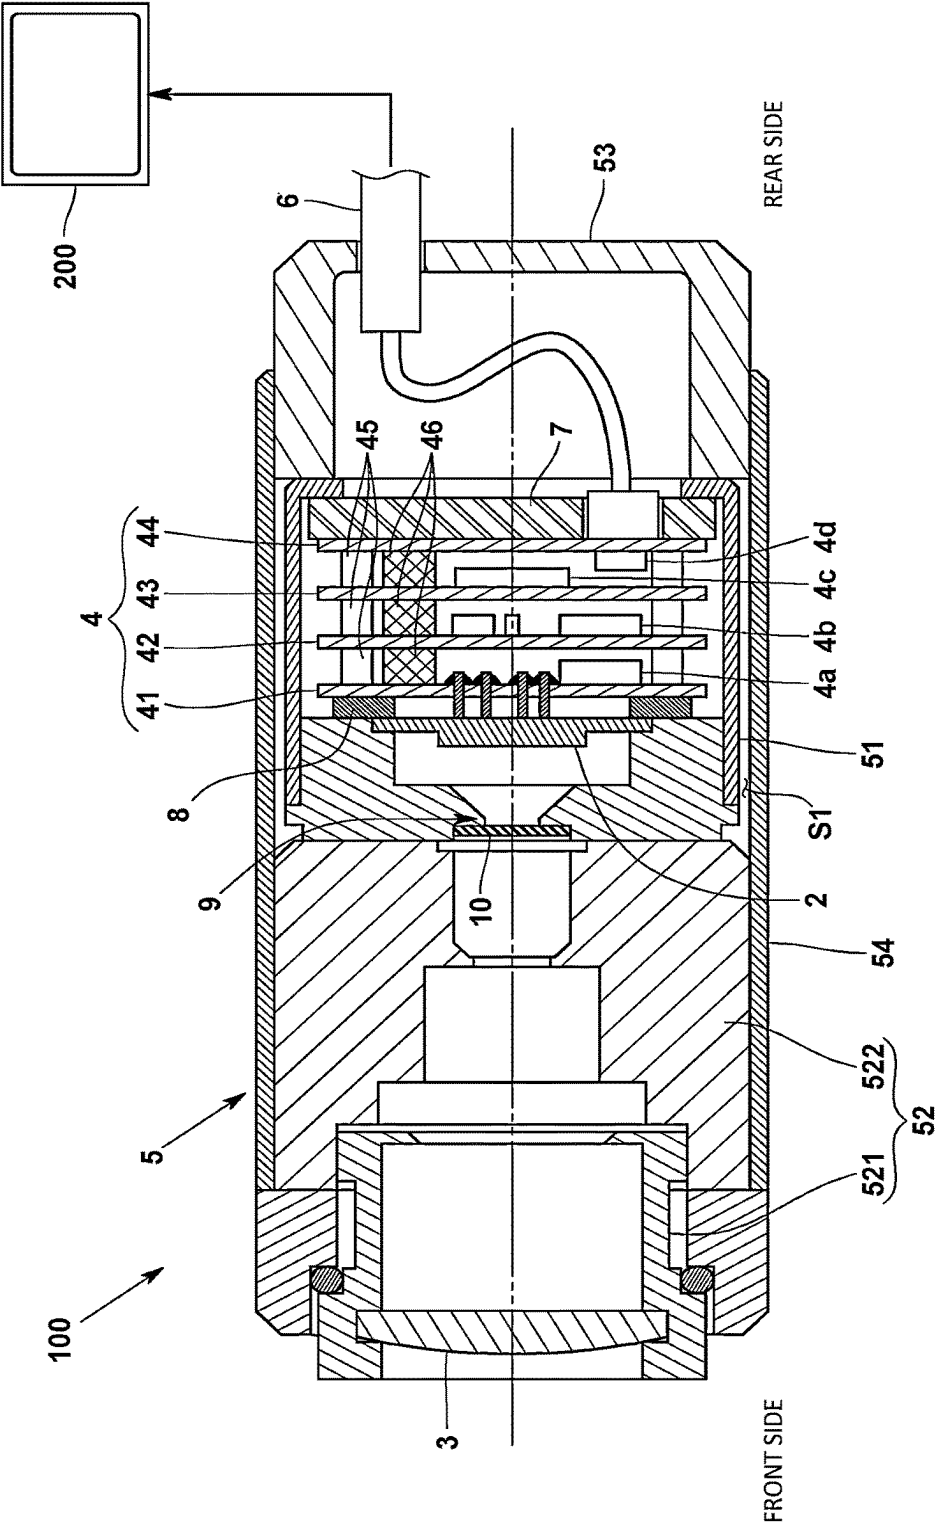


FIG.1

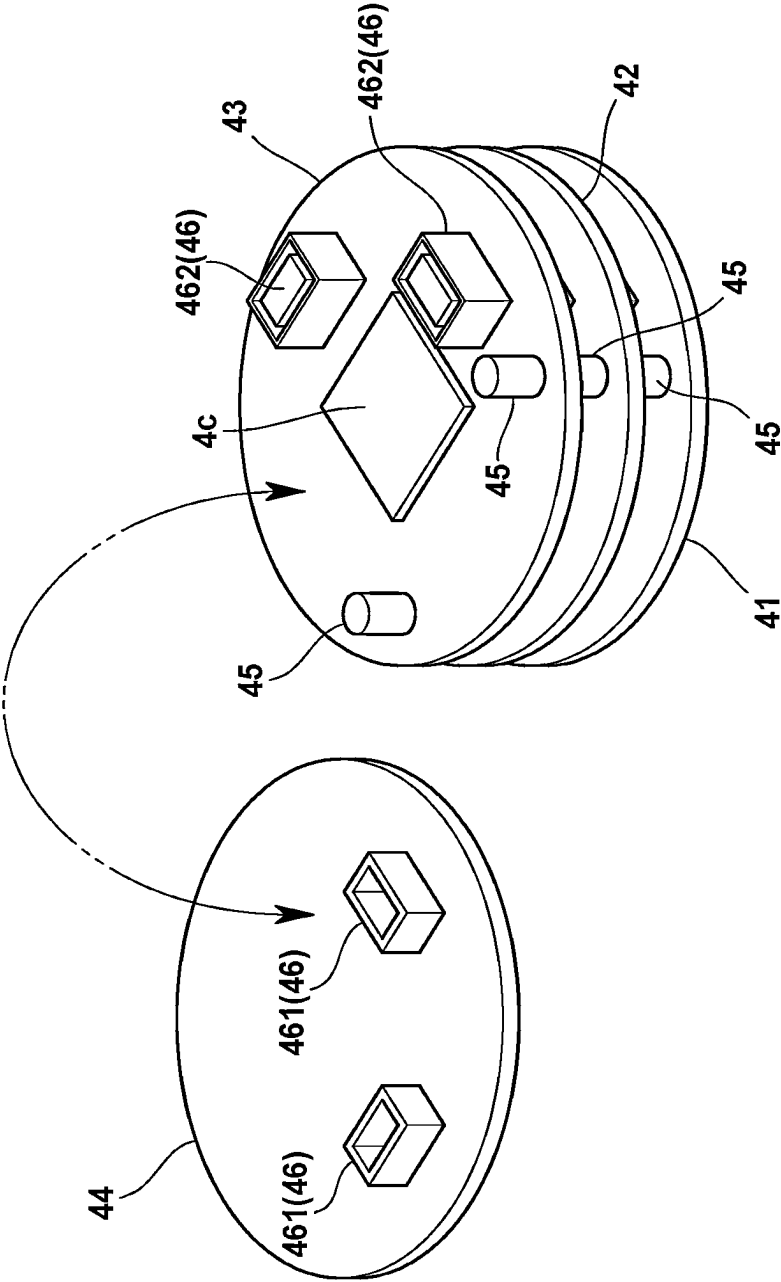


FIG.2

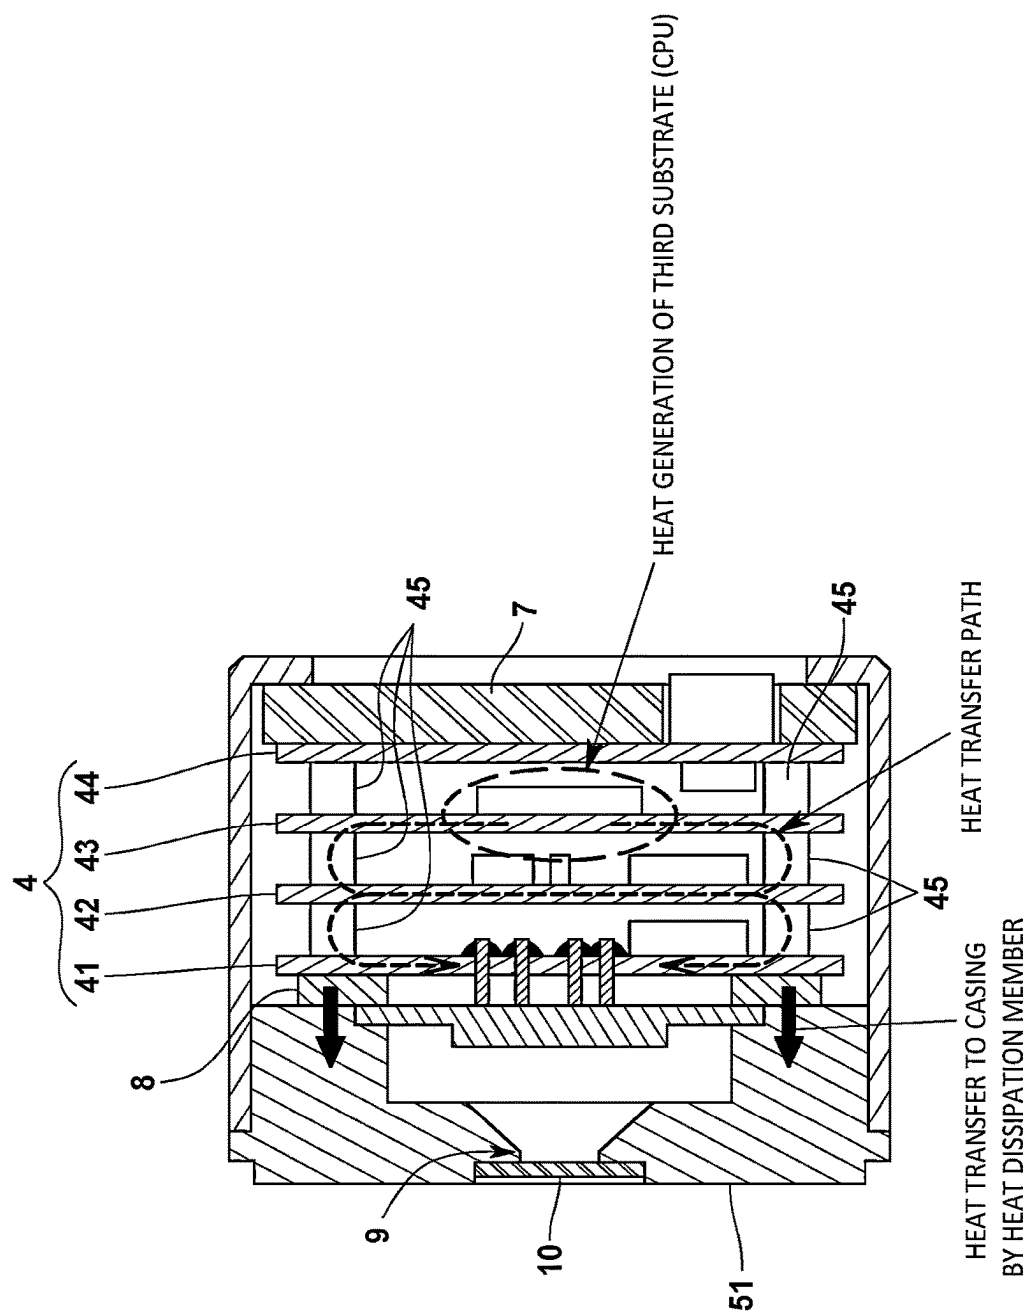


FIG.3

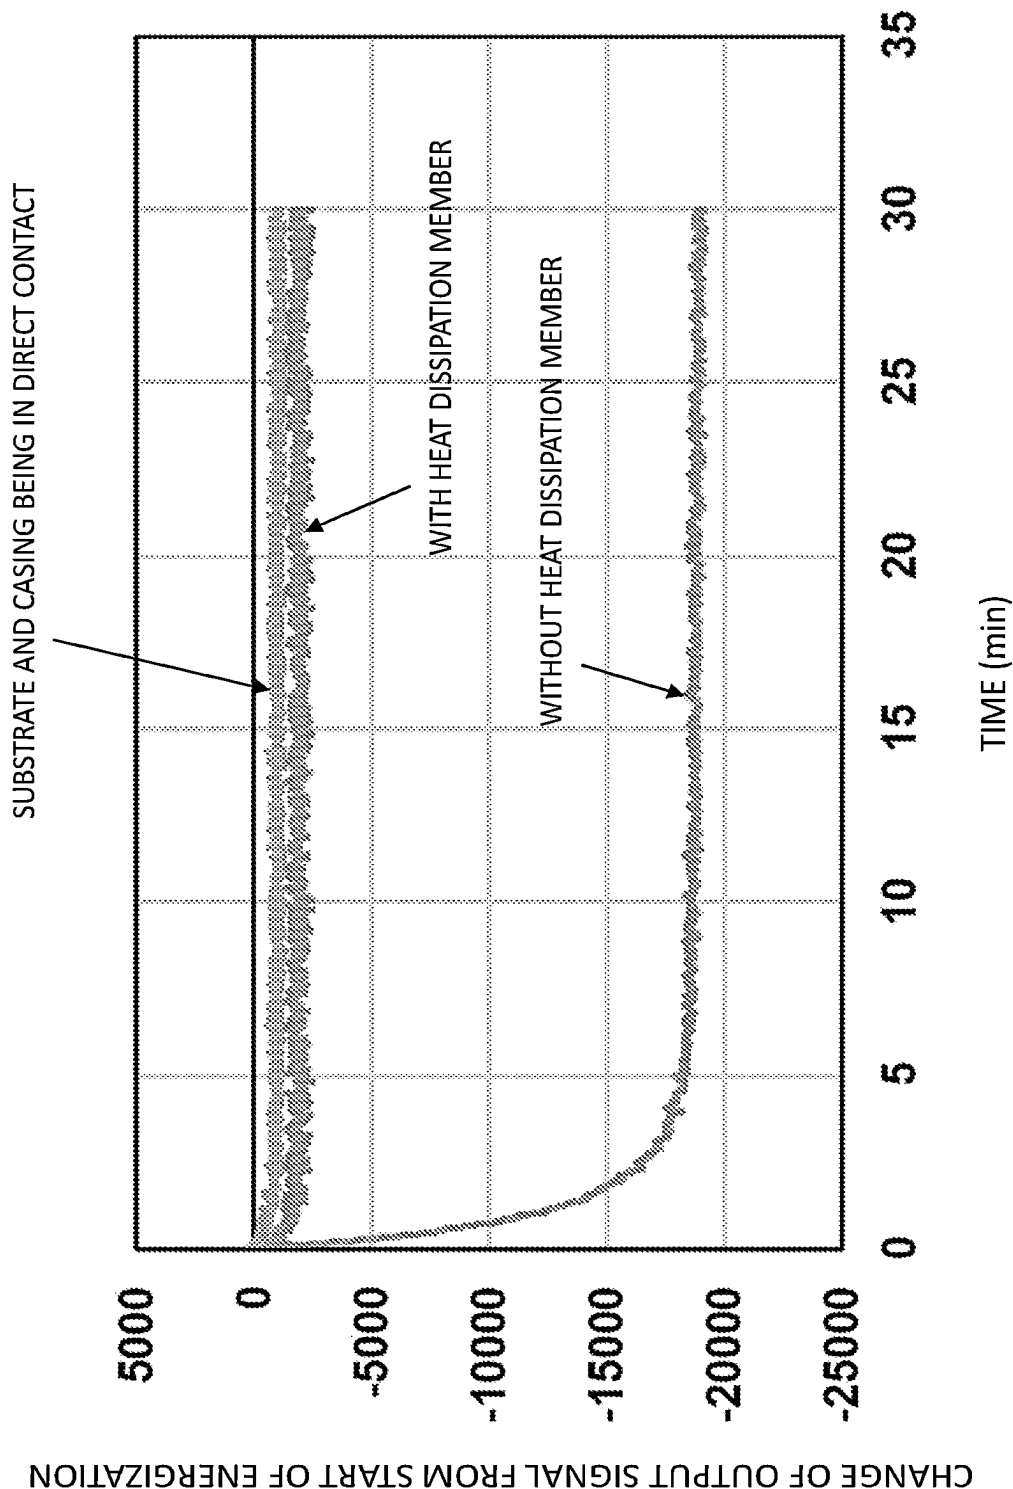


FIG.4

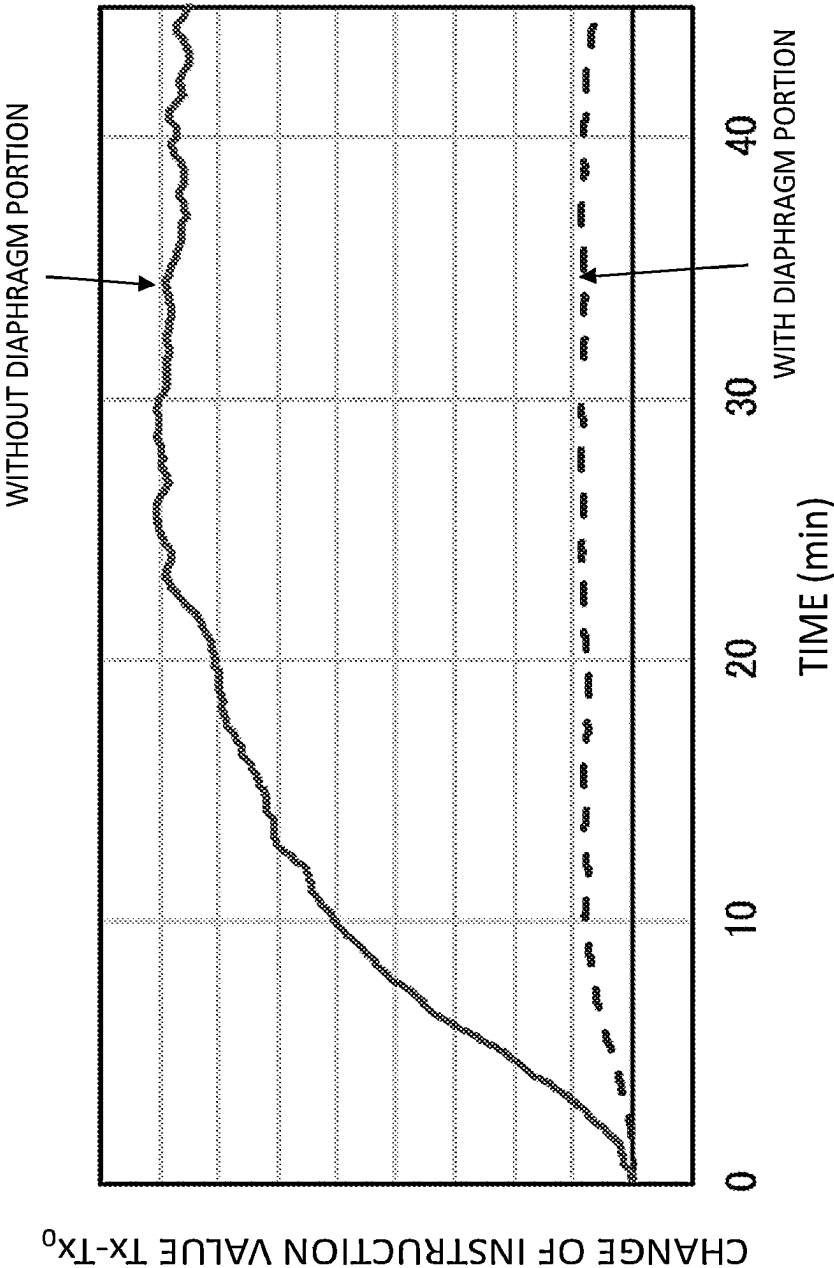


FIG.5

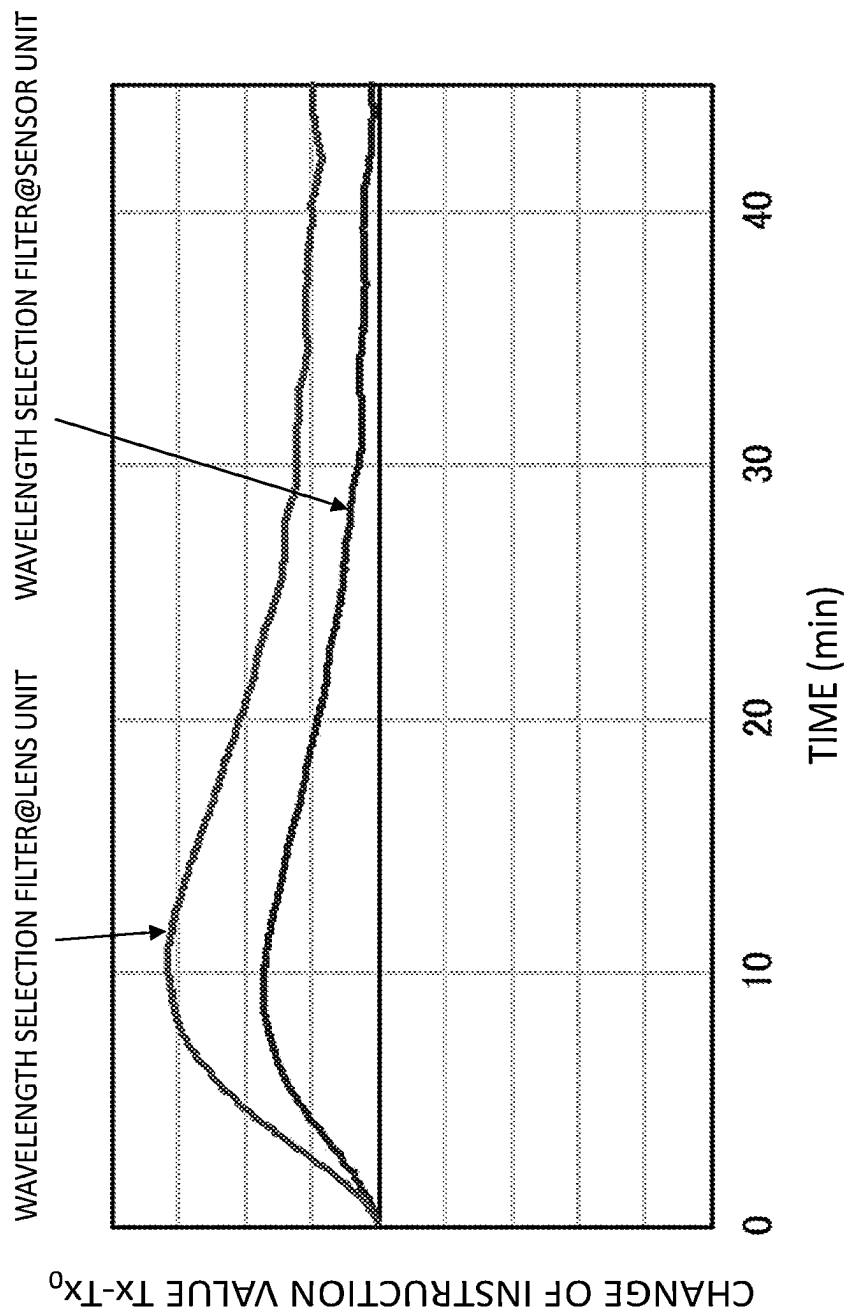


FIG.6

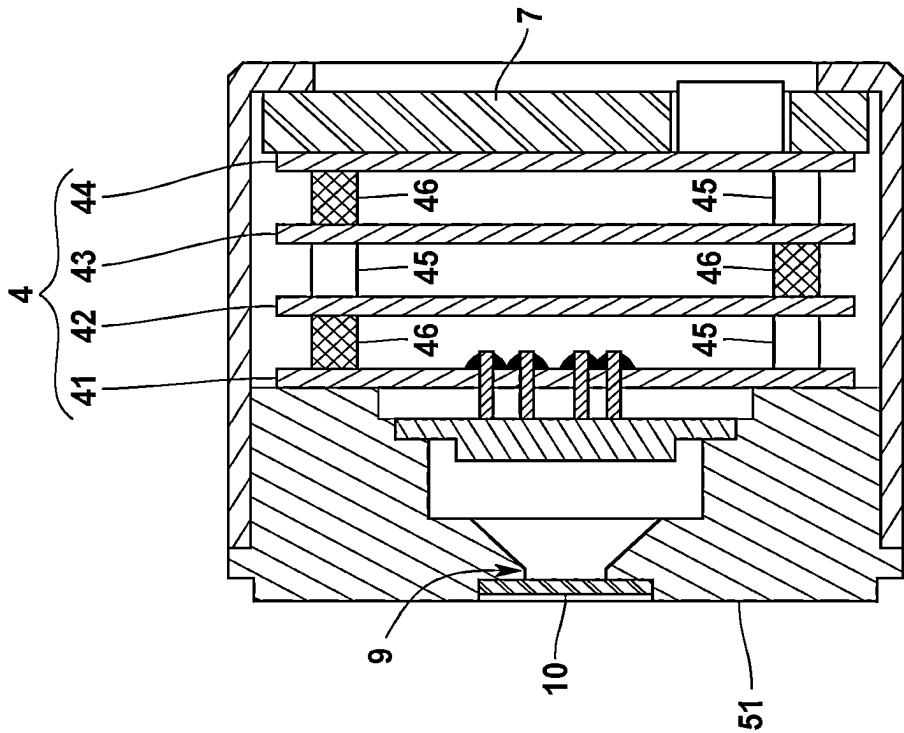


FIG.7

1

RADIATION THERMOMETER**TECHNICAL FIELD**

The present invention relates to a radiation thermometer.

BACKGROUND ART

As disclosed in Patent Literature 1, the radiation thermometer is configured to detect infrared rays emitted from a measurement target with an infrared detection element (infrared sensor) so as to be able to measure the temperature of the measurement target based on the detected intensity.

This radiation thermometer includes a measurement unit configured by accommodating an infrared sensor in a casing, and the measurement unit is desired to be downsized due to restrictions on an installation place and the like. Therefore, the casing of the measurement unit is usually configured to accommodate only the infrared sensor or to accommodate the infrared sensor and a preamplifier substrate. In addition, a calculation unit is connected to the measurement unit of the radiation thermometer via an electric cable, and the calculation unit is configured to calculate a temperature from an analog signal output from the measurement unit.

However, as described above, when the measuring unit is downsized, only a minimum circuit can be accommodated in the casing. In addition, when the minimum circuit is accommodated in the casing, an analog signal from the infrared sensor is output to the outside, and the configuration is weak against electromagnetic noise (EMC noise).

CITATION LIST**Patent Literature**

Patent Literature 1: JP 2019-100987 A

SUMMARY OF INVENTION**Technical Problem**

Therefore, the present invention has been made to solve the above problems, and a main object of the present invention is to downsize a radiation thermometer and to increase a circuit scale.

Solution to Problem

That is, a radiation thermometer according to the present invention includes: an infrared sensor; a signal processing unit that processes a signal of the infrared sensor; and a casing that accommodates the infrared sensor and the signal processing unit, in which the signal processing unit is configured by stacking a plurality of substrates with a spacer interposed therebetween.

With such a configuration, since the signal processing unit is configured by stacking the plurality of substrates with the spacer interposed therebetween, the signal processing unit can be downsized and the circuit scale can be increased. As a result, the degree of freedom of the circuit accommodated in the casing can be increased, and an analog signal from the infrared sensor can be converted into a digital signal in the same casing as the infrared sensor. Therefore, a digital signal can be output from the casing, and the configuration is resistant to electromagnetic noise.

Even in a case where the plurality of substrates are connected by an electric cable, the influence of electromag-

2

netic noise is exerted. Therefore, it is desirable that the plurality of substrates be connected using an inter-substrate connector. Further, by connecting the plurality of substrates by the inter-substrate connector, connection between the substrates can be simplified.

When a plurality of stacked substrates are fixed by screwing or the like, an excessive stress is applied to the substrates, and the plurality of substrates cannot be stably fixed. Therefore, it is desirable that the plurality of substrates be fixed to the casing with an elastic member interposed therebetween.

When the plurality of substrates are connected by the inter-substrate connector, it is necessary to fix the inter-substrate connector so that the inter-substrate connector does not come off. Therefore, it is desirable that the elastic member press the plurality of substrates from a direction in which the plurality of substrates are stacked. With this configuration, the plurality of substrates can be stably fixed without coming off of the inter-substrate connector.

In the present invention, it is conceivable that the infrared sensor is mounted on, for example, a first substrate located on an outermost side among the plurality of substrates. In the case of this configuration, the heat generated in the substrate is transmitted to the infrared sensor, and the output of the infrared sensor drifts. In order to suitably solve this problem, it is desirable that the first substrate be provided in contact with the casing or provided with a heat dissipation member interposed between the first substrate and the casing. With this configuration, the heat generated in the substrate can be released to the casing, so that the drift of the output of the infrared sensor can be reduced.

In order to accurately measure the temperature of a measurement target, it is desirable that the radiation thermometer further include a lens provided in front of the infrared sensor.

Here, in a case where the infrared sensor and the lens are accommodated in the same casing, it is necessary to take measures such as uniformizing the temperature distribution of the casing in order to cancel the thermal influence of the optical system such as the lens on the infrared sensor.

Therefore, in the present invention, it is desirable that the casing include a first casing portion that accommodates the infrared sensor and the signal processing unit, and a second casing portion that accommodates the lens, and that the first casing portion and the second casing be configured to be separable from each other. With this configuration, since the first casing portion and the second casing portion are divided and thermally separated, the influence of the optical system such as the lens on the infrared sensor can be reduced.

Here, when the infrared sensor detects thermal radiation from the second casing, a measurement error occurs. In order to reduce this measurement error, it is desirable that the first casing portion include a diaphragm portion that is provided in front of the infrared sensor and block heat radiation from the second casing portion. In addition, it is desirable that an inner diameter of the diaphragm portion be a diameter that blocks thermal radiation from the second casing portion without blocking infrared rays from a measurement target incident on the infrared sensor through the lens.

In order to improve the measurement accuracy by the infrared sensor, it is conceivable to provide a wavelength selection filter in front of the infrared sensor. When the wavelength selection filter is provided in the second casing portion, the temperature difference between the infrared sensor and the wavelength selection filter increases, and the influence of the infrared light emitted from the wavelength

3

selection filter is given. Therefore, it is desirable that the first casing portion include a wavelength selection filter provided in front of the infrared sensor. By providing the wavelength selection filter in the first casing portion in this manner, a temperature difference between the infrared sensor and the wavelength selection filter can be reduced, and a measurement error due to infrared rays emitted from the wavelength selection filter can be reduced.

In order to be replaceable with various lenses according to the application of the radiation thermometer, it is desirable that the second casing portion include a lens block that holds the lens, and the lens block be configured to be replaceable. Advantageous Effects of Invention

According to the present invention described above, the radiation thermometer can be downsized and the circuit scale can be increased.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a diagram schematically illustrating a configuration of a radiation thermometer according to an embodiment of the present invention.

FIG. 2 is a perspective view illustrating a state in which a fourth substrate is separated from a third substrate in the embodiment.

FIG. 3 is a schematic diagram illustrating a flow of heat of the embodiment.

FIG. 4 is an experimental result showing the presence or absence of a heat dissipation member and a time change in an output signal of an infrared sensor in a case where a substrate and a casing are in direct contact with each other.

FIG. 5 is an experimental result showing a time change of a measured value (instruction value) depending on the presence or absence of a diaphragm portion.

FIG. 6 is an experimental result showing a time change of a measured value (instruction value) in a case where a wavelength selection filter is provided in a lens unit and in a case where the wavelength selection filter is provided in a sensor unit.

FIG. 7 is a cross-sectional view illustrating configurations of spacers and inter-substrate connectors in a signal processing unit of a modified embodiment.

LIST OF REFERENCE CHARACTERS

- 100 radiation thermometer
- 2 infrared sensor
- 3 lens
- 4 signal processing unit
- 41 first substrate
- 42 second substrate
- 43 third substrate
- 44 fourth substrate
- 45 spacer
- 46 inter-substrate connector
- 5 casing
- 51 first casing portion
- 52 second casing portion
- 521 lens block
- 7 elastic member
- 8 heat dissipation member
- 9 diaphragm portion
- 10 wavelength selection filter

DESCRIPTION OF EMBODIMENTS

Hereinafter, a radiation thermometer according to an embodiment of the present invention will be described with reference to the drawings.

4

<Device Configuration of Radiation Thermometer>

A radiation thermometer 100 according to the present embodiment measures a temperature of a measurement target in a non-contact manner based on the intensity of infrared rays emitted from the measurement target.

Specifically, the radiation thermometer 100 includes an infrared sensor 2, a lens 3 provided in front of an incident side that is a measurement target side of the infrared sensor 2, a signal processing unit 4 that processes a signal of the infrared sensor 2 to calculate a temperature, and a casing 5 that accommodates the infrared sensor 2 and the signal processing unit 4. Note that the temperature data calculated by the signal processing unit 4 is output to an external device (not illustrated) such as an external display unit 200 or a temperature control device via an electric cable 6.

The infrared sensor 2 detects infrared rays emitted from a measurement target and outputs an intensity signal (analog signal) corresponding to energy of the detected infrared rays. Specifically, the infrared sensor 2 detects infrared rays in the entire wavelength band of the infrared wavelength band, for example, and is a thermal-type sensor such as a thermopile here. As the infrared sensor, other types, for example, quantum photoelectric elements such as HgCdTe, InGaAs, Ines, and PbSe may be used. Furthermore, the infrared sensor 2 is provided with a wavelength selection filter (not illustrated) that passes only light (electromagnetic wave) in a predetermined wavelength band. Here, for example, one that passes only infrared rays in a band with a wavelength of 8 μm to 14 μm is used, and only infrared rays that have passed through the wavelength selection filter 10 are received.

The lens 3 is an infrared lens that condenses infrared rays emitted from a measurement target on the infrared sensor 2. In the present embodiment, a plano-convex lens in which one surface is a convex surface and the other surface is a flat surface is used. In addition, the lens 3 has a circular shape in plan view. Note that the lens 3 may be a biconvex lens having convex surfaces on both sides, or the shape and size may be appropriately changed.

The signal processing unit 4 processes the analog signal of the infrared sensor 2 and calculates the temperature of the measurement target. The signal processing unit 4 includes an amplification unit 4a that amplifies an analog signal of the infrared sensor 2, an AD conversion unit 4b that converts the amplified analog signal into a digital signal, a temperature calculation unit 4c such as a CPU that calculates a temperature from the AD-converted digital signal, and an input/output interface unit 4d that outputs temperature data (digital signal) indicating the calculated temperature to the outside.

The casing 5 accommodates the infrared sensor 2, the signal processing unit 4, and the lens 3, and has a substantially cylindrical shape. The casing 5 includes a first casing portion 51 that accommodates the infrared sensor 2 and the signal processing unit 4, and a second casing portion 52 that accommodates the lens 3. The first casing portion 51 and the second casing portion 52 are desirably made of a material having high thermal conductivity, such as aluminum or copper.

Thus, as illustrated in FIG. 1, the signal processing unit 4 of the present embodiment is configured by stacking a plurality of substrates 41 to 44 in the thickness direction with spacers 45 interposed therebetween. In the present embodiment, a four-stage configuration in which four substrates 41 to 44 are stacked with the spacers 45 interposed therebetween is employed.

The infrared sensor 2 is soldered and mounted on the upper surface of the first substrate 41 located at the upper

5

most stage (foremost side in FIG. 1) which is the outermost side. In addition, the first substrate **41** is provided with an amplification unit **4a** that amplifies an analog signal of the infrared sensor **2**. Here, since the infrared sensor **2** is mounted on the upper surface of the first substrate **41**, the amplification unit **4a** is provided on the back surface of the first substrate **41**.

On the second substrate **42** next to the first substrate **41**, an AD conversion unit **4b** that converts the analog signal amplified by the amplification unit **4a** into a digital signal is mounted. In FIG. 1, the AD conversion unit **4b** is mounted on the back surface of the second substrate **42** so as not to physically interfere with the amplification unit **4a**, but may be provided on the upper surface of the second substrate **42**.

Furthermore, the third substrate **43** next to the second substrate **42** is provided with a temperature calculation unit **4c** such as a CPU that calculates a temperature from the converted digital signal. In FIG. 1, the temperature calculation unit **4c** is mounted on the back surface of the third substrate **43** so as not to physically interfere with the AD conversion unit **4b**, but may be provided on the upper surface of the third substrate **43**.

Further, thereon, the fourth substrate **44** next to the third substrate **43** is provided with an input/output interface unit **4d** for outputting the temperature data calculated by the temperature calculation unit **4c** to the outside. The electric cable **6** connected to an external device via a connector is connected to the fourth substrate **44**.

These substrates **41** to **44** are separated by a predetermined distance by the spacer **45**. The spacer may be, for example, copper plated with tin or aluminum plated with tin. One or a plurality of spacers **45** are provided between the substrates adjacent to each other. The spacers **45** prevent the electronic components **4a** to **4d** mounted on the respective substrates **41** to **44** from physically interfering with another substrate or an electronic component mounted on another substrate.

Further, these substrates **41** to **44** are connected using inter-substrate connectors **46**. The inter-substrate connector **46** is of a fitting type and is vertically connected. Specifically, as illustrated in FIG. 2, the inter-substrate connector **46** includes a plug **461** provided on one of opposing surfaces of two boards adjacent to each other, and a receptacle **462** provided on the other. Note that the inter-substrate connector **46** also has a function similar to that of the spacer **45** described above, and causes the substrates **41** to **44** to be separated from each other by a predetermined distance.

The plurality of substrates **41** to **44** constituting the signal processing unit **4** are fixed to the casing **5** (here, the first casing portion **51**) via an elastic member **7** such as silicone rubber. Specifically, the elastic member **7** is interposed between the first casing portion **51** and the plurality of substrates **41** to **44** to press the plurality of substrates **41** to **44** from a direction in which the plurality of substrates **41** to **44** are stacked (front-rear direction in FIG. 1). In the present embodiment, the elastic member **7** is provided between the fourth substrate **44** opposite to the first substrate **41** on which the infrared sensor **2** is mounted and the first casing portion **51**.

Here, a heat dissipation member **8** is provided between the first substrate **41** and the first casing portion **51**. That is, the heat dissipation member **8** is provided in contact with the first substrate **41**, and the heat dissipation member **8** is provided in contact with the first casing portion **51**. Note that, in relation to the elastic member **7** described above, the plurality of substrates **41** to **44** have a structure sandwiched between the elastic member **7** and the heat dissipation

6

member **8**. The first substrate **41** may be brought into direct contact with the first casing portion **51** without providing the heat dissipation member **8**.

The heat dissipation member **8** is, for example, an acrylic or silicone-based sheet. The heat dissipation member **8** releases the heat generated in the substrates **41** to **44** to the first casing portion **51**, thereby reducing the temperature drift of the infrared sensor **2**. The heat dissipation member **8** is provided so as to surround the infrared sensor **2** on the first substrate **41**. Among the electronic components mounted on the plurality of substrates **41** to **44**, the heat generation of the temperature calculation unit (CPU) **4c** is large, and as illustrated in FIG. 3, the heat from the third substrate **43** on which the temperature calculation unit **4c** is mounted is transferred mainly to the first substrate **41** side with the spacers **45** interposed therebetween. The heat transferred to the first substrate **41** is transferred to the first casing portion **51** via the heat dissipation member **8**. As described above, the heat generated in the substrates **41** to **44** is released to the first casing portion **51** by the heat dissipation member **8**, whereby the temperature drift of the infrared sensor **2** can be reduced as shown in FIG. 4. The temperature drift of the infrared sensor **2** can also be reduced by bringing the first substrate **41** into direct contact with the first casing portion **51**. FIG. 4 is an experimental result showing a change in the output signal of the infrared sensor **2** in a case where the heat dissipation member **8** is not used and the place of the heat dissipation member **8** is a heat insulating layer, in a case where the heat dissipation member **8** is used, and in a case where the first substrate **41** is directly brought into contact with the first casing portion **51** and fixed with screws without using the heat dissipation member **8**.

The first casing portion **51** and the second casing portion **52** constituting the casing **5** are separated from each other. Specifically, the first casing portion **51** and the second casing portion **52** may be formed of different members, and the first casing portion **51** and the second casing portion **52** may be formed of materials having different thermal conductivities. In addition, the front end surface of the first casing portion **51** and the rear end surface of the second casing portion **52** are connected so as to abut on each other. Here, the connection is made using a screw (not illustrated). A third casing **53** from which the electric cable **6** extends is connected to a rear end surface of the first casing portion **51**. In addition, the outer peripheral surfaces of the first casing portion **51** and the second casing portion **52** are covered with a fourth casing portion **54**, and here, a cylindrical gap **S1** is formed between the fourth casing portion **54** and the first casing portion **51**. The gap **S1** functions as a heat insulating layer.

The first casing portion **51** is provided with a diaphragm portion **9** that is provided in front of the incident side which is the measurement target side of the infrared sensor **2** and blocks heat radiation from the second casing portion **52**. The diaphragm portion **9** forms a circular opening, and is formed on the front end side of the first casing portion **51**. The diaphragm portion **9** can reduce thermal radiation from the second casing portion **52** incident on the infrared sensor **2**. As a result, as shown in FIG. 5, it is possible to prevent deterioration of the measured value (instruction value) due to temperature influence caused by separation of a sensor unit (the first casing portion **51** accommodating the infrared sensor **2**) and a lens unit (the second casing portion **52** accommodating the lens **3**). FIG. 5 is an experimental result showing a time change of the measured value (instruction value) in a case where the diaphragm portion **9** is not provided and a case where the diaphragm portion **9** is provided.

In the first casing portion **51**, a second wavelength selection filter **10** is provided in front of the incident side which is the measurement target side of the infrared sensor **2**. The second wavelength selection filter **10** cuts transmission of wavelength bands other than the measurement wavelength that cannot be cut by the wavelength selection filter provided in the infrared sensor **2**. Specifically, the second wavelength selection filter **10** is provided on the front side of the diaphragm portion **9** in the first casing portion **51**. By providing the second filter **10** in the first casing portion **51** in this manner, as shown in FIG. **6**, as compared with the case where the second filter is provided in the second casing portion **52** (lens unit), it is possible to reduce the temperature difference between the infrared sensor **2** and the second wavelength selection filter **10** and to prevent deterioration of the measured value (instruction value) due to the temperature influence. Note that the second wavelength selection filter **10** may not be provided.

On the other hand, the second casing portion **52** includes a lens block **521** that holds the lens **3**, and a casing main body **522** to which the lens block **521** is attached and detached, and the lens block **521** is configured to be replaceable with respect to the casing main body **522**. The lens block **521** is prepared such that the length of the optical system and the type of the lens **3** are different according to the visual field characteristic, and is attached to the casing main body **522** according to the use of the radiation thermometer **100**.

Effects of Present Embodiment

According to the radiation thermometer **100** of the present embodiment, since the signal processing unit **4** is configured by stacking the plurality of substrates **41** to **44** with the spacers **45** interposed therebetween, the signal processing unit **4** can be downsized and the circuit scale can be increased. As a result, the degree of freedom of the circuit accommodated in the casing **5** can be increased, and the analog signal from the infrared sensor **2** can be converted into the digital signal in the same casing **5** as the infrared sensor **2**. Therefore, a digital signal can be output from the casing **5**, and the configuration is resistant to electromagnetic noise.

Other Modified Embodiments

Note that the present invention is not limited to the above embodiment.

For example, the signal processing unit **4** of the above embodiment is configured using the four substrates **41** to **44**, but may be configured by stacking two or more substrates with a spacer interposed therebetween. The plurality of substrates may have different shapes.

In the above embodiment, in the substrates **41** to **44**, the spacers **45** are arranged in a row and the inter-substrate connectors **46** are arranged in a row in the stacking direction of the substrates **41** to **44**. However, as illustrated in FIG. **7**, in the substrates **41** to **44**, the spacers **45** and the inter-substrate connectors **46** may be alternately arranged in the stacking direction of the substrates **41** to **44**. As illustrated in FIG. **7**, the first substrate **41** may be fixed in direct contact with the first casing portion **51** without using the heat dissipation member **8**. Even in this case, as shown in FIG. **4**, it is possible to achieve an effect equivalent to or greater than that in the case of using the heat dissipation member **8**.

In the above embodiment, the elastic member **7** is configured to press the plurality of substrates **41** to **44** from the

direction in which the plurality of substrates **41** to **44** are stacked, but may be configured to press the plurality of substrates **41** to **44** from the periphery.

In the above embodiment, the heat dissipation member **8** is provided between the first casing portion **51** and the first substrate **41**, but may be interposed between the third substrate **43** on which the temperature calculation unit (CPU) **4c** is mounted and the first casing portion **51**. Further, the heat dissipation member **8** may be interposed between each of the plurality of substrates **41** to **44** and the first casing portion **51**.

In the above embodiment, the functions of the signal processing unit **4** are divided into four and distributed to the four substrates **41** to **44**, but the number of substrates to which the four functions are decomposed is not limited to four. The method of distributing the functions of the signal processing unit **4** to the plurality of substrates is not limited to the above embodiment.

Furthermore, the casing **5** may be integrated without being separated into the first casing portion **51** and the second casing portion **52**, or in the case where the casing **5** is separated into the first casing portion **51** and the second casing portion **52**, a heat insulating member or a heat conduction member may be interposed therebetween.

Moreover, in the above embodiment, the lens block **521** is configured to be replaceable in the second casing portion **52**, but the second casing portion **52** may be configured to be replaceable with respect to the first casing portion **51** so that the lens **3** can be replaced.

In addition, various modifications and combinations of the embodiments may be made without departing from the gist of the present invention.

INDUSTRIAL APPLICABILITY

According to the present invention, the radiation thermometer can be downsized and the circuit scale can be increased.

The invention claimed is:

1. A radiation thermometer comprising:

an infrared sensor;

a signal processing unit that processes a signal of the infrared sensor; and

a casing that accommodates the infrared sensor and the signal processing unit,

wherein the signal processing unit is configured by stacking a plurality of substrates with a spacer interposed therebetween,

wherein the plurality of substrates are sandwiched from both sides, in a stacking direction of the substrates, by an elastic member and the casing, and

wherein the plurality of substrates are pressed, directly or indirectly, against the casing by the elastic member through an elastic force, so as to fix the plurality of substrates to the casing.

2. The radiation thermometer according to claim 1, wherein the plurality of substrates are connected using an inter-substrate connector.

3. The radiation thermometer according to claim 1, wherein

the plurality of substrates include a first substrate on which the infrared sensor is mounted, and

the first substrate is provided in contact with the casing or provided with a heat dissipation member interposed between the first substrate and the casing.

4. The radiation thermometer according to claim 1, further comprising a lens provided in front of the infrared sensor,

wherein the casing includes a first casing portion that accommodates the infrared sensor and the signal processing unit, and a second casing portion that accommodates the lens, and

the first casing portion and the second casing portion are 5 configured to be separable from each other.

5. The radiation thermometer according to claim 4, wherein the first casing portion includes a diaphragm portion that is provided in front of the infrared sensor and blocks heat radiation from the second casing portion. 10

6. The radiation thermometer according to claim 4, wherein the first casing portion includes a wavelength selection filter provided in front of the infrared sensor.

7. The radiation thermometer according to claim 4, wherein the second casing portion includes a lens block that 15 holds the lens, and the lens block is configured to be replaceable.

* * * * *