
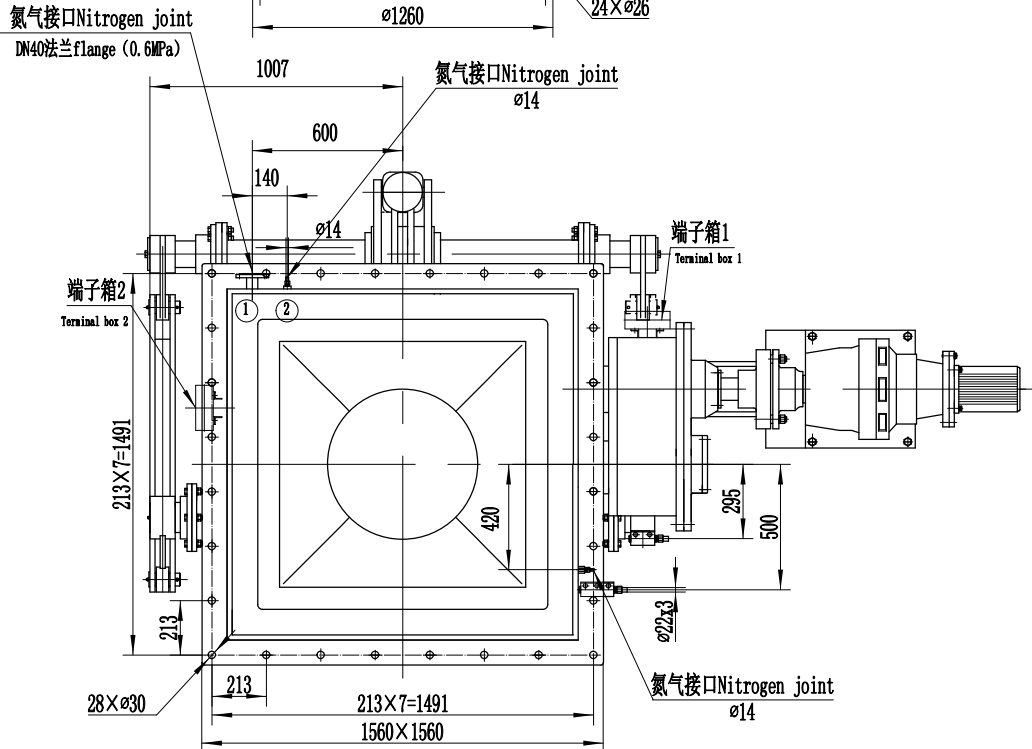
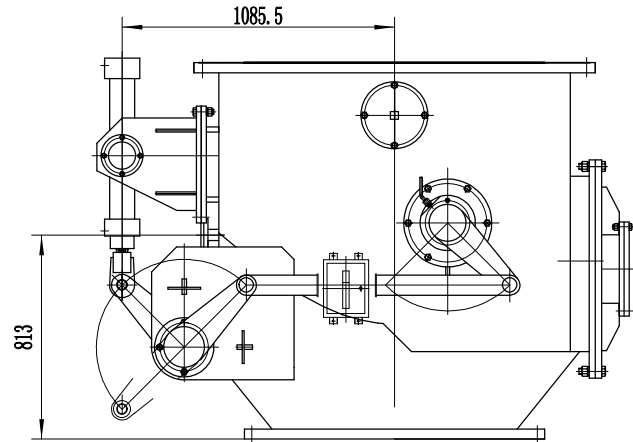


00'50CZMH

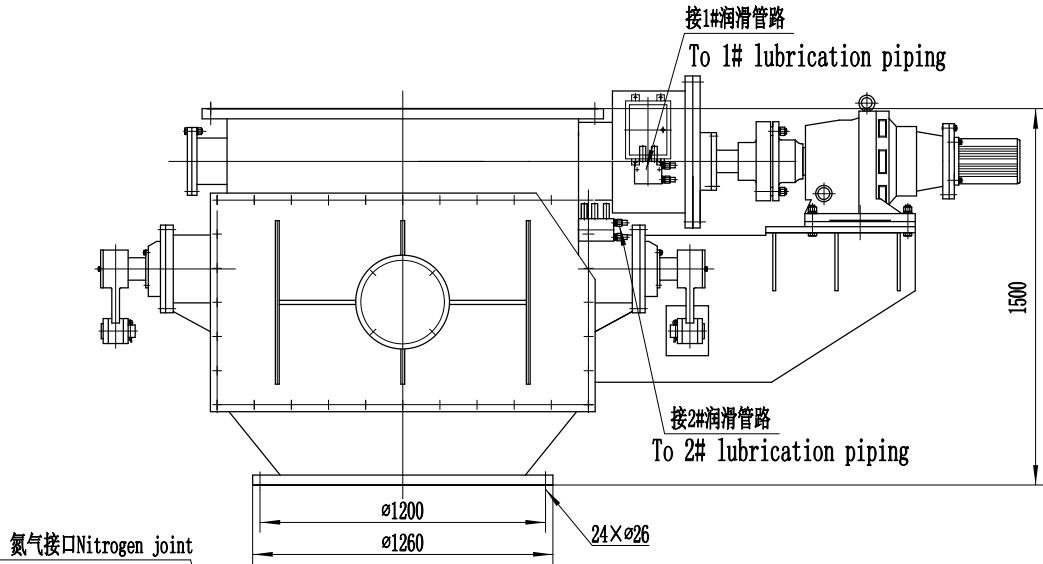

接口位置说明Notes on the position of the joints:

序号No.	接口名称Name of the joint	法兰尺寸Size of the flange	数量Qty	接口位置Position of the joint	状态Status	备注Status
1	氮气接口Nitrogen joint	DN40法兰flange (0.6MPa)	1	中心线距下法兰面The distance between the center line and the lower flange is 813 mm.	紧急情况下打开Open in emergency	
2	氮气接口Nitrogen joint	ø14焊接接头ø14 welded joint	1	中心线距下法兰面The distance between the center line and the lower flange is 813 mm.	常开Normal open	
3	氮气接口Nitrogen joint	ø14焊接接头ø14 welded joint	1	中心线距下法兰面The distance between the center line and the lower flange is 1460 mm.	常开Normal open	

端子箱说明Notes on the terminal box:

序号No.	名称name	数量Qty	接线说明Notes on wiring	备注Status
1	端子箱1Terminal box 1	1	γ角编码器1个、料流检测接近开关2个Lower sealing assembly: one γ-angle encoder, and two proximity switches for the charge flow	
2	端子箱2Terminal box 2	1	密封阀检测接近开关2个2 proximity switches for the sealing valves	

借 (通) 用
件 登 记

旧底图总号

底图总号

签 字

日 期

档案员 日期

河北华远冶金设备有限公司
HEBEI HUAYUAN METALLURGICAL
EQUIPMENT MANUFACTURING CO., LTD

下密封组合外形图External diagram
of the lower sealing assembly

HYWZC05.00

REV.	Designer	Checked By	Standard	Mark	Quantity	Weight	Scale
	贾卫东		Approved by				1:1
	Verified by		Date	Sheet	of		