

Netolerirane mjere na fazoni: ± 0.05 mm Untoleranced dimensions of cavity: $\pm 0.05mm$

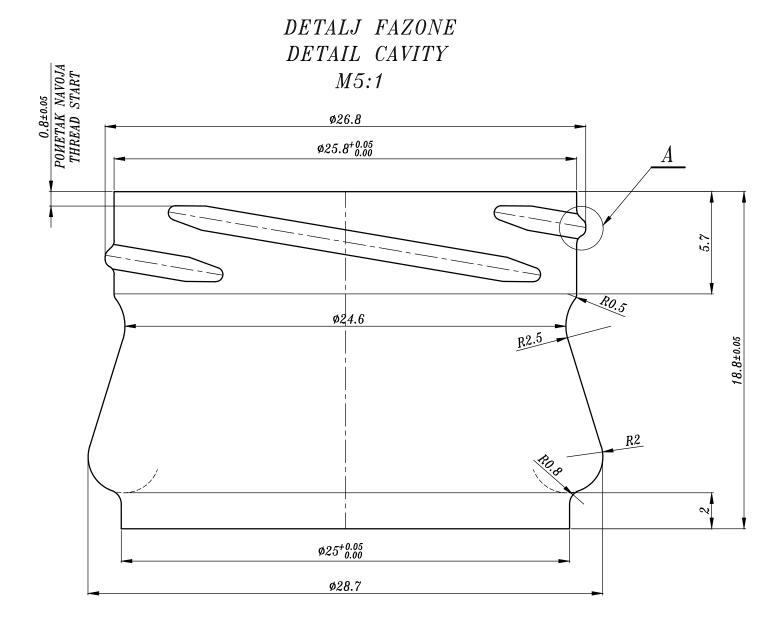

DETALJ ADETAIL A M10:1



KORAK: 9.4mm

PITCH:

GLODALO: Ø12.7mm CUTTER:

KUT NAVOJA: 6°30'


HELIX ANGLE:

KUT GLODALA 6°30' CUTTER ANGLE:

BROJ NAVOJA: 4

HELIX NR.:

Razvijen navoj Developed thread

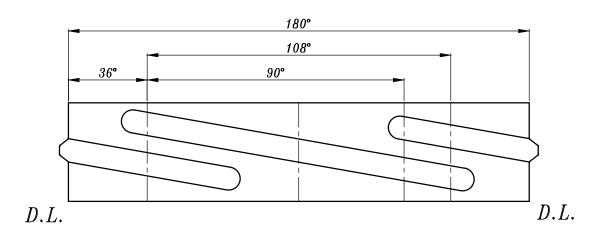

L02069

| | | | | | FAZONA GRLA | | | | |
|-------|-------------------------|-----------|----------|---------------------------------|-------------|---------------|---------------------|--------------|------------|
| | | | | Kom. | Naziv | Naziv dijela | | Materijal | Dimenzija |
| | | | | | Datum | lme i prezime | | | |
| | | | | Konstr. | 17.03.15. | НІиріж | oMCoi | | |
| | | | | Crtao | 17.03.15. | НІиріж | | | |
| | | | | Pregl. | 17.03.15. | TEPE? | | | |
| | | | | Stroj: HEYE -IS- 5" DG | | | Naziv PRE | | VIST 500ml |
| а | izmjena profila navoja; | 19.03.15. | НІиріж | Proces: pre?ano — puhano (NNPB) | | | | Kupac: GOMEL | |
| Index | Revizija | Datum | Izmjenio | Mjerilo: 1:1 | | | Broj | nacrta: | 06-05A |