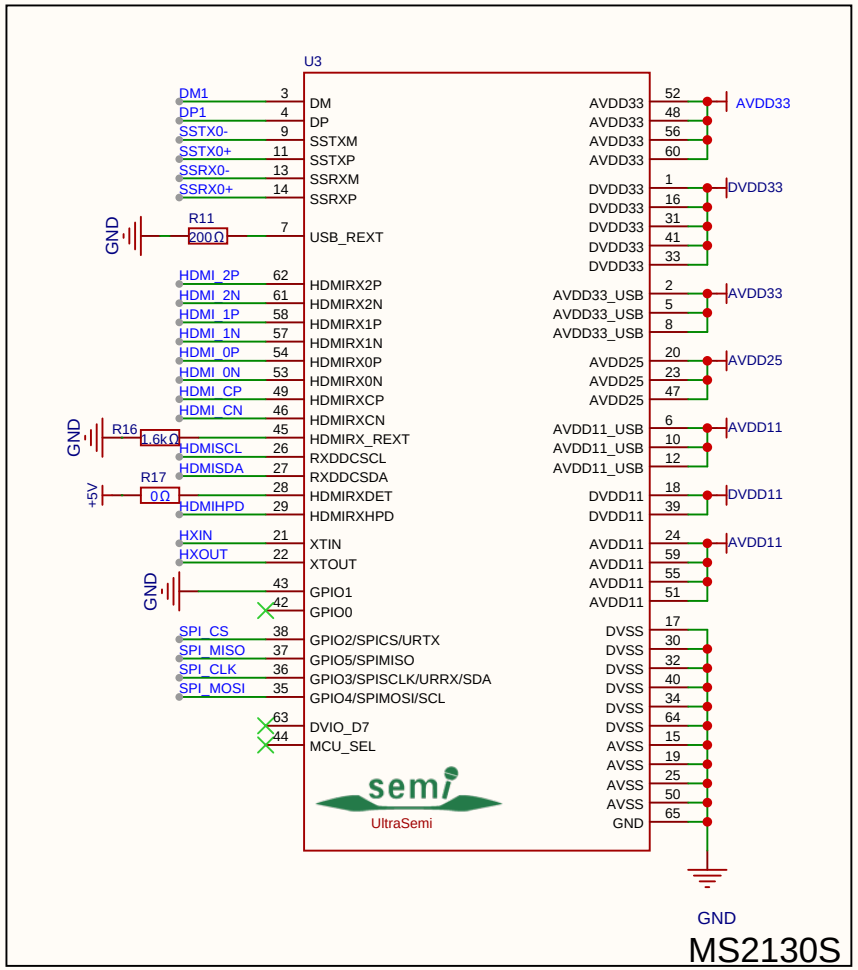

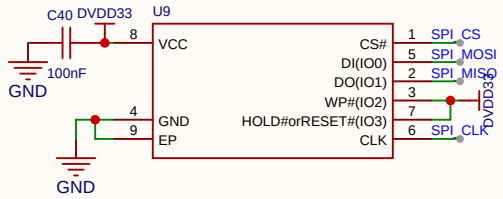

W25Q16

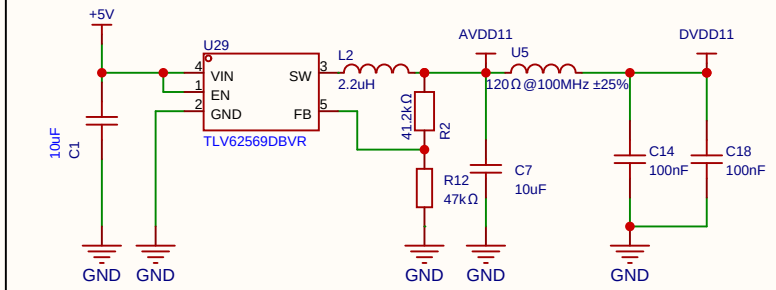

5V-1.1V

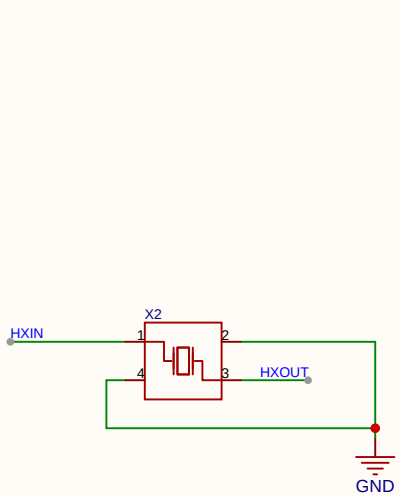

24MHz

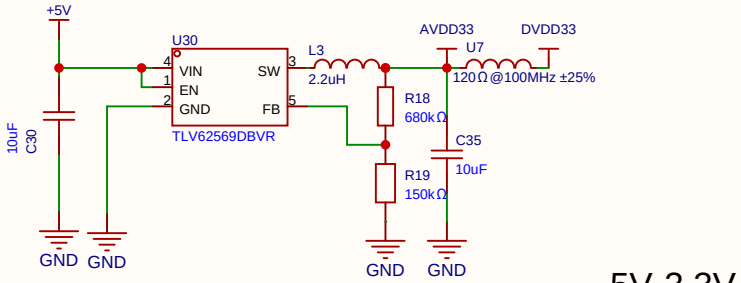

5V-3.3V



5V-2.5V

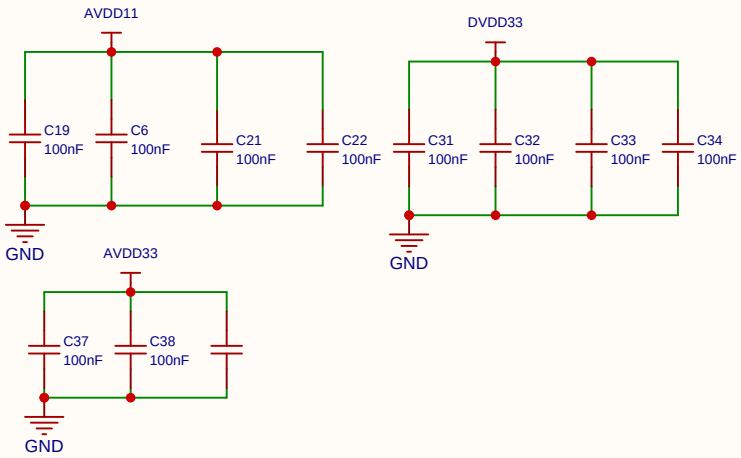

Schematic	KVM-GO DP V1.0	Updated by	2026-01-16
		Created by	2026-01-08
Page Name	video capture	BOM	
Drawd by	Wilson Yu	Openterface KVM-GO DP	
Reviewed by			
		Version	Page Size
openterface		V1.0	A4
		Page 1 / 3	
		TechxArtisan	

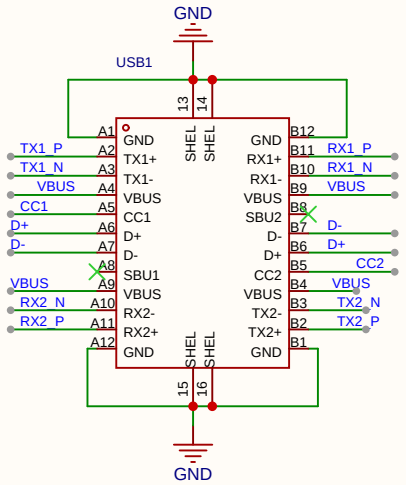

USB3.0

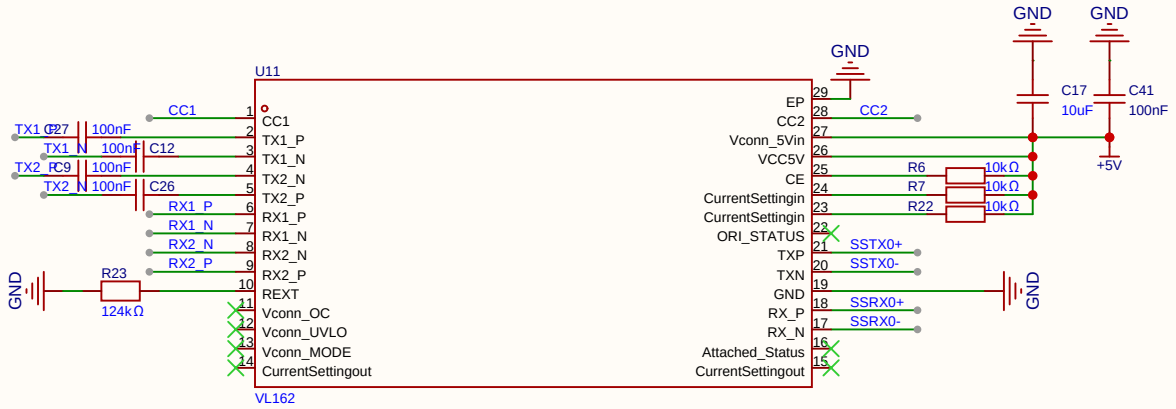

VL162



PRTR5V

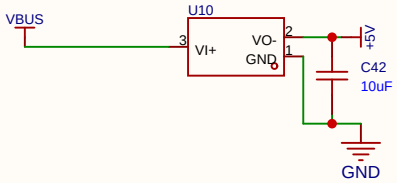

CH213K



Schematic	KVM-GO DP V1.0	Updated by	2026-01-14
		Created by	2026-01-12
Page Name	Type-c	BOM	
Drawd by	Wilson Yu	Openterface KVM-GO DP	
Reviewed by			
		Version	Page Size
openterface		V1.0	A4
		Page 2 / 3	
		TechxArtisan	

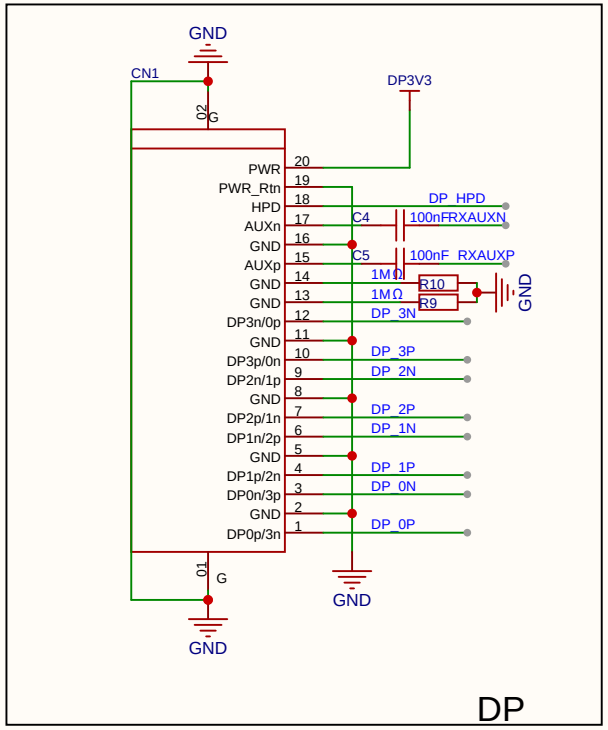
CN1
GND
DP3V3
PWR
PWR_Rtn
HPD
AUXn
GND
AUXp
GND
GND
DP3n/0p
GND
DP3p/0n
DP2n/1p
GND
DP2p/1n
DP1n/2p
GND
DP1p/2n
DP0n/3p
GND
DP0p/3n
DP_HPD
C4
100nF
RXAUXN
C5
100nF
RXAUXP
1MΩ
R10
1MΩ
R9
DP_3N
DP_3P
DP_2N
DP_2P
DP_1N
DP_1P
DP_0N
DP_0P
DP
27MHz
C11
18pF
C15
18pF
X1
27MHz
XTALOUT
XTALIN
IT6563FN
U2
IT6563FN
R1 4.7kΩ
R3 1MΩ
R4 1MΩ
R13 10.5kΩ
R14 10kΩ
R15 22kΩ
C16 1uF
RX0P
RX0N
RXAVDD10
RX1P
RX1N
RX2P
RX2N
RXAVDD10
RX3P
RX3N
RXAVDD33
ASPVCC33
ASPVCC10
XTALOUT
TX2P
TX2M
TX1P
TX1M
TAVCC10
TX0P
TX0M
TXCP
TXCM
REXT
TPVCC10
TPVCC33
CEC
SCK/MCLK
HDMI_2P
HDMI_2N
HDMI_1P
HDMI_1N
HDMI_0P
HDMI_0N
HDMI_CP
HDMI_CN
AVDD10
VDD33
IT6563
U31
TLV62569DBVR
VIN
EN
GND
SW
FB
L1
2.2uH
R5 150kΩ
R8 220kΩ
C2 10uF
C3 10uF
3.3V-1.0V
FB2
FB4
FB1
FB3
C13
C20 100nF
C23 100nF
C24 100nF
C25 100nF
C8
C10
C28 100nF
C29
ESD
Schematic
KVM-GO DP V1.0
Updated by
2026-01-16
Created by
2026-01-08
Page Name
DP to HDMI
BOM
Drawd by
Wilson Yu
Reviewed by
Openterface KVM-GO DP
Version
V1.0
Page Size
A4
Page 3 / 3
TechxArtisan
openterface