


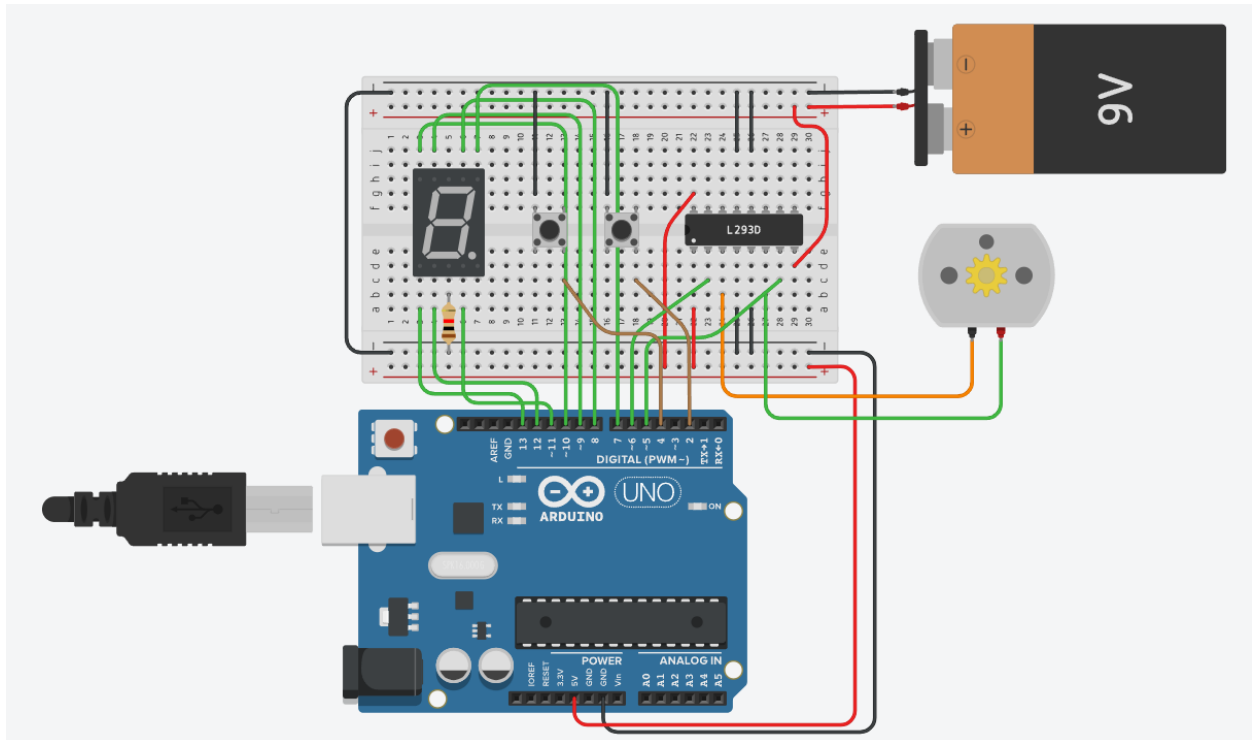

Code:

```
int pin[] = {8, 7, 11, 12, 13, 9, 10};
int digit[10][7] = {
  {HIGH, HIGH, HIGH, HIGH, HIGH, HIGH, LOW}, // 0
  {LOW, HIGH, HIGH, LOW, LOW, LOW, LOW}, // 1
  {HIGH, HIGH, LOW, HIGH, HIGH, LOW, HIGH}, // 2
  {HIGH, HIGH, HIGH, HIGH, LOW, LOW, HIGH}, // 3
  {LOW, HIGH, HIGH, LOW, LOW, HIGH, HIGH}, // 4
  {HIGH, LOW, HIGH, HIGH, LOW, HIGH, HIGH}, // 5
  {HIGH, LOW, HIGH, HIGH, HIGH, HIGH, HIGH}, // 6
  {HIGH, HIGH, HIGH, LOW, LOW, LOW, LOW}, // 7
  {HIGH, HIGH, HIGH, HIGH, HIGH, HIGH, HIGH}, // 8
  {HIGH, HIGH, HIGH, HIGH, LOW, HIGH, HIGH} // 9
};

int currentNumber = 0;

void setup() {
  for (int i = 0; i < 7; i++) {
    pinMode(pin[i], OUTPUT);
  }

  pinMode(2, INPUT_PULLUP);
  pinMode(4, INPUT_PULLUP);
  pinMode(5, OUTPUT);
  pinMode(6, OUTPUT);
}
```

```
displayDigit(currentNumber);
updateMotorSpeed();
}

void loop() {
  if (digitalRead(2) == LOW) {
    delay(100);
    if (currentNumber < 9) {
      currentNumber++;
    } else {
      currentNumber = 0;
    }
    displayDigit(currentNumber);
    updateMotorSpeed();
  }

  if (digitalRead(4) == LOW) {
    delay(100);
    if (currentNumber > 0) {
      currentNumber--;
    } else {
      currentNumber = 9;
    }
    displayDigit(currentNumber);
    updateMotorSpeed();
  }
}

void displayDigit(int digitToShow) {
  for (int i = 0; i < 7; i++) {
    digitalWrite(pin[i], digit[digitToShow][i]);
  }
}

void updateMotorSpeed() {
  int pwmValue = map(currentNumber, 0, 9, 0, 255);
  analogWrite(5, pwmValue);
}
```