


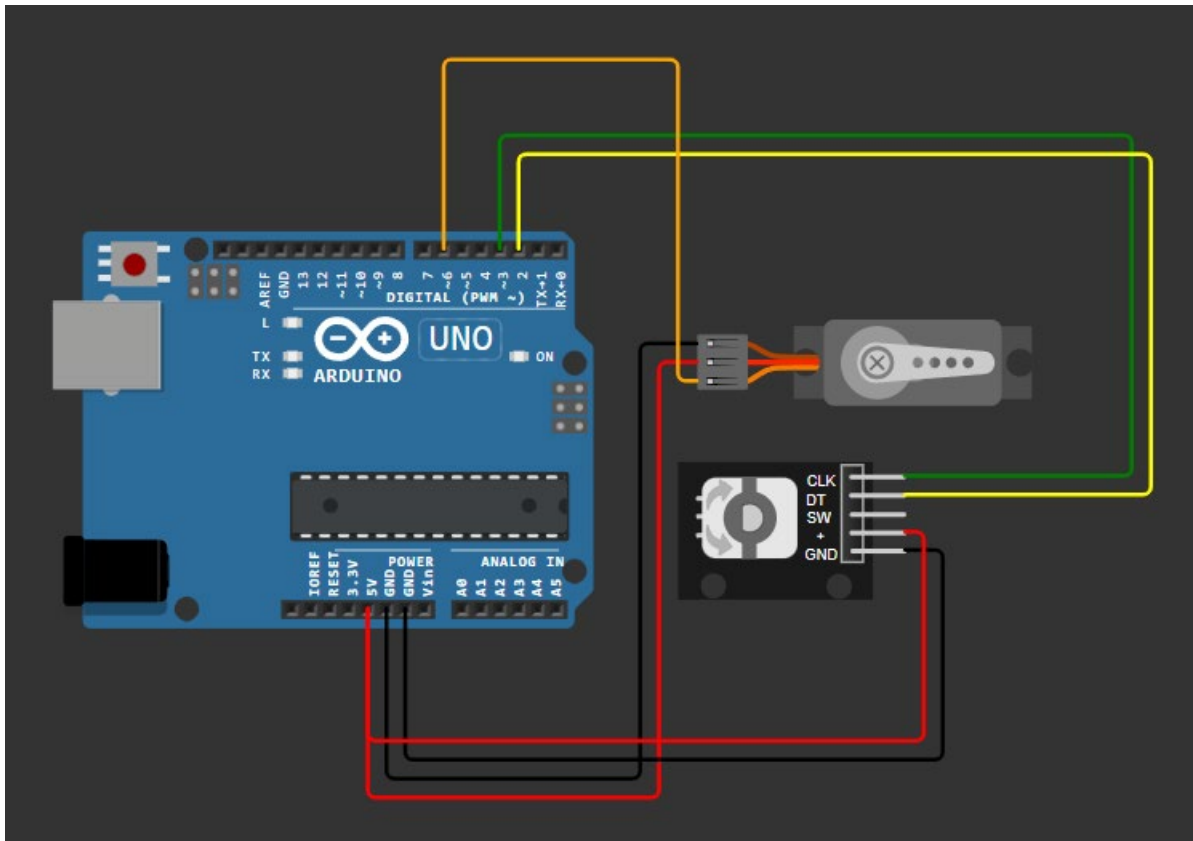

```
#include <Servo.h>

const int PinA = 3;
const int PinB = 2;
const int ServoPin = 6;

volatile int encoderPosition = 90;
volatile bool rotatingClockwise = true;

Servo myServo;

void setup() {
  pinMode(PinA, INPUT_PULLUP);
  pinMode(PinB, INPUT_PULLUP);

  attachInterrupt(digitalPinToInterrupt(PinA), handleRotation, FALLING);

  myServo.attach(ServoPin);
  myServo.write(encoderPosition);

  Serial.begin(9600);
}

void loop() {
  static int lastReportedPosition = -1;

  encoderPosition = constrain(encoderPosition, 0, 180);

  if (lastReportedPosition != encoderPosition) {
```

```
myServo.write(encoderPosition);

Serial.print("Servo Position: ");
Serial.println(encoderPosition);

    lastReportedPosition = encoderPosition;
}
}

void handleRotation() {
    if (digitalRead(PinB) == HIGH) {
        encoderPosition++;
    } else {
        encoderPosition--;
    }
}
```