


R-AeroTunnel

R-AeroTunnel is an industrial UHF RFID inventory tunnel system designed for automated high-throughput item identification on a conveyor line.

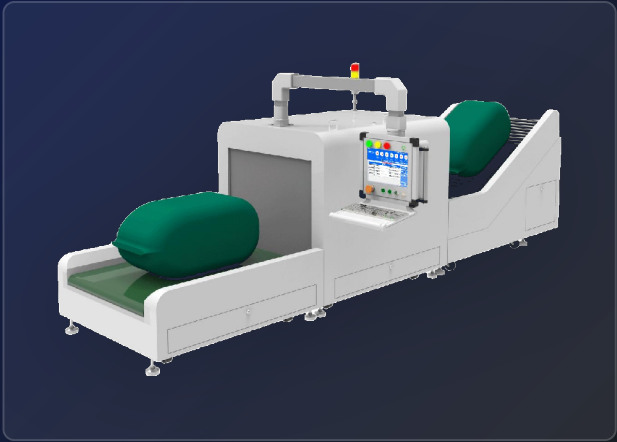

SPECIFICATION

Identification Method	UHF
RF Chip	Impinj R2000
Frequency Range	840MHz-960MHz adjustable
Protocol	EPC C1G2, ISO 18000-6B, ISO 18000-6C
Frequency Band (Optional)	ETSI: 865-868MHz, JP: 916.8-920.4MHz, TW: 922.25-927.75MHz, ID: 923.125-925.125MHz, RUS: 866.6-867.4MHz, TEST: 802.75-998.75MHz, JP_LBT: 916.8-920.8MHz
RFID Item Reader Power	33dbm +/- 1dbm (Max)
Read Rate	3 seconds
RFID Item Reader Capacity	400+ pcs
Function	RFID read function, multiple label identification, label data filtering, quantity statistics

HARDWARE SPECIFICATION

System Support	Windows / Android (optional)
Hardware	I5 CPU, 4G RAM, 128G ROM; RK3399 CPU, 4G RAM, 16G ROM (optional)
Display	1280 x 800, 10.1-inch capacitive touch screen
Communication	RJ45, RS232, USB

FUNCTION SELECTION

Sound Light Alarm	Standard
CCTV Camera	Optional
Wireless Network	WiFi / 4G

BASIC SPECIFICATION

Material	Sheet metal spray paint
Conveyor Speed	33-50 cm/s
Bearing Capacity	50kg (Max)
Power Supply	AC 110-220V 100W
Working Humidity	10%RH-90%RH
Operat Temperature	0 deg C ~ 60 deg C
Size	850mm*1277mm*3391mm
Weight	about 300 kg




FEATURE HIGHLIGHTS

- 10.1-inch capacitive touch screen with 1280 x 800 resolution
- 840-960 MHz UHF RFID technology with protocol extension support
- Multiple communication interfaces including RJ45, RS232 and USB
- Supports multiple devices operating in parallel
- Real-time list generation on screen for easier management
- Optional Windows or Android system support

PRODUCT GROUP

Category	RFID Inventory Tunnel System
Product Group	RFID Gate Product

PRODUCT VIEWS

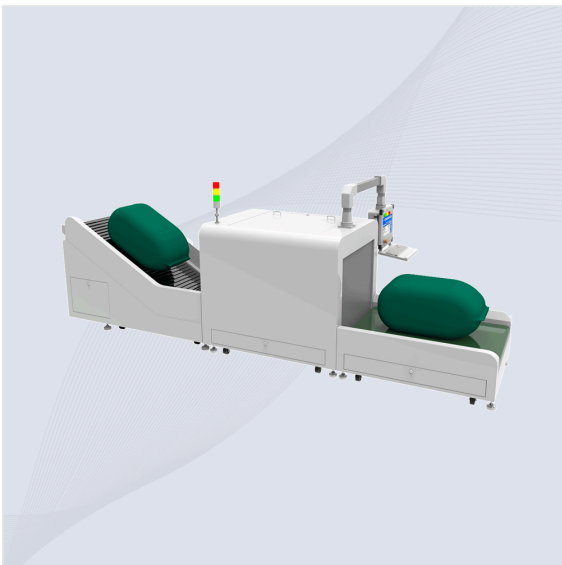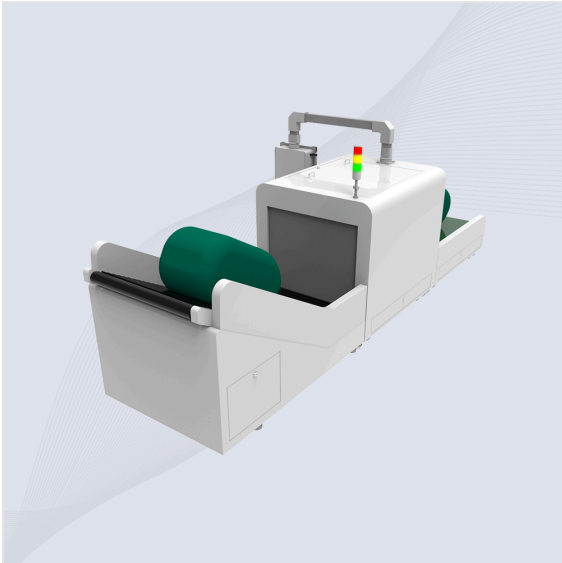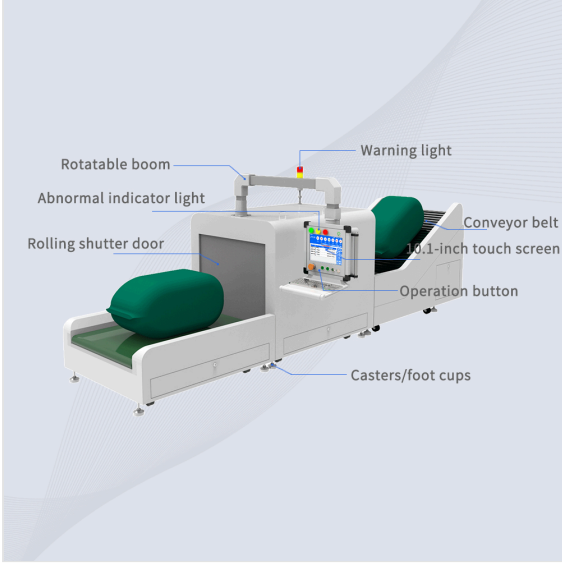

DIMENSION

