

R-BoxTunnel

R-BoxTunnel is a tunnel-type batch RFID reader machine for rapid, accurate scanning of tagged items in tool rooms, workshops and logistics warehouses.



RF SPECIFICATION

Identification Method	UHF
RF Chip	Impinj R2000
Frequency Range	840MHz-960MHz adjustable
Protocol	EPC C1G2, ISO 18000-6B, ISO 18000-6C
Frequency Band (Optional)	ETSI: 865-868MHz, JP: 916.8-920.4MHz, TW: 922.25-927.75MHz, ID: 923.125-925.125MHz, RUS: 866.6-867.4MHz, TEST: 802.75-998.75MHz, JP_LBT: 916.8-920.8MHz
Product Capacity	1000 pcs (according of item size)
Recognition Response	1-5 seconds
Function	RFID read function, multiple label identification, label data filtering, RSSI perception, quantity statistics

HARDWARE SPECIFICATION

System Support	Windows / Android (optional)
Hardware	I5 CPU, 4G RAM, 128G ROM; RK3399 CPU, 4G RAM, 16G ROM (optional)
Display	1366 x 768, 10.1-inch capacitive touch screen
Communication	RJ45 / RS232

FUNCTION SELECTION

RFID Card Reader	Standard
Bar Code	Optional
QR Code	Optional
Fingerprint Recognition	Optional
Face Recognition	Optional
CCTV Camera	Optional
Solar Energy	Optional
Sound Light Alarm	Optional
Wireless Network	WiFi / 4G

BASIC SPECIFICATION

Material	Carbon steel plate, Glass
Power Supply	AC 110-220V 50Hz 50W
Working Humidity	10%RH-90%RH
Operat Temperature	0 deg C ~ 60 deg C
Size	164 x 150 x 238.2 cm
Weight	about 150kg



FEATURE HIGHLIGHTS

- 10.1-inch colorful touch screen with 1366 x 768 resolution
- 840-960 MHz UHF RFID technology with protocol extension support
- Multiple interfaces including RJ45, RS232, WiFi, 4G and alarm input
- Integrated audible and visual alarm
- Safety automatic rolling shutter door
- Supports face recognition and space sensor options


PRODUCT GROUP

Category	Industrial Inventory RFID Channel Machine
Product Group	RFID Gate Product

PRODUCT VIEWS

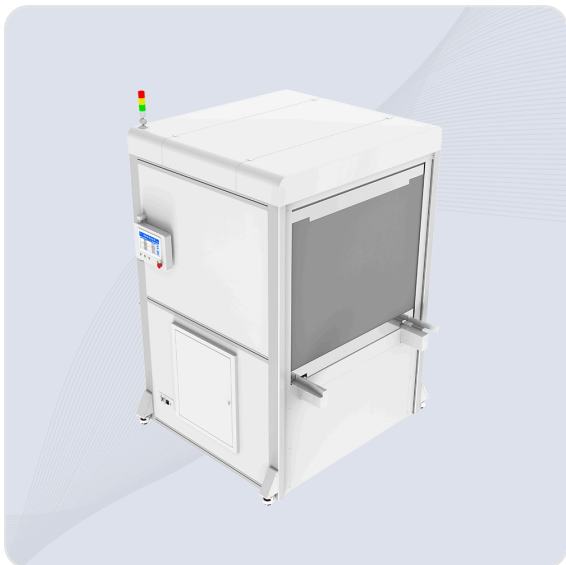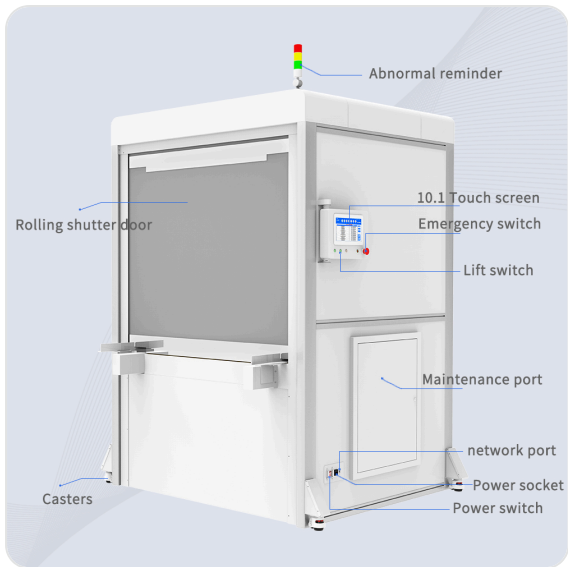

DIMENSION

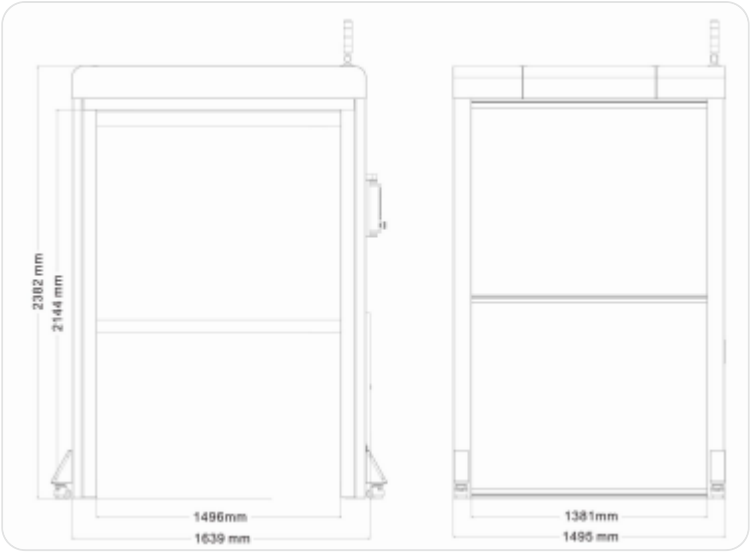

Unit : mm (inch)
Weight : about 150kg