

R-WideTunnel

R-WideTunnel is a UHF RFID conveyor tunnel reader designed for high-volume item counting, incoming and outgoing goods review and automated inventory workflows.



TECHNICAL SPECIFICATION

OS	Windows (Android optional)
Industrial Personal Computer	I5, 4G+128; RK3399, 4G+16G
Identification Technology	RFID (UHF)
Reading Speed	100pcs/s
Transmission Speed	Default 20m/min, adjustable up to 30m/min
Maximum Load	80kg
Box Reading Speed	6-10 box/min
Conveyor Belt	3 independent part
Door Opening Speed	1.2s

UHF RFID

Frequency Range	840MHz-960MHz
Protocol	ISO 18000-6C (EPC C1 G2)
RFID Chip	Impinj R2000
RFID Frequency Mode	Fixed frequency / frequency hopping
Output Power	33dbm +/- 1dBm
Tag Reading Quantity	>=800 pcs
Read Rate	3-5s
Read Mode	Static
Working Mode	Cycle / trigger

PHYSICAL SPECIFICATIONS

Material	1.2mm thick carbon steel
Screen	10-inch touch screen
Dimension	1025mm*1875mm*4022mm
Carton Dimension	900*700*550mm

POWER SUPPLY

Working Power	Maximum power 250W, standby power 120W
Working Voltage	AC 220V

OPERATING ENVIRONMENT

Storage Temperature	-20 deg C - 60 deg C
Working Temperature	-20 deg C - 60 deg C



FEATURE HIGHLIGHTS

- Identifies more than 400 items within 3 seconds
- Real-time list generation on the display screen
- Professional motion control and mechanical design
- Electromagnetic shielding and RF optimization for accurate reading
- Three independent conveyor belt sections
- Supports abnormal sorting module expansion


PRODUCT GROUP

Category	UHF Conveyor Tunnel Reader
Product Group	RFID Gate Product


PRODUCT VIEWS

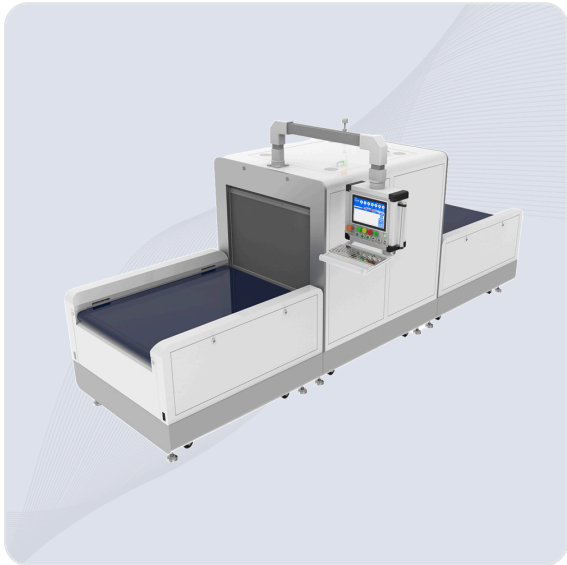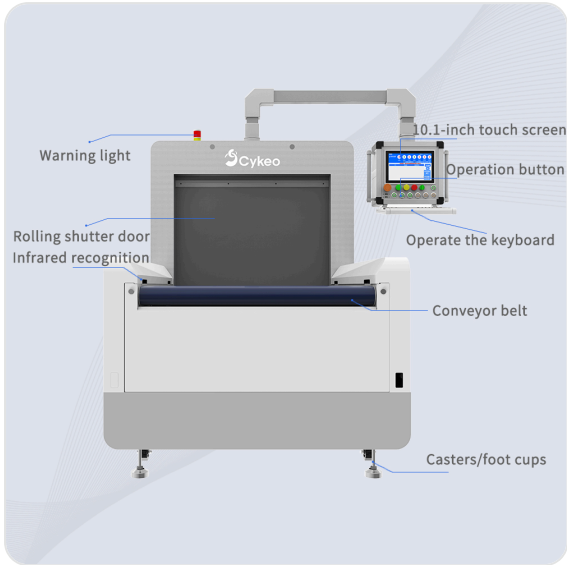

PRODUCT VIEWS

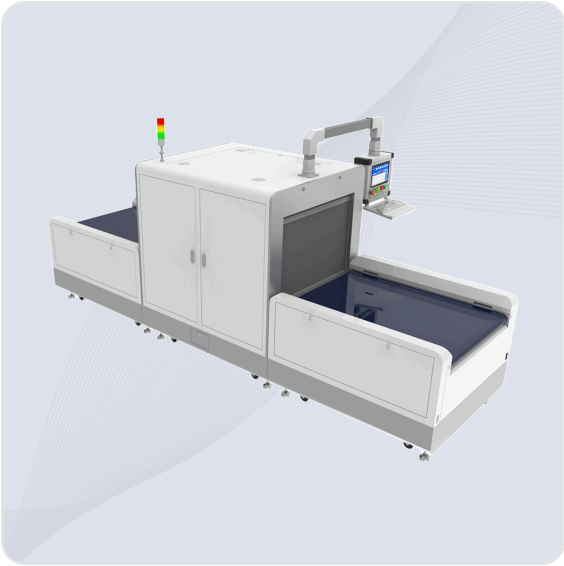


DIMENSION

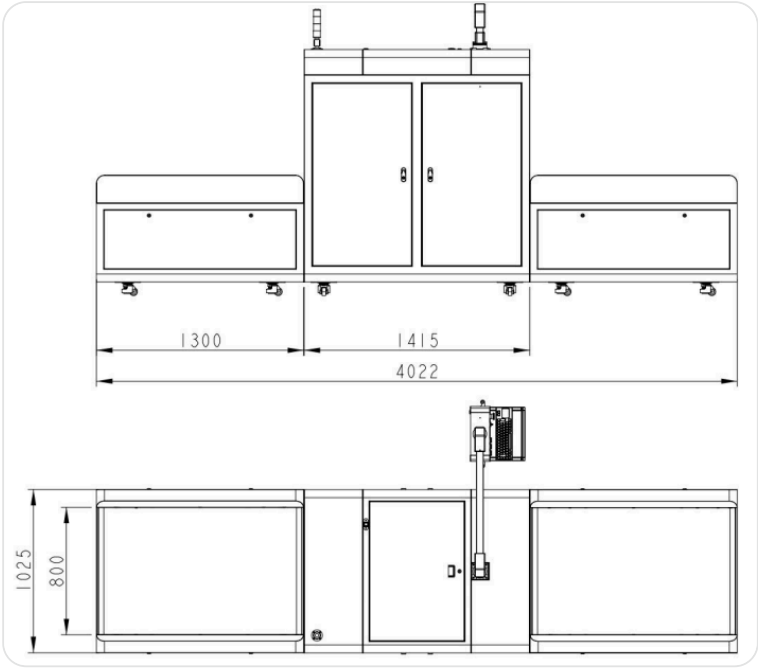

Unit : mm (inch)

DIMENSION

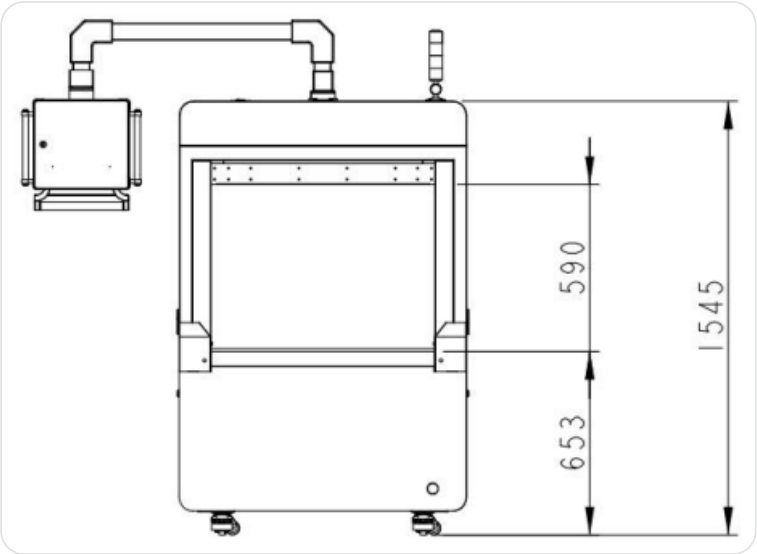

Unit : mm (inch)