


Avery Dennison AD-192
M730 UHF RFID Inlay

Tiny 22 × 12.5 mm Gen2 UHF RFID inlay with Impinj M730 Strap Attach chip featuring autotune technology. Specially designed for jewelry, cosmetics and small item-level tagging with 100% performance testing.

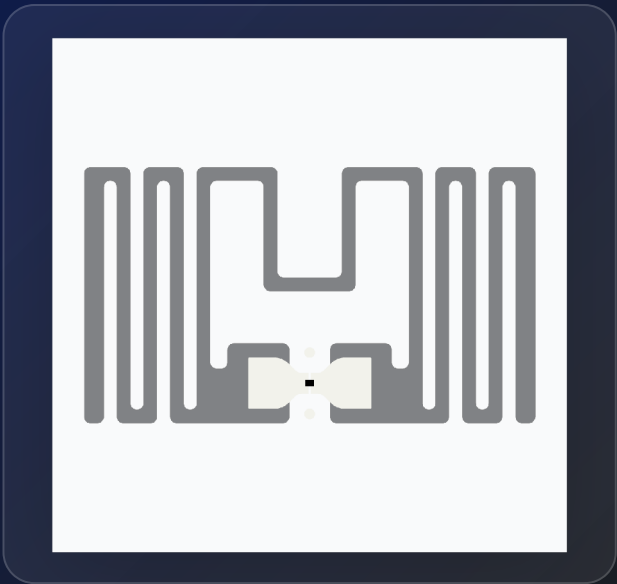

RFID SPECIFICATION

Chip	Impinj M730
IC Attachment Technology	Strap Attach
Standard	ISO 18000-63, EPC Class 1 Gen 2
Frequency Band	UHF 860–960 MHz
EPC Memory	128-bit
TID Memory	96-bit / 48-bit unique serial number
On-Metal	Non metal
RoHS	EU Directive 2011/65/EC and Directive (EU) 2015/863
REACH	Regulation (EC) No 1907/2006

PHYSICAL SPECIFICATION

Antenna Dimensions	22 × 12.5 mm / 0.9 × 0.5 in
Dry Inlay (RF602397 / IL-607934)	40# Paper substrate — pitch 38.1 mm — web 36.83 mm
Wet Inlay (RF602398 / IL-605202)	24 × 15.5 mm die-cut — 40# Paper — pitch 38.1 mm
Label (RF101097 / IL-605854)	31.75 × 15.5 mm — TT2C Bright White — pitch 38.1 mm
Core Size	76 mm / 3 in
Operating Temperature	-40°C to +85°C

FEATURE HIGHLIGHTS

- Impinj M730 chip with autotune for peak efficiency in changing environments
- 128-bit EPC memory and 96-bit TID with 48-bit unique serial number
- Tiny 22 × 12.5 mm form factor for small hang-tags and cosmetic items
- 100% performance tested
- Available in dry inlay, wet inlay and label delivery formats
- RoHS and REACH compliant
- ISO 9001:2015 and ISO 14001:2015 certified

PRODUCT GROUP

Category	UHF RFID Inlay
Product Group	RFID Label / Inlay