


Avery Dennison AD-23x U9 Pure 95™ UHF RFID Inlay

Sustainable 70 × 14.5 mm Gen2 UHF RFID inlay with NXP UCODE 9, featuring up to 95% plastic-free construction with pure aluminum antenna. Delivers 70–90% carbon footprint savings vs. traditional etching and is certified recyclable.

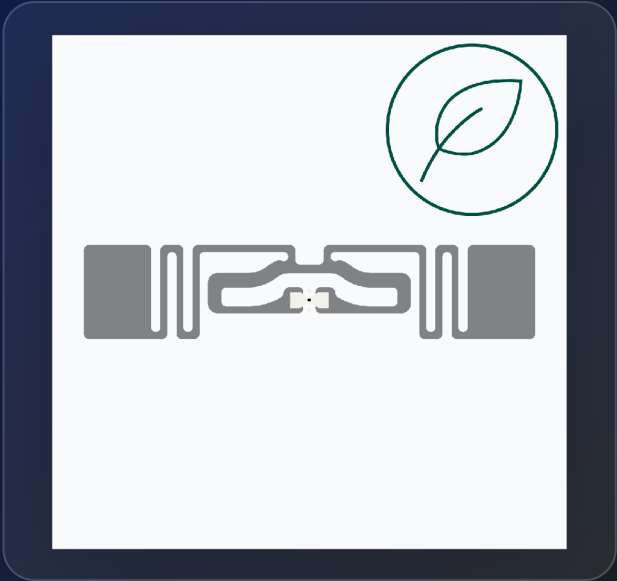

RFID SPECIFICATION

Chip	NXP UCODE 9
IC Attachment Technology	Strap Attach
Standard	ISO/IEC 18000-63 Type C
Frequency Band	UHF 860–960 MHz
EPC Memory	96-bit
TID Memory	96-bit / 48-bit unique serial number
On-Metal	Non metal
RoHS	EU Directive 2011/65/EU and 2015/863 Compliant
REACH	Regulation (EC) No. 1907/2006

PHYSICAL SPECIFICATION

Antenna Dimensions	70 × 14.5 mm / 2.756 × 0.571 in
Die-Cut Dimension	76 × 20 mm
Wet Inlay (IL-607854)	40# Paper substrate — 5,767 pcs/reel — MAX OD 13"
Label (IL-612802)	40# Paper + TT2C face sheet — 6,300 pcs/reel — MAX OD 9"
Web Width	82.55 mm / 3.25 in
Core Size	76.2 mm / 3 in
Operating Temperature	-40°C to +85°C

SUSTAINABILITY

Plastic-Free Content	Up to 95% plastic-free (wet inlay and label formats)
Antenna Material	Pure aluminum (replaces PET aluminum laminate)
Carbon Footprint Savings	Typically 70–90% vs. traditional etching methods
EU Recyclability	PTS-RH 021:97/2012 certified
US Recyclability	SBS-E Part I (repulpability) and Part II (recyclability)

FEATURE HIGHLIGHTS

- Up to 95% plastic-free construction – pure aluminum antenna replaces PET laminate
- 70–90% carbon footprint savings vs. traditional etching methods
- EU and US paper recyclability certified (PTS-RH021:97/2012, SBS-E)
- NXP UCODE 9 with 96-bit EPC memory and 96-bit TID
- Available in wet inlay and pressure sensitive label formats
- RoHS and REACH compliant
- ARC accredited quality by RFID Lab at Auburn University

PRODUCT GROUP

Category	UHF RFID Inlay
Product Group	RFID Label / Inlay