


Confidex Casey RFID Label

Industrial-grade UHF RFID label with Impinj Monza R6-P IC, optimized for glass and plastic surfaces. Delivers exceptional read ranges up to 16 m on plastic for large-scale inventory and asset management applications.

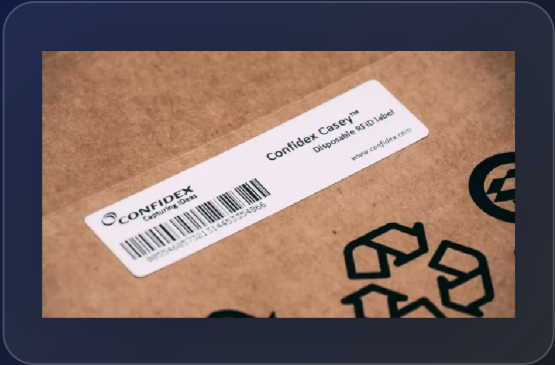

RFID SPECIFICATION

Protocol	EPCglobal UHF Class 1 Gen 2v2 (ISO 18000-6C)
Integrated Circuit	Impinj Monza R6-P
Operating Frequency	865–928 MHz (Global)
Read Range (2W ERP)	Up to 16 m on plastic

PHYSICAL SPECIFICATION

Dimensions	92 × 24 × 0.2 mm
Material	Printable white synthetic face layer
Adhesive	Permanent acrylic adhesive
Delivery Format	Reel
Applicable Surfaces	Glass, plastic, non-metal

ENVIRONMENTAL RESISTANCE

Operating Temperature	-35°C to +85°C / -31°F to +185°F
IP Classification	IP68
Chemical Resistance	Salt water, motor oil, sulfuric acid (10%), NaOH (10%)
Expected Lifetime	Years in normal operating conditions

FEATURE HIGHLIGHTS

- Impinj Monza R6-P IC – 865–928 MHz global operation
- Industry-leading read range up to 16 m on plastic
- IP68 waterproof with chemical resistance
- 92 × 24 mm printable white synthetic face label
- Applications: industrial use, inventory tracking, asset management

PRODUCT GROUP

Category	UHF RFID Label
Product Group	RFID Label / Tag