


Confidex Heatwave Tough RFID Tag

High-temperature resistant UHF RFID tag with NXP UCODE 7xm+ IC for metallic surfaces. Built from special epoxy-based composite, it withstands peak temperatures up to 250°C for 50 minutes – ideal for automotive paint shop drying cycles.

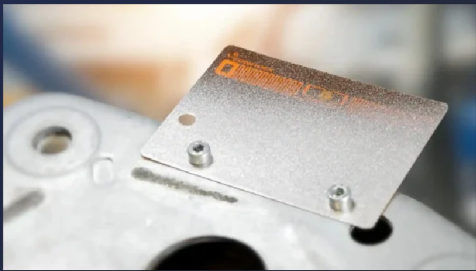

RFID SPECIFICATION

Protocol	UHF RFID / EPCglobal Gen2v2
Integrated Circuit	NXP UCODE 7xm+
Operating Frequency – ETSI	865–869 MHz
Operating Frequency – FCC	902–928 MHz
EPC Memory	448 bit
User Memory	2048 bit
TID Memory	96 bit
Digital Signature	384 bit
EPC Content	Unique number encoded
Read Range – on metal	Up to 9 m / 30 ft
Read Range – on plastic	Up to 2 m / 7 ft

PHYSICAL SPECIFICATION

Dimensions	50 × 30 × 3 mm / 1.97 × 1.18 × 0.12 in
Tag Materials	Special epoxy-based engineering composite for extreme temperatures
Attachment	Acrylic foam adhesive (optional), polyurethane/epoxy adhesives, silicone sealants
Weight	9.5 g
Amount in Box	100 pcs
Delivery Format	Single

ENVIRONMENTAL RESISTANCE

Operating Temperature	-40°C to +85°C / -40°F to +185°F
Peak Temperature	250°C / 482°F for 50 minutes
IP Classification	IP68
Chemical Resistance	168h salt water (10%), motor oil, acetone; 24h sulfuric acid (10%), NaOH (10%)
Expected Lifetime	Years in normal conditions; designed for paint shop drying cycles

FEATURE HIGHLIGHTS

- Withstands peak temperature 250°C / 482°F for 50 minutes
- NXP UCODE 7xm+ IC – 2048-bit User Memory with 384-bit digital signature
- Read range up to 9 m on metal (ETSI/FCC)
- IP68 waterproof – chemical resistant to acetone, acids and oils
- Special epoxy-based composite – 50 × 30 × 3 mm compact form factor
- ETSI 865–869 MHz and FCC 902–928 MHz variants available

PRODUCT GROUP

Category	UHF RFID Hard Tag
Product Group	RFID Label / Tag