


## R-OverHeadR

R-OverHeadR is a UHF phased array RFID smart gate system designed for real-time retail merchandise monitoring, anti-theft protection and store management integration.

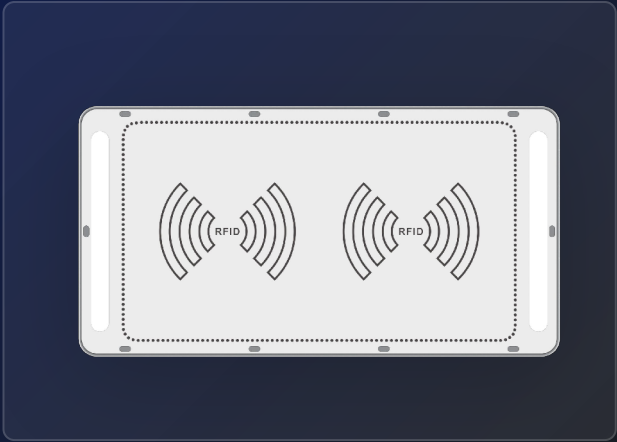

### RF SPECIFICATION

|                           |                                                                                                                                                        |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Identification Method     | UHF                                                                                                                                                    |
| RF Chip                   | Impinj R2000                                                                                                                                           |
| Frequency Range           | 840MHz-960MHz adjustable                                                                                                                               |
| Protocol                  | PC C1G2, ISO 18000-6B, ISO 18000-6C                                                                                                                    |
| Frequency Band (Optional) | 840MHz-960MHz (Adjustable)                                                                                                                             |
| Read Distance             | 0-5M                                                                                                                                                   |
| Function                  | RFID read function, multiple label identification, label data filtering, quantity statistics, spatially induced triggering, RSSI perception, EAS alarm |

### HARDWARE SPECIFICATION

|                        |                                                  |
|------------------------|--------------------------------------------------|
| RF Output Power (port) | 33dBm +/- 1dBm (MAX)                             |
| Tag recognition speed  | >500 times/second                                |
| Beam Scanning Interval | 5 degrees                                        |
| Coverage Angle         | 90 degrees (Horizontal) / 120 degrees (Vertical) |
| Beamforming Time       | 5 microseconds                                   |
| Alarm Type             | Sound & Light                                    |

BASIC SPECIFICATION

|                    |                         |
|--------------------|-------------------------|
| Material           | Carbon steel plate      |
| Power Supply       | DC12V/5A                |
| Humidity           | 5%-95% (Non-Condensing) |
| Operat Temperature | -20 deg C ~ 60 deg C    |
| Size               | 350mm x 670mm x 168mm   |




FEATURE HIGHLIGHTS

- Strong group reading capability with reading distance up to 5 m
- 0.3 second reading speed for high-traffic retail environments
- 840-960 MHz UHF RFID technology with protocol extension support
- Multiple interfaces including RJ45, RS232, WiFi, 4G and alarm input
- Integrated audible and visual alarm with online/offline EAS alarm support
- 120 degree phased array tracking with 9 adaptive beams
- Customizable product appearance, functions and protocols


PRODUCT GROUP

|               |                        |
|---------------|------------------------|
| Category      | RFID Smart Gate System |
| Product Group | RFID Gate Product      |

## PRODUCT VIEWS

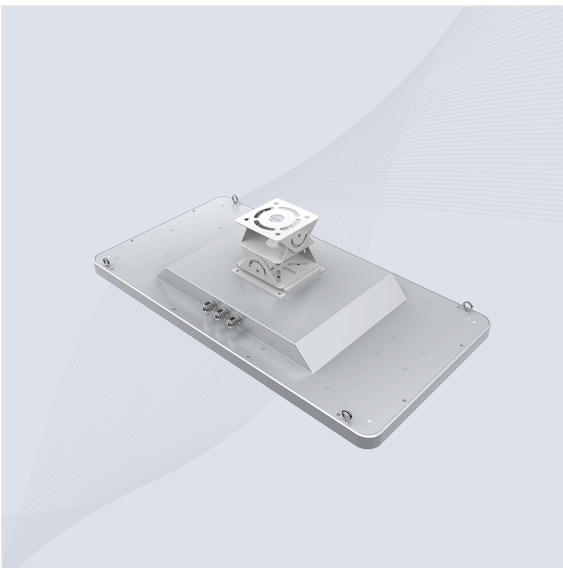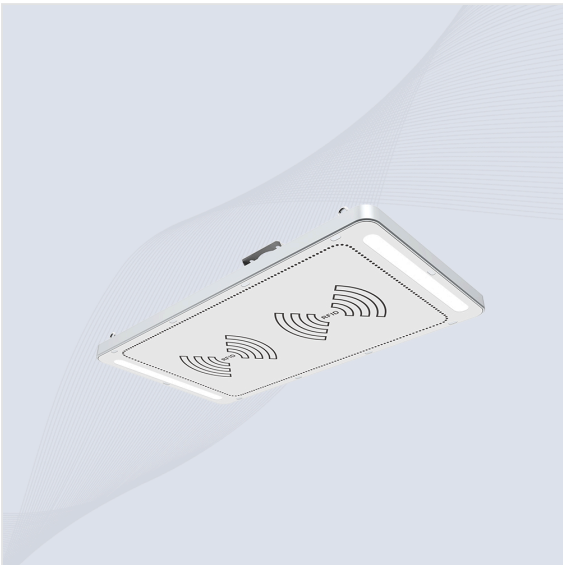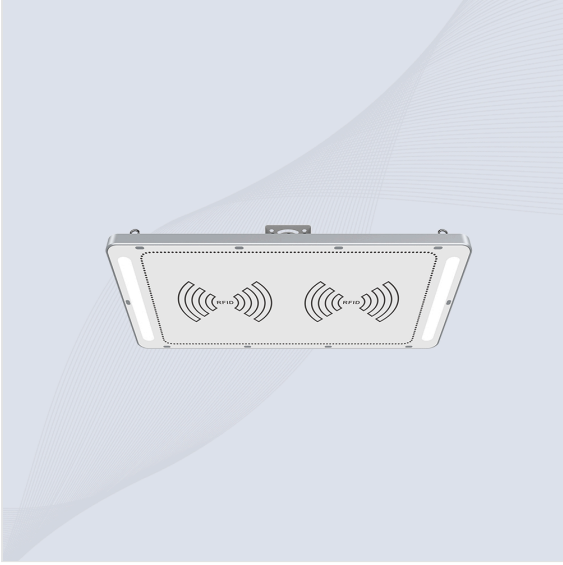

DIMENSION

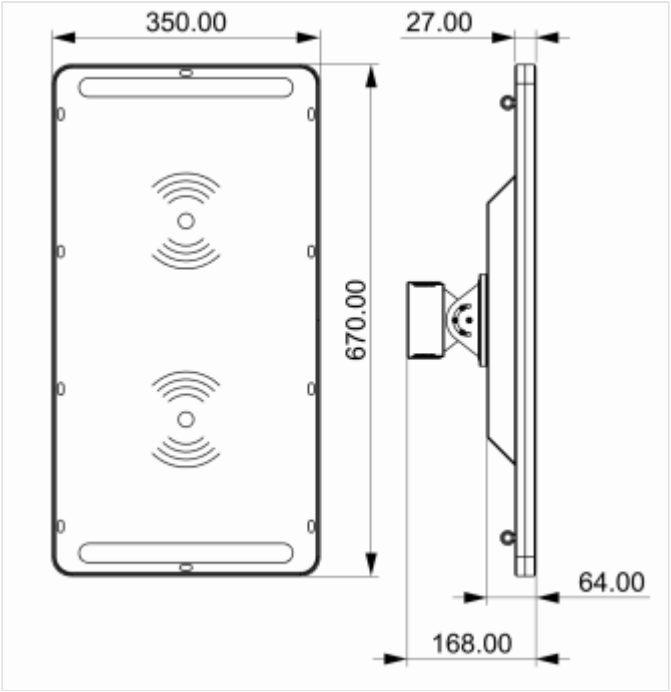

Unit : mm (inch)