


Avery Dennison AD-239 M730 UHF RFID Inlay

High-performance 70 × 14.5 mm Gen2 UHF RFID inlay with Impinj M730 Strap Attach chip. Suitable for supply chain, inventory & logistics, apparel and home essentials with ARC-certified quality.

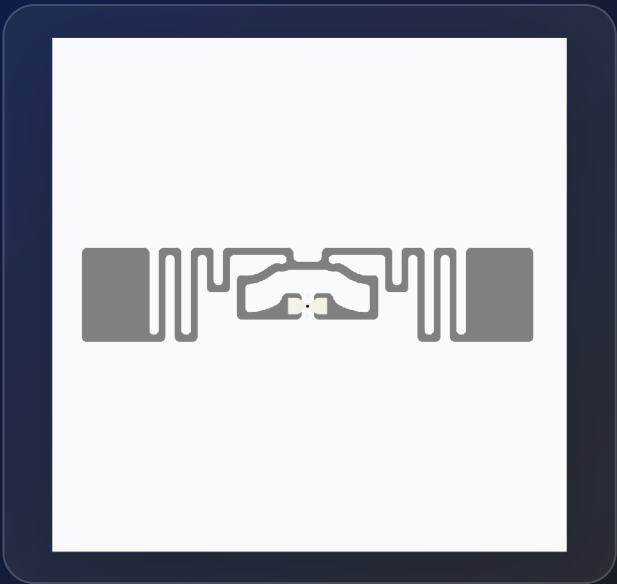

RFID SPECIFICATION

Chip	Impinj M730
IC Attachment Technology	Strap Attach
Standard	ISO 18000-63, EPC Class 1 Gen 2
Frequency Band	UHF 860–960 MHz
EPC Memory	128-bit
TID Memory	96-bit / 48-bit unique serial number
On-Metal	Non metal
Certificate	ARC (Spec N, Q, G, F, L, J, I, K, W1–W6)
RoHS	EU Directive 2011/65/EC and Directive (EU) 2015/863

PHYSICAL SPECIFICATION

Antenna Dimensions	70 × 14.5 mm / 2.76 × 0.57 in
Dry Inlay (RF602386 / IL-605262)	40# Paper substrate — pitch 38.1 mm — web 82.5 mm
Wet Inlay (RF602387 / IL-605608)	76 × 20 mm die-cut — 40# Paper — MAX OD 13"
Label (RF101088 / IL-606128)	76 × 20 mm — TT2C Bright White — MAX OD 8"
Core Size	76.2 mm / 3 in
Operating Temperature	-40°C to +85°C

FEATURE HIGHLIGHTS

- Impinj M730 chip with Strap Attach technology
- 128-bit EPC memory and 96-bit factory-locked TID with 48-bit unique serial number
- 70 × 14.5 mm footprint – maximum performance on given form factor
- Available in dry inlay, wet inlay and label formats
- ARC certified (multiple Spec compliance including N, Q, G, F, L, J, I, K, W1–W6)
- RoHS compliant – EU Directive 2011/65/EC and Directive (EU) 2015/863

PRODUCT GROUP

Category	UHF RFID Inlay
Product Group	RFID Label / Inlay