


altis teknoloji

pursuing perfection with you

Avery Dennison AD-23x
U9 UHF RFID Inlay

High-performance 70 × 14.5 mm Gen2 UHF RFID inlay with NXP UCODE 9. Delivers maximum performance for supply chain, inventory & logistics, apparel and brand protection applications with comprehensive ARC certification.

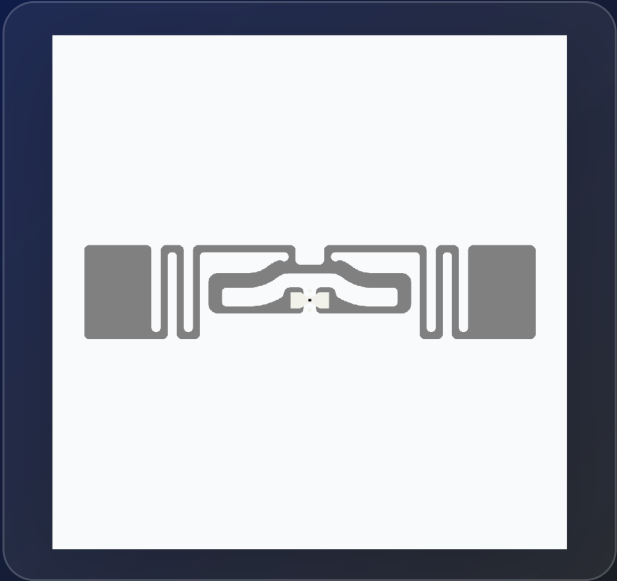

RFID SPECIFICATION

Chip	NXP UCODE 9
Standard	ISO/IEC 18000-63 Type C
Frequency Band	UHF 860–960 MHz
EPC Memory	96-bit
TID Memory	96-bit / 48-bit unique serial number
On-Metal	Non metal
Certificate	ARC (Spec N, Q, M, G, F, L, J, I, K, W1–W6)
RoHS	EU Directive 2011/65/EU and 2015/863 Compliant

PHYSICAL SPECIFICATION

Antenna Dimensions	70 × 14.5 mm / 2.76 × 0.57 in
Dry Inlay (RF602327 / IL-607121)	40# Paper substrate — 12,390 pcs/reel (13" max OD)
Wet Inlay (RF602328 / IL-605267)	76 × 20 mm die-cut — 40# Paper — 11,377 pcs/reel (13" max OD)
Label (RF101055 / IL-605489)	76 × 20 mm — TT2C Bright White — 3,154 pcs/reel (8" max OD)
Web Width	82.5 mm / 3.25 in
Core Size	76 mm / 3 in
Operating Temperature	-40°C to +85°C

FEATURE HIGHLIGHTS

- NXP UCODE 9 chip with 96-bit EPC memory and 96-bit factory-locked TID
- 48-bit unique serial number factory-encoded into TID
- 70 × 14.5 mm footprint – die-cut 76 × 20 mm
- Available in dry inlay, wet inlay and pressure sensitive label
- Comprehensive ARC certification (Spec N, Q, M, G, F, L, J, I, K, W1–W6)
- RoHS compliant – EU Directive 2011/65/EU and 2015/863

PRODUCT GROUP

Category	UHF RFID Inlay
Product Group	RFID Label / Inlay