


Avery Dennison AD-238u8 UHF RFID Inlay

High-performance 70 × 14.5 mm Gen2 UHF RFID inlay powered by NXP UCODE 8 chip, suitable for supply chain, inventory & logistics, apparel and home essentials. ARC-certified quality manufactured to the highest industry standards.

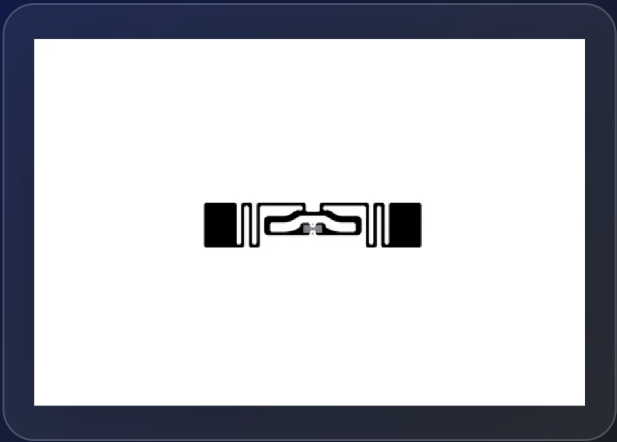

RFID SPECIFICATION

Chip	NXP UCODE 8
Standard	ISO/IEC 18000-63 Type C
Frequency Band	UHF 860–960 MHz
EPC Memory	128-bit
TID Memory	96-bit / 48-bit unique serial number
On-Metal	Non metal
Certificate	ARC (RFID Lab, Auburn University)
RoHS	EU Directive 2011/65/EU and 2015/863 Compliant

PHYSICAL SPECIFICATION

Antenna Dimensions	70 × 14.5 mm / 2.76 × 0.57 in
Dry Inlay (RF600958)	PET substrate — 40,000 pcs/reel — pitch 22.23 mm
Wet Inlay (RF600959)	73 × 17 mm die-cut — PET substrate — 10,000 pcs/reel
Label / Sticker (RF100413)	76 × 20 mm — 40# Paper + TT2C Bright White — 3,154 pcs/reel
Core Size (Dry)	152 mm / 6 in
Core Size (Wet / Label)	76 mm / 3 in
Operating Temperature	-40°C to +85°C

FEATURE HIGHLIGHTS

- NXP UCODE 8 chip with 128-bit EPC memory and 96-bit factory-locked TID
- 48-bit unique serial number factory-encoded into TID
- Compact 70 × 14.5 mm footprint for space-constrained applications
- Available in dry inlay, wet inlay and pressure sensitive label formats
- ARC accredited quality by RFID Lab at Auburn University
- Operating temperature -40°C to +85°C
- RoHS compliant – EU Directive 2011/65/EU and 2015/863

PRODUCT GROUP

Category	UHF RFID Inlay
Product Group	RFID Label / Inlay