


Avery Dennison AD-324u8 FCC UHF RFID Inlay

Versatile 41.4 × 16 mm Gen2 UHF RFID inlay optimized for FCC frequency band (902–928 MHz) with NXP UCODE 8. Ideal for supply chain, inventory & logistics, apparel and pharmaceutical & healthcare applications.

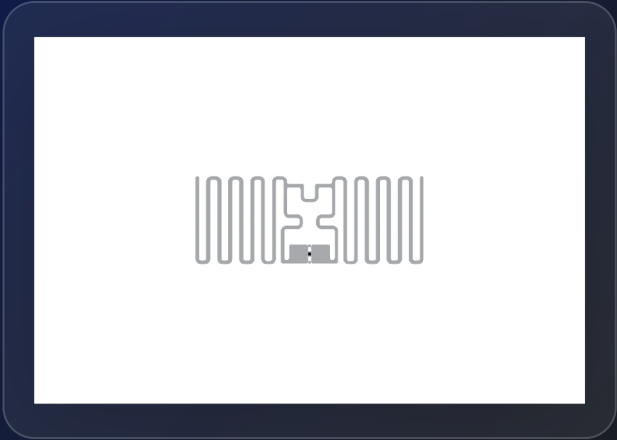

RFID SPECIFICATION

Chip	NXP UCODE 8
Standard	ISO/IEC 18000-63 Type C
Frequency Band	UHF 860–960 MHz (FCC optimized: 902–928 MHz)
EPC Memory	128-bit
TID Memory	96-bit / 48-bit unique serial number
On-Metal	Non metal
Certificate	ARC (RFID Lab, Auburn University)
RoHS	EU Directive 2011/65/EU and 2015/863 Compliant

PHYSICAL SPECIFICATION

Antenna Dimensions	41 × 16 mm / 1.63 × 0.63 in
Die-cut Dimension	44 × 19 mm / 1.75 × 0.75 in
Dry Inlay (RF601478)	38um Paper — 20,000 pcs/reel
Wet Inlay (RF601480)	38um Paper — 20,000 pcs/reel
Label / Sticker (RF100606)	5 pt Paper substrate — 5,966 pcs/reel
Web Width	50.8 mm / 2 in
Core Size	76 mm / 3 in
Operating Temperature	-40°C to +85°C

FEATURE HIGHLIGHTS

- NXP UCODE 8 chip with 128-bit EPC memory and 96-bit TID
- FCC optimized (902–928 MHz); ETSI-specific design also available
- Supports Perma-LOCK and Kill Command per EPC global V.2.0.1
- 48-bit unique serial number factory-encoded into TID
- Compact 41.4 × 16 mm footprint – die-cut 44 × 19 mm
- Available in dry inlay, wet inlay and paper label formats
- ARC accredited quality – RoHS EU Directive 2011/65/EU and 2015/863 Compliant

PRODUCT GROUP

Category	UHF RFID Inlay
Product Group	RFID Label / Inlay