


Avery Dennison AD-385u8 UHF RFID Inlay

High-performing 50 × 30 mm Gen2 UHF RFID inlay combining performance and versatility with NXP UCODE 8 chip. Available in wide-edge and narrow-edge leading formats for supply chain, logistics and apparel.

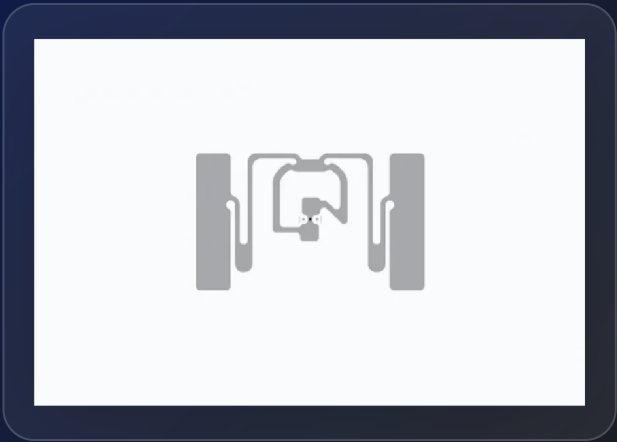

RFID SPECIFICATION

Chip	NXP UCODE 8
Standard	ISO/IEC 18000-63 Type C
Frequency Band	UHF 860–960 MHz
EPC Memory	128-bit
TID Memory	96-bit (48-bit unique serial number)
Access Password	32-bit
Kill Password	32-bit
On-Metal	Non metal
Certificate	ARC (RFID Lab, Auburn University)
RoHS	EU Directive 2011/65/EU and 2015/863 Compliant

PHYSICAL SPECIFICATION

Antenna Dimensions	50 × 30 mm / 1.97 × 1.18 in
Dry Inlay (RF601086)	PET substrate — 15,000 pcs/reel
Wet Inlay (RF601087)	54 × 34 mm die-cut — PET substrate — 10,000 pcs/reel
Label / Sticker (RF100465)	54 × 34 mm — 38um Paper + TT2C Bright White — 2,610 pcs/reel
Web Width	54–58 mm / 2 in
Core Size	76 mm / 3 in
Operating Temperature	-40°C to +85°C

FEATURE HIGHLIGHTS

- NXP UCODE 8 chip with 128-bit EPC memory, 32-bit access and kill passwords
- 96-bit TID with 48-bit unique serial number factory-encoded
- Available in wide-edge leading (WEL) and narrow-edge leading (NEL) formats
- 50 × 30 mm antenna – die-cut 54 × 34 mm (wet and label)
- Available in dry inlay, wet inlay and label / sticker delivery formats
- ARC accredited quality by RFID Lab at Auburn University
- RoHS compliant – EU Directive 2011/65/EU and 2015/863

PRODUCT GROUP

Category	UHF RFID Inlay
Product Group	RFID Label / Inlay