


Confidex Cruiser Headlamp RFID Label

UHF RFID label optimized for vehicle headlamps and plastic surfaces. Engineered to withstand UV radiation and automotive chemicals, delivering read ranges up to 9 m (ETSI) on glass for vehicle tracking applications.

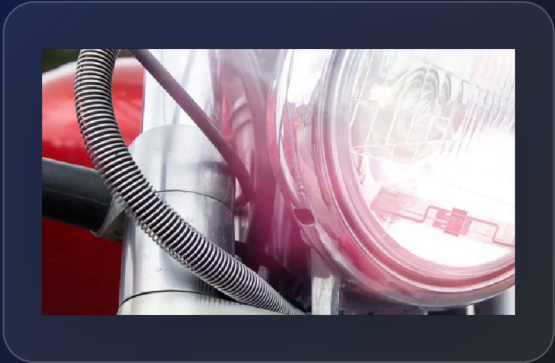

RFID SPECIFICATION

Protocol	ISO 18000-6-3 / EPC Class 1 Gen 2v2
Integrated Circuit	Impinj Monza 4E
Operating Frequency	860–960 MHz (Global)
Read Range – ETSI on glass	Up to 9 m / 30 ft
Read Range – FCC on glass	Up to 10.5 m / 34 ft

PHYSICAL SPECIFICATION

Dimensions	90 × 11.5 × 0.2 mm
Material	Aluminum antenna; transparent PET front
Adhesive	Acrylic adhesive
Delivery Format	Reel
Applicable Surfaces	Glass, plastic

ENVIRONMENTAL RESISTANCE

Operating Temperature	-35°C to +85°C / -31°F to +185°F
UV Resistance	Excellent
Chemical Resistance	Automotive chemicals, salt water, motor oil
Expected Lifetime	Years in normal operating conditions

FEATURE HIGHLIGHTS

- Optimized for vehicle headlamps and windshields
- Impinj Monza 4E IC – 860–960 MHz global operation
- Read range up to 9 m (ETSI) / 10.5 m (FCC) on glass
- UV and automotive chemical resistance
- Transparent PET front – 90 × 11.5 × 0.2 mm slim format
- Applications: automotive tracking, vehicle identification

PRODUCT GROUP

Category	UHF RFID Label
Product Group	RFID Label / Tag