


Confidex LoopTag RFID Label

Printable and versatile UHF RFID loop label designed for hard-to-tag cylindrical assets such as tubes, wires and pipes. Available in 150 mm and 250 mm strap lengths to accommodate a wide range of asset diameters.

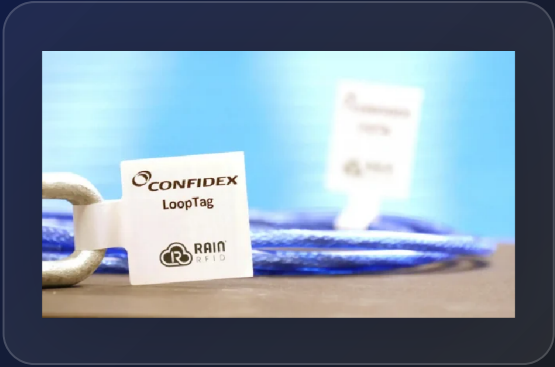

RFID SPECIFICATION

Protocol	EPCglobal Class1 Gen2 ISO 18000-6C
Integrated Circuit	Impinj Monza 4E
Operating Frequency	865–928 MHz (Global)
EPC Memory	496 bit
User Memory	128 bit
TID Memory	96 bit
Read Range – on metal pipe	Up to 7 m / 23 ft
Read Range – on plastic pipe	Up to 5 m / 16 ft
Applicable Surfaces	All materials

PHYSICAL SPECIFICATION

Dimensions (150 mm)	150 × 33 × 0.2 mm / 5.91 × 1.30 × 0.01 in
Dimensions (250 mm)	250 × 33 × 0.2 mm / 9.84 × 1.30 × 0.01 in
Tag Materials	Printable white PET; resin ribbon recommended
Adhesive	Permanent adhesive for general purpose
Weight	<1 g
Amount per Reel	500 pcs
Reel Core Inner Diameter	76 mm / 3 in
Minimum Bending Diameter	50 mm (excluding strap)

ENVIRONMENTAL RESISTANCE

Operating Temperature	-40°C to +85°C / -40°F to +185°F
Water Resistance	IP68 (tested 5h in 1m deep water)
Storage Condition	1 year at +20°C / 50% RH (adhesive shelf life)
Chemical Resistance	168h salt water (10%), motor oil; 24h sulfuric acid (10%), NaOH (10%); 30min acetone
Expected Lifetime	Years in normal operating conditions

FEATURE HIGHLIGHTS

- Loop design for tubes, wires and cylindrical assets
- Impinj Monza 4E IC – 865–928 MHz global operation
- Read range up to 7 m on metal pipe / 5 m on plastic pipe
- IP68 waterproof – chemical resistant
- Available in 150 mm and 250 mm strap lengths
- Printable white PET on 500 pcs/reel

PRODUCT GROUP

Category	UHF RFID Label
Product Group	RFID Label / Tag