


Epozy UHF RFID Tire Tag (Patch)

Durable rubber RFID patch tag designed to be vulcanized onto the sidewall of finished tires. Provides lifetime tire identification with unique ID to prevent theft and cloning for buses, trucks and trailers.

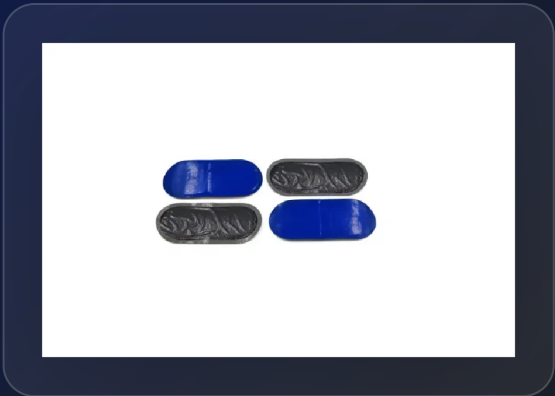

RFID SPECIFICATION

Protocol	EPC C1G2 (ISO18000-6C)
Integrated Circuit	Alien Higgs-3
Operating Frequency	860–960 MHz
EPC Memory	96 bit
User Memory	512 bit
Read Range (2W ERP FCC)	1.08 m

PHYSICAL SPECIFICATION

Dimensions	95 × 35 × 2 mm
Material	Rubber
Weight	5.0 g
Installation	Vulcanizing agent (outside tire sidewall)
Package	120 pcs / box

ENVIRONMENTAL RESISTANCE

Operating Temperature	-40°C to +85°C
IP Classification	IP68

FEATURE HIGHLIGHTS

- Alien Higgs-3 – EPC C1G2 (ISO18000-6C), 860–960 MHz
- Attached by vulcanization – lasts the lifetime of the tire
- IP68 – rubber construction, 95×35×2 mm, 120 pcs/box

PRODUCT GROUP

Category	UHF RFID Tire Tag
Product Group	RFID Label / Tag