


R-AeroTunnel

R-AeroTunnel is an industrial UHF RFID inventory tunnel system designed for automated high-throughput item identification on a conveyor line.

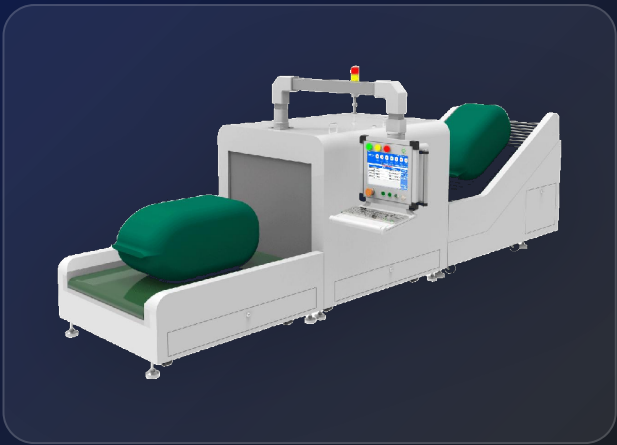

SPECIFICATION

|                           |                                                                                                                                                         |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Identification Method     | UHF                                                                                                                                                     |
| RF Chip                   | Impinj R2000                                                                                                                                            |
| Frequency Range           | 840MHz-960MHz adjustable                                                                                                                                |
| Protocol                  | EPC C1G2, ISO 18000-6B, ISO 18000-6C                                                                                                                    |
| Frequency Band (Optional) | ETSI: 865-868MHz, JP: 916.8-920.4MHz, TW: 922.25-927.75MHz, ID: 923.125-925.125MHz, RUS: 866.6-867.4MHz, TEST: 802.75-998.75MHz, JP_LBT: 916.8-920.8MHz |
| RFID Item Reader Power    | 33dbm +/- 1dbm (Max)                                                                                                                                    |
| Read Rate                 | 3 seconds                                                                                                                                               |
| RFID Item Reader Capacity | 400+ pcs                                                                                                                                                |
| Function                  | RFID read function, multiple label identification, label data filtering, quantity statistics                                                            |

HARDWARE SPECIFICATION

|                |                                                                  |
|----------------|------------------------------------------------------------------|
| System Support | Windows / Android (optional)                                     |
| Hardware       | I5 CPU, 4G RAM, 128G ROM; RK3399 CPU, 4G RAM, 16G ROM (optional) |
| Display        | 1280 x 800, 10.1-inch capacitive touch screen                    |
| Communication  | RJ45, RS232, USB                                                 |

FUNCTION SELECTION

|                   |           |
|-------------------|-----------|
| Sound Light Alarm | Standard  |
| CCTV Camera       | Optional  |
| Wireless Network  | WiFi / 4G |

BASIC SPECIFICATION

|                    |                         |
|--------------------|-------------------------|
| Material           | Sheet metal spray paint |
| Conveyor Speed     | 33-50 cm/s              |
| Bearing Capacity   | 50kg (Max)              |
| Power Supply       | AC 110-220V 100W        |
| Working Humidity   | 10%RH-90%RH             |
| Operat Temperature | 0 deg C ~ 60 deg C      |
| Size               | 850mm*1277mm*3391mm     |
| Weight             | about 300 kg            |




FEATURE HIGHLIGHTS

- 10.1-inch capacitive touch screen with 1280 x 800 resolution
- 840-960 MHz UHF RFID technology with protocol extension support
- Multiple communication interfaces including RJ45, RS232 and USB
- Supports multiple devices operating in parallel
- Real-time list generation on screen for easier management
- Optional Windows or Android system support


PRODUCT GROUP

|               |                              |
|---------------|------------------------------|
| Category      | RFID Inventory Tunnel System |
| Product Group | RFID Gate Product            |

## PRODUCT VIEWS

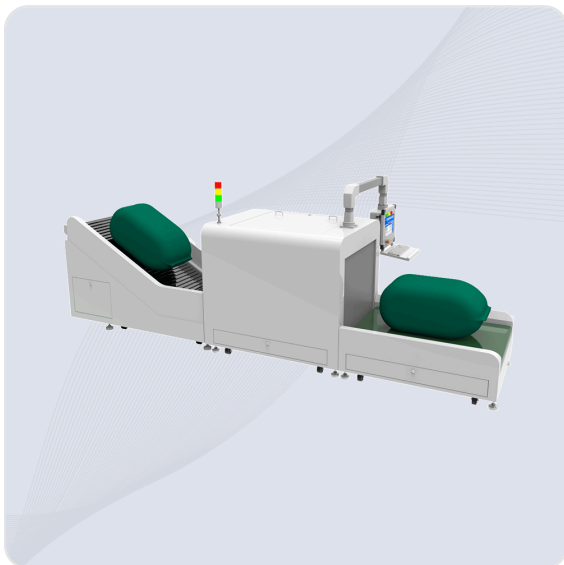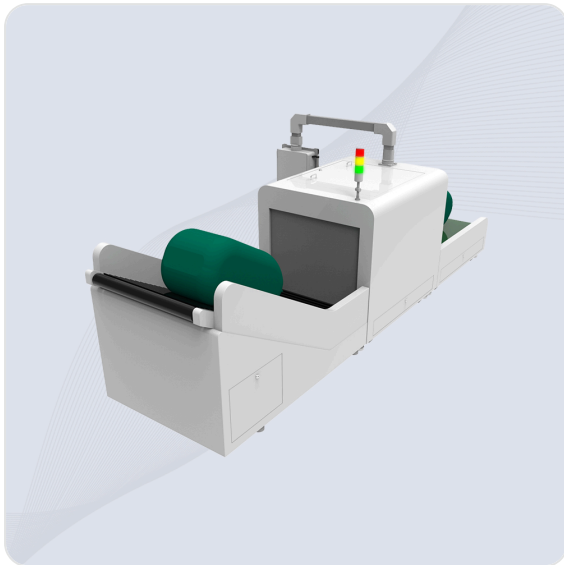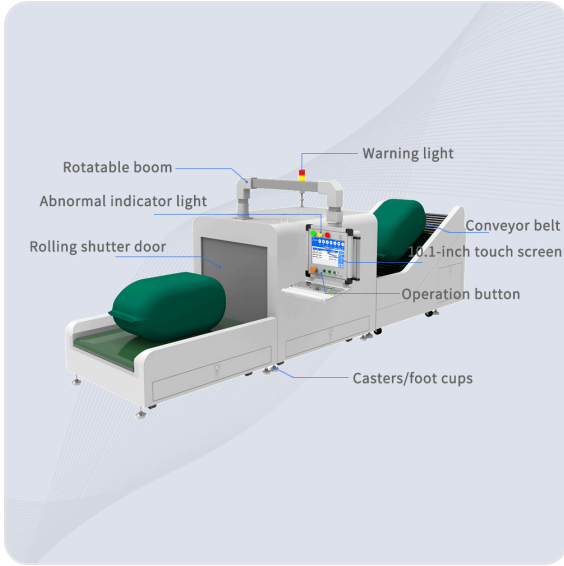

DIMENSION

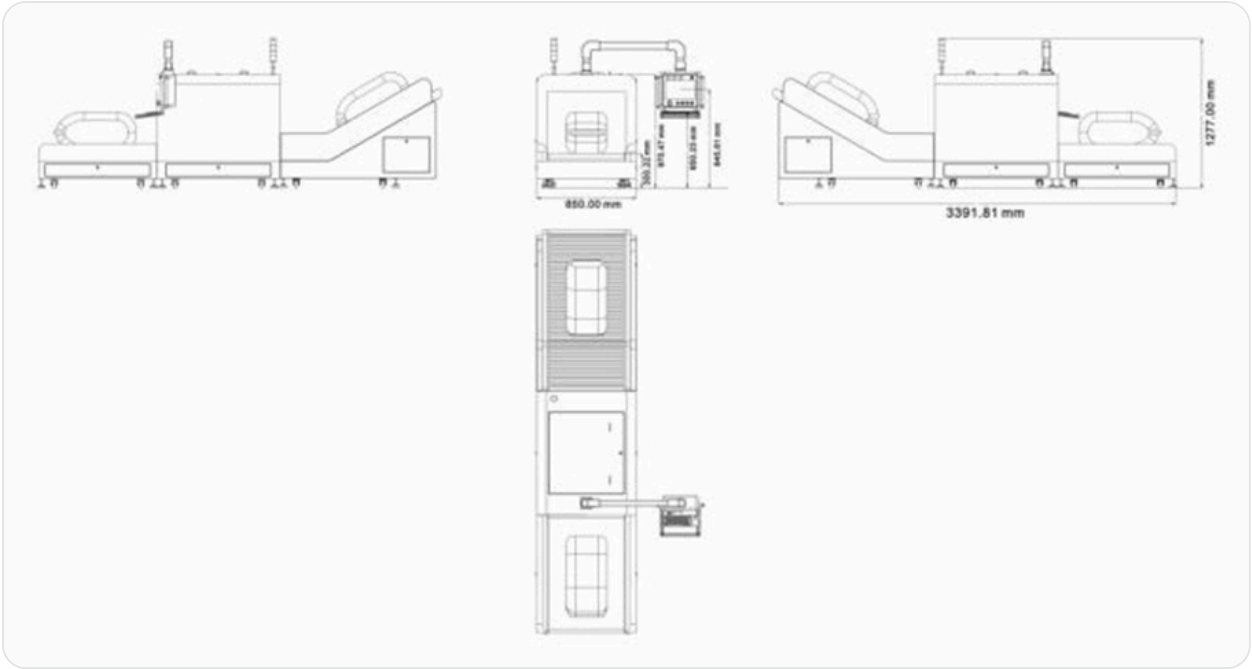

Unit : mm (inch)  
Weight : about 300 kg