

R-InBasketReader

R-InBasketReader is an embedded UHF RFID tunnel reader for precise batch reading in checkout counters, workstations and automated retail or warehouse systems.



RF SPECIFICATION

Identification Method	UHF
RF Chip	Impinj R2000
Frequency Range	840MHz-960MHz adjustable
Protocol	EPC C1G2, ISO 18000-6B, ISO 18000-6C
Frequency Band (Optional)	ETSI: 865-868MHz, JP: 916.8-920.4MHz, TW: 922.25-927.75MHz, ID: 923.125-925.125MHz, RUS: 866.6-867.4MHz, TEST: 802.75-998.75MHz, JP_LBT: 916.8-920.8MHz
RFID Item Reader	30 pcs
Function	Read & write function, multiple label identification, label data filtering, RSSI perception, quantity statistics, self-service card application

HARDWARE SPECIFICATION

Communication	RS232
---------------	-------

FUNCTION SELECTION

RFID Read & Write	Standard
Bar Code	Standard
QR Code	Standard
Fingerprint Recognition	Optional
Face Recognition	Standard
Sound Light Alarm	Optional
Keyboard	Optional
Solar Energy	Optional
Wireless Network	WiFi / 4G

BASIC SPECIFICATION

Material	Carbon steel plate, Glass
Power Supply	DC 12V/4A
Working Humidity	10%RH-90%RH
Operat Temperature	-10 deg C ~ 60 deg C
Size	680mm*560mm*296mm
Weight	about 10kg

FEATURE HIGHLIGHTS

- 30+ item bulk identification in 5 seconds
- 840-960 MHz UHF RFID technology with protocol extension support
- 20 cm anti-interference zone design
- Optimized for embedded counter and workstation installation
- Multi-interface retail system integration
- IP54 embedded installation flexibility


PRODUCT GROUP

Category	Embedded UHF RFID Tunnel Reader
Product Group	RFID Gate Product

PRODUCT VIEWS



DIMENSION

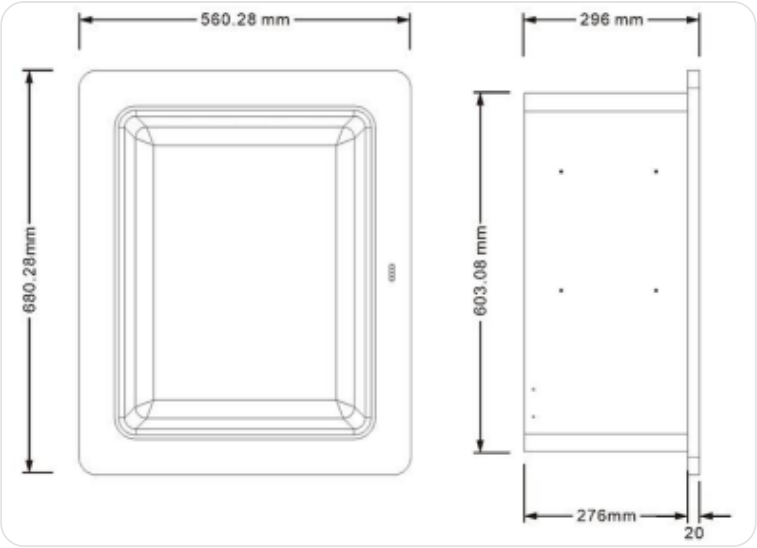

Unit : mm (inch)
Weight : about 10kg